MIL-M-60544 B(MU)
13 January 1969
SUPERSEDING
MIL-M-60544A(MU)
16 January 1967

MILITARY SPECIFICATION

MOUNTS TELESCOPE: M148 AND XM164

1. SCOPE

1.1 This specification covers two models of one type of telescope mount containing mechanisms for boresighting in elevation and azimuth, and means for quick attachent and release of a sighting telescope.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel, Packaging arid Packing of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions

DRAWINGS

U. S. Army, Frankford Arsenal

D10543453	Mount, Telescope: M148
D11728180	Mount, Telescope: XM164

PACKAGING DATA SHEETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article testing.- Requirements for the submission of first article samples by the contractor for testing shall be as specified in the contract.

3.2 Fabrication.- The mount shall be manufactured in accordance with the applicable drawing specified in Section 2.

3.3 Temperature conditions.- Except as specified in 3.6 and 3.11, the following requirements shall be met at a temperature between 60° and 90° Fahrenheit (F).

3.4 General specification.- The requirements of MIL-F-13926 listed below shall be met wherever applicable:

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking

3.5 Workmanship.- The workmanship requirements of MIL-F-13926 shall be met. In addition, exterior protective surface finishes shall be free of defects which may affect their protective qualities or appearance.

3.6 Storage temperature range.- There shall be no evidence of physical failure due to storage at temperatures ranging from -80° to +160°F.

3.7 Orientation.- Wherever specified, the conditions listed below shall apply:

a. An M120 Telescope, XM134 Telescope, or equivalent dummy load with a suitable adapter, secured in the dovetail of the bracket assembly by the telescope clamping mechanism.
b. An axis defined by the intersection of Datum Surfaces “A” and "B" (see Figure 1) shall be parallel within 10.0 mils to the intersection of Datum Surfaces “C” and “D” (see Figure 2).
c. Datum Surface “C” shall be horizontal within 5.0 degrees of arc and Datum Surface “D” positioned vertically within 5.0 degrees of arc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

3.8 Shock.- The requirements of 3.8.1 and 3.8.2 shall be met:

a. With locking screws set (3.10.3) and all the conditions listed in 3.7a and 3.7b.

b. Subsequent to a series of eighteen shocks total, with three shocks applied in each direction along each of three mutually perpendicular axes. One axis being parallel within 5.0 degrees of arc to the axis defined in paragraph 3.7b, and the other two axes perpendicular to Datum Surfaces "C" and "D" respectively. The nominal value for acceleration shall be 40 gravity units (g); and for pulse duration, 10 mini-seconds.

3.8.1 Physical failure due to shock.- There shall be no evidence of physical failure due to subjecting the mount to the shocks specified in 3.8b.

3.8.2 Line of sight change due to shock.- The relative position of the axis established in 3.7b shall not deviate more than 1.0 mil due to subjecting the mount to the shocks specified in 3.8b.

3.9 Vibration.

3.9.1 Vibration "A".- With the locking screws set (3.10.3), the mount shll be capable of meeting the requirements of 3.9.3 and 3.9.4, subseuent to being subjected to the following, with all the conditions listed in 3.7 applied:

a. Vibration in simple harmonic motion applied at the frequencies, accelerations and amplitudes shown on Figure 3.
b. The applied frequency changed from 5 to 400 to 5 cycles per second.(cps) at a logarithmic rate over a period of 15 ± 1.0 minutes.
c. A 30-minute dwell at each, but not exceeding four along each axis, of the most significant resonant frequencies.
d. The vibrations applied for three hours, including time at resonance, along each of the three mutually perpendicular axes defined in paragraph 3.8b (total nine hours).

3.9.2 Vibration "B".- With the locking screws set (3.10.3) the mount shall be capable of meeting the requirements of 3.9.3 and 3.9.4, subsequent to being vibrated for 5 ± 1/4 minutes with all the conditions listed in 3.7 applied. The vibration shall be applied in a direction perpendicular at a constant frequency of 30 cycles per second and an amplitude of 1/16 inch (1/8 inch total excursion).

3.9.3 Physical failure due to vibration.- There shall be no evidence of physical failure due to subjecting the mount to the vibrations specified in 3.9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

3.9.4 Line of sight change due to vibration.- The relative position of the axis established in 3.7b shall not deviate more than 0.1 mil due to subjecting the mount to vibration "B" in (3.9.2), or 1.0 mil due to vibration "A" (3.9.1).

3.10 Boresight movements.- The requirements of 3.10.1, 3.10.2, and 3.10.3 shall be met by the azimuth and elevation boresight movements.

3.10.1 Excursion ranges.- This requirement shall be met with the axis defined in 3.7b parallel within 2.0 mils. The boresight movements shall provide a minimum 18.0 mils movement of the bracket assembly in each direction.

3.10.2 Backlash or free play. - With the mount oriented as in 3.7 and the locking screws set as in 3.10.3, the unconstrained displacement in each boresight motion, as determined through application and release of a 20 pound force alternately applied in opposite directions at the dovetail end of the bracket, shall not exceed the following values (giving due consideration to the effect of gravity in the vertical plane):

a. 0.75 mil subsequent to vibration "B" (3.9.2).

b. 1.0 mil subsequent to vibration "A" (3.9.1) and shock (3.8)."

3.10.3 Locking screws.- This requirement shall be met with a 20 pound-inch (lb-in.) torque applied to each boresight locking screw. There shall be no visible rotation of the boresight movements when a 20 lb-in. torque is applied to each movement.

3.11 Operability.

3.11.1 Boresight movements - torque.- The running torque required for each boresight movement shall not exceed 18.0 lb-in. The running torque shall not exceed 28.0 lb-in. when the mount is thermally stabilized at -40° and +150°F.

3.11.2 Clamping lever.- The clamping lever shall be manually operable to clamp and release the M120 or XM134 Telescope dovetail or equivalent. This requirement shall also be met when the mount is thermally stabilized at -40° and +150°F.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval.- The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three (3) mounts plus three (3) each of all items covered by SQAP. The sample shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection."

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies.- All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provisions (SQAP) listed in the List of Inspection Documents (IEL), when provided with the technical data package (TDP). In the absence of SQAP'S, the applicable Quality Assurance Provisions of MIL-F-13926 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

4.3.2.2 First article tests.- Unless otherwise specified, the requirements and tests of Table I shall be conducted on first article tests only. In the event that the processes, materials or other changes in design or manufacture occur subsequent to first article approval, the first items so produced shall be submitted to the Government in accordance with 4.2 for approval prior to resumption of production.

TABLE I

	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
301.	Shock - Line of sight change	3.8, 3.8.2	4.6.2, 4.6.2.1
302.	Shock-physical failure	3.8, 3.8.1	4.6.2, 4.6.2.2
303.	Vibration "A" - Line of sight change	3.9.1, 3.9.4	4.6.3, 4.6.3.1
304.	Vibration "A" - physical failure	3.9.1, 3.9.3	4.6.3, 4.6.3.2

4.3.2.3 Final acceptance inspection.- Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in Tables II and III herein. Examination and tests for Packaging, Packing and Marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in Tables II and III shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

TABLE II - CLASSIFICATION OF DEFECTS

CLASS		REQUIREMENT	TEST PROCEDURE
CRITICAL: NONE			
MAJOR: AQL 1.0% Defective			
101.	Vibration "B" - physical failure	3.9.3	4.6.4
102.	Vibration "B" - line of sight	3.9.4	4.6.4
103.	Excursion ranges	3.10.1	4.6.5
104.	Backlash or free play	3.10.2	4.6.6
105.	Locking screws	3.10.3	4.6.7
106.	Boresight movement-torque	3.11.1	4.6.8
107.	Clamping lever	3.11.2	4.6.9
MINOR: NONE			

NOTE: Table II shall be tested at the standard ambient temperature (60° to 90°F).

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

4.4 Special sampling.- Three mounts shall be selected at random as a special sampling for each 100 produced. The sample shall meet the requirements and tests in Table III.

TABLE III

	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
401.	Fabrication	3.2	Applicable drawings-visual
402.	General specification	3.4	MIL-F-13926-visual
403.	workmanship	3.5	MIL-F-13926-visual
404.	Storage temperature range	3.6	4.6.10
405.	Operability, -40°F and +150°F	3.11	4.6.8 &4.6.9

4.4.1 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications-or SQAP forming a-part of the contract shall be supplied by the contractor in accordance with technical data listed in the List of Inspection Documents (IEL) when provided with the technical data package (TDP).

4.5.2.2 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:42Z
Check the source to verify that this is the currentversion before use.

4.6 Test methods and procedures.

4.6.1 Orientation.- The mount shall be located on a holding device capable of locating and securing the mount in the position required by 3.7. When required to conduct shock and vibration tests herein, an adapter representing the dummy load (see Figure 4A) shall be provided to simulate the size and weight of the referenced telescope in 3.7a. An aligning telescope (see Figure 4B) shall be provided with an adapter capable of fixing the optical axis parallel to the axis defined in 3.7b and with the adapter portion positioned as defined in 3.7c. The adapter, with aligning telescope, shall be capable of removal and re-insertion into the mount dovetail without changing the line of sight by more than 0.01 mil from the original setting established to insure compliance with 3.7. A target collimator or suitable target shall be established when the aligning telescope is fixed as defined above to obtain a positive target reference point where required in the following tests.

4.6.2 Shock test.- Prior to subjecting the mount to the shock specified in 3.8b, the procedures in 4.6.1 shall be established utilizing the aligning telescope (see Figure 4B) to obtain a positive target reference point. The aligning telescope shall be removed and the dummy load (Figure 4A) with its simulated telescope shall be inserted and secured. The mount with dummy load, shall be shocked in each direction with the acceleration (G's), as specified in 3.8b.

4.6.2.1 Line of sight change due to shock.- Subsequent to the shock test of 4.6.2, the dummy load shall be removed and the aligning telescope shall be inserted into the mount and repositioned to view the originally established target reference point (see 4.6.1). Sight through the telescope and view the position of the telescope line of sight with respect to the original target reference point. The telescope line of sight shall be within the collimating tolerances specified in 3.8.2.

4.6.2.2 Physical failure due to shock.- Subsequent to the shock and examination in 4.6.2 and 4.6.2.1 a visual and tactile examination shall be conducted to determine compliance with 3.8.1. Remove the alignment telescope from the mount and the mount from the holding device. The mounting surfaces and the dovetail locating surfaces of the bracket shall be examined for brinelling due to metal contact and other surface defects. The locking lever shall then be given a tactile examination for damaged or broken parts and function of moving parts.

4.6.3 Vibration "A".- In addition to first article sample and conditions specified in 3.9.1, the test shall be performed on three (3) mount telescope assemblies randomly selected at 25, 50 and 75% point of production of total contract quantity. The telescope mount assemblies shall be subjected to test Method 514 of MIL-STD-810. The vibrating equipment shall be equipped with an adapter capable of accepting and securing the mount assembly. The test equipment shall provide the acceleration, amplitude, frequency and duration specified in 3.9.1. The locking lever shall be immobilized in the locked detent position. Prior to vibration, a target

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

reference point shall be established utilizing the aligning telescope as defined in 4.6.1. Remove the aligning telescope and insert the dummy load (Figure 4A) and vibrate the mounts in accordance with 3.9.1. Upon completion of the vibration test the mount assemblies shall meet the requirements specified in 4.6.3.1 and 4.6.3.2.

4.6.3.1 Collimation change due to vibration.- Subsequent to vibration the mount shall be repositioned to view the originally established target reference point. Remove the dummy load and insert the aligning telescope. Sight through the telescope and view the position of telescope line of sight with respect to the target reference point originally established. Collimation shall be within the collimation tolerances specified in 3.9.4.

4.6.3.2 Physical failure due to vibration.- Subsequent to the vibration and examination in 4.6.3 and 4.6.3.1 the aligning telescope shall be removed from the mount and the mount from the holding device and a visual examination shall be conducted. The mounting surfaces of the mount support and the dovetail locating surfaces of the bracket shall be examined for evidence of damage or physical failure as specified in 3.9.3.

4.6.4 Vibration "B".- Standard vibrating equipment capable of providing the amplitude and frequency specified in 3.9.2 shall be utilized for this vibration test. Unless otherwise specified, the test equipment shall be in accordance with the "Test Facilities" requirements of MIL-F-13926. The vibrating equipment shall be equipped with an adapter that is capable of accepting and securing the mount assembly as specified in" 3.9.2. The locking lever shall be immobilized in the locked detent position. The mount assembly shall be collimated as specified in 4.6.3 prior to vibration. The mount shall then be vibrated in accordance with Procedure II of MIL-F-13926 and the conditions of 3.9.2. Subsequent to vibration the mount shall be subjected to the tests in 4.6.3.1 and 4.6.3.2. The mount shall conform to the requirements of 3.9.2.

4.6.5 Boresight, excursion ranges.- The mount shall be positioned as in 4.6.1 with the aligning telescope secured in the dovetail, and aligned on the zero elevation (horizontal) line of the target specified in 4.6.1. Loosen the locking screw on the elevation worm and with the aid of a screwdriver rotate the worm, and at the same time sight through the aligning telescope to the target and ascertain that the elevating worm meets the requirements in both directions as specified in 3.10.1.

4.6.6 Backlash or free play.- The mount shall be positioned as in 4.6.1, and the aligning telescope vertical and horizontal reticle lines established coincident to the vertical and horizontal target line image. The boresight movements shall be locked by applying a 20 pound-inch torque to each boresight locking screw. A 20 pound (push) force shall be applied to the dovetail end of the mount as specified in 3.10.2. Upon release of the applied force the line of sight shall not be displaced beyond the tolerance specified in 3.10.2, as measured on the target.

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:42Z
Check the source to verify that this is the current version before use.

4.6.7 Locking screws.- The mount shall be positioned as in 4.6.1 with the aligning telescope secured in the dovetail. The telescope reticle shall be aligned to a point on the target, and the locking screws secured as specified in 3.10.3. Use a torque wrench and a standard type driver bit capable of producing the required torque for both locking screws and the elevation and azimuth boresight movements. Place the torque wrench in the elevation worm slot, and apply the required torque. Then sight the target and observe any change of reticle position on the target with respect to the original point. Repeat the process on the deflection (azimuth) boresight. There shall be no visible displacement or movement of the boresight movements to meet the requirement of 3.10.3.

4.6.8 Boresight movements-torque.- With the mount at standard ambient temperature (+60° to +90°F) the torque required to rotate the boresight movements, with the locking screw loose, shall not exceed the tolerance specified in 3.11.1. When the mount is thermally stabilized at -40°F or +150°F the operable torque shall not exceed the tolerance specified in 3.11.1 for each respective temperature.

4.6.9 Clamping lever.- Utilize the aligning telescope, to check the clamping mechanism. The telescope must be held secure when the clamping lever is in the locked position and is located with the detent for that position. when the lever is moved to the other detent position, the telescope shall disengage freely from the dovetail slot. This test shall be performed at the standard ambient temperature (60° to 90°F). The mount shall also perform in the same manner as above except the mount shall be thermally stabilized at the extreme temperatures specified in 3.11.2.

4.6.10 Storage temperature range.- Testing equipment utilized in this test shall be in accordance with the "Test Facilities" requirements of MIL-F-13926 and the conditions of 3.6. The mount assembly shall be exposed to each specified temperature range for a minimum of 5 hours. Subsequent to the temperature exposures, the mount shall be stabilized in standard ambient temperature (between +60° and +90°F) and subjected to the tactile and visual examinations of 4.6.3.2 to determine compliance with requirements of 3.6.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking.- Packaging, packing, and marking shall be in accordance with MIL-P-14232 and Packaging Data Sheet 10543453. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use.- The M148 and XM164 Telescope Mounts are employed respectively to support Telescope XM120 and Telescope XM134. A telescopes with telescope mount and Instrument Light M52 comprise direct fire. sighting systems for 20mm guns installed on armored personnel carriers, and other ground mounted weapons.

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:42Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Selection of applicable levels of preservation, packaging, and packing (see 5.1).
c. Applicable packaging data sheet number (see 5.1).
d. Applicable stock number.
e. Requirements for first article inspection.

6.3 Order of precedence.- Order of precedence is specified in MIL-F-13926.

6.4 Definition.- In the presence of Backlash or Free Play (3.10.2), Line of sight Change due to shock (3.8.2) or Vibration (3.9), is defined as the change in position of the reference axis as centered between the extremes of the backlash or free play.

Custodian:


Army - MU

Preparing activity:

Army - MU


Project No. 1240-A127

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:42Z
Check the source to verify that this is the current version before use.

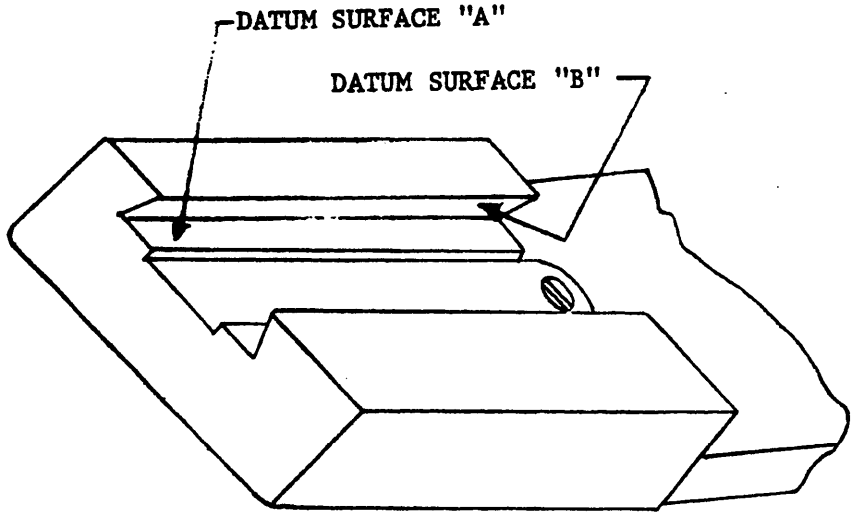

BRACKET ASSEMBLY


FIGURE I

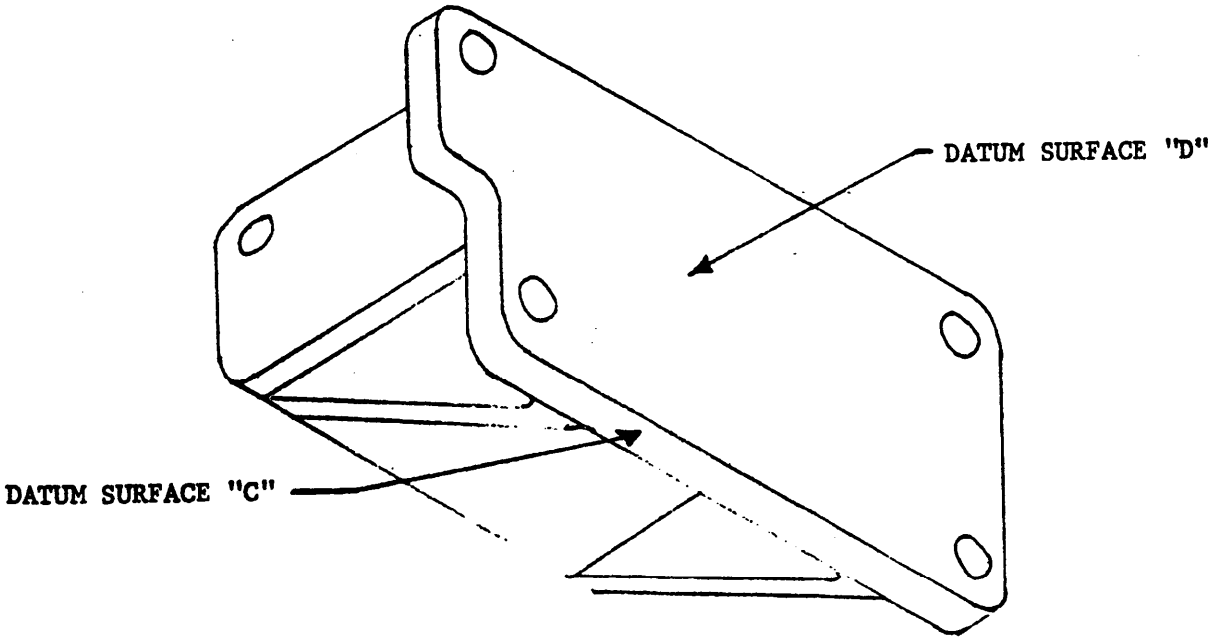

SUPPORT ASSEMBLY

FIGURE 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

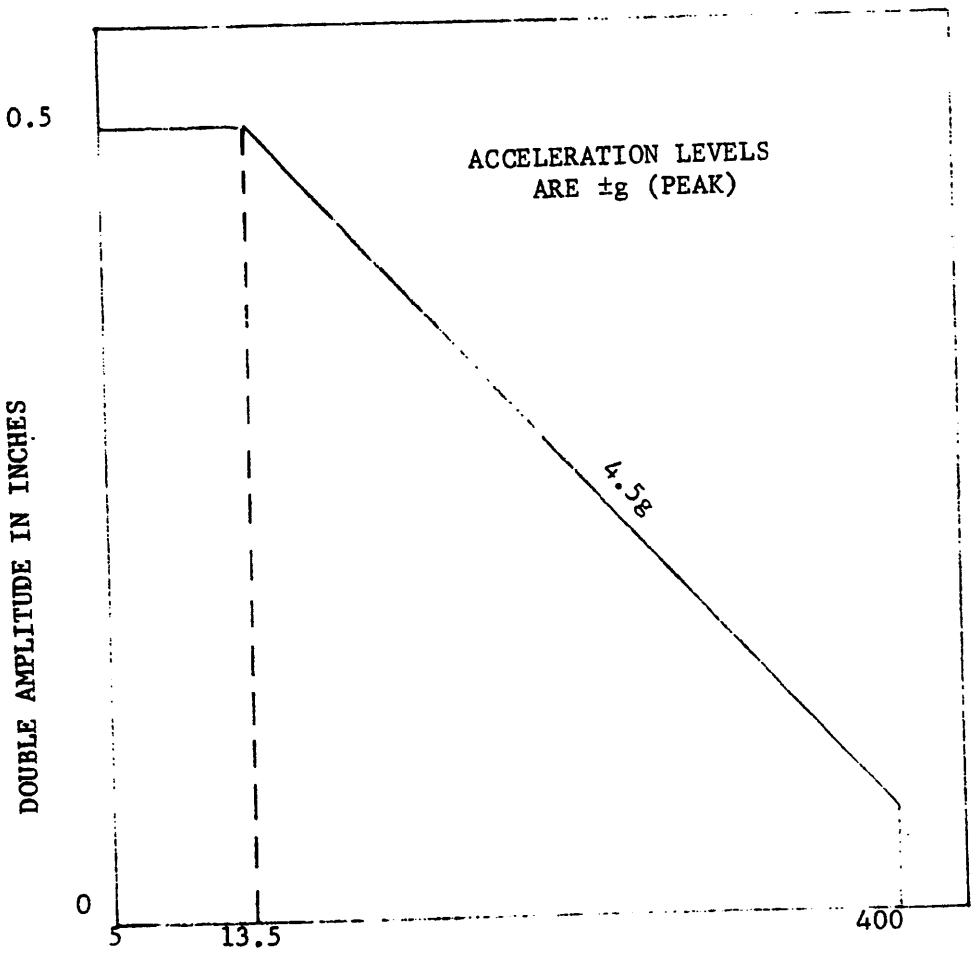

VIBRATION CURVE

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

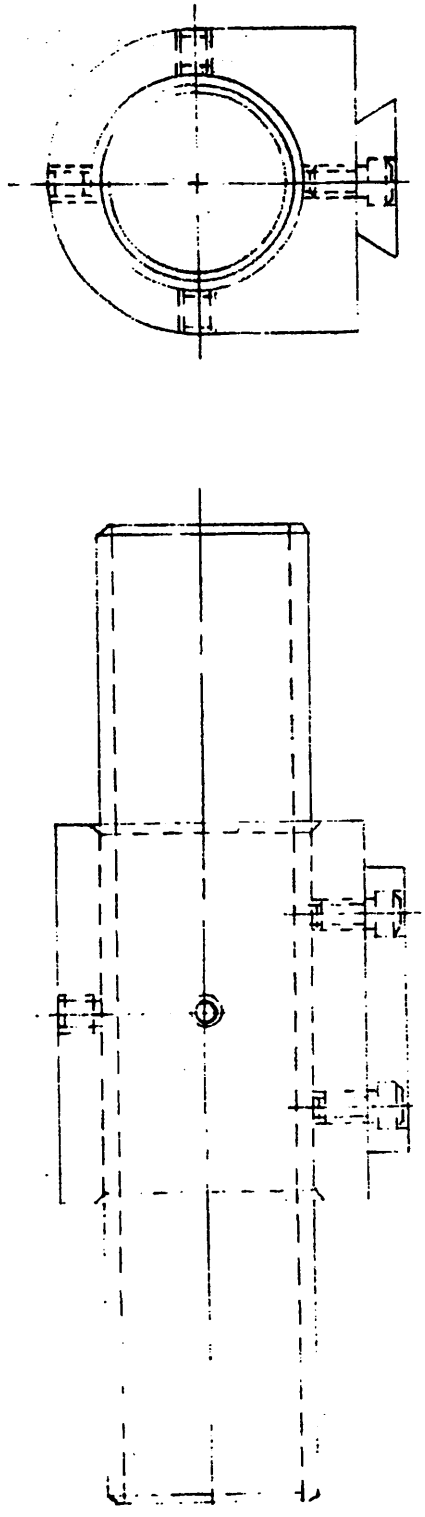


APPROXIMATE WEIGHT 3 LBS.

FIGURE 4A

DUMMY LOAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

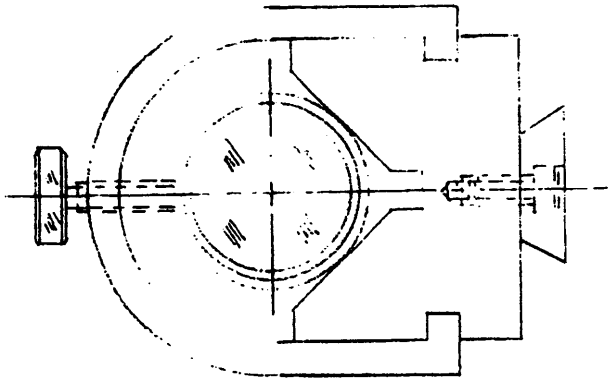

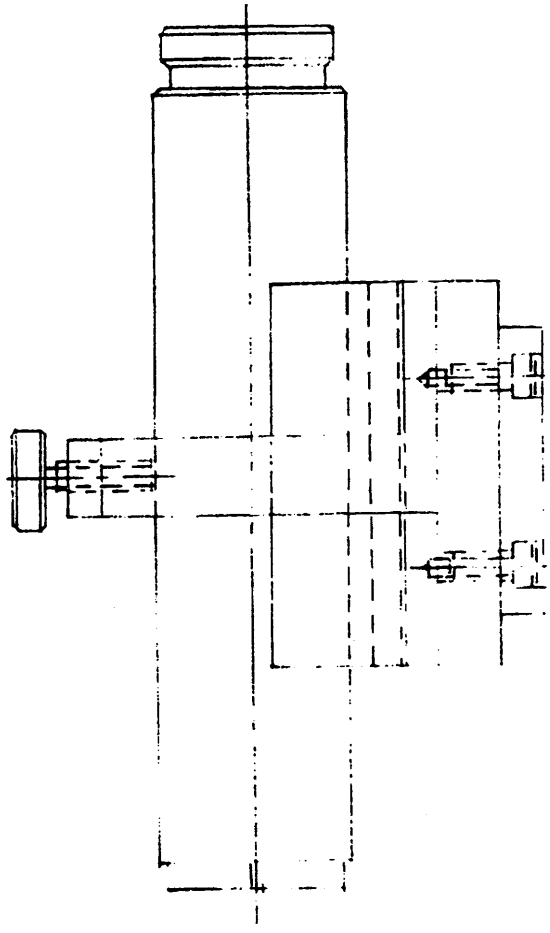


FIGURE 4B

ALIGNMENT TELESCOPE WITH ADAPTER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

YES NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

5. SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:42Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army

Frankford Arsenal
Philadelphia, Pa. 19137

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
Department of the Army

Commanding Officer
Frankford Arsenal
ATTN: SMUFA-N1100
Philadelphia, Pa. 19137

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.