MIL-P-60504A(MU)
AMENDMENT 6
24 August 1973
SUPERSEDING
AMENDMENT 5
8 September 1972

MILITARY SPECIFICATION

PRINTED CIRCUIT BOARD ASSEMBLY Q-SWITCH TIMING CIRCUIT: 10541270

This amendment forms a part of Military Specification MIL-P-60504A(MU), dated 18 June 1970.

Paragraph 2.1: Add Military Specification "MIL-P-46843 - Printed Circuit Assemblies, Design and Production of".

Paragraph 3.3: Add "and MIL-P-46843".

Paragraph 3.3.1: Add after MIL-F-13926 "and MIL-P-46843".

Paragraph 3.3.1.6.- Delete first sentence.

Paragraph 3.3.1.11.1 line 3, delete "The R12".

Paragraph 3.5.3.- Change 350 milliamperes to 550 milliampers.

Paragraph 3.5.4.- Change first sentence "The assembly shall supply a regulated 17.5 ± 0.25 VOLTS "TO READ". The assembly shall supply a steady state regulated 18.5 ± 2.5 VOLTS "In the last line change 300 ± 10ma to 330 ± 50 ma.

Paragraph 3.5.7a: Delete "1.5 ± 0.25V amplitude and 750 ± 50 microseconds" and substitute "1.3 ± 0.25V amplitude and at least 450 microseconds

Paragraph 3.5.7b: Delete "50 microseconds" and substitute "40 microseconds."

Paragraph 3.5.7c: Delete "5 ± .25V amplitude and 70 ± 10 microsecond duration (see Figure 5)" and substitute "5.4 ± .5V, amplitude and 75 ± 15 microseconds duration and separated by the pulse width of the output in paragraph 3.5.7a (see Figure 4)".

Paragraph 3.5.7(b) Change 9.25 ± 0.25V to 10 ± 1V.

Paragraph 4.3.4: Delete this paragraph in its entirety and substit

"4.3.4 Certification.- Certification shall include test data and results for the characteristics specified below. Certification shall b provided prior to performing final acceptance inspection, and remain i effect throughout the performance of the contract. This does not reli the contractor from inspection throughout the contract production, inc ing recording data and results therefrom. Recorded data and results

FSC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:39Z
Check the source to verify that this is the current version before use.

be made available to the Government upon request. A new certification shall be required whenever any change (s) occur in materials, manufacturing processes and techniques previously certified.

Exception to the above may be provided by certificate of compliance (COC) for those items for which the contractor cannot obtain recorded data, i.e., off the shelf items. This exception shall not apply without prior approval by Frankford Arsenal. Request for approval shall include item name, part number, identification of supplier, and justification for exception; and shall be forwarded to Commanding Officer, Frankford Arsenal, ATTN: SMUFA-Q4000."

Paragraph 4.4.1, Table III, No. 303: Add "MIL-P-46843".

Paragraph 4.5.3(4) Change 300 milliamperes to 550 milliamperes.

Paragraph 4.6.2.1 Change "Figure 3-1" to "Figure 2".

Paragraph 4.6.1.3: In the second sentence delete and substitute the following: "The test shall be performed as specified in Procedure I of MIL-F-13926 except the shock pulse shall comply with the wave form, time duration and peak "G" value specified in 3.4.3."

* Paragraph 4.6.1.4: Delete second sentence and substitute "The vibration equipment shall be capable of providing the conditions of amplitude, frequency and duration specified in 3.4.4."; Add: "The vibration test shall be performed in accordance with Figure 514-1, Curve C, of MIL-STD-810 except double amplitude shall not exceed .036 inch."

Paragraph 4.6.2.5 Change 350 milliamperes to 550 milliamperes.

Sheet 14 Figure 1; Delete and substitute New Figure 1.

Figure 1: Change resistor at Pin 11 from "68K" to "6.8K".

Sheet 15 Figure 2 and 3; Delete and substitute New Figure 2 and 3.

Figure 3: Change "1.5 ± 0.25V" to "1.3V ± 0.25V"; change "750 ± 50 u sec" to "450 u sec minimum"; change ".75V" to "half amplitude".

Figure 4; Change "50 usec min" to "40 u sec min"; change "4.1V ± 0.1V" to "half amplitude"; change "9.25 ± 0.25V" to "10.0 ± 1.0V".

Figure 5: Change "2.5 ± 0.1V" to "half amplitude"; change "70 ± 10 u sec" to "75 ± 15 usec"; change "750 ± 50 usec" to "450 u sec min".

The outside margins have been marked to indicate where additions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:39Z
Check the source to verify that this is the current version before use.

requirements of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous amendment.

Custodian:


Army (MU)

Preparing activity:

Army (MU)

Project No. 1240-A541

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:39Z
Check the source to verify that this is the current version before use.

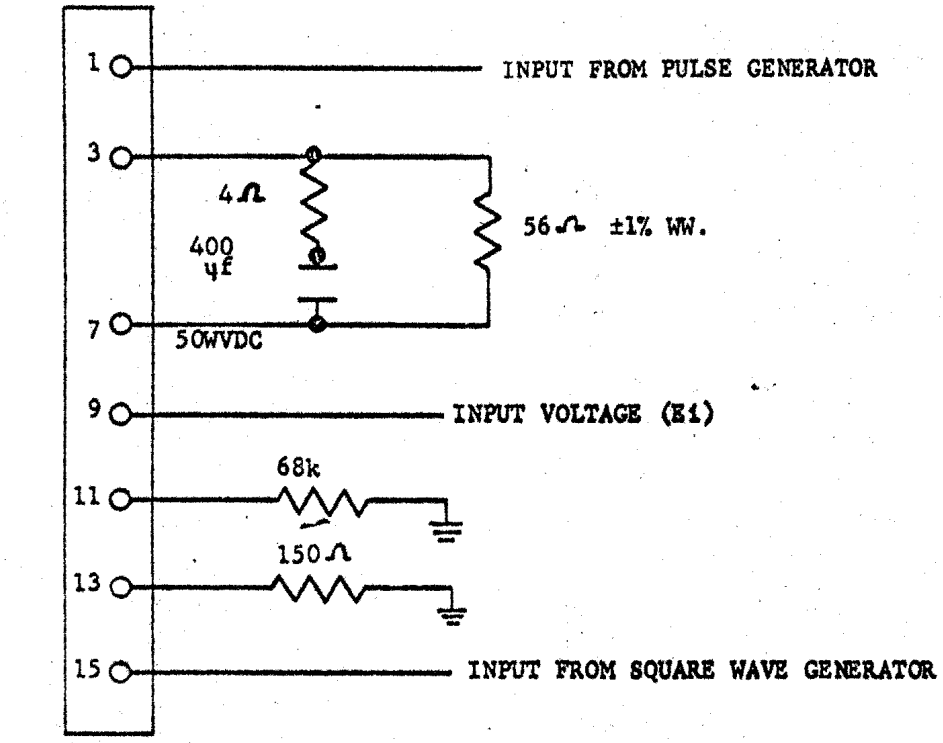

NOTE 1. ALL EVEN NUMBERED PINS ARE SYSTEM GROUND.

2. RESISTORS 1/4 WATT, RESISTANCE TOLERANCE ±5% UNLESS OTHERWISE SPECIFIED.

3. TOLERANCE ON CAPACITORS ±10%.

FIGURE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:39Z
Check the source to verify that this is the current version before use.

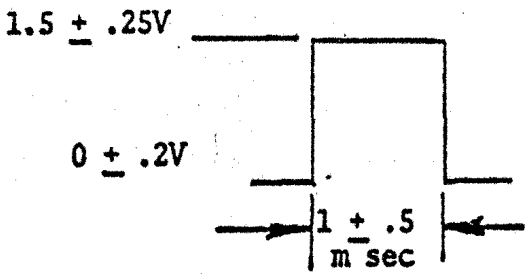


FIGURE 2

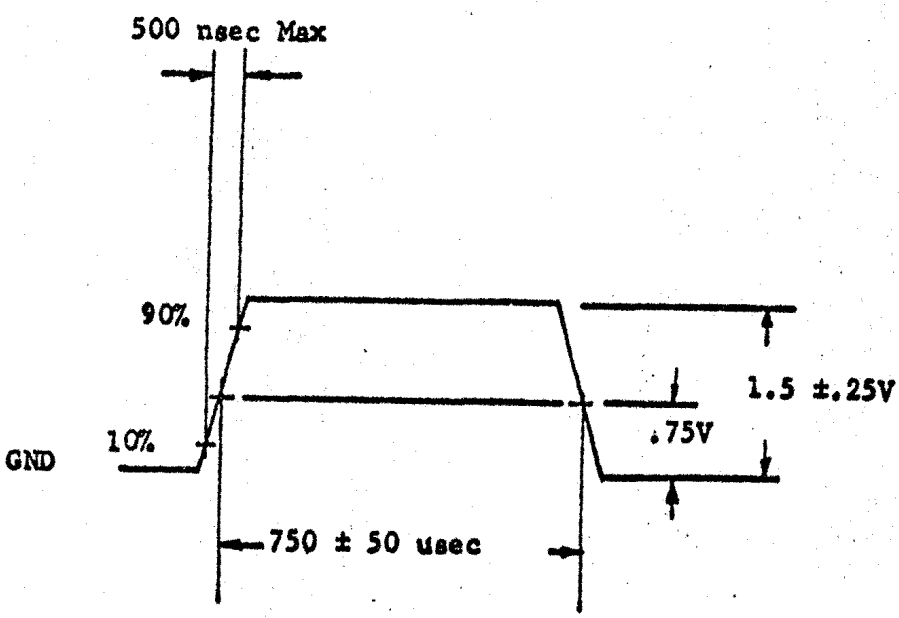


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:39Z
Check the source to verify that this is the current version before use.