MILITARY SPECIFICATION SHEET

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP-FREE, SINGLE POLE (0.2 to 100 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the circuit breakers described herein shall consist of this specification and the latest issue of MIL-C-55629.

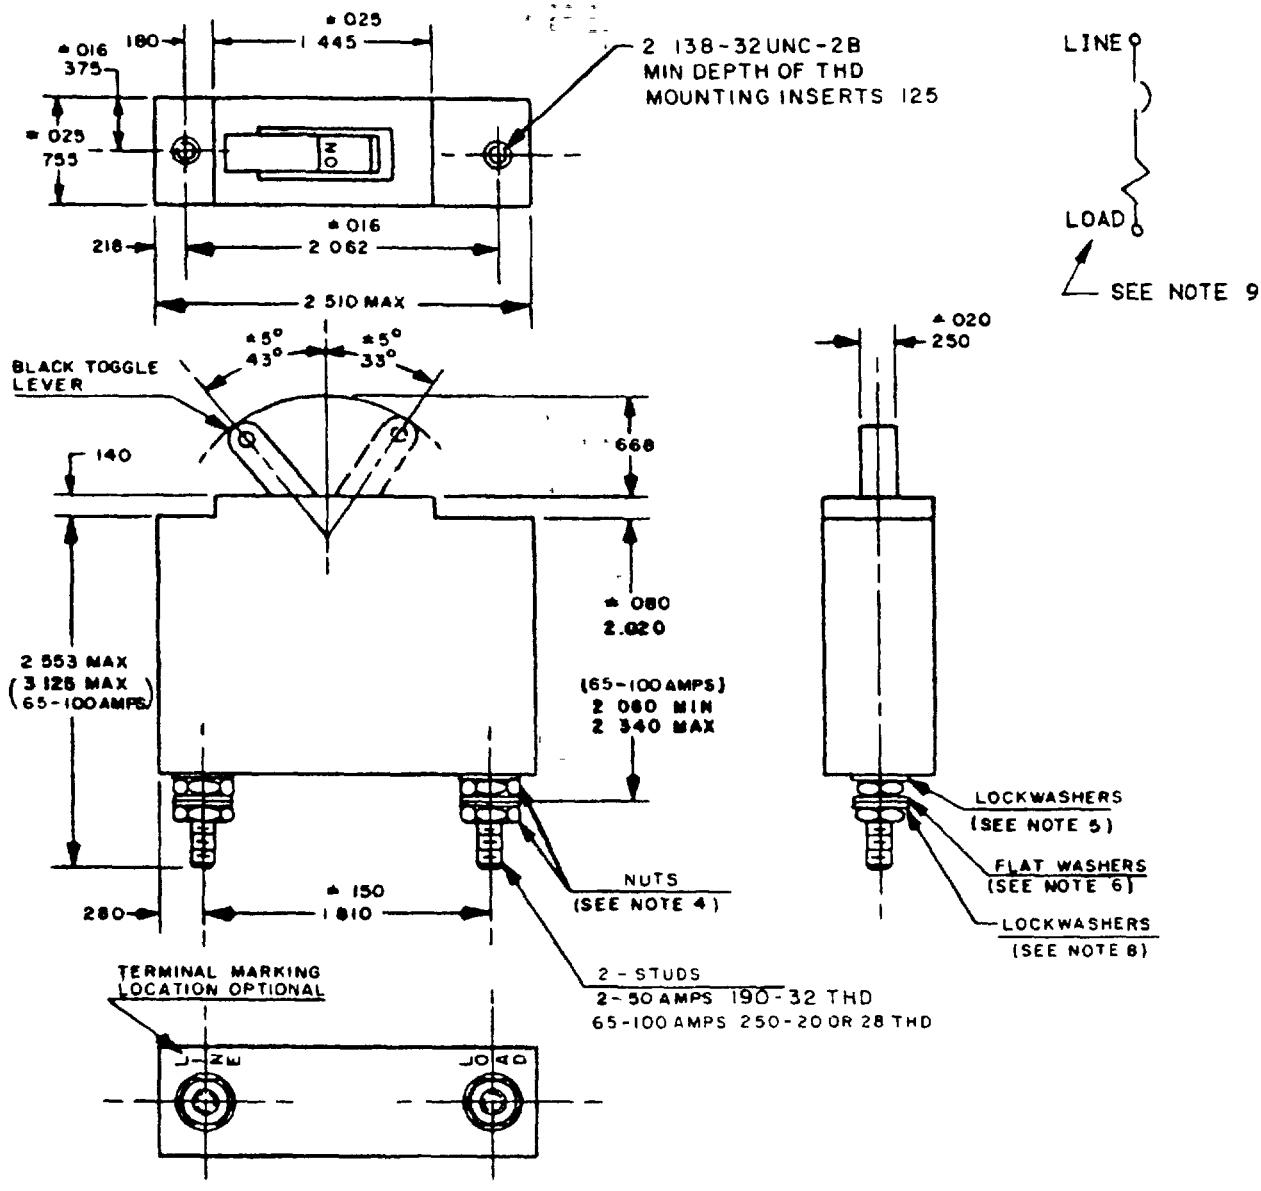


FIGURE 1 Dimensions and configurations

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
005	0 13	125	3 18	280	7 11	1 445	36 70
010	0 25	138	3 50	.281	7 14	1 810	45 97
016	0 41	140	3 56	303	7 70	2 020	51 31
.020	0.51	150	3 81	313	7 95	2 060	52 32
025	0 64	156	3 96	368	9.35	2 062	52 37
.031	0.79	180	4 58	375	9 52	2.340	59 44
032	0 81	190	4 83	378	9 60	2 510	63 75
.035	0 89	.204	5 18	.438	11.13	2.553	64 85
080	2 03	218	5.54	500	12 70	3 125	79 38
109	2 77	.250	6.35	.755	19.18		

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only.
3 Unless otherwise specified, tolerance is ± 031
4 NUT-HEX (.2 - 50 amperes) 190 - 32 UNF-2B 313/ 303 across flats, 109 ± 010 thick.
(65 - 100 amperes) 250 - 28 UNF-2B 438 ± 016 across flats or 250 - 20 UNC-2B 375 ± 016 across flats
Material - Brass (QQ-B-626), Tin Plated (MIL-T-10727 type I) or Stainless Steel, for each terminal
5 Captive washer nut assembly of brass nut, bronze washer, tin plated, or lockwasher, internal or external tooth, MS35333-107 or MS35335-88 (2 - 50 amperes), MS35333-108 or MS35335-89 (65 - 100 amperes) or equivalent (Use of washers optional on 65 - 100 amperes units)
6 Washer, Flat (2 - 50 amperes) 378/ 368 OD, 204/ 190 ID, 032 ± 005 thick
(65 - 100 amperes) 500 ± 016 OD, 281 ± 016 ID, 035 ± 005 thick.
Material - Brass (QQ-B-626) Tin plated (MIL-T-10727 type I) or Phosphor Bronze, composition (QQ-B-750).
7 When panel sealing is required, boots shall be in accordance with MIL-B-5423/14-05
8 Lockwasher, Split (2 - 50 amperes) MS35338-138 or equivalent
(65 - 100 amperes) MS35338-139 or equivalent
9 Physical item marking of load terminal optional

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration See figure 1.

Current ratings: See table I.

Voltage ratings See tables II through V. 240 V ac breakers are designed also for use at 120 V ac.

Tripping-time delays See tables II through V

High inrush Applicable to time delays K, L, M, N, P, R, and S.

Terminal and mounting hardware See figure 1.

Terminals See figure 1.

Actuator strength 25 pounds.

Actuator operating force 4 pounds, maximum.

Endurance (65 through 100 amperes): 6,000 mechanically performed make and break operations.

Terminal strength

Applied load 30 pounds.
Applied torque 22 pound-inches.

Vibration: Energized current shall be 90 percent for characteristics H, I, and J.

Shock Energized current shall be 90 percent for characteristics H, I, and J.

Moisture resistance (65 through 100 amperes) Change in resistance shall not exceed 50 percent.

Temperature rise (65 through 100 amperes): 65°C.

Interrupting capacities:

2,000 amperes at 50 V dc (32 V dc for 65 through 100 amperes).
2,000 amperes at 120 V ac, 60 Hz.
1,500 amperes at 120 V ac, 400 Hz
1,000 amperes at 240 V ac, 60 and 400 Hz.

Part number. M55529/1- (dash number from table I)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
001	0.2	A	32	154	0.75	H	3
002	"	B	32	157	"	I	3
003	"	C	34	161	"	J	7
004	"	D	34	274	"	K	3
005	"	E	72	275	"	L	3
006	"	F	72	276	"	M	3
007	"	G	72	277	"	N	3
136	"	H	32	278	"	P	7
137	"	I	34	279	"	R	7
138	"	J	72	280	"	S	7
253	"	K	32	437	"	T	3
254	"	L	32	015	1.0	A	2
255	"	M	34	016	"	B	2
256	"	N	34	017	"	C	2
257	"	P	72	018	"	D	2
258	"	R	72	019	"	E	4
259	"	S	72	020	"	F	4
434	"	T	34	021	"	G	4
139	0.25	A	21	162	"	H	2
140	"	B	21	163	"	I	2
142	"	C	23	164	"	J	4
143	"	D	23	281	"	K	2
145	"	E	43	282	"	L	2
146	"	F	43	283	"	M	2
147	"	G	43	284	"	N	2
141	"	H	21	285	"	P	4
144	"	I	23	286	"	R	4
148	"	J	43	287	"	S	4
260	"	K	21	438	"	T	2
261	"	L	21	165	1.5	A	.9
262	"	M	23	166	"	B	.9
263	"	N	23	168	"	C	.9
264	"	P	43	169	"	D	.9
265	"	R	43	171	"	E	2
266	"	S	43	172	"	F	2
435	"	T	23	173	"	G	2
008	0.5	A	6	167	"	H	.9
009	"	B	6	170	"	I	.9
010	"	C	6	174	"	J	2
011	"	D	6	288	"	K	.9
012	"	E	12	289	"	L	.9
013	"	F	12	290	"	M	.9
014	"	G	12	291	"	N	.9
149	"	H	6	292	"	P	2
150	"	I	6	293	"	R	2
151	"	J	12	294	"	S	2
267	"	K	6	439	"	T	.9
268	"	L	6	022	2.0	A	.5
269	"	M	6	023	"	B	.5
270	"	N	6	024	"	C	5
271	"	P	12	025	"	D	.5
272	"	R	12	026	"	E	.8
273	"	S	12	027	"	F	.8
436	"	T	6	028	"	G	.8
152	0.75	A	3	175	"	H	.5
153	"	B	3	176	"	I	5
155	"	C	3	177	"	J	8
156	"	D	3	295	"	K	.5
158	"	E	7	296	"	L	5
159	"	F	7	297	"	M	.5
160	"	G	7	298	"	N	.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
299	2.0	P	.8	040	4.0	E	.3
300	"	R	.8	041	"	F	.3
301	"	S	.8	042	"	G	.3
440	"	T	.5	201	"	H	.1
178	2.5	A	.35	202	"	I	.1
179	"	B	.35	203	"	J	.3
181	"	C	.35	323	"	K	.1
182	"	D	.35	324	"	L	.1
184	"	E	.6	325	"	M	.1
185	"	F	.6	326	"	N	.1
186	"	G	.6	327	"	P	.3
180	"	H	.35	328	"	R	.3
183	"	I	.35	329	"	S	.3
187	"	J	.6	444	"	T	.1
302	"	K	.35	043	5.0	A	.08
303	"	L	.35	044	"	B	.08
304	"	M	.35	045	"	C	.08
305	"	N	.35	046	"	D	.08
306	"	P	.6	047	"	E	.15
307	"	R	.6	048	"	F	.15
308	"	S	.6	049	"	G	.15
441	"	T	.35	204	"	H	.08
029	3.0	A	.3	205	"	I	.08
030	"	B	.3	206	"	J	.15
031	"	C	.3	330	"	K	.08
032	"	D	.3	331	"	L	.08
033	"	E	.5	332	"	M	.08
034	"	F	.5	333	"	N	.08
035	"	G	.5	334	"	P	.15
188	"	H	.3	335	"	R	.15
189	"	I	.3	336	"	S	.15
190	"	J	.5	445	"	T	.08
309	"	K	.3	050	6.0	A	.06
310	"	L	.3	051	"	B	.06
311	"	M	.3	052	"	C	.06
312	"	N	.3	053	"	D	.06
313	"	P	.5	054	"	E	.08
314	"	R	.5	055	"	F	.08
315	"	S	.5	056	"	G	.08
442	"	T	.3	207	"	H	.06
191	3.5	A	.15	208	"	I	.06
192	"	B	.15	209	"	J	.08
194	"	C	.15	337	"	K	.06
195	"	D	.15	338	"	L	.06
197	"	E	.35	339	"	M	.06
198	"	F	.35	340	"	N	.06
199	"	G	.35	341	"	P	.08
193	"	H	.15	342	"	R	.08
196	"	I	.15	343	"	S	.08
200	"	J	.35	446	"	T	.06
316	"	K	.15	057	7.0	A	.04
317	"	L	.15	058	"	B	.04
318	"	M	.15	059	"	C	.04
319	"	N	.15	060	"	D	.04
320	"	P	.35	061	"	E	.07
321	"	R	.35	062	"	F	.07
322	"	S	.35	063	"	G	.07
443	"	T	.15	210	"	H	.04
036	4.0	A	1	211	"	I	04
037	"	B	1	212	"	J	.07
038	"	C	.1	344	"	K	.04
039	"	D	.1				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
345	7.0	L	.04	085	12.5	A	.013
346	"	M	.04	086	"	B	.013
347	"	N	.04	087	"	C	.015
348	"	P	.07	088	"	D	.015
349	"	R	.07	089	"	E	.03
350	"	S	.07	090	"	F	.03
447	"	T	.04	091	"	G	.03
064	8.0	A	.03	222	"	H	.013
065	"	B	.03	223	"	I	.013
066	"	C	.03	224	"	J	.03
067	"	D	.03	372	"	K	.013
068	"	E	.06	373	"	L	.013
069	"	F	.06	374	"	M	.015
070	"	G	.06	375	"	N	.015
213	"	H	.03	376	"	P	.03
214	"	I	.03	377	"	R	.03
215	"	J	.06	378	"	S	.03
351	"	K	.03	451	"	T	.015
352	"	L	.03	092	15.0	A	.01
353	"	M	.03	093	"	B	.01
354	"	N	.03	094	"	C	.011
355	"	P	.06	095	"	D	.011
356	"	R	.06	096	"	E	.02
357	"	S	.06	097	"	F	.02
448	"	T	.03	098	"	G	.02
071	9.0	A	.018	225	"	H	.013
072	"	B	.018	226	"	I	.015
073	"	C	.02	227	"	J	.03
074	"	D	.02	379	"	K	.01
075	"	E	.05	380	"	L	.01
076	"	F	05	381	"	M	.011
077	"	G	.05	382	"	N	.011
216	"	H	.02	383	"	P	.02
217	"	I	.02	384	"	R	.02
218	"	J	.05	385	"	S	.02
358	"	K	.018	452	"	T	.011
359	"	L	.018	099	20.0	A	.007
360	"	M	.02	100	"	B	.007
361	"	N	.02	101	"	C	.007
362	"	P	.05	102	"	D	007
363	"	R	.05	103	"	E	.01
364	"	S	.05	104	"	F	.01
449	"	T	.02	105	"	G	01
078	10.0	A	.02	228	"	H	.007
079	"	B	.02	229	"	I	.007
080	"	C	02	230	"	J	01
081	"	D	.02	386	"	K	.007
082	"	E	.04	387	"	L	.007
083	"	F	.04	388	"	M	.007
084	"	G	.04	389	"	N	.007
219	"	H	.02	390	"	P	.01
220	"	I	.02	391	"	R	.01
221	"	J	.04	392	"	S	.01
365	"	K	.02	453	"	T	.007
366	"	L	.02	106	25.0	A	.006
367	"	M	.02	107	"	B	.006
368	"	N	.02	108	"	C	.006
369	"	P	.04	109	"	D	.006
370	"	R	04	110	"	E	007
371	"	S	.04	111	"	F	.007
450	"	T	.02				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
112	25.0	G	.007	413	35.0	S	.005
231	"	H	.006	456	35.0	T	.004
232	"	I	.006	240	40.0	A	.0038
233	"	J	.007	241	"	B	.0038
393	"	K	.006	243	"	C	.0038
394	"	L	.006	244	"	D	.0038
395	"	M	.006	246	"	E	.0052
396	"	N	.006	247	"	F	.0052
397	"	P	.007	248	"	G	.0052
398	"	R	.007	242	"	H	.0038
399	"	S	.007	245	"	I	.0038
454	"	T	.006	249	"	J	.0052
113	30.0	A	.005	414	"	K	.0038
114	"	B	.005	415	"	L	.0038
115	"	C	.005	416	"	M	.0038
116	"	D	.005	417	"	N	.0038
117	"	E	.006	418	"	P	.0052
118	"	F	.006	419	"	R	.0052
119	"	G	.006	420	"	S	.0052
234	"	H	.005	457	"	T	.0038
235	"	I	.005	127	50.0	A	.003
236	"	J	.006	128	"	B	.003
400	"	K	.005	129	"	C	.003
401	"	L	.005	130	"	D	.003
402	"	M	.005	131	"	E	.004
403	"	N	.005	132	"	F	.004
404	"	P	.006	133	"	G	.004
405	"	R	.006	250	"	H	.003
406	"	S	.006	251	"	I	.003
455	"	T	.005	252	"	J	.004
120	35.0	A	.004	421	"	K	.003
121	"	B	.004	422	"	L	.003
122	"	C	.004	423	"	M	.003
123	"	D	.004	424	"	N	.003
124	"	E	.005	425	"	P	.004
125	"	F	.005	466	"	R	.004
126	"	G	.005	427	"	S	.004
237	"	H	.004	458	"	T	.003
238	"	I	.004	428	65	A	.003
239	"	J	.005	429	65	B	.003
407	"	K	.004	430	75	A	.0025
408	"	L	.004	431	75	B	.0025
409	"	M	.004	432	85	A	.0025
410	"	N	.004	433	85	B	.0025
411	"	P	.005	134	100	A	.002
412	"	R	.005	135	100	B	.002

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE II. Tripping-time, standard delay. 1/ 2/

Time delay percent rated current	Tripping-time delay at 25°C ±2°C (tripping time in seconds)													
	50 V dc				240 V 60 Hz				240 V 400 Hz					
	A		B		C		D		E		F		G	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	70	7	7	.5	120	10	17	.7	---	---	---	---	---	---
150	---	---	---	---	---	---	---	---	60	5	5.8	.50	400	40
200	8	.6	1.4	.13	20	2.2	1.6	.13	20	2.1	1.9	.15	150	9.5
400	1.5	.15	.25	.031	2.3	.3	.25	.03	3.2	.4	.19	.02	19	1.9
600	.5	Inst	.12	Inst	.75	Inst	.13	Inst	.19	Inst	.08	Inst	1.6	Inst
800	.051	Inst	051	Inst	.16	Inst	07	Inst	06	Inst	05	Inst	4	Inst
1,000	.026	Inst	.026	Inst	.04	Inst	.04	Inst	.045	Inst	.036	Inst	.043	Inst

See footnotes at end of table V.

TABLE III. Tripping-time, high-inrush design. 1/ 3/

Time delay percent rated current	Tripping-time delay at 25°C ±2°C (tripping time in seconds)															
	50 V dc				240 V 60 Hz						240 V 400 Hz					
	K		L		M		N		T		P		R		S	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	100	10	12	.5	120	10	18	1	700	50	---	---	---	---	---	---
150	---	---	---	---	---	---	---	---	350	32	60	6	5.8	6	500	60
200	20	2.5	1.5	.13	20	3	1.6	.16	70	10	20	2.1	2	.2	160	20
400	2	.36	.29	031	2 3	.3	.3	.04	15	1.5	4	.4	.35	.035	19	2
600	1	.13	15	Inst	1	.13	.17	Inst	7	.7	.6	Inst	.125	Inst	3.5	.250
800	6	Inst	06	Inst	.5	Inst	.09	Inst	3	1	.06	Inst	.05	Inst	.5	.025
1,000	.29	Inst	.05	Inst	.29	Inst	.043	Inst	2	.01	.045	Inst	.036	Inst	.043	Inst
1,800 4/	no trip		no trip		no trip		no trip		no trip		no trip		no trip		no trip	

See footnotes at end of table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE IV. Tripping-time at high-low temperature, high-inrush and standard delay. 1/

Time delay percent rated current	Tripping-time delay at high and low temperature °C (tripping time in seconds) 5/															
	50 V dc				240 V 60 Hz						240 V 400 Hz					
	A and K		B and L		C and M		D and N		T		E and P		F and R		G and S	
	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour				no trip one hour		no trip one hour		no trip one hour	
125	500	5	100	.1	500	1	100	.1	8000	25	---	---	---	---	---	---
150	---	---	---	---	---	---	---	---	900	12	500	.5	100	.1	1500	5
200	100	.1	10	.05	100	.05	10	.05	500	5	100	.1	10	.5	500	.5
400	20	Inst	3	Inst	20	Inst	3	Inst	100	.8	20	Inst	3	Inst	100	Inst
600	5	Inst	1	Inst	5	Inst	1	Inst	40	.1	6	Inst	1	Inst	5	Inst
800	2	Inst	.5	Inst	.5	Inst	.5	Inst	10	.05	.5	Inst	.5	Inst	.5	Inst
1,000	---	---	---	---	---	---	---	---	3	.01	---	---	---	---	---	---

See footnotes at end of table V.

TABLE V Tripping-time, standard nondelay. 1/ 2/

Time delay percent rated current	Tripping-time delay at -40°C ±2°C, +25°C ±2°, and +85°C ±2°C (tripping time in seconds)					
	50 V dc		240 V 60 Hz		240 V 400 Hz	
	H (nondelay)		I (nondelay)		J (nondelay)	
	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour	
125	0.15	Inst	0.15	Inst	---	---
150	---	---	---	---	0.15	Inst
200	0.07	Inst	0.05	Inst	0.070	Inst
400	0.032	Inst	0.02	Inst	0.032	Inst
600	0.02	Inst	0.017	Inst	0.020	Inst
800	0.02	Inst	0.017	Inst	0.020	Inst

1/ Circuit breakers shall not trip at 100 percent rated current. Characteristics A, B, C, D, H, I, K, L, M, and N must trip at 125 percent rated current, E, F, G, J, P, R, and S at 150 percent. Any characteristic may trip between 100 percent and the must-trip value. Instantaneous (Inst) is defined as less than 15 milliseconds.

2/ Voltage, frequency, and tripping-time delay codes A, B, C, D, E, F, G, H, I, and J are standard delays without the high-inrush feature.

3/ Voltage, frequency, and time delay codes K, L, M, N, P, R, and S incorporate the high-inrush or transient suppression feature.

4/ High-inrush test shall be performed using one alternation which has a peak value of 1,800 percent of rated current. 400 Hz and dc delays are subjected to a 400 Hz waveform, 60 Hz delays shall be subjected to a 60 Hz waveform.

5/ High and low test temperature tolerances are ±2°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

Circuit breakers covered by this specification sheet are substitutable for the manufacturer's part numbers as shown in table VI. This information in no way implies that the manufacturer's part number is substitutable for the military part number.

TABLE VI. Supersession and substitution data

Superseding military part number	Superseded manufacturers part number	
	FSCM 81541	FSCM 74193
	Type APL-1 UPL-1	Type AMI
M55629/1-XXX	The complete part number consists of the type (above) plus identification codes for comparable internal connections, voltage, frequency, time delay and current rating. UL recognition and moisture fungus proofing is also superseded by the military circuit breakers.	

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - ME, MI
Navy - AS, OS
Air Force - 17, 99
DLA - ES

User activities
Army - AV
Navy - MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5925-0153-1)

* U.S. GOVERNMENT PRINTING OFFICE: 1986-605 036/4 107

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.