
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CONTACT FORK TYPE, CRIMP REMOVABLE (5.0 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28731.

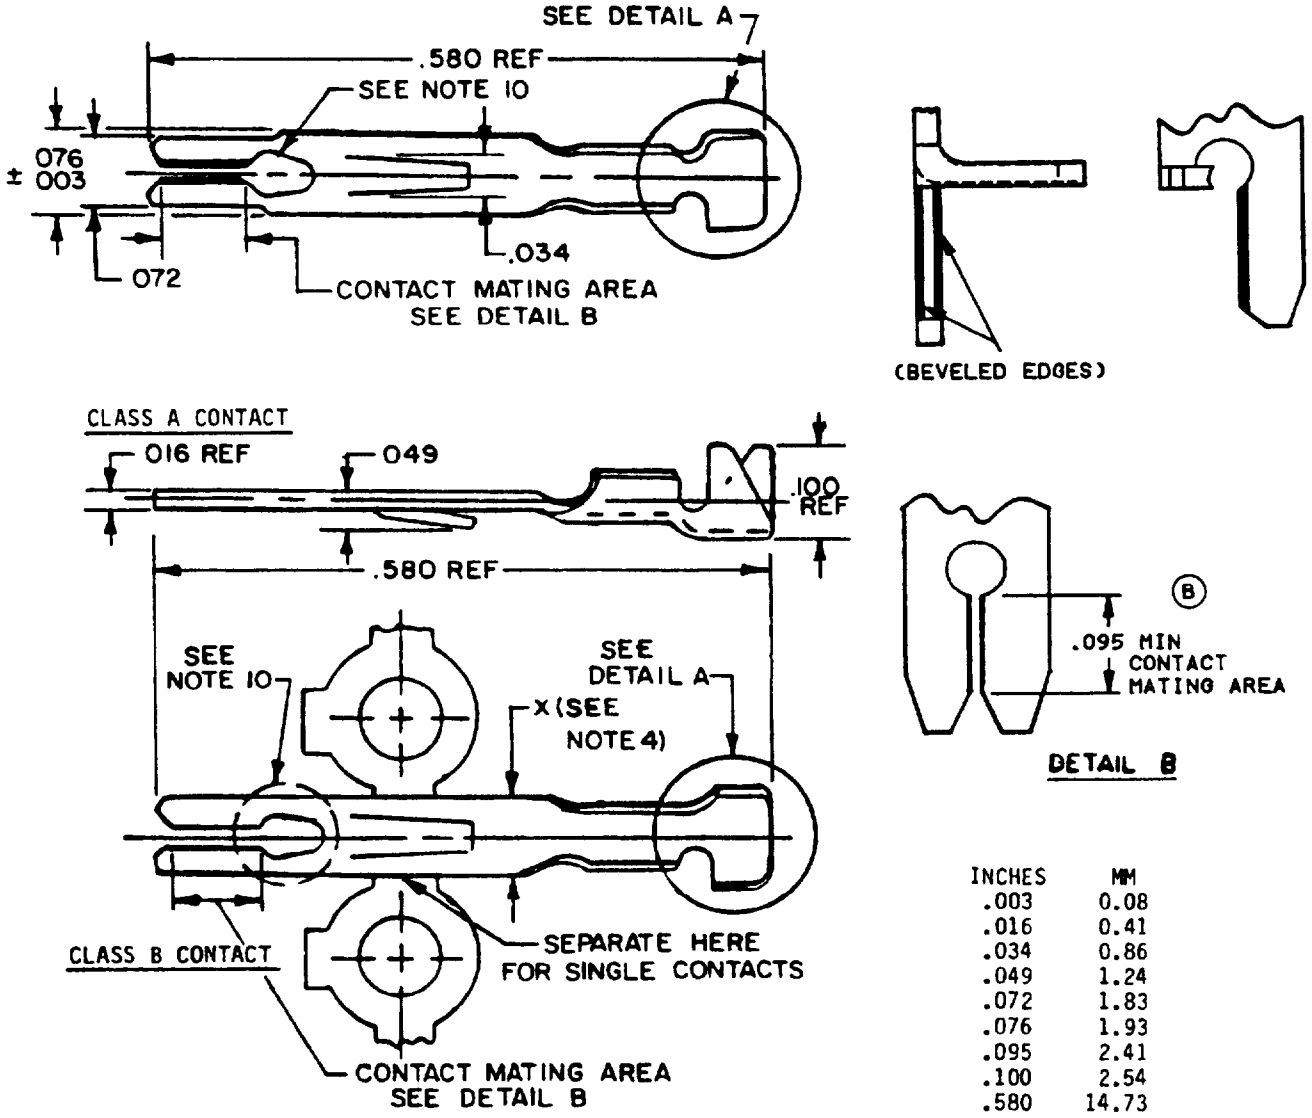


INCHES	MM
.003	0.08
.016	0.41
.034	0.86
.049	1.24
.072	1.83
.076	1.93
.095	2.41
.100	2.54
.580	14.73

FIGURE 1. Contact, fork type, crimp removable.

Ⓑ denotes changes


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

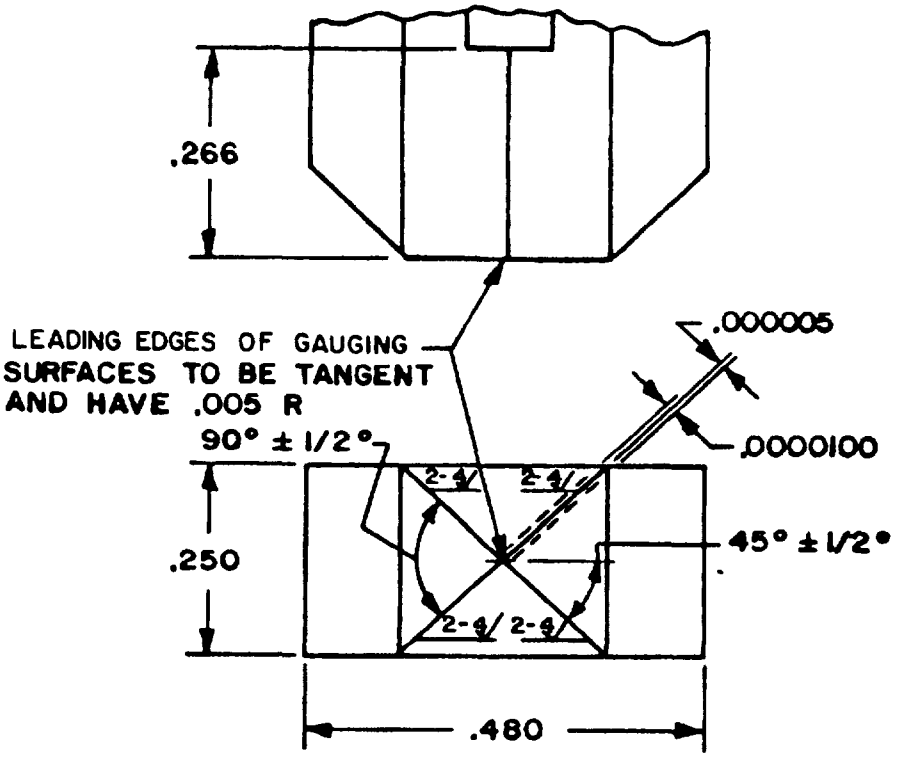

INCHES	MM
.0000050	0.000127
.0000100	0.000254
.001	0.03
.005	0.13
.250	6.35
.266	6.76
.480	12.19

Material: Medium alloy steel bonded titanium carbide, rockwell-67-69

Configuration A - Test gauge

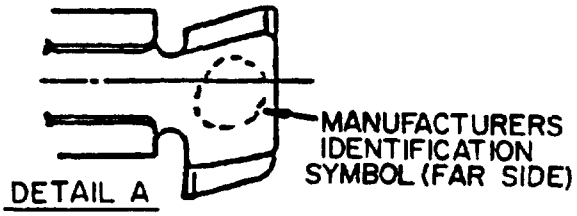

Manufacturers identification symbol shall be imprinted approximately as shown.

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm). All dimensions are for parts after plating.
4. Trim area not to exceed width of contact across retaining lance area "X".
5. Contact crimp for use with (AWG) wire range No. 22 to No. 30 standard type E per MIL-W-16878.
6. Remove all burrs and sharp edges .001 (0.03 mm) maximum.
7. Crimp tool MIL-C-22520/17-02.
8. Contact insertion and removal tool MIL-I-81969/5-01 and MIL-I-81969/4-02.
9. Patent Notice. Patent No. 3,248,686 owned by Elco Corporation. The government has a royalty-free license under the above patent for the benefit of manufacturers of the items called for in this specification, either for the government or for use in equipment to be delivered to the government.
10. Contact relief hole configuration, optional.

FIGURE 1. Contact, fork type, crimp removable - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration. See figure 1.

Contact separating force (see configuration A):

Polished steel gauge from unplated contacts: 1 ounce, minimum.
Plated gold over nickel contacts (contact to contact): 2 to 10 ounces.

Current rating: 5 amperes, 22 AWG wire.

Contact mating area Contacts may be supplied with either overall plating or localized finish. For localized finish contacts the contact mating area shall be in accordance with detail B and MIL-C-28731.

Part Number:
M28731/35-0001 - supplied loose for hand crimpling installation.
M28731/35-0002 - supplied on a reel for automatic crimping machine installation.

Identification of contact: Contacts shall be permanently imprinted with manufacturer's symbol for purpose of identifying manufacturer's product (see detail A).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, MI
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AL, AV, ME
Navy - MC, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3488-27)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.