
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CONTACT FORK TYPE, WRAPPOST REMOVABLE (3.0 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28731.

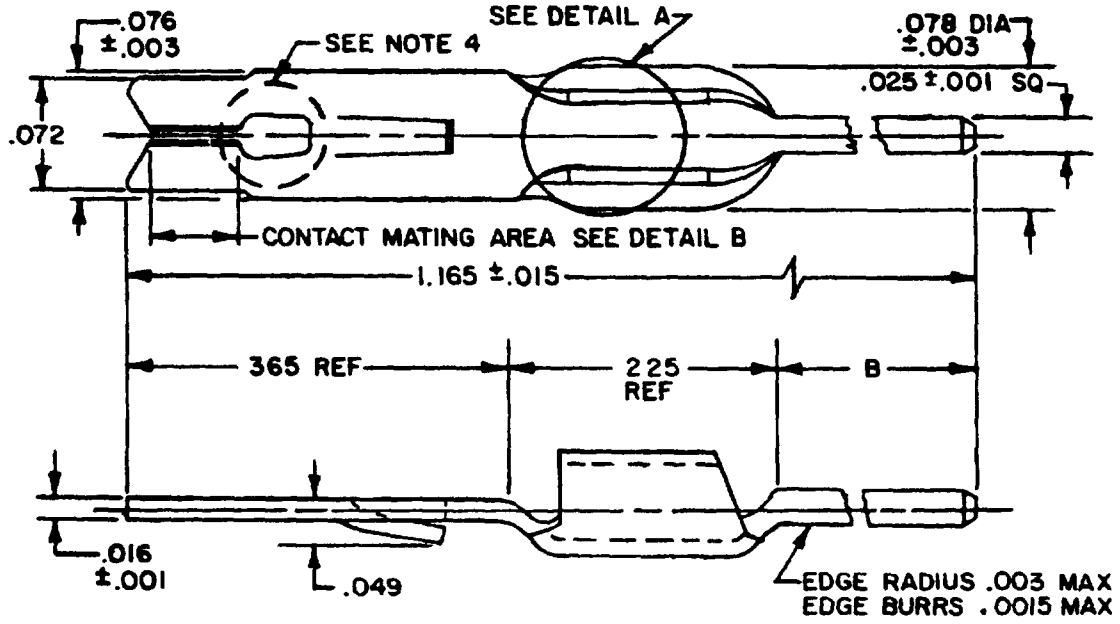

INCHES	MM
.001	0.03
.0015	0.038
.003	0.08
.015	0.38
.016	0.41
.025	0.64
.049	1.24
.072	1.83
.076	1.93
.078	1.98
.095	2.41
.225	5.72
.365	9.27
1.165	29.59


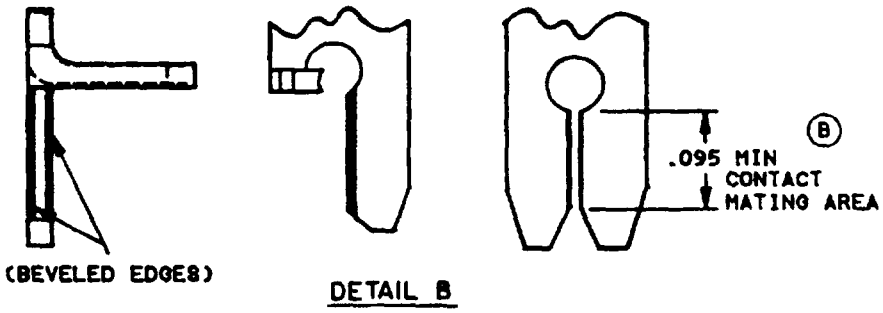


FIGURE 1. Contact, fork type, wrappost removable.

Ⓑ denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

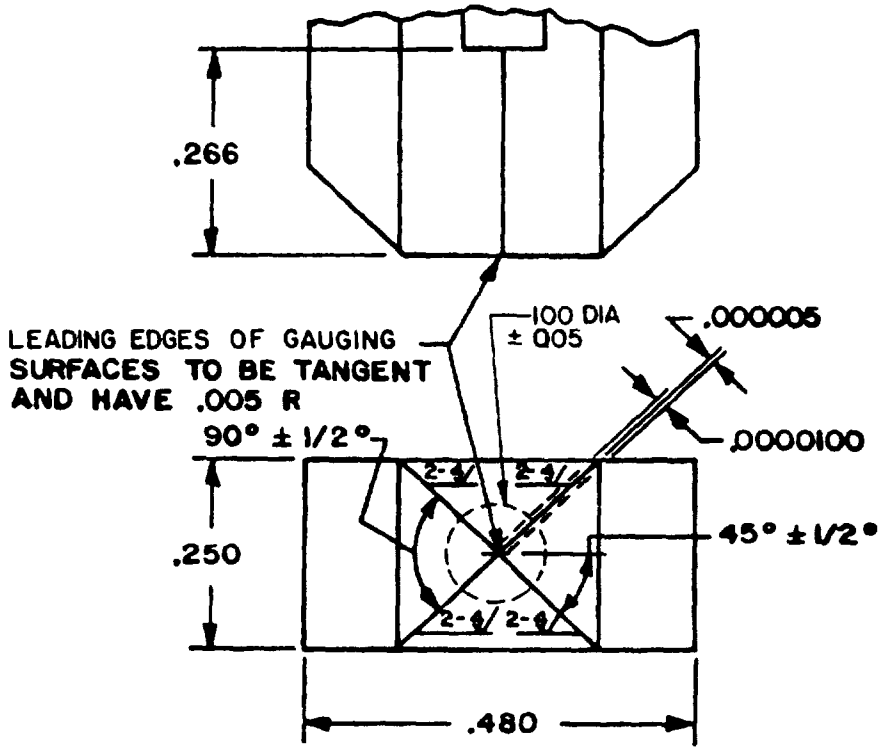

MATERIL: MEDIUM ALLOY STEEL BOUNED TITANIUM CARBIDE, ROCKWELL"C"67-69

Configuration A - Test gauge

INCHES	MM
.0000050	0.00027
.0000100	0.000254
.005	0.13
.100	2.54
.250	6.35
.266	6.76
.489	12.19

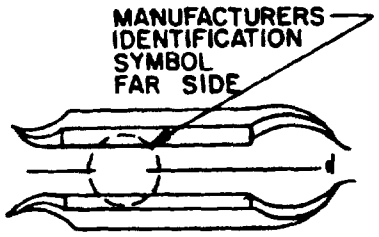

DETAIL A

Manufacturers identification symbol shall be imprinted approximately as shown.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm). All dimensions are for parts after plating.
4. Contact relief hold configuration, optional. (8)
5. Contact insertion and removal tool, MIL-I-81969/5-01 and MIL-I-81969/4-02.
6. Patent Notice. Patent No. 3,248,686 owned by Elco Corporation. The government has a royalty-free license under the above patent for the benefit of manufacturers of the items called for in this specification, either for the government or for use in equipment to be delivered to the government.

FIGURE 1. Contact, fork type, wrappost removable - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Application: Contacts are used with mounted connectors having fixed actuating hardware on connectors MIL-C-28731/27 through MIL-C-28731/34. Contacts are not recommended for use on automatic wire wrap applications.

Wire size: For .025 square wrappost, wire sizes 24, 26, 28 and 30 are recommended (see MIL-STD-1130).

Contact separating force (see configuration A):

Polished steel gage from unplated contacts: 1 ounce, minimum.
Plated gold over nickel contacts (contact to contact): 2 to 10 ounces.

Current rating: 3 amperes, 24 AWG wire.

Contact mating area: Contacts may be supplied with either overall plating or localized finish. For localized finish contacts the contact mating area shall be in accordance with detail B and MIL-C-28731 and the tail area (dimension B of figure 1) shall be in accordance with MIL-C-28731.

Part Number: M28731/36-0001.

Identification of contact: Contacts shall be permanently imprinted with manufacturer's symbol for purpose of identifying manufacturer's product (see detail A).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, MI
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AL, AV, ME
Navy - MC, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3488-28)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.