INCH-POUND

MIL-DTL-28731/37A
15 March 2004
SUPERSEDING
MIL-C-28731/37
21 February 1985

DETAIL SPECIFICATION SHEET

CONNECTOR, ELECTRICAL, RECTANGULAR SHIELD, FOR FEMALE RECTANGULAR 165 REMOVABLE TYPE CONTACTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28731.


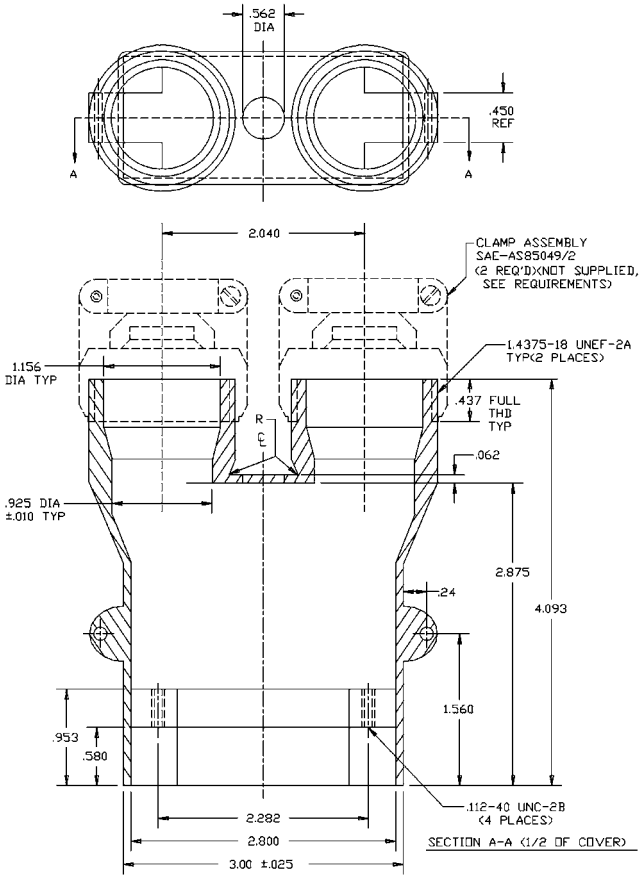


FIGURE 1. Shield rectangular design configuration.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

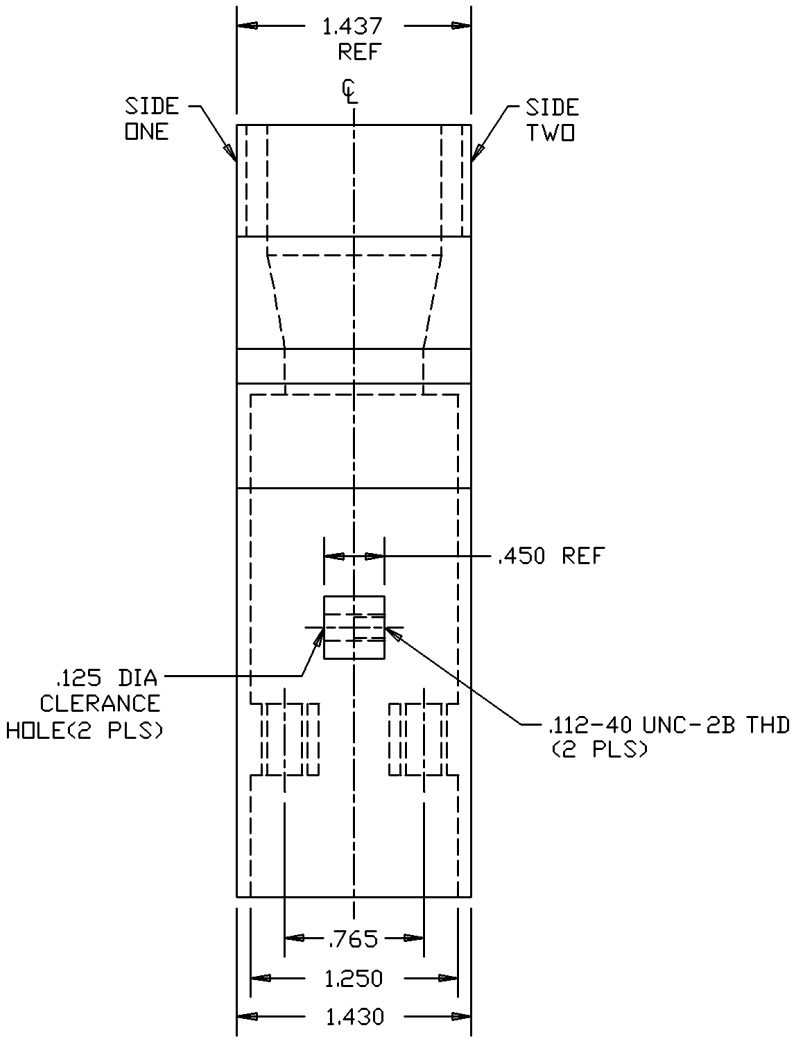

Inches	mm
.062	1.57
.112	2.84
.125	3.18
.240	6.10
.437	11.10
.450	11.43
.562	14.27
.580	14.73
.765	19.43
.925	23.49
.953	24.21
1.156	29.36
1.250	31.75
1.430	36.32
1.437	36.50
1.560	39.62
2.040	51.82
2.282	57.96
2.800	71.12
2.875	73.02
3.000	76.20
4.094	103.96

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .005 (0.37 mm).
4. Cover sides 1 and 2 are manufactured as a unit. To maintain proper alignment, cover sections should not be interchanged with other cover sections.
5. Covers are shipped with sides 1 and 2 assembled to prevent mixing.
6. Application: The shield assembly can be used only with connector assembly M28731/34-0007.
7. Hardware: The shield assemblies are supplied with four #4-40UNC 2A-.500 inch screws for mounting shield to insulator.

FIGURE 1. Shield rectangular design configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.

Packaging: Complete unit to be packaged in accordance with method 10 of MIL- STD-2073-1.

Cable clamp assemblies: Shield is supplied assembled as shown on figure 1; however, two cable clamp assemblies, Part or Identifying Number (PIN) SAE AS85049/2-16C must be acquired separately and shall conform to SAE AS58049/2.

PIN: M28731/37-0001.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-28731, this document references the following:

MIL-STD-2073-1
SAE AS85049/2

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4508-007)

Review activities:
Army - AR, AT, AV, CR4
Navy - MC, OS
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of information above using the ASSIST Online database at http://www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.