MILITARY SPECIFICATION SHEET

CONNECTOR, ELECTRICAL, RECTANGULAR SHIELD, FOR USE WITH MIL-C-28731/32

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the rectangular shield described herein shall consist of this specification and the latest issue of MIL-C-28731.


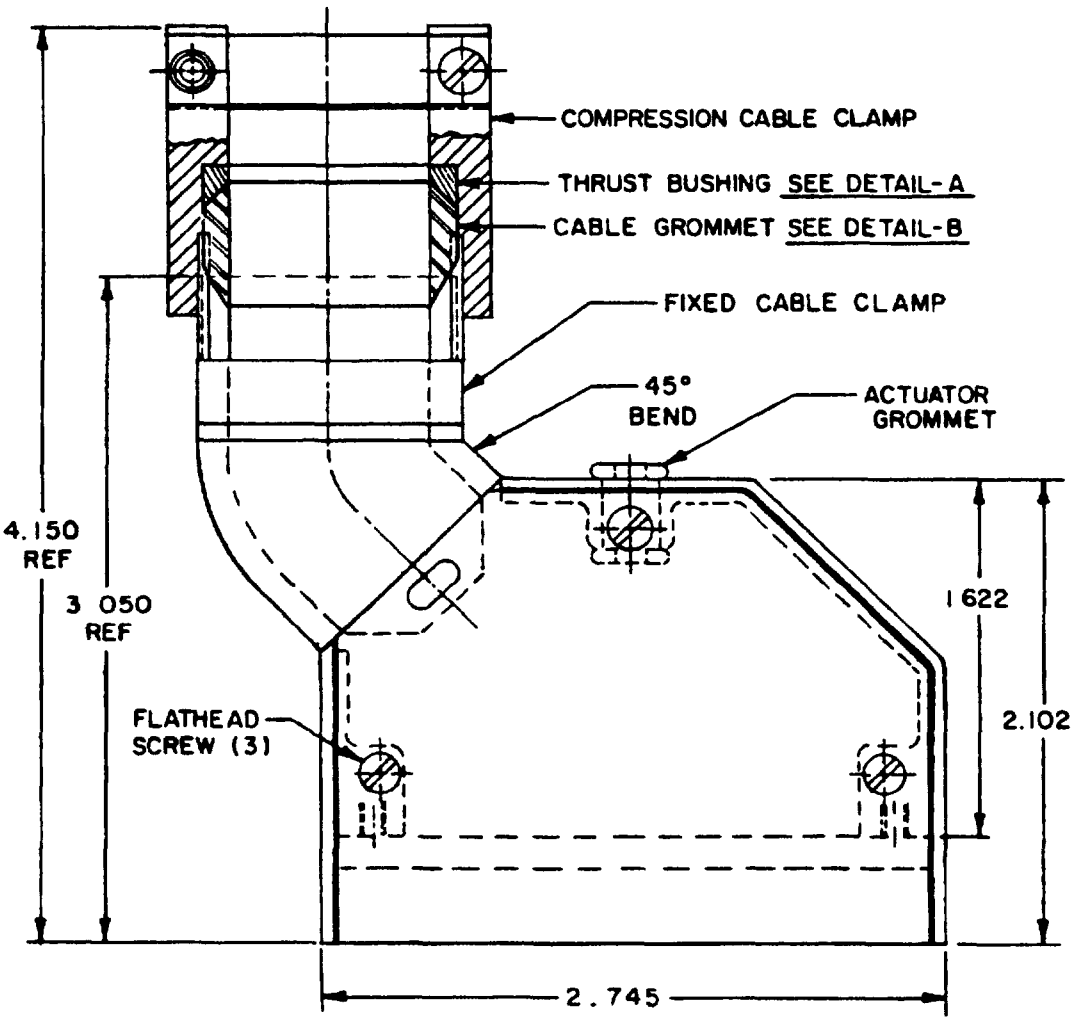



FIGURE 1 Shield rectangular cable clamp style A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

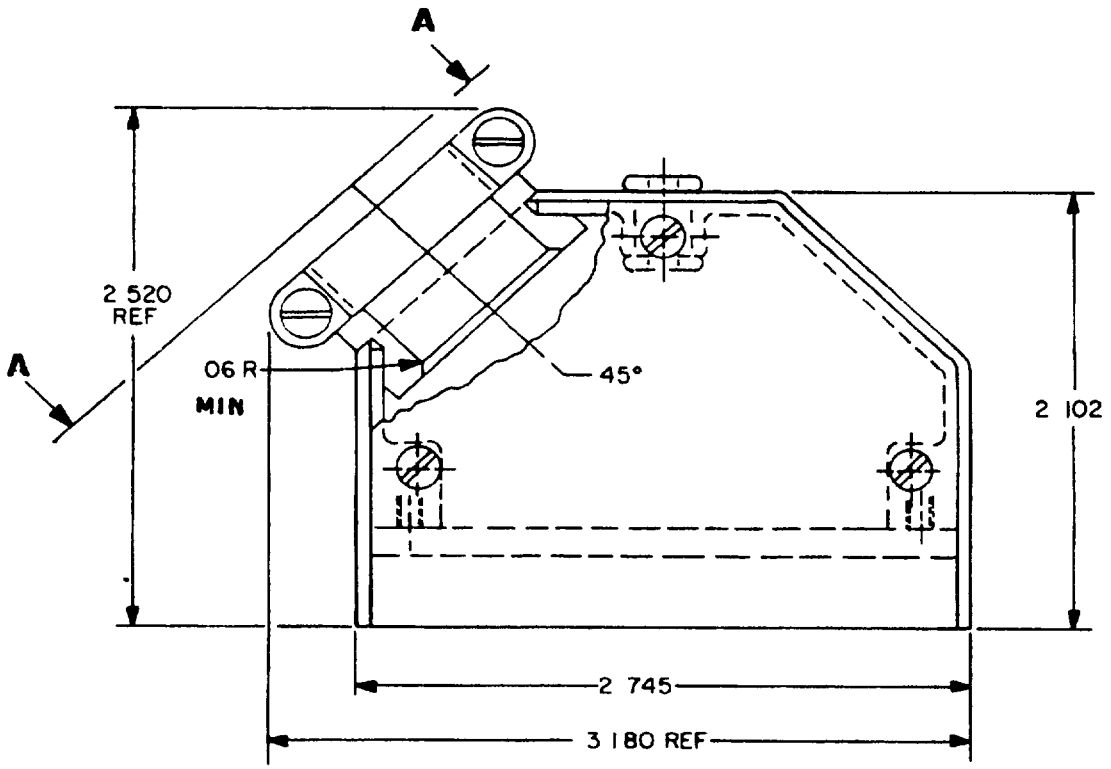

Shield rectangular cable clamp style B

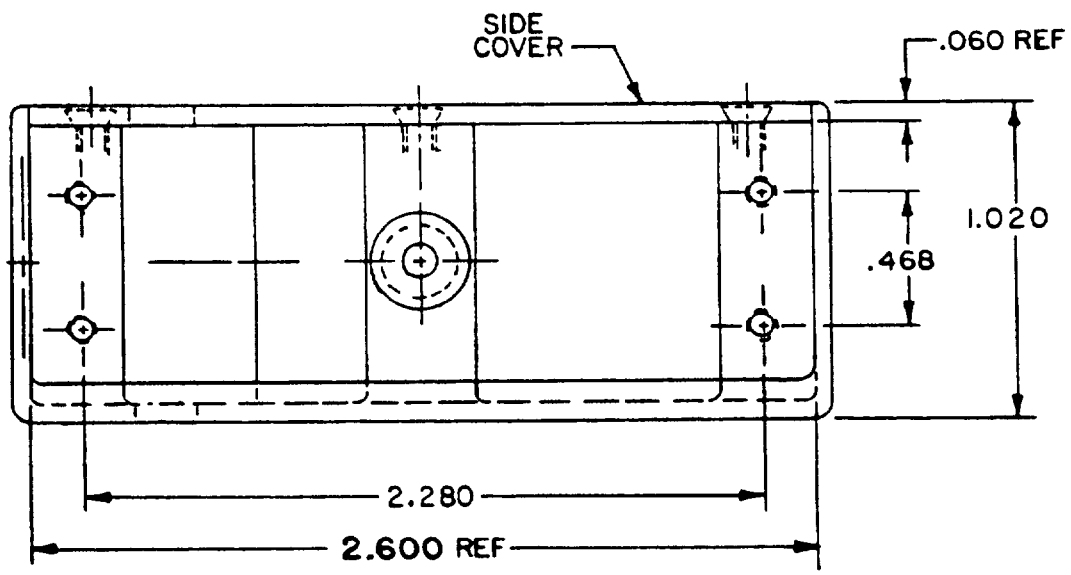



BOTTOM VIEW

Connector mounting
clamp style A & B

FIGURE 1 Shield rectangular cable clamp style B - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

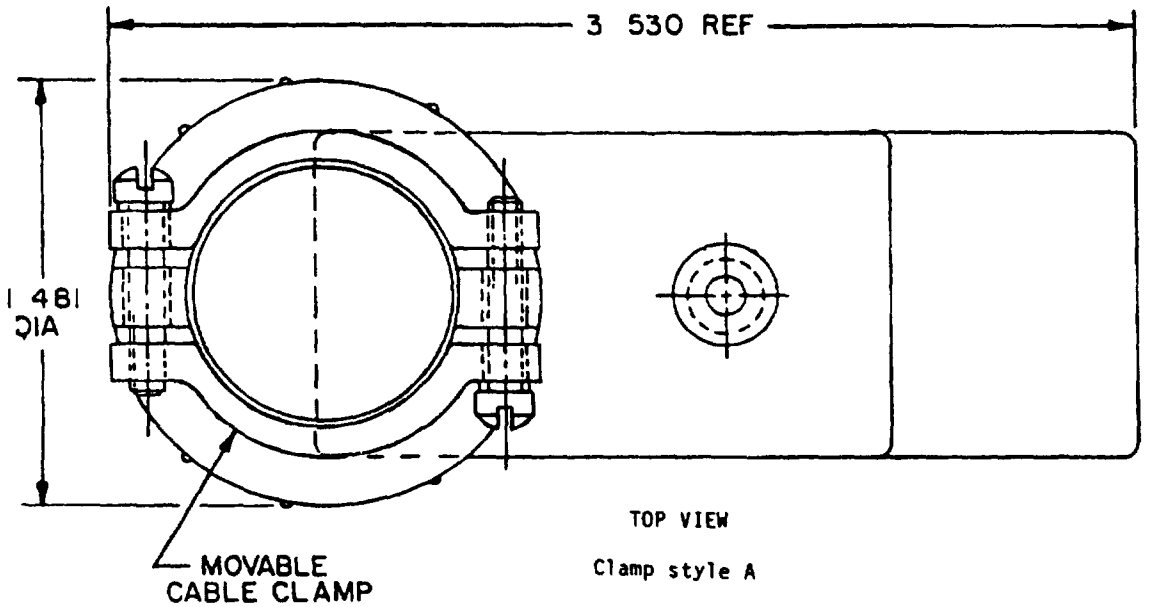


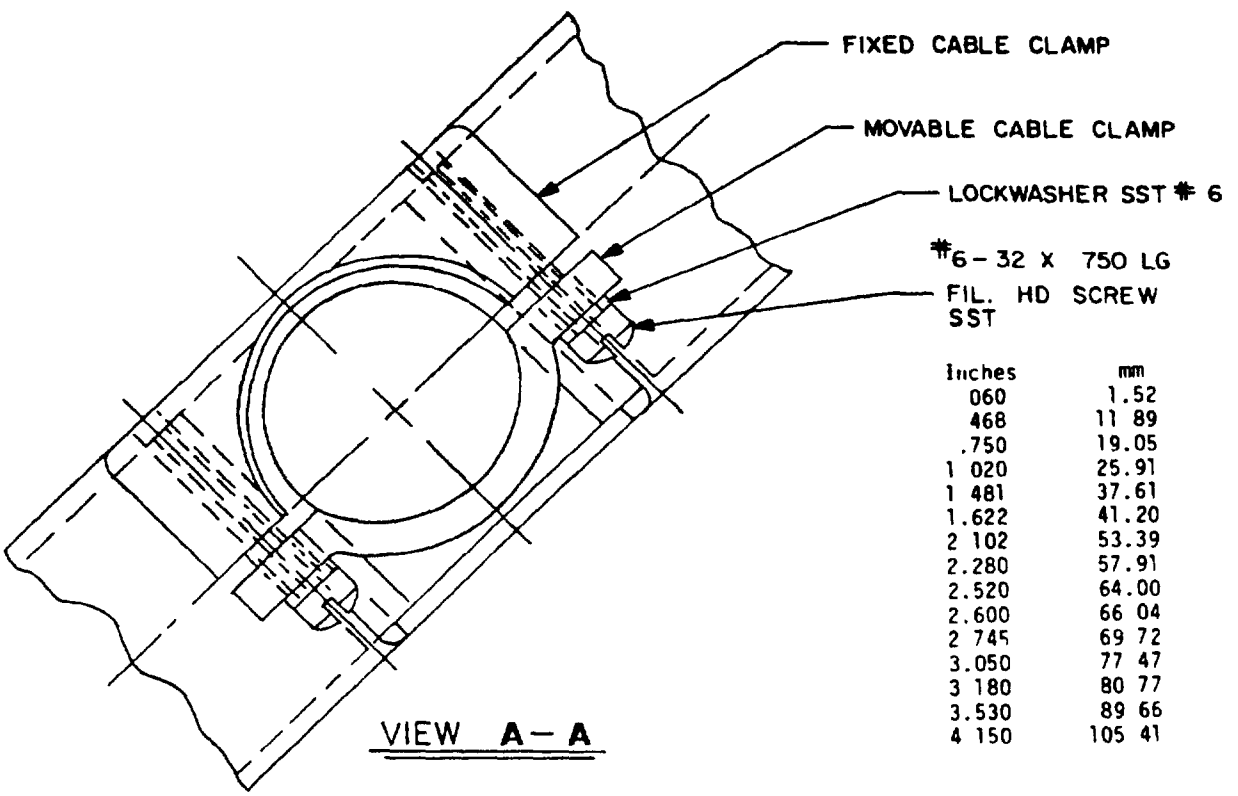

Inches	mm
060	1.52
468	11 89
.750	19.05
1 020	25.91
1 481	37.61
1.622	41.20
2 102	53.39
2.280	57.91
2.520	64.00
2.600	66 04
2 745	69 72
3.050	77 47
3 180	80 77
3.530	89 66
4 150	105 41


FIGURE 1 Shield rectangular cable clamp style B - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

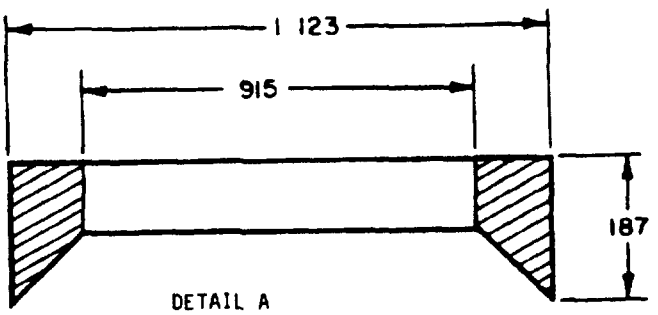

DETAIL A
Thrust bushing

NOTES
1. Dimensions are in inches
2 Metric equivalents are given for general information only
3 Unless otherwise specified, tolerance is ± 015 (37 mm)
4 Unless otherwise specified, shields are supplied assembled as shown in figure 1
5 Shield assembly is used with connector assembly #M28731/32-0002
6. Maximum cable size for both styles is 900 inch diameter

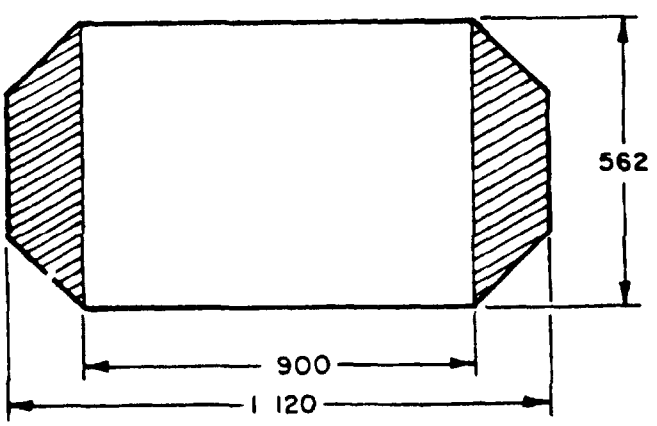

DETAIL B
Cable grommet

Inches	mm
.187	4 75
562	14.27
900	22.86
.915	23 24
1 120	28 45
1 123	28.52

FIGURE 1 Shield rectangular - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Materials and finishes.

Grommets, actuator, and cable: Rubber, nominal hardness per MIL-STD-417-RS615.

Thrust bushing: Aluminum alloy 2024-T4, per QQ-A-225/6, gold chromate finish.

Compression cable clamp: Aluminum alloy no. 380, per QQ-A-591, olive drab chromate finish.

Hardware:

Shield assemblies are supplied with four no. 4-40 UNC 2A 0.5 inch screws for mounting shield to insulator.

Packaging:

Complete unit to be packaged in accordance with MIL-P-116, Method III.

Part number:

M28731/38-0001. Cable clamp style A.

M28731/38-0002: Cable clamp style B.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, MI
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AL, AV, ME
Navy - MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3488-29)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:02Z
Check the source to verify that this is the current version before use.