
INCH-POUND
MIL-DTL-28748/3E
11 May 1999
SUPERSEDING
MIL-C-28748/3D
4 February 1985

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECTANGULAR, RACK AND PANEL, CRIMP TYPE REMOVABLE PIN CONTACTS, SIZES 16 AND 20

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue MIL-DTL-28748 listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation.

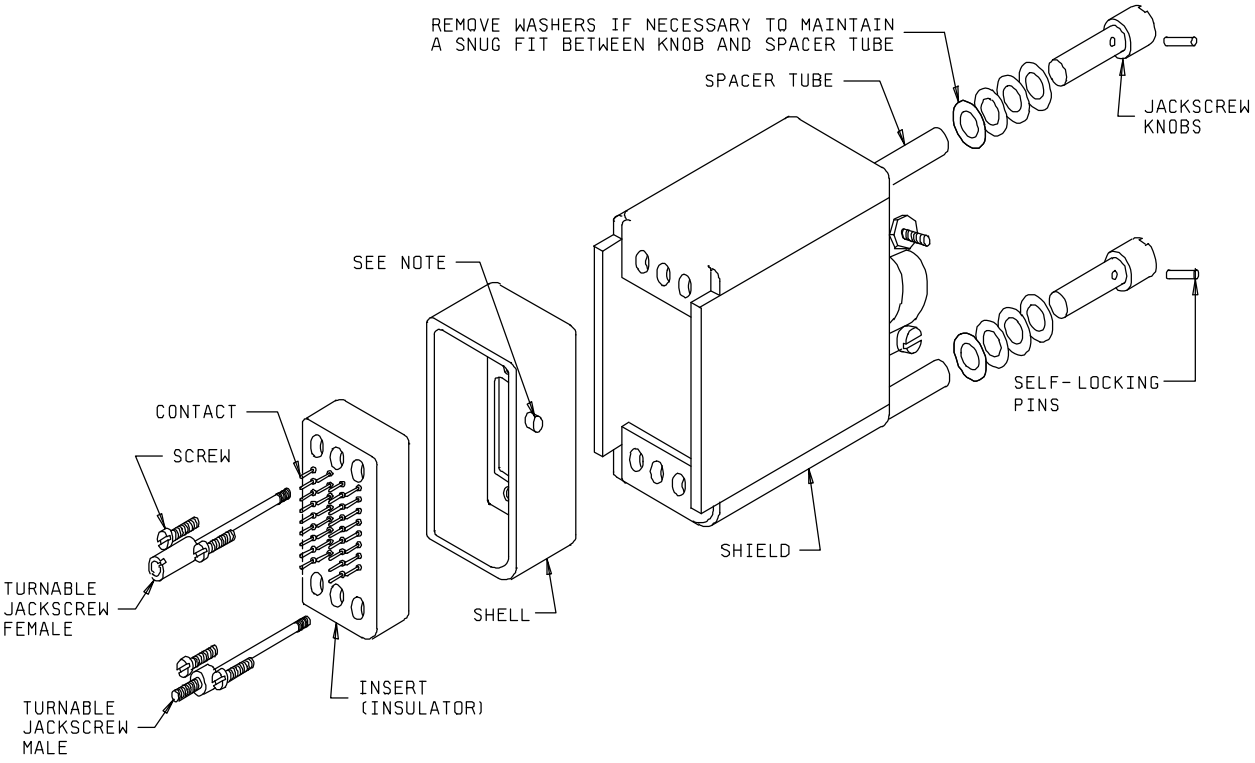

Connector


NOTE: The polarization feature (pin on the plug shell, groove on the receptacle shell) shall be adjacent to the side closest to the number 1 or A contact position.

Configuration A

FIGURE 1. Connector with shield, plug shell, jackscrews, and guidepins.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

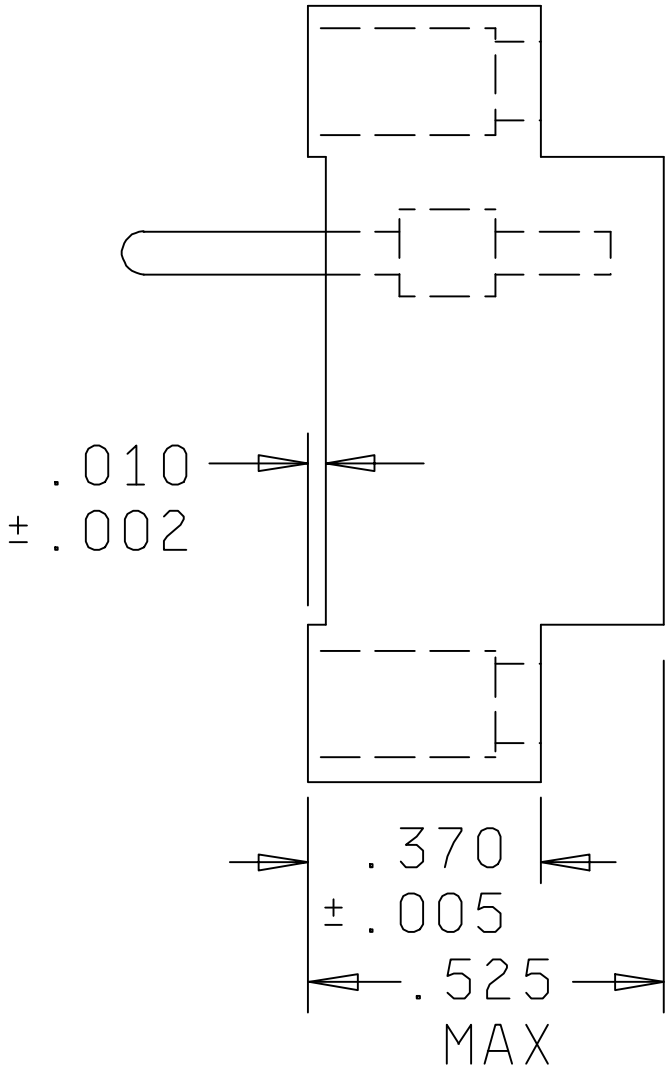

Inches	mm
.005	0.13
.325	8.25
.370	9.40
.525	13.33

FIGURE 1. Connector assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

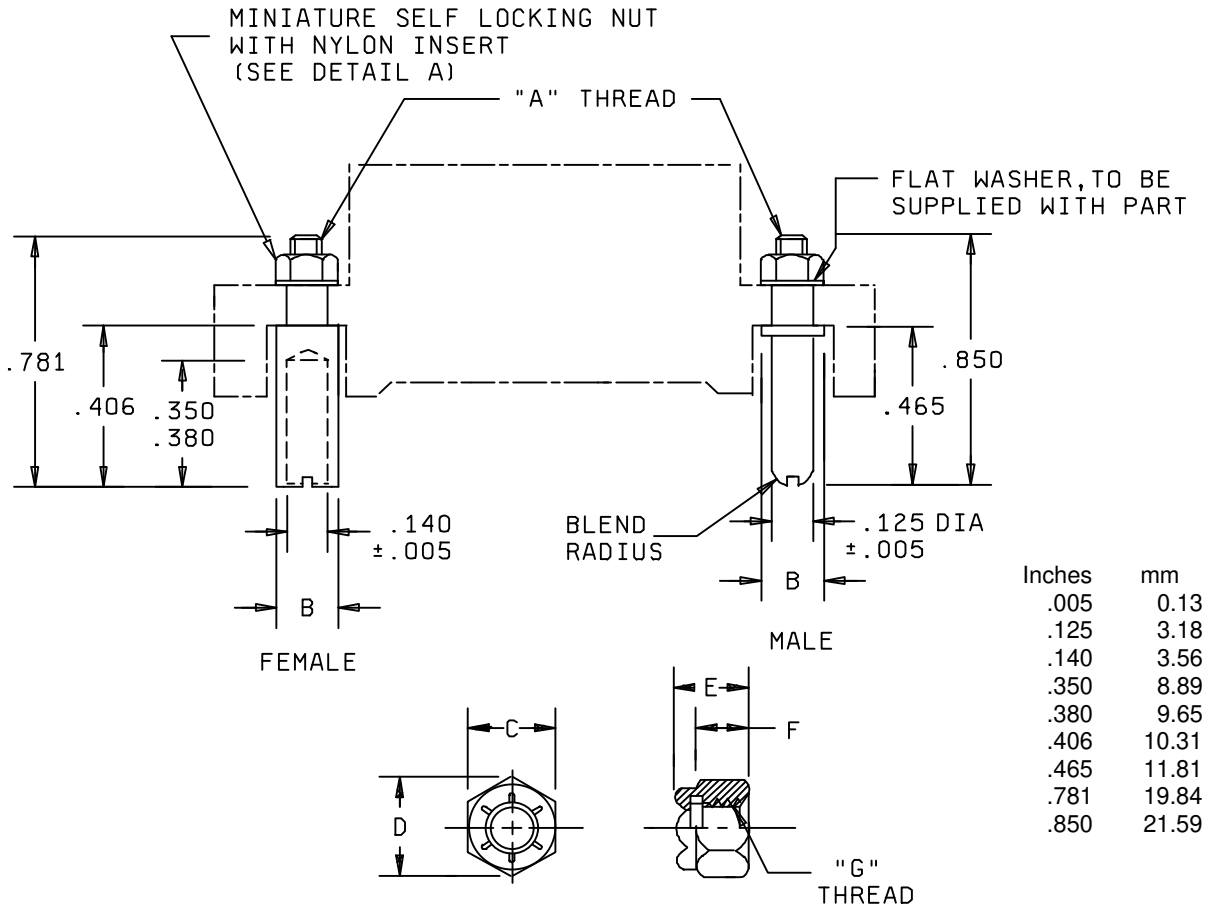

Inches	mm
.005	0.13
.125	3.18
.140	3.56
.350	8.89
.380	9.65
.406	10.31
.465	11.81
.781	19.84
.850	21.59

Detail A
Miniature self locking nut
(nylon insert)
Guidepin designator G


Style	Connector size (number of contacts)	A Thread class 2	B dia max	C min	C max	D ref	E min	E max	G Thread class 3
Male	7, 9, 14, 20, 26, 34, 42, 50, 66, 75	4-40 UNC-2A .112-40 UNC	.190 (4.83)	.181 (4.06)	.190 (4.83)	.205 (5.21)	.095 (2.41)	.125 (3.18)	4-40 UNC-3B .112-32 UNC
Female	7, 9, 14, 20, 26, 34, 42, 50, 66, 75	4-40 UNC-2A .112-40 UNC	.190 (4.83)	.181 (4.06)	.190 (4.83)	.205 (5.21)	.095 (2.41)	.125 (3.18)	4-40 UNC-3B .112-32 UNC
Male	104	6-32 UNC-2A .138-32 UNC	.190 (4.83)	.240 (6.10)	.252 (6.04)	.275 (6.99)	.133 (3.38)	.153 (3.89)	6-32 UNC-3B .138-32 UNC
Female	104	6-32 UNC-2A .138-32 UNC	.190 (4.83)	.240 (6.10)	.252 (6.04)	.275 (6.99)	.133 (3.38)	.153 (3.89)	6-32 UNC-3B .138-32 UNC

Connector with guidepins

Configuration B

FIGURE 1. Connector with shields, jackscrews, and guidepins - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

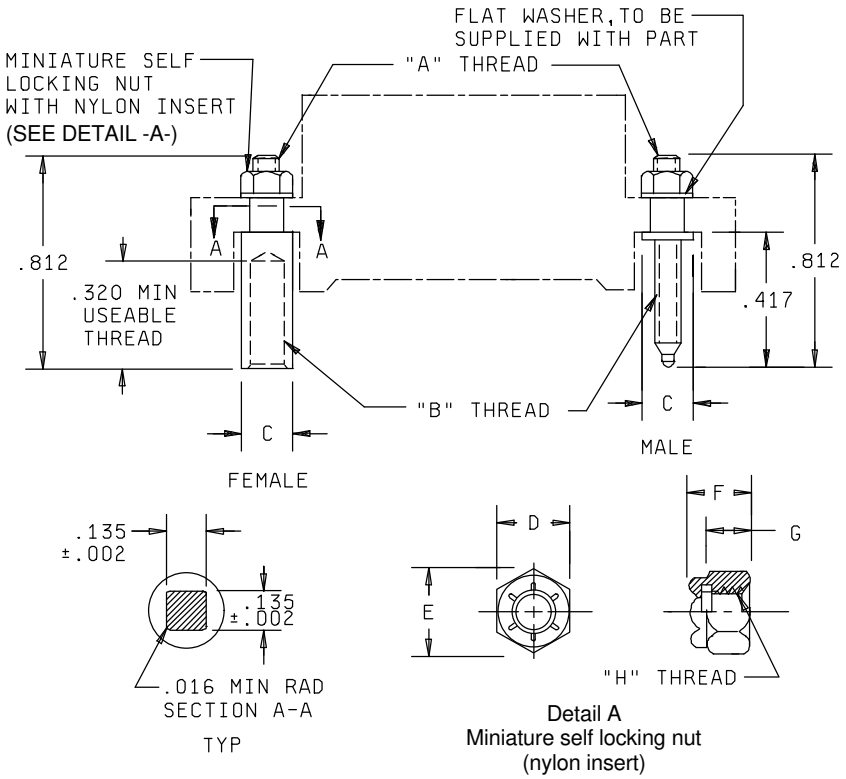

Detail A
Miniature self locking nut
(nylon insert)

Inches	mm
.002	0.05
.016	0.41
.135	3.43
.320	8.13
.417	10.57
.812	20.62

Jackscrew designator F

Style	Connector size (number of contacts)	A Thread class 2	B Thread class 2	C dia max
Male	7, 9, 14, 20, 26, 34, 42, 50, 66, 75	4-40 UNC-2A .112-40 UNC	6-32 UNC-2A .138-32 UNC	.190 (4.83)
Female	7, 9, 14, 20, 26, 34, 42, 50, 66, 75	4-40 UNC-2A .112-40 UNC	6-32 UNC-2B .138-32 UNC	.190 (4.83)
Male	104	6-32 UNC-2A .138-32 UNC	8-32 UNC-2A .164-32 UNC	.137 (3.48)
Female	104	6-32 UNC-2A .138-32 UNC	8-32 UNC-2B .164-32 UNC	.137 (3.48)

Self locking nut


Connector size (number of contacts)	D		E ref	F		G ref	H Thread class 3
	min	max		min	max		
7, 9, 14, 20, 26, 34, 42, 50, 66, 75	.181 (4.06)	.190 (4.83)	.205 (5.21)	.095 (2.41)	.125 (3.18)	.070 (1.78)	4-40 UNC-3B .112-40 UNC
104	.240 (6.10)	.252 (6.04)	.275 (6.99)	.133 (3.38)	.153 (3.89)	.081 (2.06)	6-32 UNC-3B .138-32 UNC

Connector with fixed jackscrews

Configuration C

FIGURE 1. Connector with shields, jackscrews, and guidepins - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

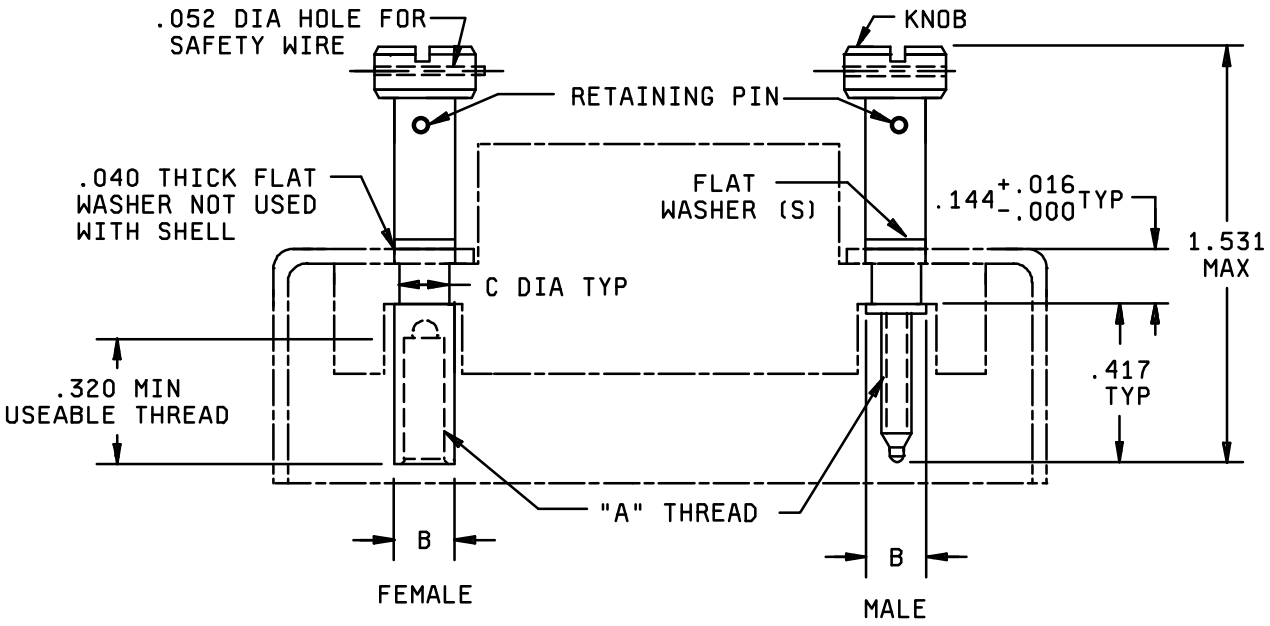

Inches	mm
.016	0.41
.040	1.02
.052	1.32
.144	3.60
.320	8.13
.417	10.59
1.531	58.89

Jackscrew designator S


Style	Connector size (number of contacts)	"A" Thread class 2	"B" dia max	C DIA ±.003 (0.08 mm)
Male	7, 9, 14, 20, 26, 34, 42, 50, 66, 75	6-32 UNC-2A .138-32 UNC	.190 (4.83)	.115 (2.92)
Female	7, 9, 14, 20, 26, 34, 42, 50, 66, 75	6-32 UNC-2B .138-32 UNC	.190 (4.83)	.115 (2.92)
Male	104	8-32 UNC-2A .164-32 UNC	.225 (5.72)	.137 (3.48)
Female	104	8-32 UNC-2B .164-32 UNC	.225 (5.72)	.137 (3.48)

Connector with short turnable jackscrews

Configuration D

FIGURE 1. Connector with shields, jackscrews, and guidepins - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

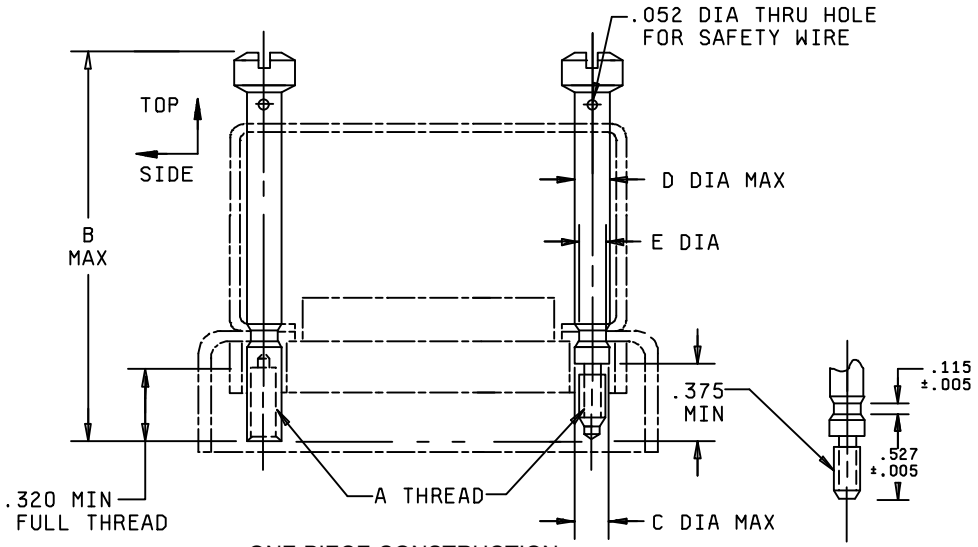

ONE PIECE CONSTRUCTION

Inches	mm
.005	0.13
.052	1.32
.115	2.92
.320	8.13
.375	9.53
.527	13.39

Jackscrew designator L

Style	Connector size (number of contacts)	"A" Thread class 2	"B" max	C dia max	D dia max	E dia ±.002 (0.05 mm)
Male	34, 42, 50, 66, 75	6-32-UNC-2A .138-32 UNC	2.438 (61.93)	.192 (4.88)	.192 (4.88)	.111 (2.82)
Female	34, 42, 50, 66, 75	6-32-UNC-2B .138-32 UNC	2.438 (61.93)	.192 (4.88)	.192 (4.88)	.111 (2.82)
Male	104	8-32-UNC-2A .164-32 UNC	3.282 (83.36)	.225 (5.72)	.225 (5.72)	.140 (3.56)
Female	104	8-32-UNC-2B .164-32 UNC	3.282 (83.36)	.225 (5.72)	.225 (5.72)	.140 (3.56)

For use with shields 3, 4, 9, A, D, and E or plug shells S thru Z, and receptacle shells 1 thru 8.


When plug shells S thru Z or receptacle polarizing shells 1 thru 8 are required to be used with a shield, use shield configurations 1, 2, B, and C.

Connector with long turnable jackscrews

Configuration L

FIGURE 1. Connector with shields, jackscrews, and guidepins - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

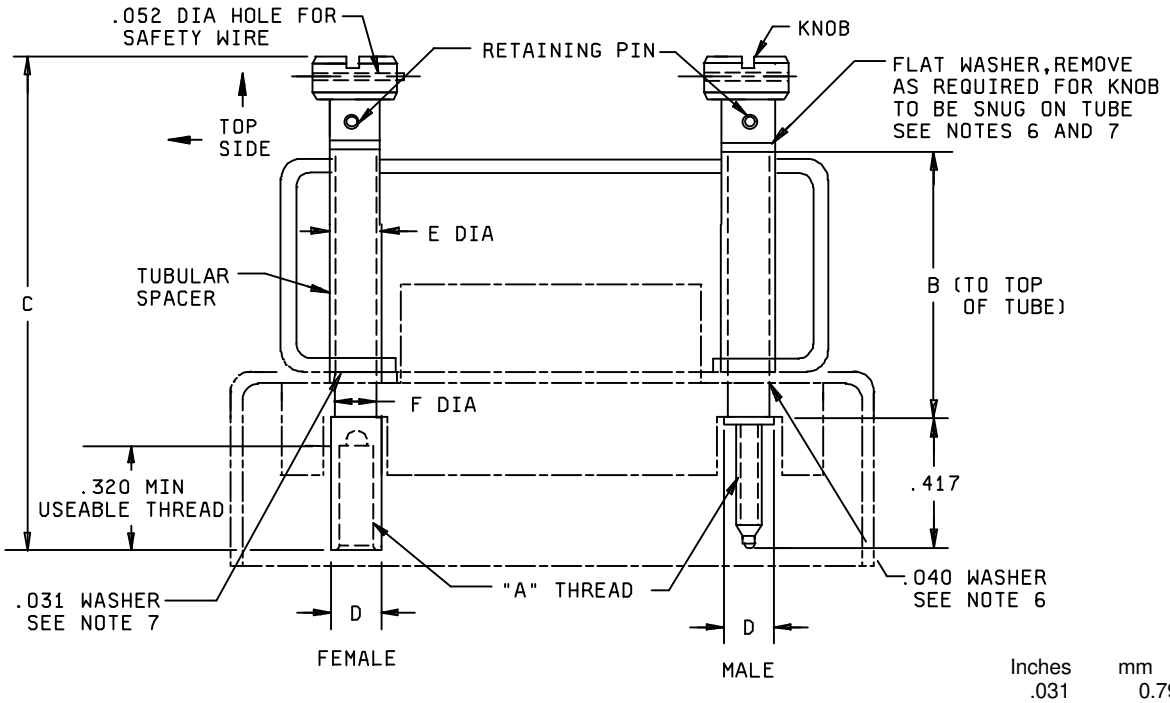

Inches	mm
.031	0.79
.040	1.02
.052	1.32
.320	8.13
.417	10.59

MULTIPIECE CONSTRUCTION

Jackscrew designator M

Style	Connector size (number of contacts)	"A" Thread class 2	"B" ±.016 (0.41 mm)	C max	D dia max	E dia ±.004 (0.10 mm)	F dia ±.003
Male	7, 9, 14, 20, 26, 34, 42, 50, 66, 75	6-32 UNC-2A .138-32 UNC	1.500 (43.10)	2.467 (62.66)	.190 (4.83)	.188 (4.78)	.115 (2.92)
Female	7, 9, 14, 20, 26, 34, 42, 50, 66, 75	6-32-UNC-2B .138-32 UNC	1.500 (43.10)	2.467 (62.66)	.190 (4.83)	.188 (4.78)	.115 (2.92)
Male	104	8-32-UNC-2A .164-32 UNC	2.495 (63.37)	3.438 (87.33)	.225 (5.72)	.219 (5.56)	.137 (3.48)
Female	104	8-32-UNC-2B .164-32 UNC	2.495 (63.37)	3.438 (87.43)	.225 (5.72)	.219 (5.56)	.137 (3.48)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.016 inch (0.41 mm).
4. Material corrosion resistance steel in accordance with QQ-S-763 or QQ-S-764, classes 302, 303, 303se, 304 or 316 except for aluminum alloy knob and tubular, spacer, on multipiece construction.
5. Finish passivated in accordance with QQ-P-35 except for anodized knob and tubular spacer on multipiece construction.
6. Washer .040 inch thick (1.02 mm) supplied with all sizes, not used with shell.
7. Washer .031 inch thick (0.79 mm), supplied with shields size 34 through 75, not used with shields 26 and smaller.


For use with shields 1, 2, plug shells A thru H and receptacle polarizing shields J thru R. When plug shells A through H and receptacle shells J through R are required to be used with a shield, Use shield configurations 1, 2, B, and C.

Connector with long turnable jackscrews

Configuration E

FIGURE 1. Connector with shields, jackscrews, and guidepins - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

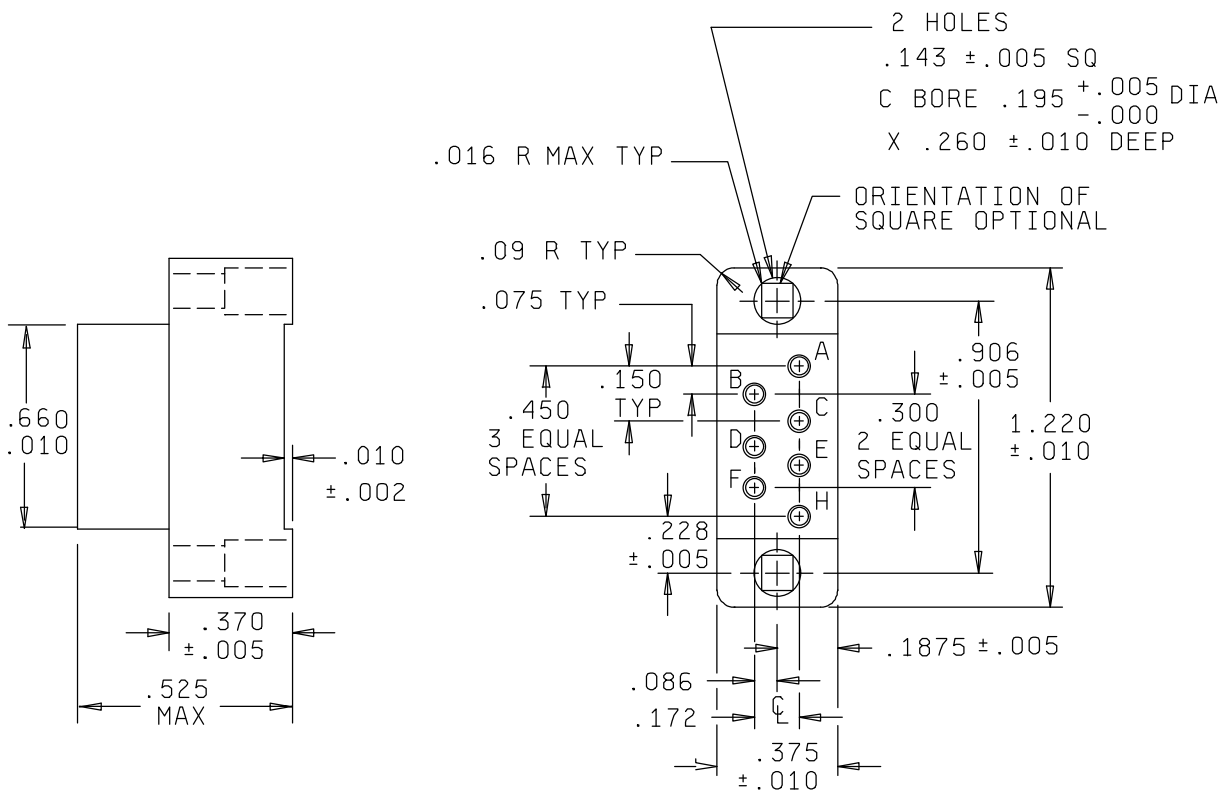


Inches	mm	Inches	mm	Inches	mm
.002	.05	.143	3.63	.300	7.62
.005	.13	.150	3.81	.370	9.40
.010	.25	.172	4.37	.375	9.53
.016	.41	.1875	4.765	.450	11.43
.075	1.91	.195	4.95	.525	13.34
.086	2.18	.228	5.79	.660	16.76
.09	2.29	.260	6.60	.906	23.01
				1.220	30.99

Insert with 7 contacts

Insert designators A and T

FIGURE 2. Insert arrangements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

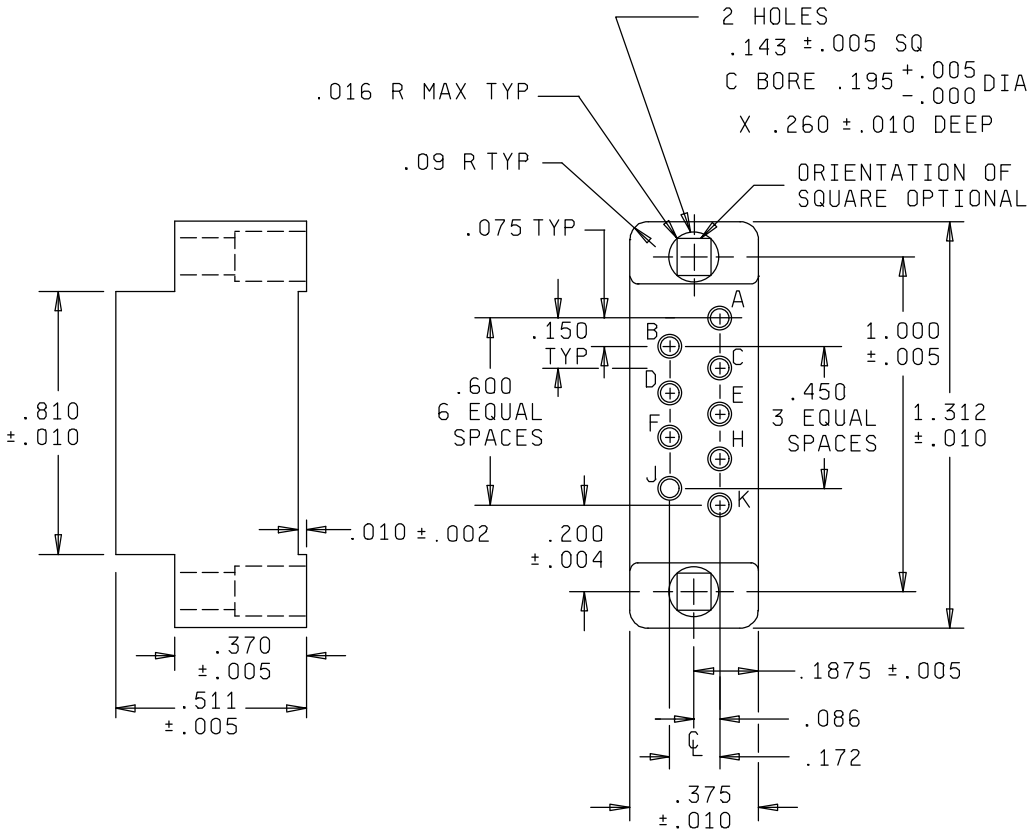


Inches	mm	Inches	mm	Inches	mm
.002	0.05	.143	3.63	.375	9.53
.004	0.10	.150	3.81	.450	11.43
.005	0.13	.172	4.37	.511	12.98
.010	0.25	.1875	4.76	.600	15.24
.016	0.41	.195	4.95	.810	20.57
.075	1.91	.200	5.08	1.000	25.40
.086	2.18	.260	6.60	1.312	33.32
.09	2.29	.370	9.40		

Insert with 9 contacts

Insert designators B and U.

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

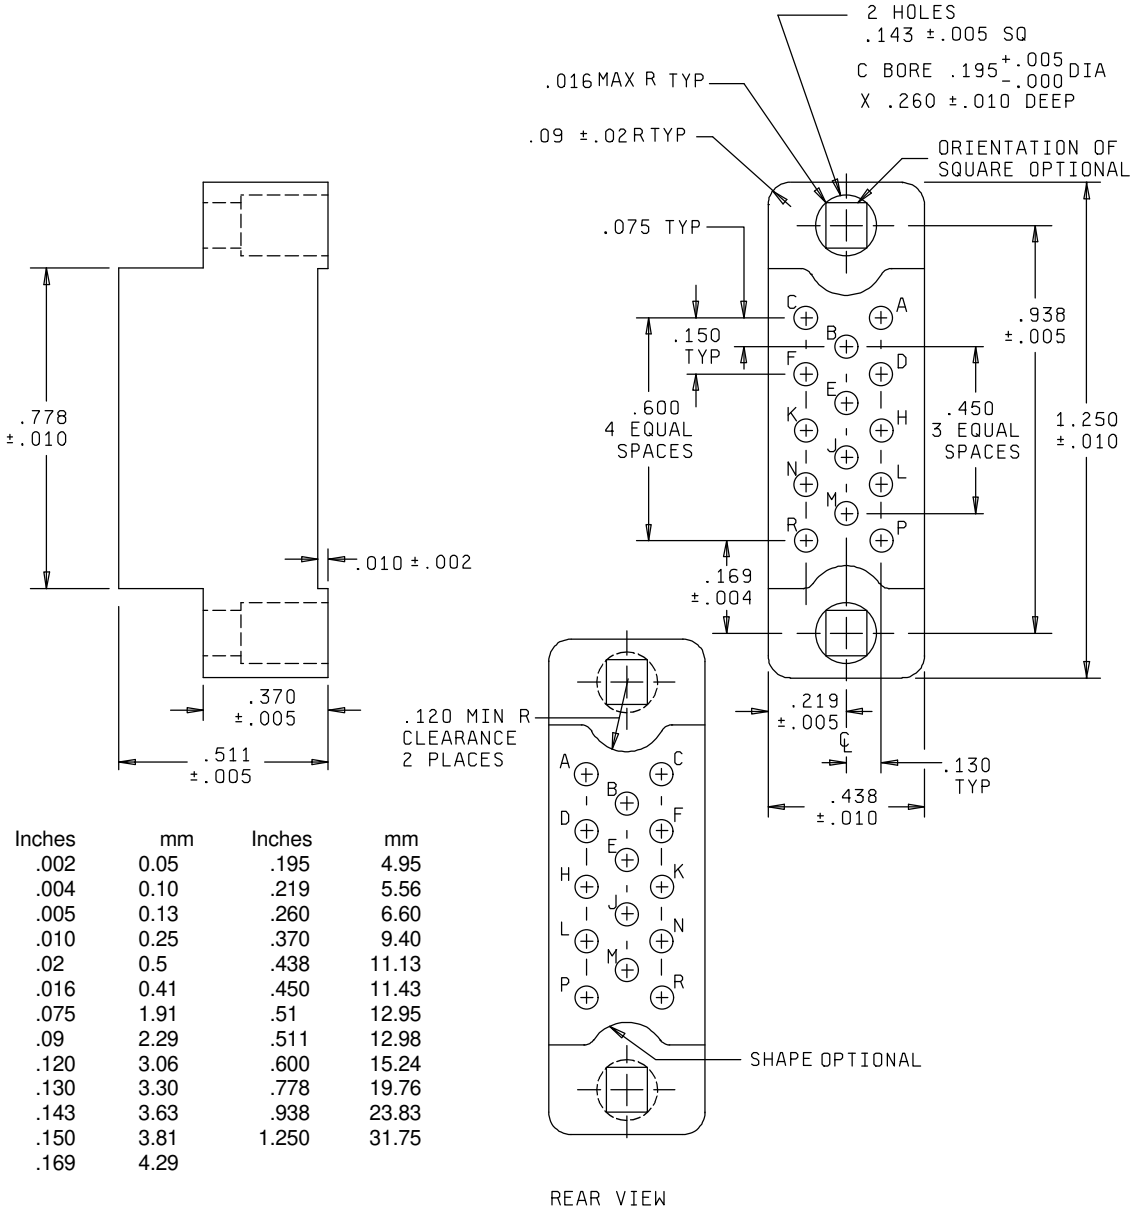


Inches	mm	Inches	mm
.002	0.05	.195	4.95
.004	0.10	.219	5.56
.005	0.13	.260	6.60
.010	0.25	.370	9.40
.02	0.5	.438	11.13
.016	0.41	.450	11.43
.075	1.91	.51	12.95
.09	2.29	.511	12.98
.120	3.06	.600	15.24
.130	3.30	.778	19.76
.143	3.63	.938	23.83
.150	3.81	1.250	31.75
.169	4.29		

Insert with 14 contacts

Insert designators C and V.

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

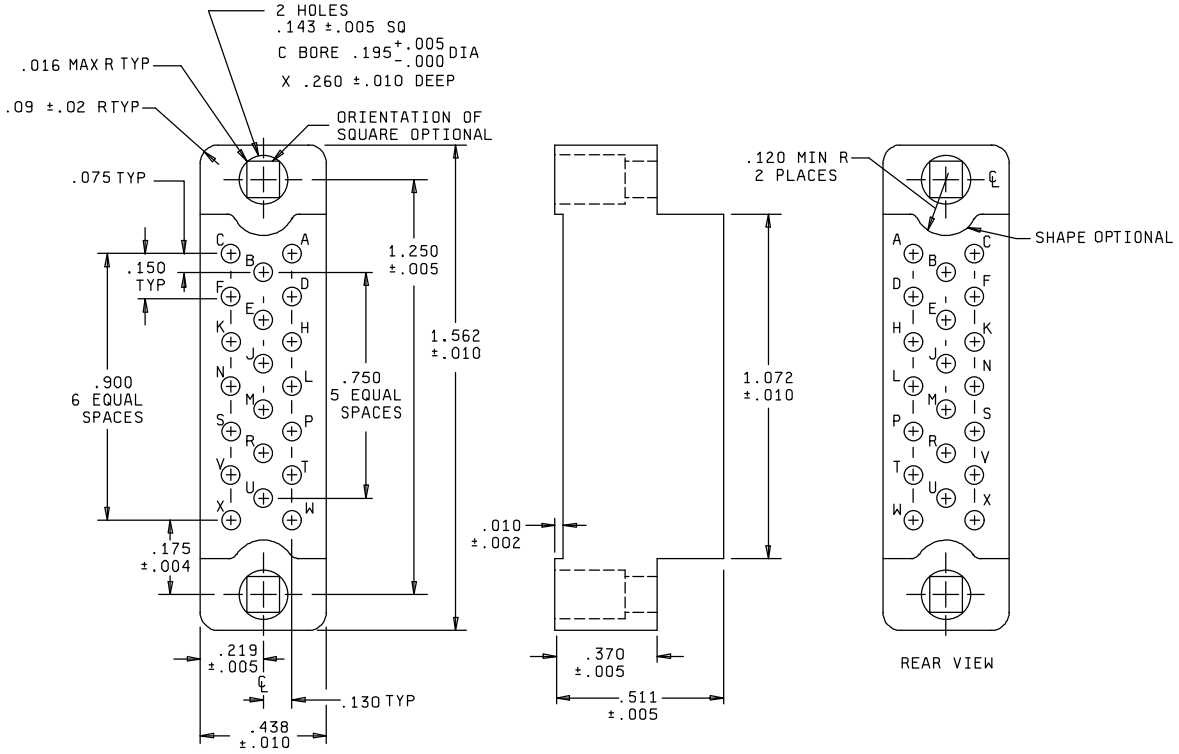


Inches	mm	Inches	mm	Inches	mm
.002	0.05	.130	3.30	.438	11.13
.004	0.10	.143	3.63	.51	13.0
.005	0.13	.150	3.81	.511	12.98
.010	0.25	.170	4.32	.750	19.05
.016	0.41	.175	4.45	.900	22.86
.02	0.5	.195	4.95	1.072	27.23
.075	1.91	.219	5.56	1.250	31.75
.09	2.29	.260	6.60	1.562	39.67
.120	3.06	.370	9.40	2.290	58.17

Insert with 20 contacts

Insert designators D and W.

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

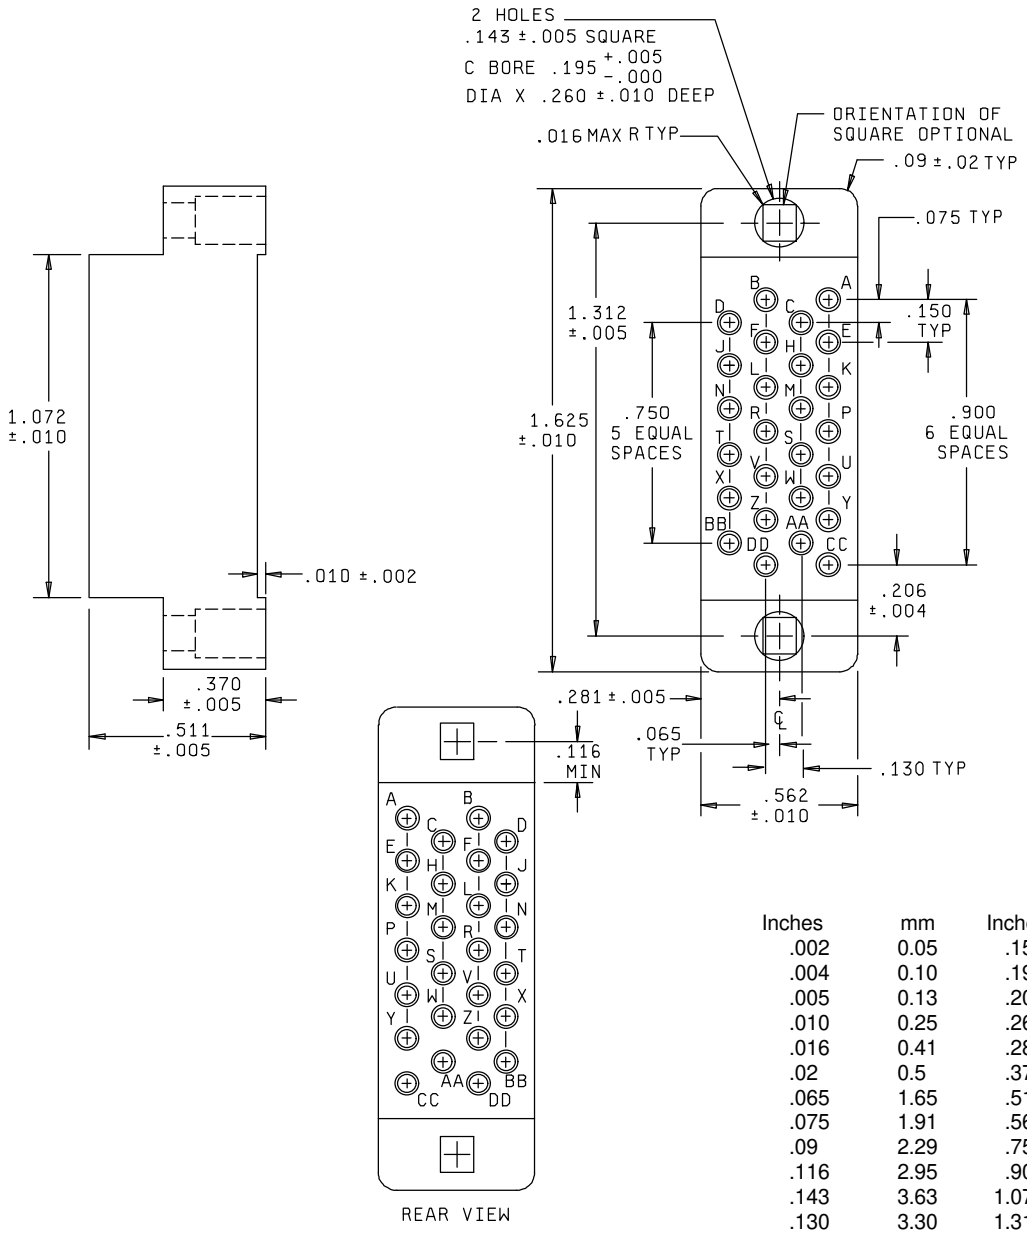


Inches	mm	Inches	mm
.002	0.05	.150	3.81
.004	0.10	.195	4.95
.005	0.13	.206	5.23
.010	0.25	.260	6.60
.016	0.41	.281	7.14
.02	0.5	.370	9.40
.065	1.65	.511	12.98
.075	1.91	.562	14.28
.09	2.29	.750	19.05
.116	2.95	.900	22.86
.143	3.63	1.072	27.24
.130	3.30	1.312	33.32
.143	3.143	1.625	41.28

Insert with 26 contacts

Insert designators E and X.

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

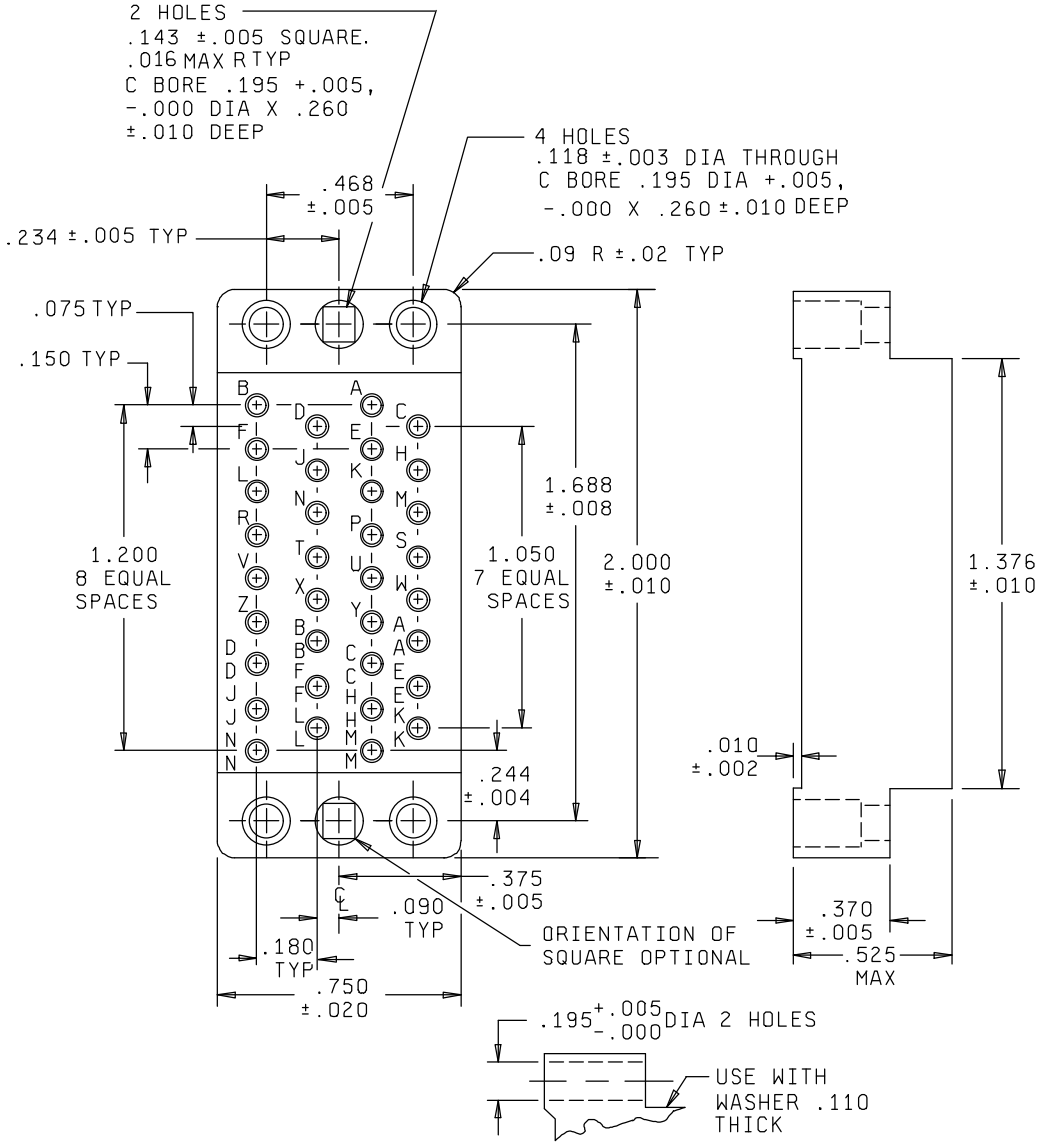

CENTER THROUGH
HOLE CONSTRUCTION
CONFIGURATION M AND 5

Inches	mm
.002	0.05
.003	0.08
.004	0.10
.005	0.13
.008	0.20
.010	0.25
.016	0.41
.02	0.5
.075	1.91
.09	2.8
.090	2.79
.110	2.29
.118	3.00
.143	3.63
.150	3.81
.180	4.57
.195	4.95
.234	5.94
.244	6.20
.260	6.60
.370	9.40
.375	9.53
.468	11.68
.511	12.98


Configurations F and Y - Suitable for all applications, except for one-piece jackscrews.
Configurations M and 5 - For one-piece jackscrews (through hole construction).

Insert with 34 contacts

Insert designators F, M, Y and 5.

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

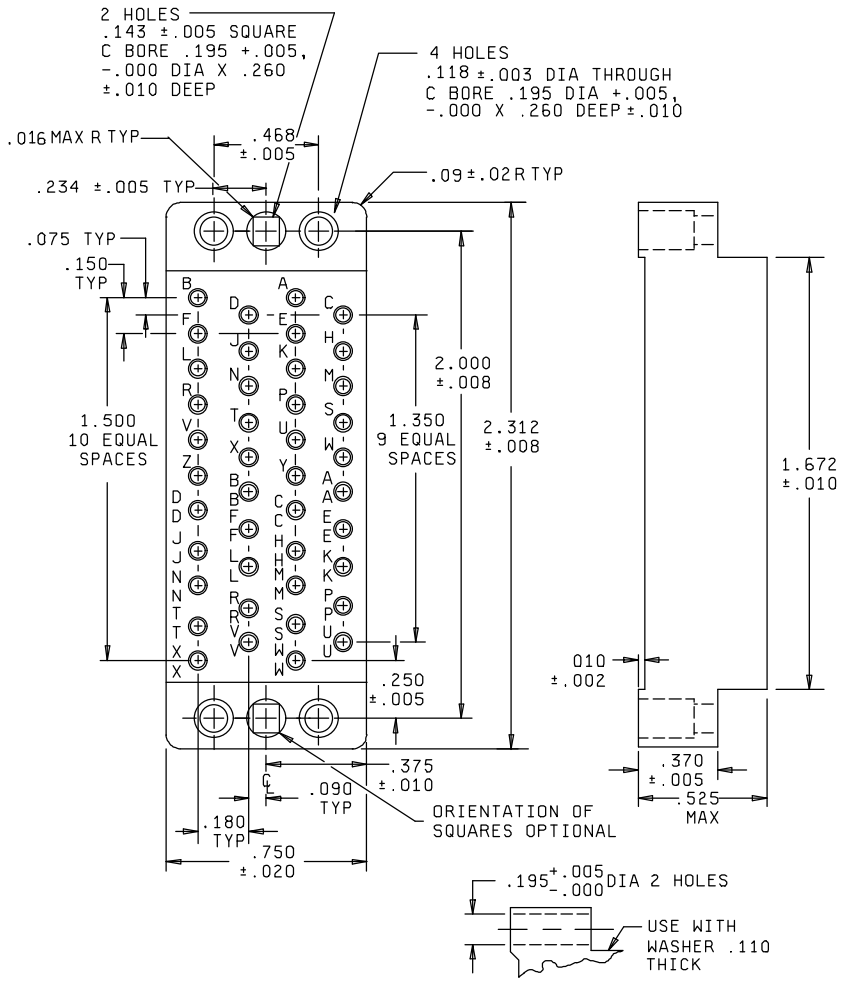

CENTER THROUGH
HOLE CONSTRUCTION
CONFIGURATIONS N AND 6

Inches	mm
.002	0.05
.003	0.08
.004	0.10
.005	0.13
.008	0.20
.010	0.25
.016	0.41
.02	0.5
.020	0.51
.075	1.91
.09	2.8
.090	2.29
.110	2.79
.118	3.00
.143	3.63
.150	3.81
.180	4.57
.195	4.95
.234	5.94
.250	6.35
.260	6.60
.370	9.40
.375	9.53
.468	11.89
.511	12.98
.750	19.05
1.350	34.29
1.500	38.10
1.672	42.47
2.000	50.80
2.312	58.72


Configurations G and Z - Suitable for all applications, except one-piece jackscrews.
Configurations N and 6 - For one-piece jackscrews (through hole construction).

Insert with 42 contacts

Insert designators G, N, Z, and 6.

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

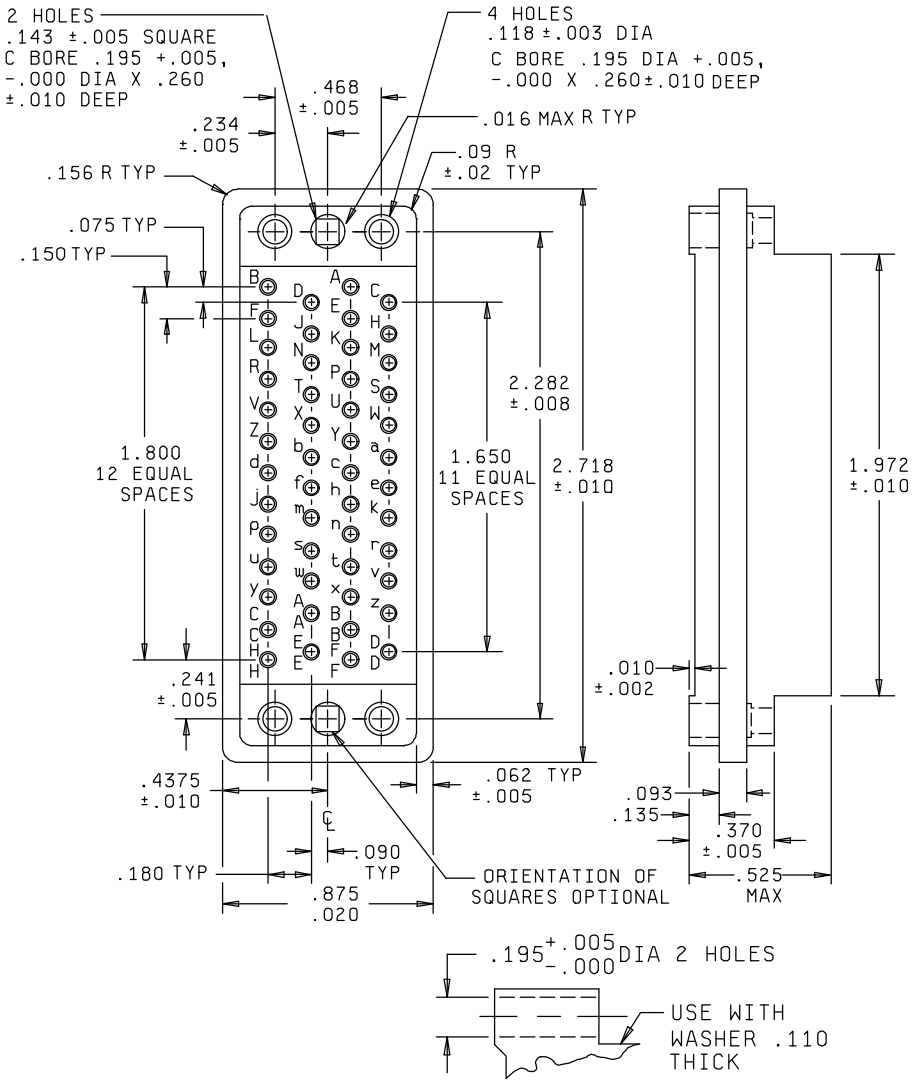

Inches	mm
.002	0.05
.003	0.08
.005	0.13
.008	0.20
.010	0.25
.016	0.41
.02	0.5
.020	0.51
.062	1.57
.075	1.91
.09	2.8
.090	2.79
.093	2.36
.110	2.79
.118	3.00
.135	3.43
.143	3.63
.150	3.81
.156	3.96
.180	4.57
.195	4.95
.234	5.94
.241	6.12
.260	6.60
.370	9.40
.4375	11.11
.525	12.98
.875	22.23
1.650	42.04
1.800	45.72
1.972	50.09
2.282	57.96
2.718	69.04

CENTER THROUGH
HOLE CONSTRUCTION
CONFIGURATIONS P AND 7


Configurations H and 1 - Suitable for all applications, except one-piece jackscrews.
Configurations P and 7 - For one-piece jackscrews (through hole construction).

Insert with 50 contacts

Insert designators H, P, 1, and 7.

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

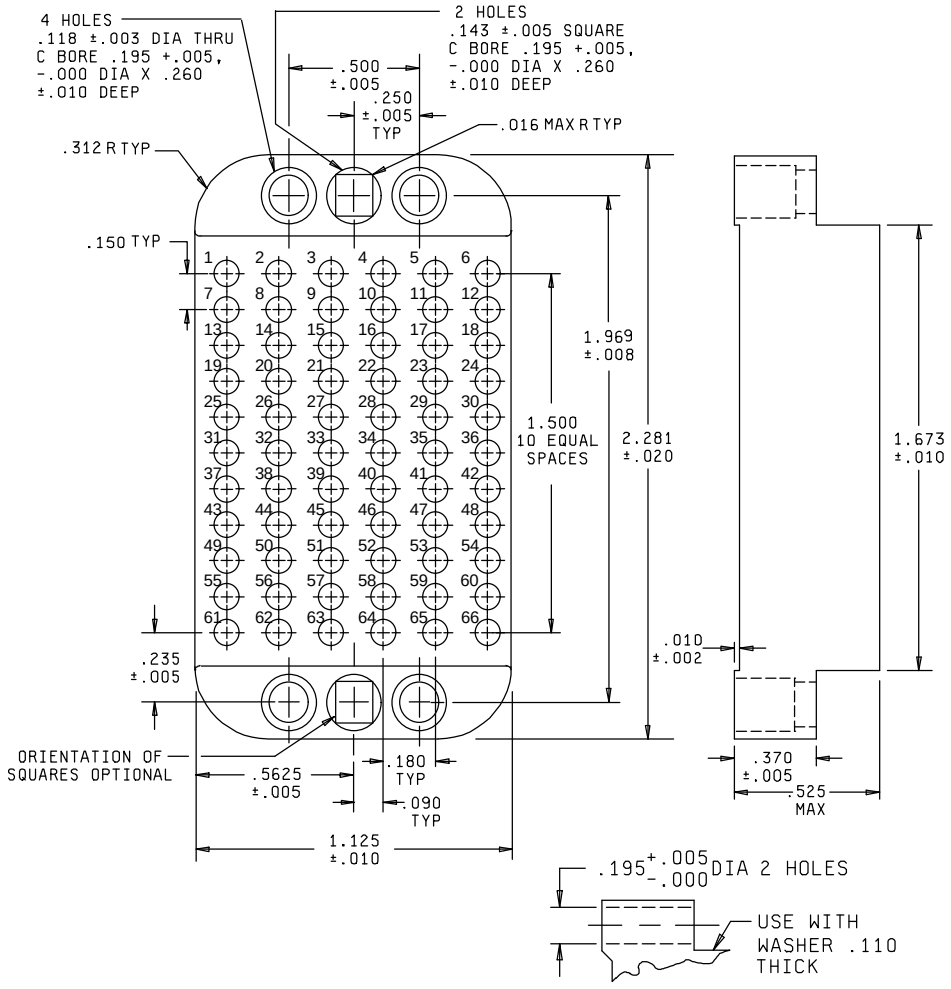

CENTER THROUGH
HOLE CONSTRUCTION
CONFIGURATIONS Q AND 8

Inches	mm
.002	0.05
.003	0.08
.005	0.13
.008	0.20
.010	0.25
.020	0.51
.090	2.23
.110	2.79
.118	2.30
.143	3.63
.150	3.81
.180	4.57
.195	4.95
.234	5.94
.235	5.97
.250	6.35
.260	6.60
.312	7.92
.370	9.40
.500	12.70
.525	13.34
.5625	14.288
1.125	28.58
1.500	38.10
1.969	50.01
2.281	57.94


Configurations J and 2 - Suitable for all applications, except for one-piece jackscrews.
Configurations Q and 8 - For one-piece jackscrews (through hole construction).

Insert with 66 contacts

Insert designators J, Q, 2, and 8.

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

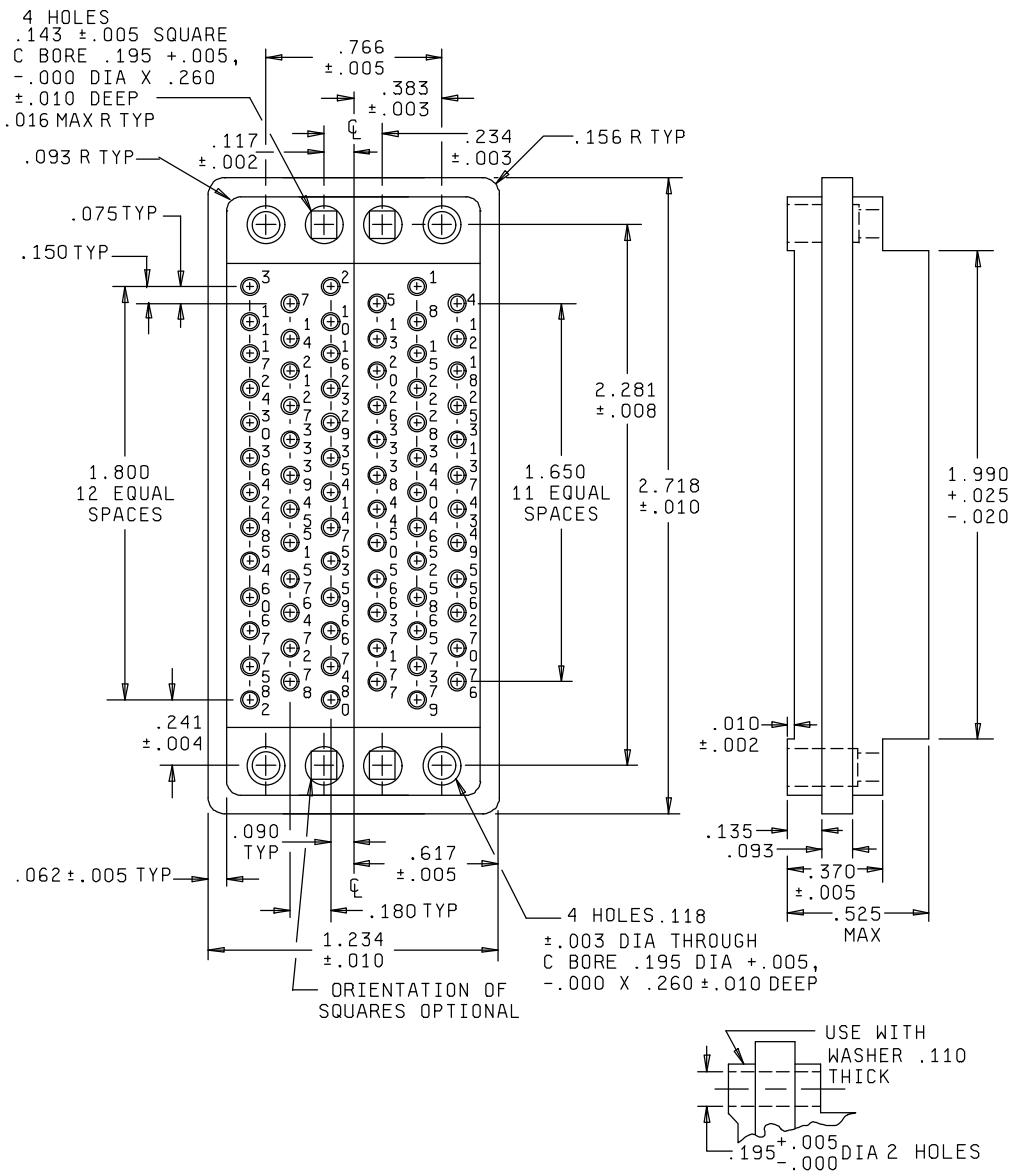

CENTER THROUGH
HOLE CONSTRUCTION
CONFIGURATIONS R AND 9

Inches	mm
.002	0.05
.003	0.08
.004	0.10
.005	0.13
.008	0.20
.010	0.25
.016	0.41
.020	0.51
.025	0.64
.062	1.57
.075	1.91
.090	2.29
.093	2.79
.110	3.00
.117	2.97
.118	3.00
.135	3.45
.143	3.63
.150	3.81
.156	3.96
.180	4.57
.195	4.95
.234	5.94
.241	6.12
.260	6.60
.370	9.40
.383	9.73
.525	13.34
.617	15.67
.766	19.46
1.234	31.34
1.650	41.91
1.800	45.72
1.990	50.55
2.718	69.04


Configurations K and 3 - Suitable for all applications, except one-piece jackscrews.
Configurations R and 9 - For one-piece jackscrews (through hole construction).

Insert with 75 contacts

Insert designators K, R, 3, and 9.

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

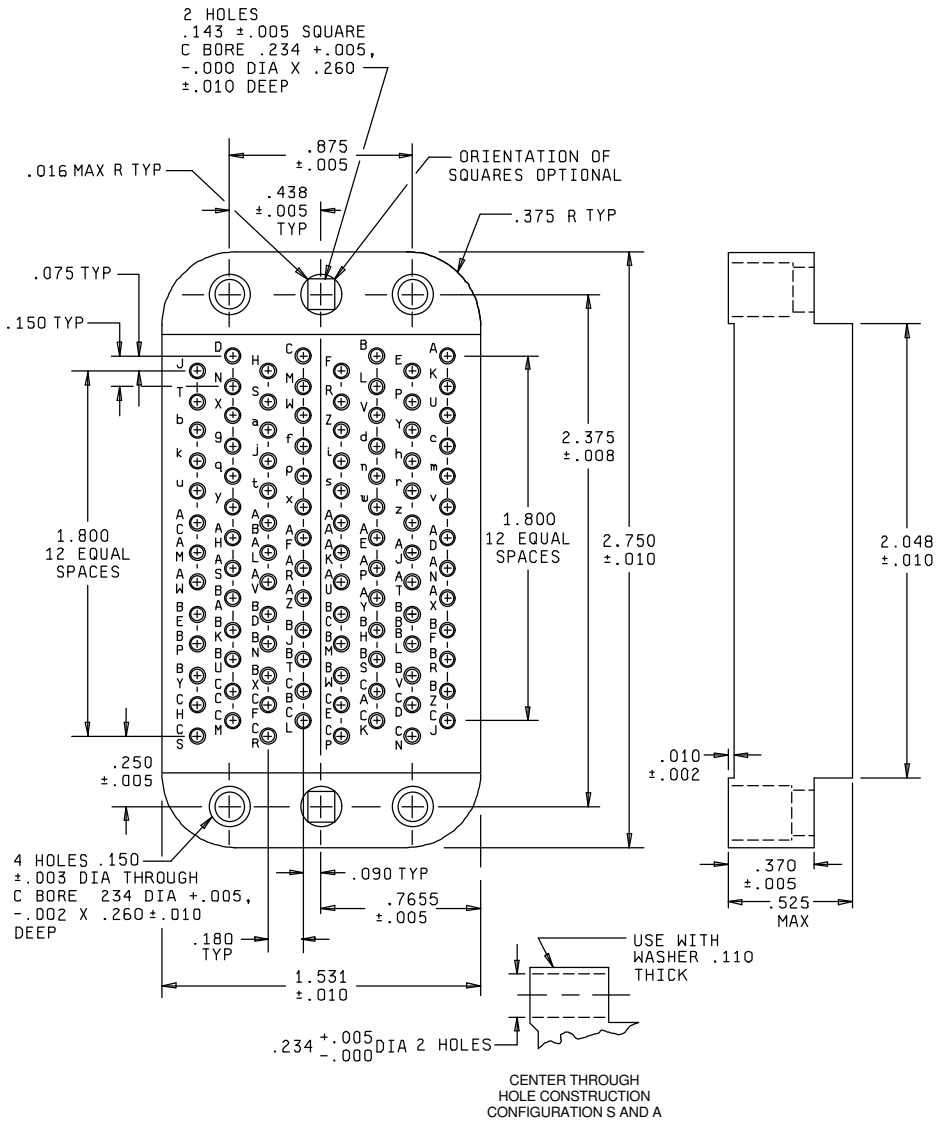

Inches	mm
.002	0.05
.003	0.08
.005	0.13
.008	0.20
.010	0.25
.016	0.41
.075	1.91
.090	2.79
.110	2.79
.143	3.63
.150	3.81
.180	4.57
.234	5.94
.250	6.35
.260	6.60
.370	9.40
.375	9.53
.438	11.13
.525	13.34
.7655	19.44
.875	22.23
1.531	38.89
1.800	45.72
2.048	52.02
2.375	60.33
2.750	69.85


Configurations L and 4 - Suitable for all applications, except one-piece jackscrews.
Configurations S and A- For one-piece jackscrews (through hole construction).

Insert with 104 contacts

Insert designators L, S, 4, and A.


FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

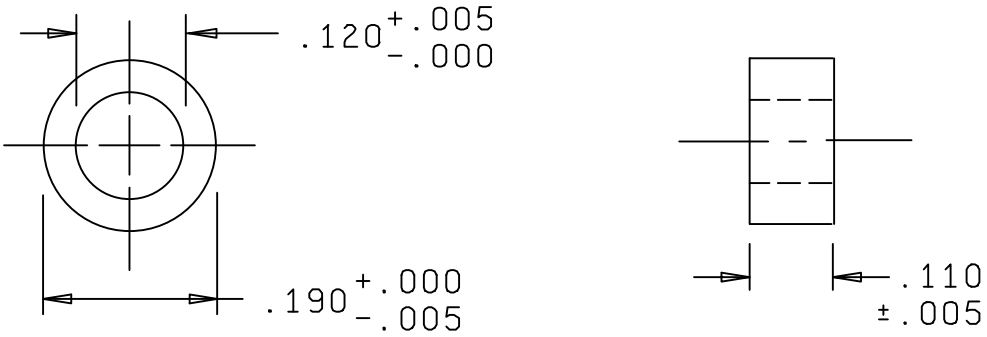

Inches	mm
.005	0.13
.110	2.79
.120	3.05
.143	3.63
.190	4.83
.225	6.

For use with inserts M, N, P, Q, R (34, 42, 50, 66, AND 75).

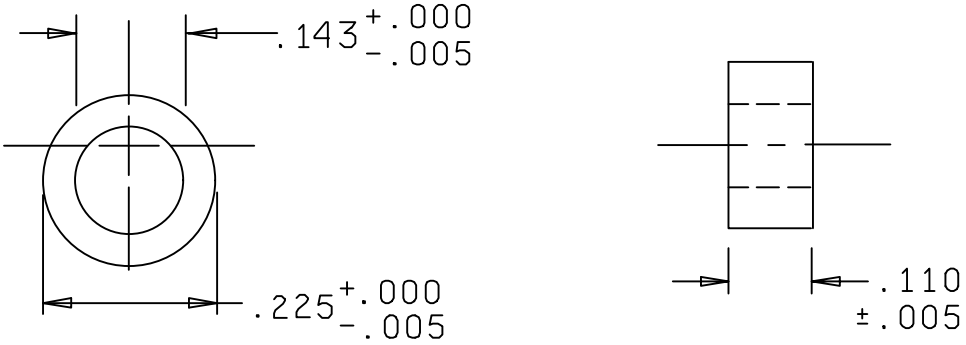


For use with insert S (104 contacts).


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) inch for two place decimals, and ±.015 inch (0.38 mm) for three place decimals.
4. Tolerance between any two adjacent contact centers shall be ±.004 inch (0.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 inch (0.15 mm).
5. Contact hole details shall be in accordance with MIL-DTL-28748.
6. Contact identification may be located on either side of the contact hold but shall appear on the front and rear face of the contact insert.
7. Designed for use with MIL-DTL-28748 size 16 and M39029/43-271 size 20 contacts.
8. Insert material shall be in accordance with MIL-DTL-28748.
9. Washer and self locking nut: Corrosion resistant steel, in accordance with QQ-S-763 or QQ-S-764, classes 302, 303, 303Se, 304, or 316.
10. Washer finish: Passivated in accordance with QQ-P-35 and self locking nut.

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

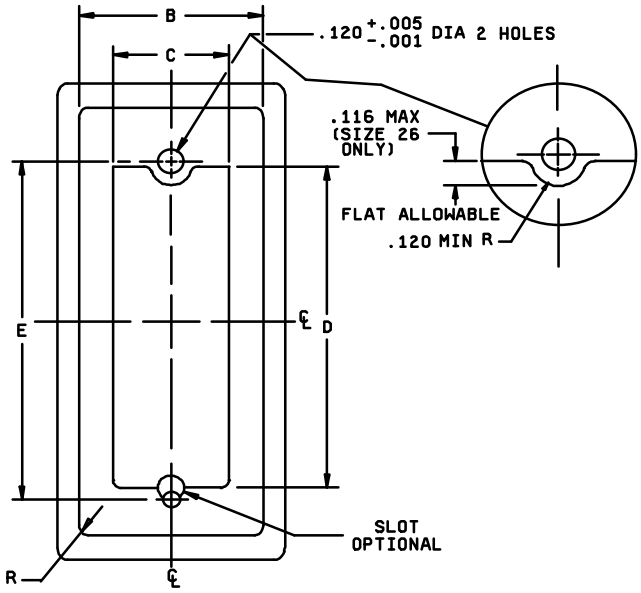

STYLE FOR 9, 14, 20 AND 26
CONTACT CONNECTORS
(J THRU R)

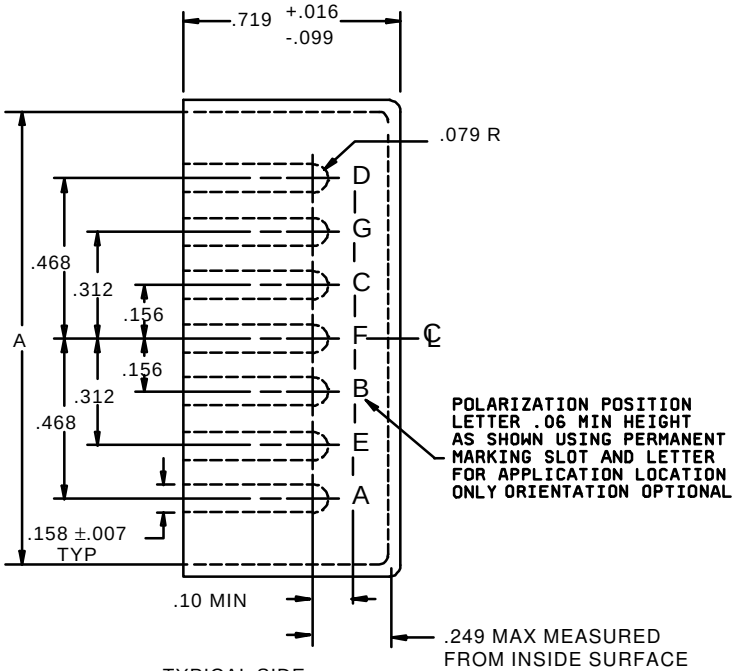


TYPICAL SIDE
VIEW FOR ALL
RECEPTACLE SHELLS

Receptacle shell polarizing

FIGURE 3. Shell configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

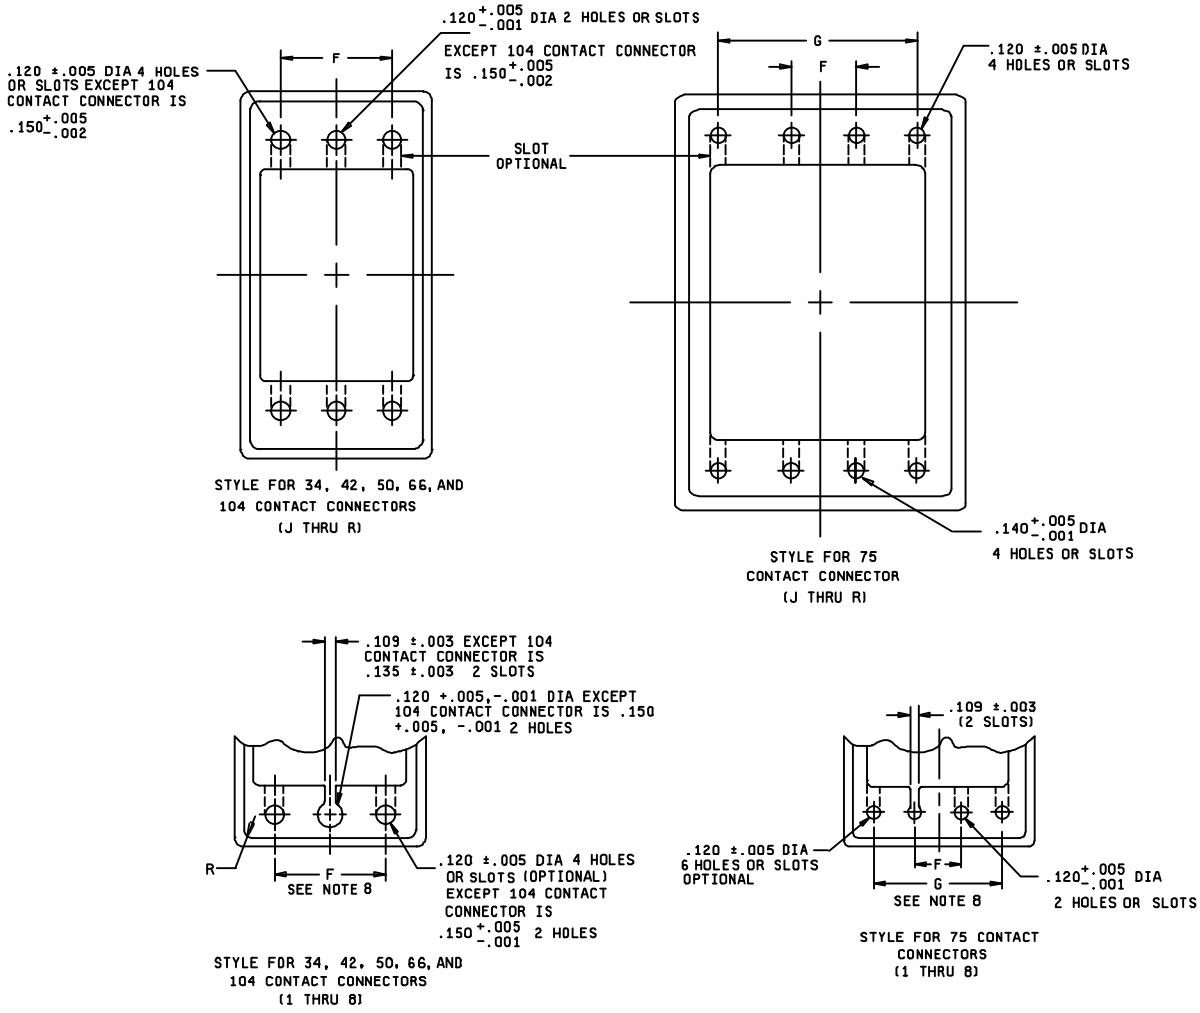

Inches	mm	Inches	mm
.001	0.03	.116	2.95
.002	0.05	.120	3.05
.003	0.08	.135	3.43
.005	0.13	.140	3.56
.007	0.18	.150	3.81
.016	0.41	.156	3.96
.06	1.5	.158	4.01
.079	2.01	.249	6.32
.099	2.51	.312	7.92
.10	2.5	.468	11.89
.109	2.77	.719	18.26

Receptacle shell polarizing

FIGURE 3. Shell configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.


Polarization designators	Connector size (number of contacts)	A min	B min	C min	D min	E ±.005 (0.13 mm)	F ±.005 (0.13 mm)	G ±.005 (0.13 mm)	R
J thru R	9	1.448 (36.78)	.512 (13.00)	.375 (9.52)	.864 (21.94)	1.000 (25.40)	---		.141 (3.58)
J thru R	14	1.388 (35.36)	.575 (14.60)	.440 (11.18)	.800 (20.32)	.938 (23.82)	---		.141
J thru R	20	1.702 (43.23)	.575 (14.60)	.440 (11.18)	1.097 (27.86)	1.250 (31.75)	---		.141
J thru R	26	1.763 (44.78)	.696 (17.68)	.565 (14.35)	1.182 (30.02)	1.312 (33.32)	---		.141 (3.58)
J thru R	34	2.138 (54.30)	.888 (22.56)	.745 (18.92)	1.400 (35.76)	1.688 (42.88)	.468 (11.89)		.141 (3.58)
J thru R	42	2.450 (62.23)	.888 (22.56)	.745 (18.92)	1.700 (43.18)	2.000 (50.80)	.468 (11.89)		.141 (3.58)
J thru R	50	2.856 (72.54)	1.015 (25.78)	.745 (18.92)	2.026 (51.46)	2.281 (57.94)	.468 (11.89)		.188 (4.78) (see note 4)
J thru R	66	2.420 (61.47)	1.264 (32.11)	1.115 (28.32)	1.696 (43.08)	1.969 (50.01	.500 (12.70)		.375 (9.52)
J thru R	75	2.855 (72.52)	1.370 (34.80)	1.104 (28.04)	2.026 (51.46)	2.281 (57.94)	.234 (5.94)	.766 (19.46)	.203 (5.16)
J thru R	104	2.900 (73.66)	1.680 (42.67)	1.476 (37.49)	2.073 (52.65)	2.375 (60.32)	.875 (22.22)		.422 (10.72)
1 thru 8 (see note 8)	34	2.138 (54.30)	.888 (22.56)	.745 (18.92)	1.400 (35.56)	1.688 (42.88)	.468 (11.89)		.141 (3.58)
1 thru 8 (see note 8)	42	2.450 (62.23)	.888 (22.56)	.745 (18.92)	1.700 (43.18)	2.000 (50.80)	.468 (11.89)		.141 (3.58)
1 thru 8 (see note 8)	50	2.856 (72.54)	1.015 (25.78)	.745 (18.92)	2.026 (51.46)	2.281 (57.94)	.468 (11.89)		.188 (4.78) (see note 4)
1 thru 8 (see note 8)	66	2.420 (61.47)	1.264 (32.10)	1.115 (28.32)	1.696 (43.08)	1.969 (50.01)	.500 (12.70)		.375 (9.52)
1 thru 8 (see note 8)	75	2.855 (72.52)	1.370 (34.80)	1.104 (28.04)	2.026 (51.46)	2.281 (57.94)	.234 (5.94)	.766 (19.46)	.203 (5.16)
1 thru 8 (see note 8)	104	2.900 (73.66)	1.680 (42.67)	1.476 (37.49)	2.073 (52.65)	2.375 (60.32)	.875 (22.22)		.422 (10.72)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.016 inch (0.41 mm).
4. Tolerance +.020 inch (0.51 mm) -.016 inch (0.41 mm).
5. Material aluminum alloy in accordance with specification QQ-A-250/8, temper H32 .040 inch (1.02 mm) thick.
6. Finish anodize in accordance with MIL-A-8625, type I or type II.
7. Each slot may vary ±.005 inch (0.13 mm) from centerline.
8. Receptacle shell designators 1, 2, 3, 4, 5, 6, 7, and 8 are not used with one-piece jackscrew shield designators 3, 4, 9, A, D, and E.

Receptacle shell polarizing

FIGURE 3. Shell configurations - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

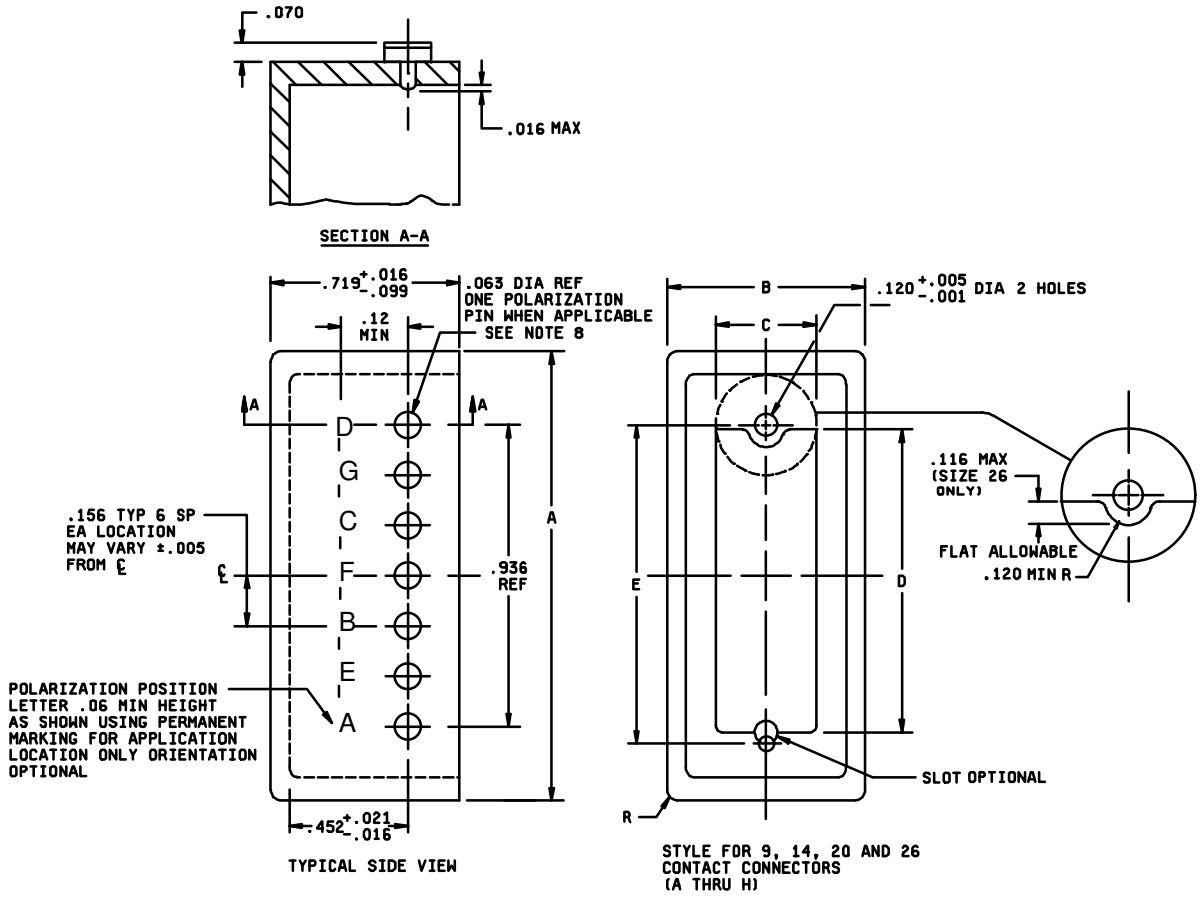

Plug shell polarizing

FIGURE 3. Shell configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

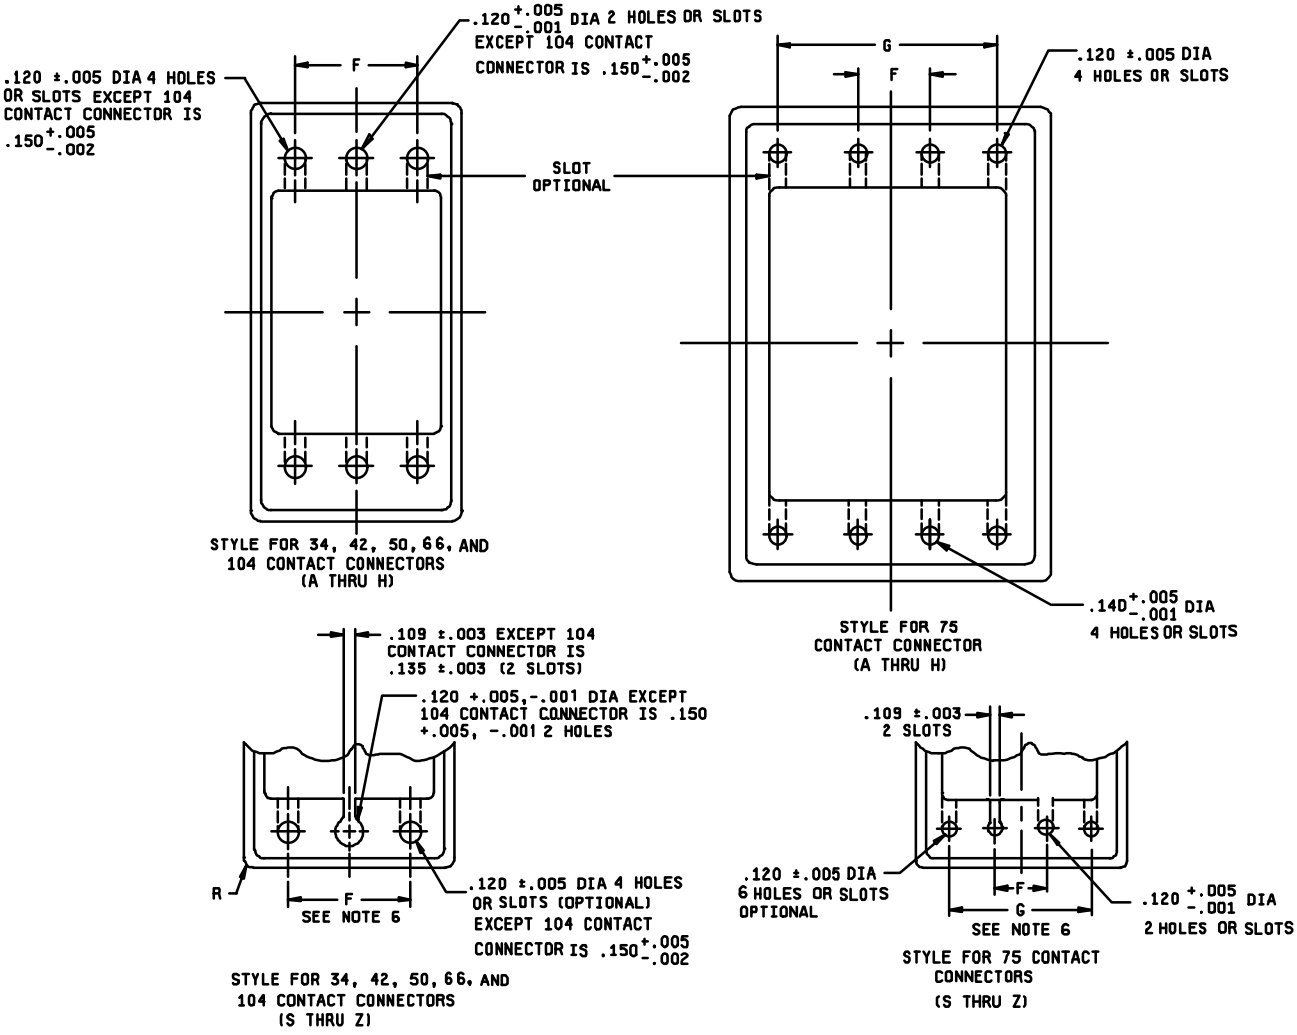

Inches	mm	Inches	mm
.001	0.03	.116	2.95
.002	0.05	.12	3.0
.003	0.08	.120	3.05
.005	0.13	.135	3.43
.016	0.41	.140	3.56
.021	0.53	.150	3.81
.063	1.60	.156	3.96
.070	1.78	.234	5.94
.099	2.51	.452	11.48
.109	2.77	.719	18.26
		.936	23.77

Plug shell polarizing

FIGURE 3. Shell configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.


Shield and shield clamp location	Connector size (number of contacts)	A max	B max	C min	D min	E ±.005 (0.13 mm)	F ±.005 (0.13 mm)	G ±.005 (0.13 mm)	R
A thru H	9	1.440 (36.58)	.500 (12.70)	.375 (9.52)	.864 (21.94)	1.000 (25.40)	---		.141 (3.58)
A thru H	14	1.380 (35.05)	.567 (14.40)	.440 (11.18)	.800 (20.32)	.938 (23.82)	---		.141
A thru H	20	1.700 (43.18)	.567 (14.40)	.440 (11.18)	1.097 (27.86)	1.250 (31.75)	---		.141
A thru H	26	1.755 (44.58)	.688 (17.48)	.565 (14.35)	1.182 (30.02)	1.312 (33.32)	---		.141 (3.58)
A thru H	34	2.130 (54.10)	.880 (22.35)	.745 (18.92)	1.400 (35.76)	1.688 (42.88)	.468 (11.89)		.141 (3.58)
A thru H	42	2.442 (62.03)	.880 (22.35)	.745 (18.92)	1.700 (43.18)	2.000 (50.80)	.468 (11.89)		.141 (3.58)
A thru H	50	2.846 (72.39)	1.005 (25.53)	.745 (18.92)	2.026 (51.46)	2.281 (57.94)	.468 (11.89)		.188 (4.78)
A thru H	66	2.410 (61.21)	1.254 (31.85)	1.115 (28.32)	1.696 (43.08)	1.969 (50.01	.500 (12.70)		.375 (9.52)
A thru H	75	2.850 (72.39)	1.365 (34.67)	1.104 (28.04)	2.026 (51.46)	2.281 (57.94)	.234 (5.94)	.766 (19.46)	.187 (4.75)
A thru H	104	2.890 (73.41)	1.670 (42.42)	1.476 (37.49)	2.073 (52.65)	2.375 (60.32)	.875 (22.22)		.422 (10.72)
S thru Z (see note 6)	34	2.130 (54.10)	.880 (22.35)	.745 (18.92)	1.400 (35.56)	1.688 (42.88)	.468 (11.89)		.141 (3.58)
S thru Z (see note 6)	42	2.442 (62.03)	.880 (22.35)	.745 (18.92)	1.700 (43.18)	2.000 (50.80)	.468 (11.89)		.141 (3.58)
S thru Z (see note 6)	50	2.846 (72.29)	1.005 (25.53)	.745 (18.92)	2.026 (51.46)	2.281 (57.94)	.468 (11.89)		.188 (4.78)
S thru Z (see note 6)	66	2.410 (61.21)	1.254 (31.85)	1.115 (28.32)	1.696 (43.08)	1.969 (50.01)	.500 (12.70)		.375 (9.52)
S thru Z (see note 6)	75	2.850 (72.39)	1.365 (34.67)	1.104 (28.04)	2.026 (51.46)	2.281 (57.94)	.234 (5.94)	.766 (19.46)	.187 (4.75)
S thru Z (see note 6)	104	2.890 (73.41)	1.670 (42.42)	1.476 (37.49)	2.073 (52.65)	2.375 (60.32)	.875 (22.22)		.422 (10.72)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.016 inch (0.41 mm).
4. Material aluminum alloy in accordance with QQ-A-250/8, temper H32 .040 inch (1.02 mm) thick.
5. Finish anodizes in accordance with MIL-A-8625, type I or type II.
6. Plug shell designators S, T, U, V, W, X, Y, and Z are not used with one-piece jackscrew shield designators 3, 4, 9, A, D, and E.
7. One polarization pin is used when applicable.

Plug shell polarizing

FIGURE 3. Shell configurations. - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

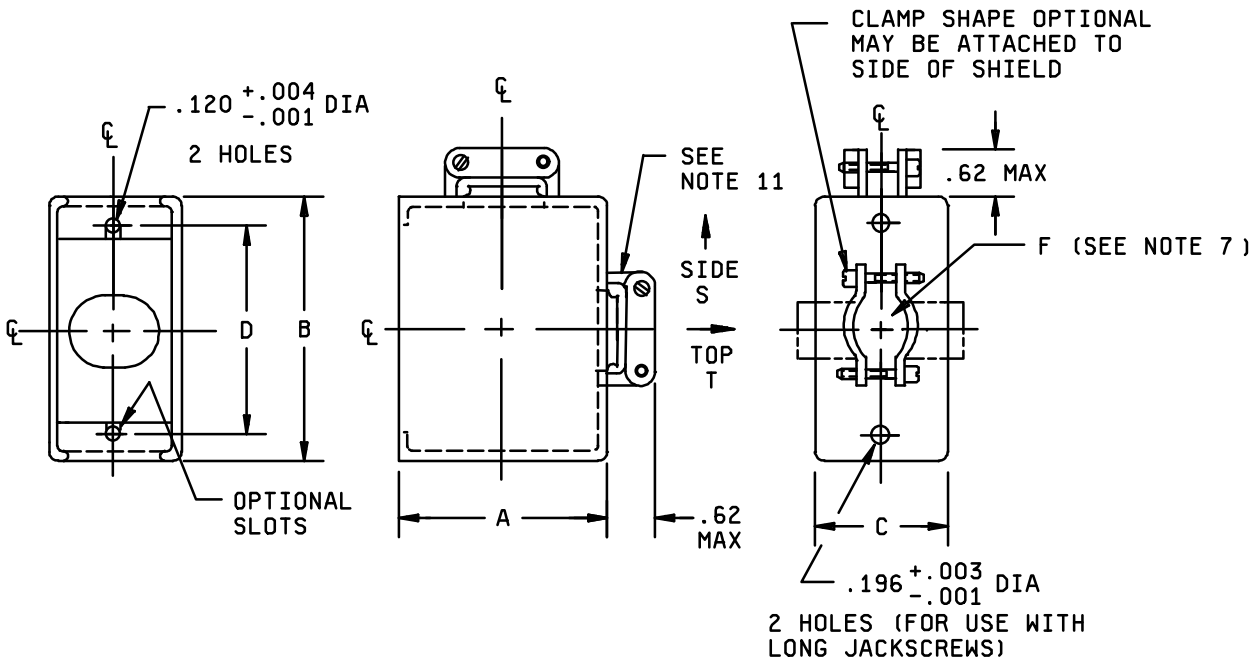

Inches	mm
.001	0.03
.003	0.08
.004	0.10
.120	3.05
.196	4.98
.62	15.75


Configurations 1 and 2 are used with shell for “L” hardware and can be used with or without shell for “M” hardware.
Configurations 3 and 4 are used without shell.

Shield and shield clamp location	Connector size (no. of contacts)	A min max	B ± .016 (0.41 mm)	C ± .016 (0.41 mm)	D ±.005 (0.13 mm)	F Min. cable opening sq. inch
1 - top opening 2 - side opening	7	1.18 (29.97) 1.35 (34.29)	1.220 (30.99)	.437 (11.10)	.906 (23.01)	.18 (4.57)
1 - top opening 2 - side opening	9	1.18 (29.97) 1.35 (34.29)	1.312 (33.32)	.437 (11.10)	1.000 (25.40)	.10 (2.54)
1 - top opening 2 - side opening	14	1.18 (29.97) 1.35 (34.29)	1.250 (31.75)	.500 (12.70)	.938 (23.83)	.19 (4.83)
1 - top opening 2 - side opening	20	1.18 (29.97) 1.35 (34.29)	1.562 (39.67)	.500 (12.70)	1.250 (31.75)	.22 (5.59)
1 - top opening 2 - side opening	26	1.18 (29.97) 1.35 (34.29)	1.625 (41.28)	.640 (16.26)	1.312 (33.32)	.22 (5.59)

See notes at end of figure.

FIGURE 4. Shield.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

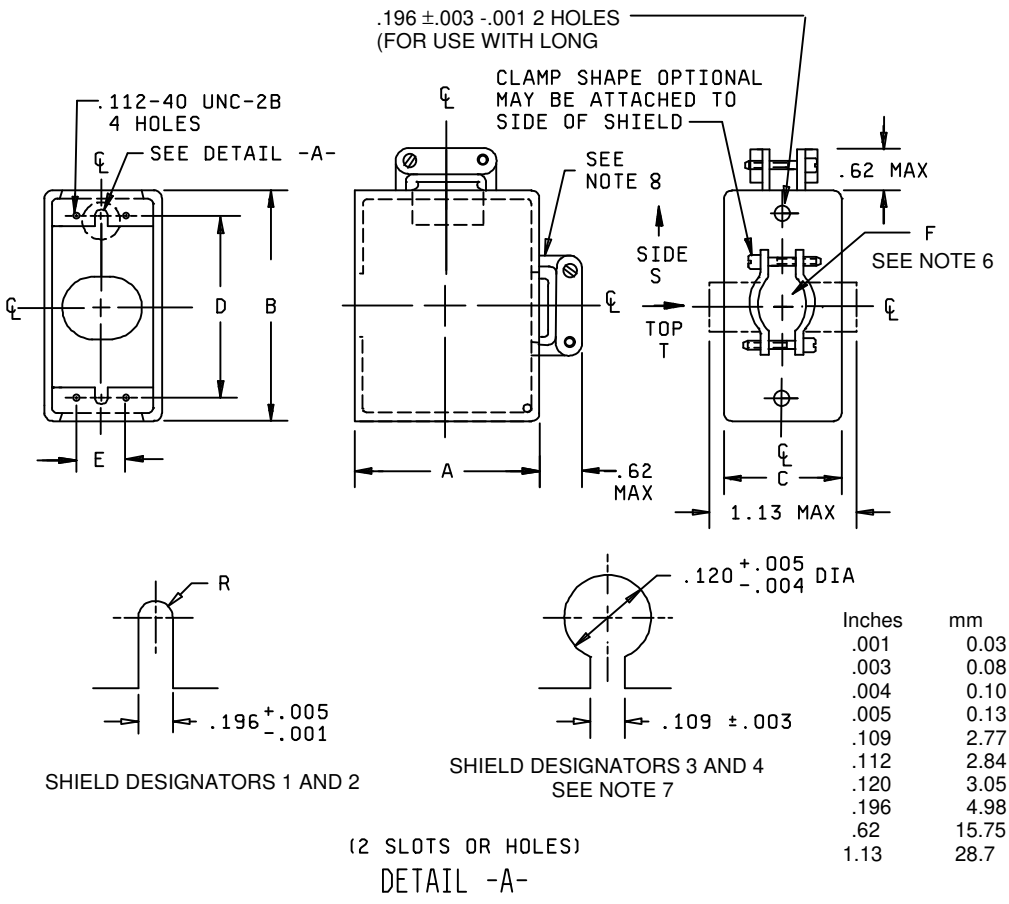

Inches	mm
.001	0.03
.003	0.08
.004	0.10
.005	0.13
.109	2.77
.112	2.84
.120	3.05
.196	4.98
.62	15.75
1.13	28.7


Configurations 1 and 2 are used with shell for “L” hardware and can be used with or without shell for “M” hardware.
Configurations 3 and 4 are used without shell.

Shield and shield clamp location suffix designator	Connector size (no. of contacts)	A min max	B ± .016 (0.41 mm)	C ± .016 (0.41 mm)	D ±.005 (0.13 mm)	E ±.010 (0.25)	F Min. Cable opening sq. inch
1 - top opening 2 - side opening	34	1.22 (30.99) 1.35 (34.29)	2.000 (50.80)	.828 (21.03)	1.688 (42.88)	.468 (11.89)	.34 (8.64)
1 - top opening 2 - side opening	42	1.22 (30.99) 1.35 (34.29)	2.312 (58.72)	.828 (21.03)	2.000 (50.80)	.468 (11.89)	.34 (8.64)
1 - top opening 2 - side opening	50	1.22 (30.99) 1.35 (34.29)	2.594 (65.89)	.828 (21.03)	2.282 (57.96)	.468 (11.89)	.34 (8.64)
3 - top opening (see note 7) 4 - side opening	34	1.22 (30.99) 1.35 (34.29)	2.000 (50.80)	.828 (21.03)	1.688 (42.88)	.468 (11.89)	.34 (8.64)
3 - top opening (see note 7) 4 - side opening	42	1.22 (30.99) 1.35 (34.29)	2.312 (58.72)	.828 (21.03)	2.000 (50.80)	.468 (11.89)	.34 (8.64)
3 - top opening (see note 7) 4 - side opening	50	1.22 (30.99) 1.55 (39.37)	2.594 (65.89)	.828 (21.03)	2.282 (57.96)	.468 (11.89)	.34 (8.64)

See notes at end of figure.

FIGURE 4. Shield - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

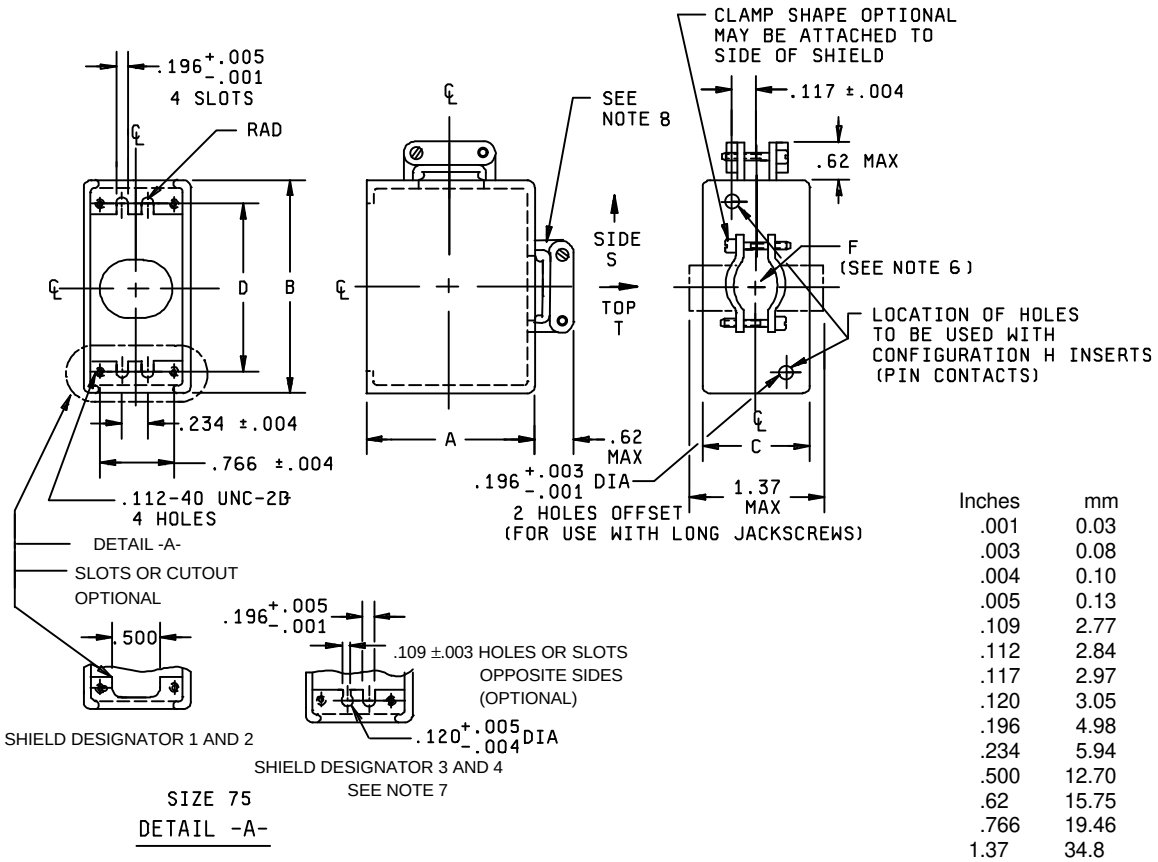

Inches	mm
.001	0.03
.003	0.08
.004	0.10
.005	0.13
.109	2.77
.112	2.84
.117	2.97
.120	3.05
.196	4.98
.234	5.94
.500	12.70
.62	15.75
.766	19.46
1.37	34.8


Configurations 1 and 2 are used with shell for “L” hardware and can be used with or without shell for “M” hardware.
Configurations 3 and 4 are used without shell.

Shield and shield clamp location Suffix designator	Connector size (no. of contacts)	A min max	B ± .016 (0.41 mm)	C ± .016 (0.41 mm)	D ±.005 (0.13 mm)	F Min. cable opening sq. inch
1 - top opening 2 - side opening	75 Pin only	1.22 (30.99) 1.35 (34.29)	2.594 (65.89)	1.188 (65.89)	2.282 (57.96)	.55 (13.97)
3 - top opening (see note 7) 4 - side opening	75 Pin only	1.22 (30.99) 1.35 (34.29)	2.594 (65.89)	1.188 (65.89)	2.282 (57.96)	.55 (13.97)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.016 inch (0.41 mm).
4. Material aluminum alloy in accordance with QQ-A-250/8, temper H32 .040 inch (1.02 mm) thick.
5. Finish anodizes in accordance with MIL-A-8625, type I or type II.
6. Edges of cable entry hole to be rounded to prevent insulation chafing.
7. Shield and shield clamp location PIN designators,” 3 and 4”, are for use with one-piece jackscrews
8. Clamp hinge may attach to side of shield.


FIGURE 4. Shield - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

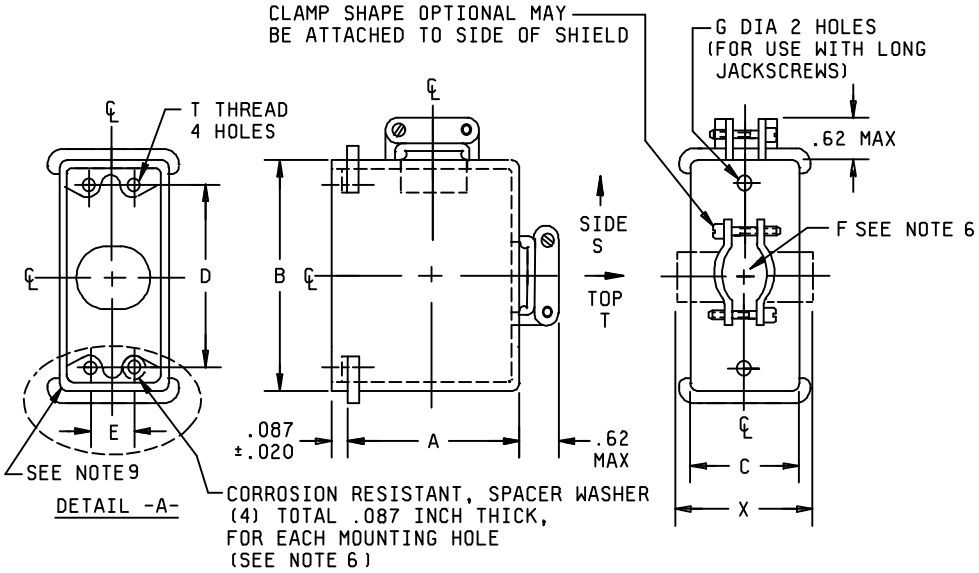

Shield and shield clamp location (see note 8)	U ±.003 (0.08 mm)	V +.005 (0.13 mm) -.001 (0.03 mm)	W Min	Connector size (no. of contacts)
7 - top opening 8 - side opening	.109 (2.77)	.120 (3.05)	.062 (1.57)	66
7 - top opening 8 - side opening	.133 (3.38)	.150 (3.81)	.110 (2.79)	104

Inches	mm
.001	0.03
.003	0.08
.004	0.10
.020	0.51
.087	2.21
.120	3.05
.196	4.98
.62	15.75

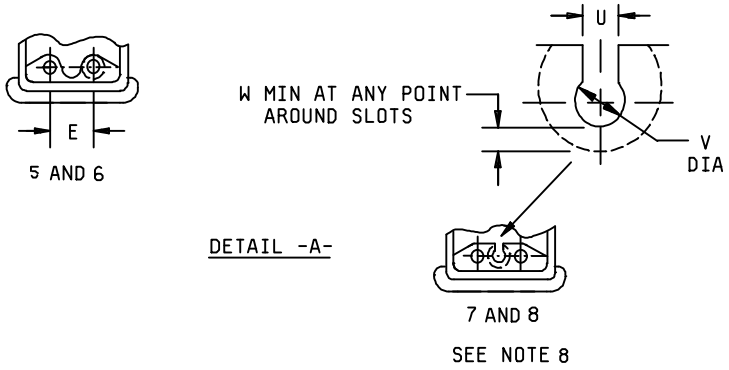

Use with or without shells.

FIGURE 4. Shield - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

Shield and shield clamp location	Connector size (no. of contacts)	A ±.03 (0.76 mm)	B ± .016 (0.41 mm)	C ± .016 (0.41 mm)	D ±.005 (0.13 mm)	E ±.005 (0.13 mm)	F Min. cable opening sq. inch	G +.003 (0.08 mm) -.001 (0.03 mm)	T thread	X max
5 - top opening 6 - side opening	66	1.17 (29.72)	2.366 (60.10)	1.211 (30.76)	1.969 (50.01)	.500 (12.70)	.55 (13.97)	.196 (4.98)	.112-40 UNC-2B	1.37 (34.80)
5 - top opening 6 - side opening	104	2.23 (56.64)	2.835 (72.01)	1.625 (41.28)	2.375 (60.33)	.875 (22.23)	1.10 (27.94)	.229 (5.82)	.138-32 UNC-2B	1.88 (47.75)
7 - top opening (see note 8) 8 - side opening	66	1.17 (29.72)	2.366 (60.10)	1.211 (30.76)	1.969 (50.01)	.500 (12.70)	.55 (13.97)	.196 (4.98)	.112-40 UNC-2B	1.37 (34.80)
7 - top opening (see note 8) 8 - side opening	104	2.23 (56.64)	2.835 (72.01)	1.625 (41.28)	2.375 (60.33)	.875 (22.23)	1.10 (27.94)	.229 (5.82)	.138-32 UNC-2B	1.88 (47.75)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.016 inch (0.41 mm).
4. Material aluminum alloy in accordance with QQ-A-250/8, temper H32 .040 inch (1.02 mm) thick.
5. Finish anodize in accordance with MIL-A-8625, type I or type II.
6. Spacer washers, (4), used only with shell: discard in other uses.
7. Edges of cable entry hole to be rounded to prevent insulation chafing.
8. For use with one-piece jackscrews.
9. No cracks, chips, or sharp edges on all 4 edges of flange.

FIGURE 4. Shield - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

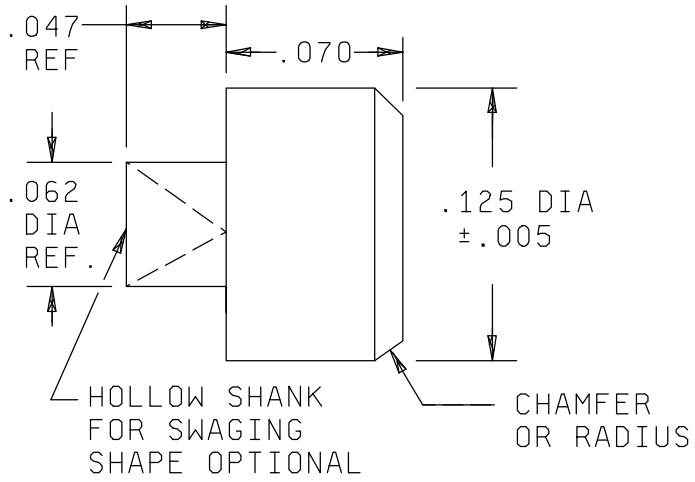


Inches	mm
.005	0.13
.047	1.19
.062	1.57
.070	1.78
.125	3.18

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 inch (0.41 mm).
3. Metric equivalents are given for general information only.
4. Material: Corrosion resistant steel in accordance with QQ-S-763, classes 302, 303, 303Se, 304, 316, or ASTM A484, or ASTM A532.
5. See M28748/1 to order polarizing pin separately.

Pin polarizing, straight headed.

FIGURE 5. Pin configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

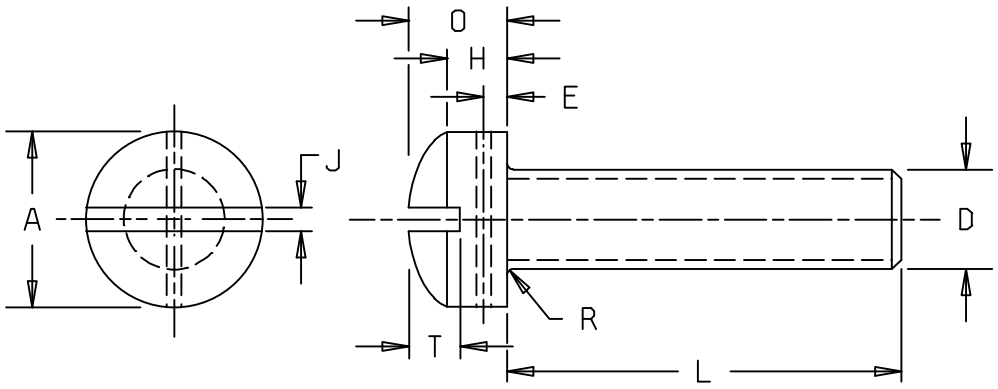

Screws furnished with shields when required, crossed drilled hole is optional.
To order screws individually use MS35275-215 (#4) or -229 (#6).


Shield designator	Nominal size	Threads per inch, UNC-2A (Pitch)	D Body diameter		A Head diameter		H Head side height		O Total head height	
			min	max	min	max	min	max	min	max
1, 2, 3, 4 (sizes 34, 42, 50, 75) 5, 6, 9, A (size 66 only)	.112 (#4) (2.845)	40 (.64)	.0925 (2.350)	.1120 (2.845)	.166 (4.216)	.183 (4.648)	.072 (1.829)	.079 (2.007)	.094 (2.388)	.107 (2.718)
7, 8, B, C (size 104 only)	.138 (#6) (3.505)	32 (.79)	.1141 (2.898)	.1380 (3.505)	.208 (5.283)	.226 (5.740)	.089 (2.261)	.096 (2.438)	.118 (2.997)	.132 (3.353)

Shield designator	J Slot width		T Slot depth		E drill location nom	Drilled hole size nom	R radius max	Tensile strength LB-min (KN-min)
	min	max	min	max				
1, 2, 3, 4 (sizes 34, 42, 50, 75) 5, 6, 9, A (size 66 only)	.031 (.787)	.039 (.991)	.030 (.762)	.038 (.965)	.035 (.889)	.037 (.940)	.017 (.432)	.480 (2.151)
7, 8, B, C (size 104 only)	.039 (.991)	.048 (1.219)	.035 (.889)	.045 (1.143)	.043 (1.092)	.046 (1.168)	.021 (.533)	.730 (3.272)

NOTES:
1. Material corrosion resisting, in accordance with Federal standard number 66, AISI 302, 303, 304, 305, 316, 384 (developed for cold heading) or type UNS S30430 in accordance with the chemical requirements of ASTM-A-493.
2. Treatment: Passivation shall be in accordance with QQ-P-35, or an industry approved equivalent.
3. Magnetic permeability: These screws shall have a magnetic permeability or 2.0 maximum (air = 1.0) for a field strength of H = 200 oersteds, using a magnetic indicator in accordance with ASTM A342.
4. Threads: Threads shall be in accordance with FED-STD-H28.
5. Threads: Screws shall have complete threads extending to within two threads of the head, or closer if practicable.
6. Drilled hole is to be approximately at right angles to the slot and may be permitted to break through the bottom of the slot. All sharp edges shall be removed.

FIGURE 6. Slotted screw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

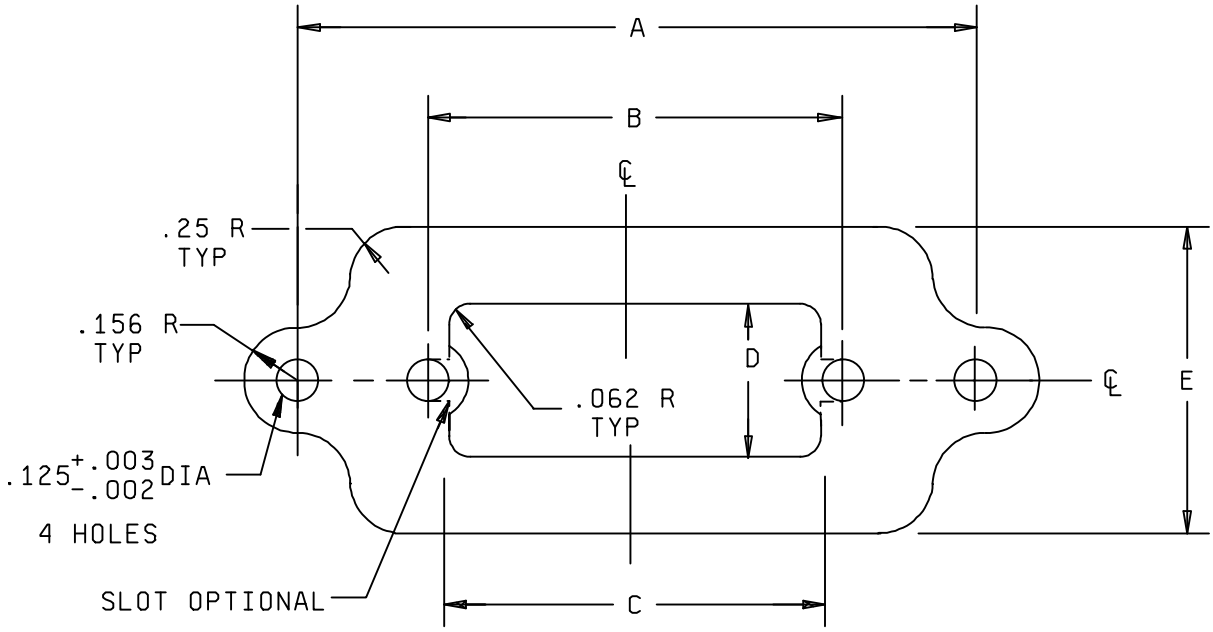


Inches	mm
.002	0.05
.003	0.08
.062	1.57
.125	3.18
.156	3.96
.25	6.35

Connector size (No. of contacts)	A ±.005 (0.13 mm)	B ±.005 (0.13 mm)	C	D	E
9	2.016 (51.21)	1.000 (2.54)	.875 (22.23)	.406 (10.31)	.953 (24.21)
14	1.953 (49.61)	.937 (23.80)	.812 (20.62)	.469 (11.91)	1.016 (25.81)
20	2.266 (57.56)	1.250 (31.75)	1.125 (28.58)	.469 (11.91)	1.016 (25.81)
26	2.328 (59.13)	1.312 (33.32)	1.187 (30.15)	.593 (15.06)	1.141 (28.98)

See notes at end of figure.

FIGURE 7. Retaining plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

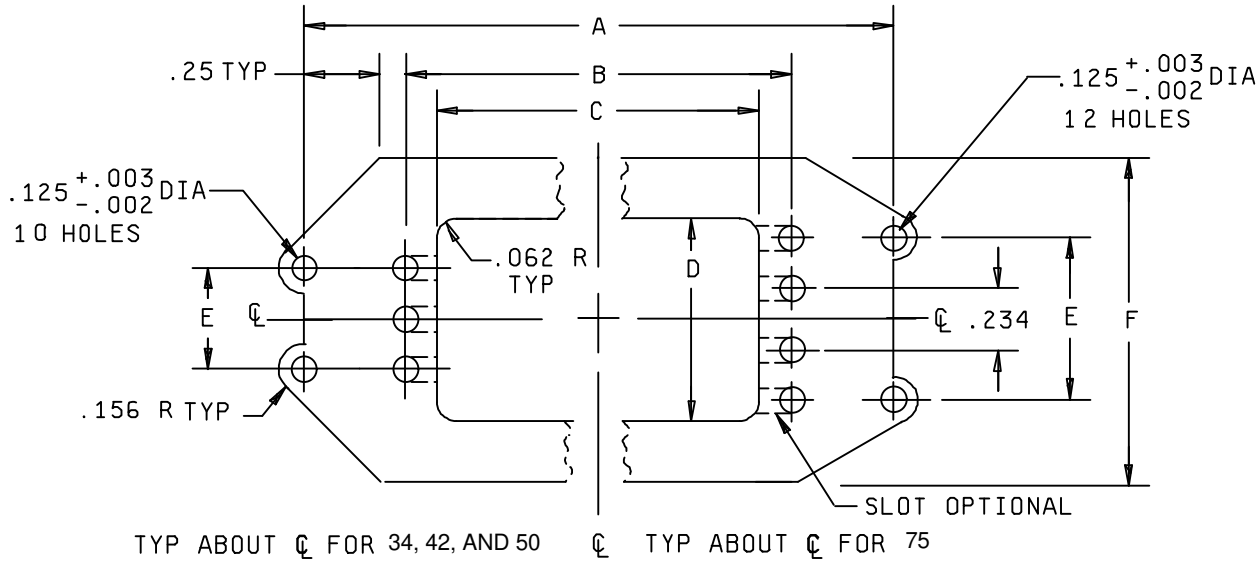


Inches	mm
.002	0.05
.003	0.08
.062	1.57
.125	3.18
.156	3.96
.234	5.94
.25	6.35

Connector size (No. of contacts)	A ±.005 (0.13 mm)	B ±.005 (0.13 mm)	C	D	E ±.005 (0.13 mm)	F
34	2.703 (68.66)	1.687 (42.85)	1.438 (36.53)	.750 (19.05)	.468 (11.89)	1.328 (33.73)
42	3.016 (78.89)	2.000 (50.80)	1.750 (44.45)	.750 (19.05)	.468 (11.89)	1.328 (33.73)
50	3.422 (86.92)	2.281 (57.94)	2.031 (51.60)	.750 (19.05)	.468 (11.89)	1.453 (36.91)
75	3.422 (86.92)	2.281 (57.94)	2.031 (51.60)	1.109 (28.17)	.766 (19.46)	1.797 (45.64)

See notes at end of figure.

FIGURE 7. Retaining plate - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

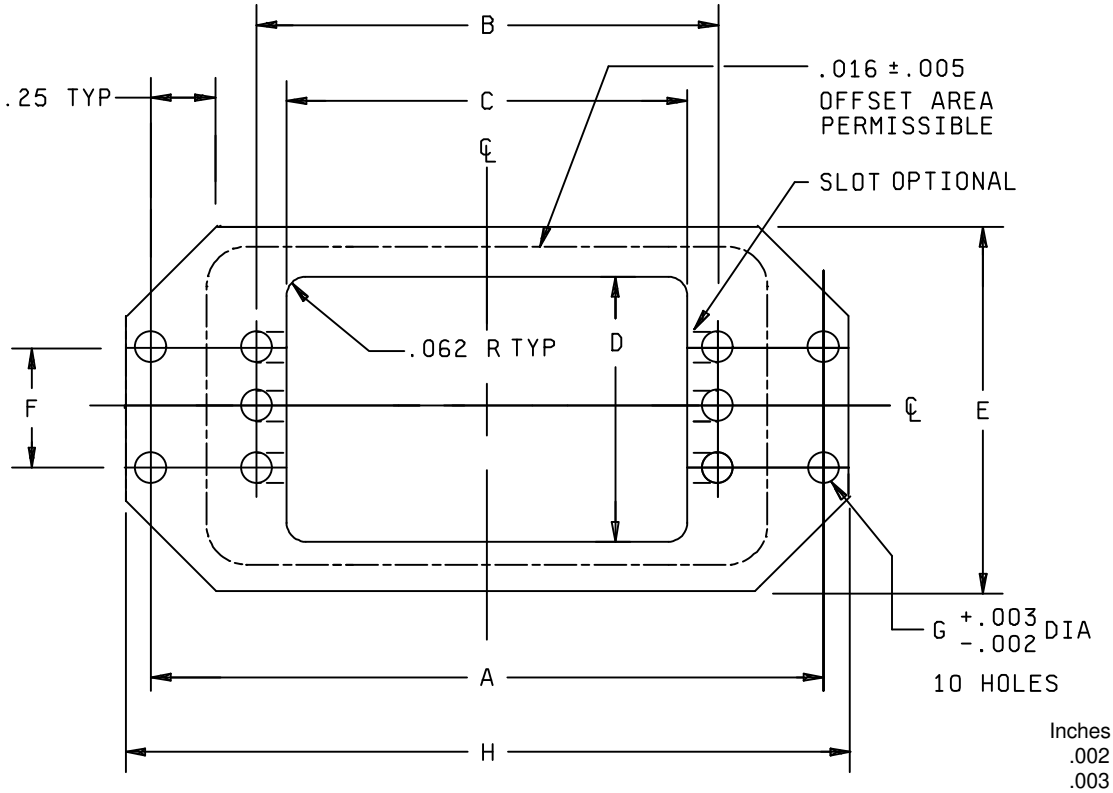

Inches	mm
.002	0.05
.003	0.08
.062	1.57
.125	3.18
.156	3.96
.234	5.94
.25	6.35

Connector size (No. of contacts)	A ±.005 (0.13 mm)	B ±.005 (0.13mm)	C	D	E	F ±.005 (0.13mm)	G	H
66	2.984 (75.79)	1.969 (50.01)	1.718 (43.64)	1.125 (28.58)	1.688 (42.88)	.500 (17.70)	.125 (3.18)	3.296 (83.72)
104	3.500 (83.90)	2.375 (60.33)	2.125 (53.98)	1.486 (37.74)	2.000 (50.80)	.875 (22.23)	.150 (3.81)	3.875 (98.43)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.016 inch (0.41 mm).
4. Material aluminum alloy in accordance with specification QQ-A-250/8, temper H32, .040 inch (1.02 mm) thick.
5. Finish anodize in accordance with MIL-A-8625, type I or type II.

FIGURE 7. Retaining plate - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1, 2, 3, 4, 5, 6, and 7.

Mating connector: See MIL-DTL-28748/2 and MIL-DTL-28748/4.

Part or Identifying Number (PIN): As shown in the following example: 1/

(See (PIN) code)

M28748/3	B	A	1	H	L	1 A
Basic number of specification sheet	Hardware designator (see figure 1 for configu-ration styles)	Insert designator (see figure 2)	Shield and shield clamp location or retaining plate (see figure 4)	Shell and polarization position (see figure 3)	Jackscrews or guidepins (see figure 1)	Contacts (see table I)

PIN code:

Hardware Designators 2/	Insert designators	Number of contact positions	Shield and shield clamp Locations	Polarization designators	Polarization positions 3/
A - Long jackscrew hardware only.	A	7	1 - top opening 5/	0 - None included	
B - All other hardware.	B	9	2-side opening 5/	A	A
- - (insert only)	C	14	3 - top opening 6/	B	B
	D	20	4-side opening 6/	C Plug	C
	E	26	5 - top opening 7/	D shells --	D
	F	34	6-side opening 7/	E	E
	G	42	7- top opening 7/	F	F
	H	50	8- side opening 7/	G	G
	J	66		H - Unpolarized	
	K	75	0-none included	J	A
	L	104		K	B
	0	No insert included	Retaining plate	L Receptacle	C
			P - Plate	M shells ----------	D
	Insert designators through hole 4/			N	E
				P	F
	M	34		Q	G
	N	42		R - Unpolarized	
	P	50		S	A
	Q	66		T	B
	R	75		U Plug	C
	S	104		V shells --	D
				W	E
	Insert designators for piece part orders 10/	Connector sizes	Through hole insert designators for piece part orders 9/	X	F
				Y	G
	T	7	|	Z - Unpolarized	
	U	9	|	1	A
	V	14	|	2	B
	W	20	|	3 Receptacle	C
	X	26	|	4 shells ----------	D
	Y	34	5	5	E
	Z	42	6	6	F
	1	50	7	7	G
	2	66	8	8 - Unpolarized	
	3	75	9		
	4	104	A		

See footnotes on next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

Jackscrews
or
guidepins

F - Fixed jackscrews, configuration C, figure 1 (not used with shield).
G - Guidepins, configuration B, figure 1.
L - Long jackscrews, one-piece construction, configuration E, figure 1.
M - Long jackscrews, multi-piece construction, configuration F, figure 1.
S - Short jackscrews slotted head, configuration D, figure 1 (not used with shield).
0 - None included.

Jack and guide location: The jackscrew female (turning or fixed) or guide socket shall be located by the A or 1 pin contact.

Contacts: In accordance with MIL-DTL-28748.

1A - 100 percent size 16
1L - none included 10/

1/ The number zero (0) is used to indicate which parts are not included.
2/ Used for information to indicate size and style of insert or hardware to be used.
3/ Polarization positions are for location of plug and receptacle shells pins and slots (see figure 3).
4/ Manufacturers, mold bodies, and hardware will not necessarily interchange with each other.
5/ Used when shell is specified and with “L” hardware or used with or without shell for “M” hardware.
6/ Use when no shell is specified and with “L” hardware.
7/ Used with or without shell for “M” hardware or used when shell is specified and with “L” hardware.
8/ Used when no shell is specified and with “L” hardware.
9/ These designators are informational and used for insert reference (connector size) to order an appropriate shield or shell as a piece part. Shields and shells may be ordered together or separately.
10/ The “1L” ordering code shall be used in conjunction with insert designator zero “0” or with the insert designators for piece part orders for which no insert is included.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

TABLE I. Contact size percent.

Contact	Sizes 16-16 M39029/34-273 (percent)	Sizes 16-20 M39029/34-272 (percent)	Sizes 20-20 M39029/34-271 (percent)
1A	100	0	0
1B	90	0	0
1C	80	0	0
1D	70	0	0
1E	60	0	0
1F	50	0	0
1G	40	0	0
1H	30	0	0
1J	20	0	0
1K	10	0	0
1L	0	0	0
2A	0	100	0
2B	0	90	0
2C	0	80	0
2D	0	70	0
2E	0	60	0
2F	0	50	0
2G	0	40	0
2H	0	30	0
2J	0	20	0
2K	0	10	0
3A	0	0	100
3B	0	0	90
3C	0	0	80
3D	0	0	70
3E	0	0	60
3F	0	0	50
3G	0	0	40
3H	0	0	30
3J	0	0	20
3K	0	0	10

Installation tool M81969/18-01.
Removal tool M81969/20-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

TABLE II. Superseded specification and MS sheets.

Specification or MS sheet	Dated
MIL-C-28748/3C	30 November 1981
MS14007	2 August 1982
MS14008	2 August 1982
MS14010	18 March 1985
MS18174	2 August 1982
MS18176	2 August 1982
MS18178	18 March 1985
MS18180	18 March 1985
MS18182	26 April 1990
MS18184	18 March 1985
MS18187	19 July 1988
MS18189	18 March 1985
MS18192	1 June 1983
MS18193	26 April 1990
MS18194	11 April 1974
MS18195	20 May 1970
MS18196	23 June 1972
MS18197	23 June 1972
MS18198	23 June 1972
MS18199	23 June 1972
MS18200	20 May 1970
MS18203	26 April 1990
MS18204	26 April 1990
MS18205	23 June 1972
MS35275	14 June 1976
MS35275	14 June 1976

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AT, MI
Navy - AS, SH
Air Force - 17, 99

Preparing activity:
DLA - CC

(Project 5935-4132-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3 The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-DTL-28748/3E	2. DOCUMENT DATE *(YYYYMMDD)* 1999 May 11

3. DOCUMENT TITLE
CONNECTORS, ELECTRICAL, RECTANGULAR, RACK AND PANEL, CRIMP TYPE REMOVABLE PIN CONTACTS, SIZES 16 AND 20

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include zip code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(if applicable)*	7. DATE SUBMITTED *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME **Defense Logistics Agency** **Defense Supply Center, Columbus**	b. TELEPHONE *(Include Area Code)* (1) Commercial **614-692-0573** (2) DSN **850-0573**
c. ADDRESS *(Include Zip Code)* **DSCC-VAI** **P.O. Box 3990** **Columbus, Ohio 43216-5000**	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** **Defense Standardization Program Office (DLSC-LM)** **8725 John J. Kingman Road,Suite 2533** **Fort Belvoir, Virginia 22060-6621** **Telephone (703) 767-6888 DSN 427-6888**

DD Form 1426, FEB 1999 (EG) PREVIOUS EDITION IS OBSOLETE. WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:11Z
Check the source to verify that this is the current version before use.