INCH-POUND

MIL-DTL-45468F(AR)
29 August 2012
SUPERSEDING
MIL-C-45468E(AR)
13 January 1986

DETAIL SPECIFICATION

CAP, BLASTING: ELECTRIC - M6
PARTS FOR, AND LOADING, ASSEMBLING AND PACKING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the parts for, and loading, assembling and packing for one type of blasting cap designated as CAP, BLASTING: electric, M6.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those specified in the solicitation or contract.

Comments, suggestions, or questions on this document should be addressed to (Commander ARDEC, ATTN: Standardization RDAR-QES-E, Picatinny Arsenal, New Jersey 07806-5000) or emailed to ardecstdzn@conus.army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE SPECIFICATIONS

A-A-208	-	Ink, Marking, Stencil, Opaque (Porous and Non-Porous Surfaces)
A-A-59383	-	Marking Media, Opaque (Porous and Non-Porous Surfaces)

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-650	-	Explosive: Sampling, Inspection and Testing
MIL-STD-1168	-	Ammunition Lot Numbering and Ammunition Data Card
MIL-STD-1916	-	DOD Preferred Method for Acceptance of Product

(Copies of these documents are available online at https://assist.dla.mil/quicksearch/ or from the Standardization Document Order Desk, 700 Robbins Avenue Bldg. 4D, Philadelphia, PA 19111-5-94.)

2.2.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation (see 6.2).

Armament Research, Development and Engineering Center (ARDEC) DRAWINGS

8830953	-	Cup
8830954	-	Spool
8830971	-	Plug Assembly (Rubber)
8830972	-	Cap, Blasting, Electric, M6 Assembly
12913870	-	Packing and Marking, For Box, Wirebound For Cap, Blasting, Electric, M6
12913871	-	Packing and Marking, For M19A1 Ammunition Box For Cap, Blasting, Electric, M6

(Application for copies of these drawings may be requested through email to Pica.Drawing.Request@conus.army.mil or from U.S. Army ARDEC, ATTN: RDAR-EIS-PE, Picatinny, NJ 07806-5000.)

DEFENSE AMMUNITION CENTER DRAWINGS

19-48-4116/121Q	-	Unitization Procedures for Boxed Ammunition and Components on 4-way Entry Pallets

(Copies of these drawings may be ordered online at https://www3.dac.army.mil/DET/order/draworder.html or from Defense Ammunition Center, 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

C Tree Road, Bldg. 35, McAlester, OK 74501.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein.

ASTM INTERNATIONAL

ASTM B 749 - Standard Specification for Lead and Alloy Strip, Sheet, and Plate Products

(Copies of ASTM standards may be ordered online at http://www.astm.org/ or from ASTM International, 100 Barr Harbor Drive, Conshohocken, PA 19428-2959.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supercedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Required inspections.

3.1.1 First article. When specified, a sample shall be subjected to first article inspection in accordance with 4.2.

3.1.2 Conformance. A sample shall be subjected to conformance inspection in accordance with 4.3.

3.2 Materials and parts. Materials and parts shall be in accordance with the drawings and specifications cited.

3.3 Assemblies. The assemblies shall comply with all requirements specified on 8830971 and 8830972.

3.4 Moisture content of the lead azide. The moisture content of the lead azide at the loading station, at the time of loading the blasting cap assemblies, shall be not greater than 0.50 percent.

3.5 Pull test of the lead wires. Lead wires shall not be separated from the blasting cap when a pull force of 5 pounds (lb_f) is exerted on each individual lead wire while the blasting cap is held stationary.

3.6 Resistance of bridge wire and wire leads. Resistance of blasting cap, including bridge wire and wire leads, shall be not greater than 1.76 ohms and not less than 1.44 ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

3.7 No fire (critical). The M6 cap shall not be initiated by an electric current of not less than 0.20 Ampere and not greater than 0.21 Ampere for the duration of 5 seconds.

3.8 Waterproofness. The M6 blasting cap shall function after submersion in water for not less than 4 hours at not less than 65°F and not greater than 75°F when the water is under a pressure of not less than 50 pounds per square inch (gauge).

3.9 Functioning. The M6 blasting cap shall be capable of initiating high-order when tested in the following methods.

3.9.1 Ampere initiation of single cap. The M6 blasting cap shall be initiated when an electric DC current of not greater than 0.45 Ampere is applied to the lead wires for not greater than 50 milliseconds.

3.9.2 Milliwatt-second initiation of single cap. The M6 blasting cap shall be initiated when electrical energy of not greater than 18.3 milliwatt-seconds and not less than 16.3 milliwatt-seconds is applied to the lead wires for not less than 10 milliseconds and not greater than 24 milliseconds.

3.9.3 Fire conditions for fifty (50) caps in series. Fifty (50) M6 blasting caps connected in series through the full lengths of their leads shall be initiated by the application of a current of not less than 1.40 and not greater than 1.60 Ampere for not less than 1.5 and not greater than 1.6 milliseconds.

3.9.4 Fire conditions for four (4) caps in series. Four (4) M6 blasting caps connected in series through the full lengths of their leads shall be initiated by the application of electrical energy of not more than 0.3 Joule for not greater than 100 milliseconds.

3.10 Marking performance and durability. Performance and durability of marking inks shall meet the requirements of the ink’s respective specification.

3.11 Workmanship. All parts and assemblies shall be clean and free of chips, burrs, sharp edges, dirt, grease, rust, corrosion products, and other defects and foreign matter which would affect their serviceability. The cleaning method used shall not be injurious to any part or assembly nor shall the cleaning agent contaminate them. Exterior surface coatings shall be continuous. All required markings shall be neat and sharply defined. Required packing shall be dry.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

Table I. Requirement/verification cross reference matrix.

Method of Verification		Classes of Verification						
1- Analysis 2- Demonstration 3- Examination 4- Test		A - First Article B - Conformance						
Section 3 Requirements	Description	Verification Method				Verification Class		Section 4
		1	2	3	4	A	B	
3.1.1	First article		X	X	X	X		4.2
3.1.2	Conformance inspection		X	X	X		X	4.3
3.2	Materials and parts			X	X	X	X	4.3.2
3.3	Assemblies			X		X	X	4.3.2
3.4	Moisture content of the lead azide				X	X	X	4.3.3
3.5	Pull test of the lead wires				X	X	X	4.3.4
3.6	Resistance of bridge wire and wire leads			X		X	X	4.3.5
3.7	No-fire				X	X	X	4.3.6
3.8	Waterproofness				X	X	X	4.3.7
3.9.1	Ampere initiation of single cap		X			X	X	4.3.8.1
3.9.2	Milliwatt-second initiation of single cap		X			X	X	4.3.8.2
3.9.3	Fire conditions for fifty (50) caps in series		X			X	X	4.3.8.3
3.9.4	Fire conditions for four (4) caps in series		X			X	X	4.3.8.4
3.10	Marking performance and durability				X	X		4.3.9
3.11	Workmanship			X	X	X	X	4.3.2

4.1 Classification of verification. The verification requirements specified herein are classified as follows:

a. First Article Inspection (see 4.2)

b. Conformance Inspection (see 4.3)

4.2 First article inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

4.2.1 Submission. When specified, a first article sample of 190 M6 caps shall be submitted for evaluation in accordance with the provisions of 4.2.2, Table II, and Figure 1.

4.2.2 Rejection. The first article sample shall be rejected if any of the inspections/tests fail to meet specification or drawing requirements.

TABLE II. First article inspection.

Examination or test	Conformance criteria	Requirement paragraph	Paragraph reference/ inspection method
Examination for defects	190	3.2 – 3.3	4.3.2.2 – 4.3.2.9
Moisture content of lead azide	2 grams	3.4	4.3.3
Lead wires pull test	190	3.5	4.3.4
Resistance of bridgewire and leads	190	3.6	4.3.5
No-fire	190	3.7	4.3.6
Waterproofness	110	3.8	4.3.7
Ampere initiation	50	3.9.1	4.3.8.1
Milliwatt-second initiation	50	3.9.2	4.3.8.2
50 cap series	50	3.9.3	4.3.8.3
4 cap series	40	3.9.4	4.3.8.4
Packing and marking	5	3.3	4.3.2.7 – 4.3.2.9
Marking performance and durability	3	3.10	4.3.9

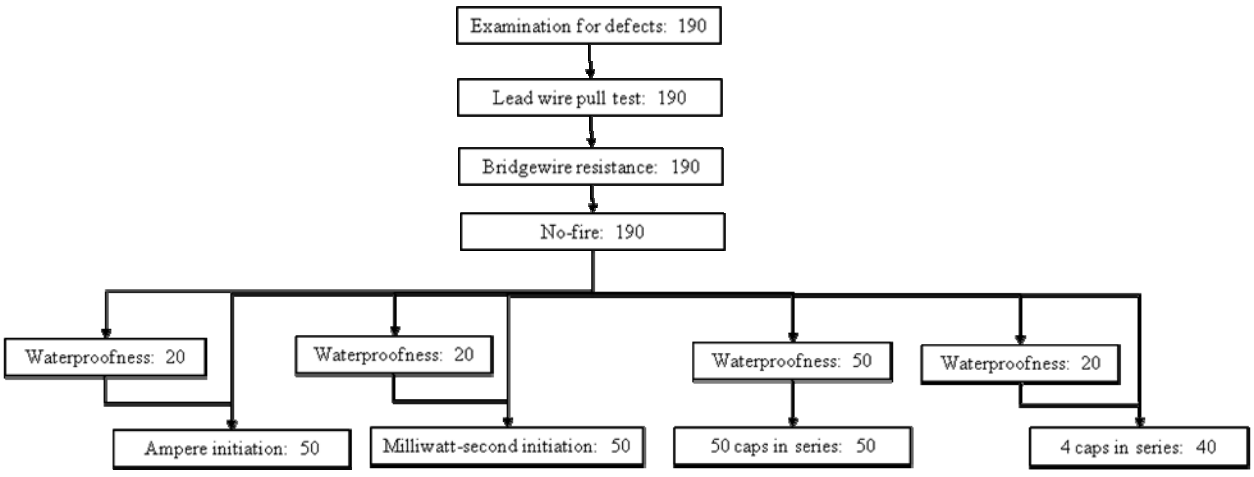


FIGURE 1. First article test and lot acceptance test sequence.

4.3 Conformance inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

4.3.1 Inspection lot formation. Lot formation shall be in accordance with the lot requirement of MIL-STD-1916. Lot numbering, as required, shall be in accordance with MIL-STD-1168. Each inspection lot of loaded charge assemblies shall contain:

a. Parts from not more than one lot interfix number from one manufacturer.

b. Ignition charge from not more than one lot from one manufacturer.

c. Lead azide from not more than one lot from one manufacturer.

d. RDX from not more than one lot from one manufacturer.

4.3.2 Examination. For the conformance inspection paragraphs 4.3.2.2 to 4.3.2.9, the definitions of critical, major, and minor defects are provided in paragraph "Definitions" of MIL-STD-1916. Inspection sampling requirements for critical, major, and minor characteristics aree defined in MIL-STD-1916. Unless specified otherwise, Inspection Level VII in addition to 100% inspection shall be used for all characteristics defined as Critical, Inspection Level IV shall be used for characteristics defined as Major, and Inspection Level II for all Minor characteristics. Three characteristics are defined as Critical in 4.3.2.5.

4.3.2.1 Allowance for failure mode. A lot shall be accepted with one function failure as long as there is evidence of bridgewire failure. Bridgewire failure shall be determined by a continuity check prior to functioning and does not replace the inspection in 3.6.

4.3.2.2	Plug assembly (rubber).			DRAWING NUMBER 8830971 NEXT HIGHER ASSEMBLY 8830972
CATEGORY	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE/ INSPECTION METHOD
Critical	None defined			
Major				
101	Pull test of lead wires	IV	3.5	4.3.4
102	Length of bare wire not covered by rubber plug	IV	3.2	Gage
103	Length from bare end of lead wire to insulation, max.	IV	3.2	Gage
104	Length of plug, min.	IV	3.2	Gage
105	Bridge wire improperly soldered	IV	3.2	Visual
106	Tension on bridge wire	IV	3.2	Visual
107	Resistance of bridge wire and lead wires	100%	3.6	SME
Minor				
201	Diameter of plug, min.	II	3.2	Gage
202	Evidence of poor workmanship	II	3.11	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

4.3.2.3	Cup.			DRAWING NUMBER 8830953 NEXT HIGHER ASSEMBLY 8830972
CATEGORY	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE/ INSPECTION METHOD
Critical	None defined			
Major				
101	Cup split or cracked	100%	3.2	Visual
102	Thickness through bottom	IV	3.2	Gage
103	Length, min.	IV	3.2	Gage
Minor				
201	Inside diameter, min.	II	3.2	Gage
202	Outside diameter, max.	II	3.2	Gage
203	Concavity of bottom, max.	II	3.2	Gage
204	Evidence of poor workmanship	II	3.11	Visual

4.3.2.4	Spool.			DRAWING NUMBER 8830954 NEXT HIGHER ASSEMBLY 8830972
CATEGORY	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE/ INSPECTION METHOD
Critical	None Defined			
Major	None defined			
Minor				
201	Total length	II	3.2	Gage
202	Depth of slot	II	3.2	Gage
203	Width of slot, min.	II	3.2	Gage
204	Outside diameter, max.	II	3.2	Gage
205	Evidence of poor workmanship	II	3.11	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

4.3.2.5	Assembly (prior to insertion in spool).			DRAWING NUMBER 8830972 NEXT HIGHER ASSEMBLY ----------
CATEGORY	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE/ INSPECTION METHOD
Critical				
1	Cup split or cracked or explosive leakage	100% + VL-VII	3.3	Visual
2	No-fire test	100% + VL-VII	3.7	4.3.6
3	Lead wires not shunted	100% + VL-VII	3.3	Visual
Major				
101	Length of cup, max.	IV	3.3	Gage
102	Diameter of cup, crimp end, max.	IV	3.3	Gage
103	Insulation on lead wires damaged	IV	3.3	Visual
104	Not crimped 360° (4 places)	IV	3.3	Visual
105	Moisture content of lead azide	2 grams, see 1/	3.4	4.3.3
Minor				
201	Evidence of poor workmanship	II	3.11	Visual
1/: Sampling of lead azide shall be in accordance with 4.3.3.				

4.3.2.6	Assembly.			DRAWING NUMBER 8830972 NEXT HIGHER ASSEMBLY ----------
CATEGORY	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE/ INSPECTION METHOD
Critical	None defined			
Major				
101	Insulation on wires damaged	IV	3.3	Visual
102	Spool torn or crushed	IV	3.3	Visual
103	Waterproofness	110	3.8	Figure 1 and 4.3.7
104	Functioning – ampere	50	3.9.1	Figure 1 and 4.3.8.1
105	Functioning – milliwatt-second	50	3.9.2	Figure 1 and 4.3.8.2
106	Functioning – 50 cap series	50	3.9.3	Figure 1 and 4.3.8.3
107	Functioning – 4 cap series	40	3.9.4	Figure 1 and 4.3.8.4
Minor				
201	Wires improperly wrapped on spool	II	3.3	Visual
202	Evidence of poor workmanship	II	3.11	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

4.3.2.7	M19A1 inner pack.			DRAWING NUMBER 12913871 NEXT HIGHER ASSEMBLY 12913870
CATEGORY	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE/ INSPECTION METHOD
Critical	None defined			
Major				
101	Markings misleading or unidentifiable	IV	3.3	Visual
102	Cap holder dimensions incorrect	IV	3.2	Gage
103	Any component missing or improperly oriented	IV	3.3	Visual
104	Incorrect number of M6 items	IV	3.3	Visual
Minor				
201	Cap holder material incorrect	II	3.2	See 1/
202	Foam packaging material incorrect	II	3.2	See 1/
203	Evidence of poor workmanship	II	3.11	Visual
1/: Objective evidence with test results indicating compliance with specification requirements is required.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

4.3.2.8	Packing and marking of wirebound box.			DRAWING NUMBER 12913870 NEXT HIGHER ASSEMBLY 19-48-4116/121Q
CATEGORY	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE/ INSPECTION METHOD
Critical	None defined			
Major				
101	Dimensions of wirebound box incorrect	IV	3.3	Gage
102	Packaging not closed or sealed correctly.	IV	3.3	Visual
103	Any cushioning or packaging material damaged, missing, or improperly orientated.	IV	3.3	Visual
104	Markings missing, incorrect, illegible, incorrect size/height or not in correct location.	IV	3.3	Visual
105	2D bar code missing, incorrect or in incorrect location.	IV	3.3	Visual
106	Metallic seal missing, incorrect, not secured, or not applied correctly.	IV	3.3	Visual
107	Wood preservative marking is missing, incorrect, or in incorrect location (for natural wood only).	IV	3.3	Visual
108	Heat treatment stamp missing, incorrect, or in incorrect location (for natural wood only).	IV	3.3	Visual
Minor				
201	Evidence of poor workmanship	II	3.11	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

4.3.2.9	Unitization.			DRAWING NUMBER 19-48-4116/121Q NEXT HIGHER ASSEMBLY ----------
CATEGORY	EXAMINATION OR TEST	CONFORMANCE CRITERIA	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE/ INSPECTION METHOD
Critical	None defined			
Major				
101	Pallet not in accordance with requirements	See 1/	3.3	See 1/
102	Pallet markings missing, incorrect or not located properly	IV	3.3	Visual
103	Boxes incorrectly oriented or positioned on pallet	IV	3.3	Visual
104	Filler assembly, if required, not made, treated, or marked correctly	IV	3.3	Visual
105	Strapping incorrectly routed, not located correctly or material incorrect	IV	3.3	Visual
106	Unit load not tightly strapped or any strap loose	IV	3.3	Visual
107	Strapping seal not properly crimped	IV	3.3	Visual
108	Wood preservative marking is missing, incorrect, or in incorrect location on pallet.	IV	3.3	Visual
109	Heat treatment stamp missing, incorrect, or in incorrect location on pallet.	IV	3.3	Visual
Minor				
201	Evidence of poor workmanship	II	3.11	Visual
1/: Inspection shall be in accordance with MIL-P-15011 except MIL-STD-1916 shall be used in lieu of MIL-STD-105.				

4.3.3 Moisture content of lead azide. The moisture content of the lead azide shall be determined for each lot at the time of loading. A sample shall be selected from that quantity of lead azide used in each production shift, and tested as specified in 4.3.3.1. A composite sample shall not be used. If the moisture content is in excess of the percentage specified and loading has not begun, the lot of lead azide shall be rejected until proper corrective action has been accomplished as verified by performing the moisture content test specified in 4.3.3.1. If loading has begun, action on the unloaded lead azide shall be as specified above and all components loaded with the nonconforming lead azide shall be rejected.

4.3.3.1 Determination of moisture content of lead azide. The moisture content of the lead azide shall be determined in accordance with Method 101.5 of MIL-STD-650, except that a two-gram (gr.) sample shall be tested and the dish shall be covered with a sheet of polytetrafluoroethylene.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

4.3.4 Pull test of the lead wires. The plug assembly shall be tested with the specified load applied. Any plug assembly that shows evidence of slippage of either lead wire within the plug shall be classed defective and shall reject the lot.

4.3.5 Resistance of bridge wire and wire leads. The electrical resistance of the cap, including the leads, shall be measured as specified using a test current not to exceed 0.020 Ampere. Any assembly which fails to comply with the applicable requirement shall be classed defective and shall reject the lot.

4.3.6 No-fire (critical). The blasting cap shall be assembled to a suitable test fixture and an electric current of 0.20 to 0.21 Ampere shall be applied singularly to each cap for a period of 5 seconds. No reaction of the cap shall be considered a success for this test.

4.3.7 Waterproofness. The cap assemblies shall be completely immersed in water for not less than four (4) hours at a temperature of 70 degrees plus or minus 5 degrees Fahrenheit, and a pressure of 50 plus 0.50 pounds per square inch gauge. Within four hours of removal from the water, the sample caps shall be subjected to function tests in accordance with Table II, Figure 1, and 4.3.8.

4.3.8 Functioning. Prior to functioning, check for conformance that the lead wires are shunted and that the caps are not split, cracked, or show evidence of explosive leakage in accordance with 4.3.2.5. The requirements of 3.9 shall be verified by puncturing a lead disc in the following demonstration. The lead discs used in this test shall be made of 8 pound sheet lead complying with ASTM B 749 for Lead Sheet material, and shall be 0.1345 inch min. thickness and 1.22 - .01 inch in diameter. The disc shall be centered over a 15/16 inch diameter hole in a metal support. The cap shall be suitably fixed in an upright position, with its bottom resting on the unsupported section of the lead disc. The cap shall be fired in accordance with one of the following initiation methods.

4.3.8.1 Ampere initiation of single cap. Using the test method described in 4.3.8, the cap shall be fired in accordance with 3.9.1. Observation shall be made for complete detonation of the cap as evidenced by perforation of the lead disc.

4.3.8.2 Milliwatt-second initiation of single cap. Using the test method described in 4.3.8, the cap shall be fired in accordance with 3.9.2. Observation shall be made for complete detonation of the cap as evidence by perforation of the lead disc.

4.3.8.3 50 caps in series. Fifty (50) M6 blasting caps shall be connected in series and initiated by applying current of 1.50 Ampere from power source. Suitable equipment to measure and control DC electric power shall be used, as well as equipment capable of measuring to the nearest millisecond the time from application to detonation of the blasting cap. Five (5) randomly selected blasting caps in the series shall have their explosive output verified by perforation of a lead disc as described in 4.3.8. Verify that all caps have functioned high-order.

4.3.8.4 Four (4) caps in series. Four (4) M6 blasting caps shall be connected in series and initiated in accordance with 3.9.4. One (1) cap shall be selected to have explosive output

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

verified by perforation of a lead disc as described in 4.3.8. Verify that all caps have functioned high-order.

4.3.9 Marking performance and durability. Verify by test that the ink meets performance and durability criteria. Markings that do not meet the durability requirements of these tests shall be considered non-conforming.

a. When A-A-59383 is being utilized, markings shall be tested in accordance with the performance criteria of its respective specification. The performance tests shall be conducted by applying the marking media either to actual parts to be marked in production or test samples made out of the same materials and prepared using the same methods as used for the end item.
b. When A-A-208 inks are utilized, objective evidence showing that the ink meets all performance criteria shall be submitted. Additionally, “Resistance to Rubbing” paragraph 5.4 and “Resistance to Water” paragraph 5.5 tests contained within A-A-208 shall be completed and verified for conformance.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order. When packaging of material is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

6.1 Intended use. The M6 blasting cap is intended for detonating all past and current fielded and developmental military explosives.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.

b. Provisions for submission of first article samples.

c. Requirements for Ammunition Lot Numbering, if applicable.

d. Requirement for acceptance inspection equipment (AIE) designs.

e. Certificate of Conformance for each lot or shipment of product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

6.3 Warning. This specification contains sampling procedures and tests which involve materiel potentially hazardous to personnel. It is emphasized that all applicable safety rules, procedures and regulatory requirements be strictly followed during the handling, processing and testing of these blasting caps. Hazardous component safety data sheets contained in the technical data package contain specific safety-related information.

6.4 Check test for possible deterioration of blasting caps. The following test is designed to prevent blasting caps that have deteriorated from being assembled into major ammunition items. The test should be performed on blasting caps from each lot which have been stored under normal conditions for more than two (2) years or under adverse conditions for any period of time. If the specification for the ammunition item into which blasting caps are assembled does not require that the check test be performed, the Contracting Officer should insert in the contract a provision for the performance of the check test. The Contracting Officer should arrange for the contractor to be reimbursed for expense incurred in the performance of the check tests for possible deterioration. Blasting caps should be selected from each lot and tested as per 6.4.1.

6.4.1 Functioning. Eighty (80) blasting cap assemblies should be selected from each lot and subjected to the functioning test as specified in 4.3.8.1. The lot should be rejected if one (1) or more blasting caps fail to comply with the functioning requirements specified in 3.9.1.

6.5 Critical characteristic. Inadvertent initiation of the blasting cap can lead to injury and death.

6.5.1 Cup split or cracked or explosive leakage. The blasting cap cup being split or cracked, explosive charge being exposed, or there being evidence of explosive leakage is a critical characteristic of the M6. The explosives contained within the blasting cap are highly sensitive to static discharge and should be contained within the blasting cap cup.

6.5.2 No-fire test. The blasting cap's ability to withstand small electrical charges such as those from handling or the environment and function only at the prescribed inputs is a critical characteristic of the M6. It is important to perform a no-fire test to ensure the caps are robust enough to withstand small electrical charges.

6.5.3 Lead wires not shunted. The blasting cap's ability to remain safe prior to use and not function due to electrical charges such as those from handling or the environment is a critical characteristic of the M6. It is important to shunt the lead wires and short-circuit the cap to prevent unwanted initiation.

6.6 Certification. Unless otherwise specified by the Contracting Officer, certification should be submitted by the contractor in accordance with the contract. Distribution should include: U.S. Army ARDEC, RDAR-MEM-G, Picatinny Arsenal, NJ 07806-5000.

6.7 Subject term (key word) listing.

Initiator

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.

Energetic

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army-AR

Preparing Activity:
Army-AR
(Project 1375-2012-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:05Z
Check the source to verify that this is the current version before use.