MIL–P–45454B(MU)
30 AUGUST 1963
SUPERSEDING
MIL–P–45454A(ORD)
16 JUNE 1960

MILITARY SPECIFICATION

PRIMER, PERCUSSION, M79
LOADING, ASSEMBLING, AND PACKING

1. SCOPE

1.1 This specification covers the loading, assembling and packing for one type of primer designated as Primer, Percussion, M79.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL–P–116 —Preservation, Methods of
MIL–P–223 —Powder, Black
MIL–A–2550 —Ammunition and Special Weapons; General Specification for
MIL–P–20449 —Primer, Percussion, M61, Loading Assembling and Packing
MIL–I–45208 —Inspection Requirements, General Specification for
MIL–B–45451 —Benite Strands
MIL–I–45607 —Inspection Equipment, Supply and Maintenance of

STANDARDS

MILITARY

MIL–STD–105 —Sampling Procedures and Tables for Inspection by Attributes
MIL–STD–109 —Quality Assurance Terms and Definitions
MIL–STD–1235 —Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes.

DRAWINGS

ORDNANCE CORPS

8839485 —Primer, Percussion, M79 Assembly
8846855 —Box, Packing, Ammunition, for Primer, Percussion, M79
8846856 —Carton, Packing, Ammunition, for Primer, Percussion, M79

PUBLICATIONS

ORDNANCE CORPS

IEL–8839485 —Index of Inspection Equipment Lists

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. Materials shall be in accordance with applicable drawings and specifications.

3.2 Primer. The primer shall comply with all requirements specified on Drawing (dwg.) 8839485 and with all requirements specified in applicable specifications.

FSC 1390

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:03Z
Check the source to verify that this is the current version before use.

3.3 Head assembly

3.3.1 *Nonfunctioning.* The head assembly shall not function when tested as specified in 4.3.1.1.

3.3.2 *Functioning.* The head assembly shall function on the first attempt, when tested as specified in 4.3.1.2.

3.4 Primer assembly functioning. The primer assembly shall function, there shall be no audible hangfire and no part shall show evidence of rupture, break or become detached, when tested as specified in 4.3.2.

3.5 Moisture content

3.5.1 *Black powder.* The moisture content of the black powder at the loading station, at the time of loading shall not exceed 0.5 percent when determined as specified in 4.3.3.1.

3.5.2 *Benite strands.* The moisture content of the benite strands at the loading station, at the time of loading shall not exceed 1.0 percent when determined as specified in 4.3-3.2.

3.6 Workmanship. All parts and assemblies shall be clean and free of burs, chips, dirt, grease, rust, corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agent. Surface coatings shall be continuous except for a few small scratches. All required marking shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 General quality assurance provisions. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements. Reference shall be made to Standard MIL-STD-109 in order to define terms used herein. The provisions of Specification MIL-A-2550 shall apply.

4.1.1 *Contractor quality assurance system.* The contractor shall provide and maintain an effective quality assurance system in compliance with the requirements of Specification MIL-I-45208, except that the height of the drop and weight of ball for the non-functioning and functioning tests shall not vary from the procedure specified in 4.3.1.

4.1.2 *Submission of product.* At the time the completed lot of product is submitted to the Government for acceptance the contractor shall supply the following information accompanied by a certificate which attests that the information provided is correct and applicable to the product being submitted:

(a) A statement that the lot complies with all quality assurance provisions of the approved current written description of the system.

(b) Number of units of product inspected.

(c) Results obtained for all inspection performed.

(d) Drawing, specification number and date, together with an identification and date of changes.

(e) Certificates of compliance of all material purchased by the contractor when such material is controlled by Government specifications referenced in any of the contractual documents.

(f) Number of items in the lot.

(g) Date submitted.

The certificate shall be signed by a responsible agent of the certifying organization. The initial certificate submitted shall be substantiated by evidence of the agent's authority to bind his principal. Substantiation of the agent's authority will not be required with subsequent certificates unless, during the course of the contract, this authority is vest-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:03Z
Check the source to verify that this is the current version before use.

ed in another agent of the certifying organization.

4.1.3 *Government verification.* Using the contractor's written quality assurance procedure, this detail specification, the applicable drawings and other contractual documents as a guide, the Government inspector shall verify at unscheduled intervals all quality assurance operations performed by the contractor. Verification will be in accordance with Specification MIL-I-45208 and will be performed to the extent necessary to assure compliance with the contractual requirements. Severity of Government inspection of individual characteristics will be directly related to the seriousness of the classification assigned. In no instance will a characteristic classified "critical" be accepted solely on the basis of the contractor's records.

4.2 **Inspection provisions.**

4.2.1 *Lot formation.* A lot shall consist of primers produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification, and same specification revision. Drawing, specification, and process changes not affecting safety, performance or fit, as determined by the Government shall not necessitate changing the lot interfix number. Each lot shall contain:

(a) Metal parts or metal parts assemblies of one lot interfix number, from one manufacturer.

(b) Benite of one lot interfix number, from one manufacturer.

(c) Black powder from not more than one lot.

(d) Percussion elements of one lot interfix number, frome one manufacturer.

4.2.2 *Examination.* Sampling plans and procedures for the following classifications of defects shall be in accordance with Standard MIL-STD-105 except that inspection for critical defects, when listed, shall be 100 percent. Continuous sampling plans in accordance with Standard MIL-STD-1235 may be used if approved by the procuring activity. Also, at the option of the procuring activity, AQL's and sampling plans may be applied to the individual characteristics listed using an AQL of 0.25 percent for each major defect and an AQL of 0.40 percent for each minor defect. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.2.4.

4.2.2.1 Head assembly, prior to inserting percussion element (see dwg. 8839481 covering a detail of dwg. 8839485).

Categories	*Defects*	*Method of inspection*	*Code No. (see 6.2)*
Critical: None defined			
Major:	AQL 0.25 percent		
101.	Flash hole obstructed by foreign material	Visual	01001
102.	Charge missing or disc punctured	Visual	01002
Minor:	AQL 1.00 percent		
201.	Crimp incomplete or not sealed on plug	Visual	01003
202.	Evidence of poor workmanship (see 3.6)	Visual	01004

4.2.2.2 Head assembly, prior to assemblying battery cup and firing plug (see dwg. 8839481 covering a detail of dwg. 8839485).

Categories	*Defects*	*Method of inspection*	*Code No.*
Critical: None defined			
Major	AQL 0.25 percent		
101.	Percussion element missing, cocked or inverted	Visual	02001
Minor:	AQL 1.00 percent		
201.	Seal between percussion element assembly and head assembly missing or incomplete	Visual	02002
202.	Evidence of poor workmanship (see 3.6)	Visual	02003

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:03Z
Check the source to verify that this is the current version before use.

4.2.2.3 Head assembly, prior to assembling to body (see dwg. 8839481 covering a detail of dwg. 8839485).

Categories	Defects	Method of inspection	Code No.
Critical:			
1.	Firing plug or battery cup above flush	Visual	03001
Major:	AQL 0.40 percent		
101.	Firing plug missing, cocked or inverted	Visual	03002
102.	Flash hole in plug completely obstructed	Visual	03003
103.	Battery cup loose	Manual	03004

4.2.2.4 Body, prior to assembly of liner (see dwg. 8840616 covering a detail of dwg 88394-85).

Categories	Defects	Method of inspection	Code No.
Critical:			
1.	Any flash hole missing from body	Gage	04001
2.	Body cracked or split	Visual	04002
Major: None defined			
Minor:	AQL 0.40 percent		
201.	Evidence of poor workmanship (see 3.6)	Visual	04003

4.2.2.5 Body, prior to assembling head assembly (see dwg. 8839485).

Categories	Defects	Method of inspection	Code No.
Critical: None defined			
Major:	AQL 0.40 percent		
101.	Weight of charge	Balance	05001
102.	Liner fails to cover all holes	Visual	05002
103.	Closing plug improperly sealed	Visual	05003
104.	Closing plug above flush	Visual	05004
Minor:	AQL 0.40 percent		
201.	Foreign matter in charge	Visual	05005

4.2.2.6 Assembly (see dwg. 8839485).

Categories	Defects	Method of inspection	Code No.
Critical: None defined			
Major:	AQL 0.40 percent		
101.	Case thread damaged	Gage	06001
102.	Any flash hole not completely sealed (see Note 1)	Visual	06002
103.	Head assembly loose or assembled to wrong end of primer body	Manual-Visual	06003
Minor:	AQL 2.50 percent		
201.	Total length, maximum, (max.)	Gage	06004
202.	Diameter of flange, max	Gage	06005
203.	Crimp of body to head missing or incomplete	Visual	06006
204.	Marking missing, misleading or unidentifiable	Visual	06007
205.	Evidence of poor workmanship (see 3.6)	Visual	06008

Note 1. Sketches 1, 2 and 3 of figure 1 indicate acceptable primers. Furthermore, a primer with holes displaying the conditions 4, 5 and 6 may be classed acceptable provided that visible liner is completely covered with paint or lacquer and not more than 20 percent of the holes have this condition.

4.2.2.7 Carton, prior to sealing (see dwg. 8846856).

Categories	Defects	Method of inspection	Code No.
Critical: None defined			
Major:	AQL 0.25 percent		
101.	Number of primers incorrect	Visual	07001
Minor:	AQL 1.00 percent		
201.	Any packing material missing	Visual	07002
202.	Separator damaged to the extent that primers touch each other	Visual	07003

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:03Z
Check the source to verify that this is the current version before use.

4.2.2.8 Carton, sealed (see dwg. 8846856).

Categories	Defects	Method of inspection	Code No.
Critical:	None defined		
Major:	None defined		
Minor:	AQL 2.50 percent		
201.	Sealing strip torn, badly wrinkled, incomplete or otherwise fails to seal carton	Visual	08001
202.	Carton torn, cut or punctured	Visual	08002
203.	Marking misleading or unidentifiable	Visual	08003
204.	Contents loose	Manual	08004

4.2.2.9 Sealed barrier bag (see dwg. 8846856).

Categories	Defects	Method of inspection	Code No.
Critical:	None defined		
Major:	AQL 0.25 percent		
101.	Seal improper or incomplete	Visual	09001
102.	Bag punctured, torn or cut	Visual	09002
Minor:	None defined		

4.2.2.10 Packing box, prior to sealing (see dwg. 8846855).

Categories	Defects	Method of inspection	Code No.
Critical:	None defined		
Major:	AQL 0.25 percent		
101.	Carton missing	Visual	10001
Minor:	None defined		

4.2.2.11 Packing box, sealed (see dwg. 8846855).

Categories	Defects	Method of inspection	Code No.
Critical:	None defined		
Major:	AQL 0.25 percent		
101.	Box broken, board loose or protruding nail	Visual	11001
102.	Hardward or strapping, broken or loose	Visual-Manual	11002 11002
Minor:	AQL 1.50 percent		
201.	Car seal missing, unsealed or improperly positioned	Visual	11003
202.	Hardware or strapping improperly engaged or mislocated	Visual	11004
203.	Marking misleading or unidentifiable	Visual	11005
204.	Contents loose (when tilted)	Manual	11006

4.2.3 *Testing*

4.2.3.1 Head assembly.

4.2.3.1.1 Nonfunctioning (see 3.3.1)—Critical defect—Code No. 03005.

4.2.3.1.1.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the acceptance criteria specified, the acceptance and rejection criteria for this test shall be in accordance with Standard MIL-STD-105, table IV A, Code letter L, and AQL of 0.065 percent. The test shall be performed as specified in 4.3.1.1, using test equipment specified in 4.2.4.

4.2.3.1.1.2 After three consecutive lots have met the criteria of 4.2.3.1.1.1, the acceptance and rejection criteria for this test shall be in accordance with Standard MIL-STD-105, table IV A, Code letter I, and AQL of 0.25 percent. The test shall be performed as specified in 4.3.1.1, using test equipment specified in 4.2.4.

4.2.3.1.2 Functioning (see 3.3.2)–Major defect–Code No. 03006.

4.2.3.1.2.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the acceptance criteria specified the acceptance and rejection

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:03Z
Check the source to verify that this is the current version before use.

criteria for this test shall be in accordance with Standard MIL-STD-105, table VI, Code letter O, and AQL of 0.10 percent. The test shall be performed as specified in 4.3.1.2, using test equipment specified in 4.2.4.

4.2.3.1.2.2 After three consecutive lots have met the criteria of 4.2.3.1.2.1 a sample of 125 head assemblies shall be selected from each lot for test. If 2 or more assemblies fail to comply with the specified requirement, the lot shall be rejected. If only one defective is found, a second sample of 250 primer assemblies shall be selected. If the combined number of defectives in both the first and second samples is 2 or more, the lot shall be rejected. The test shall be performed as specified in 4.3.1.2, using test equipment specified in 4.2.4.

4.2.3.2 Primer assembly functioning (see 3.4)–Major defect–Code No. 06009.

4.2.3.2.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the acceptance criteria specified, the sampling plan for this test shall be in accordance with Standard MIL-STD-105, using table IV A, Code letter G and an AQL of 0.65 percent. The test shall be performed as specified in 4.3.2.

4.2.3.2.2 After three consecutive lots have met the criteria of 4.2.3.2.1, the sampling plan for this test shall be in accordance with Standard MIL-STD-105, using table IV A, Code letter E and an AQL of 1.5 percent. The test shall be performed as specified in 4.3.2.

4.2.3.3 *Moisture content*

4.2.3.3.1 Black powder (see 3.5.1)–Major defect–Code No. 12001. A sample of ten head assemblies, prior to sealing, shall be randomly selected from each eight hours production. The black powder shall be tested as specified in 4.3.3.1. Any failure to comply with the applicable requirement shall be cause for rejection of the eight hours production represented by the sample.

4.2.3.3.2 Benite strands (see 3.5.2)–Major defect–Code No. 12002. A sample of one body assembly, prior to sealing, shall be randomly selected from each eight hours production. The benite strands shall be removed and tested as specified in 4.3.3.2. Any failure to comply with the applicable requirement shall be cause for rejection of the eight hours production represented by the sample.

4.2.3.4 Check test for deterioration of percussion elements—Major defect—Code No. 12003. If the total elapsed time between original acceptance of the percussion element lot and the assembly of that lot into the primers exceeds two years, or if the percussion elements have been subjected to adverse conditions for any period of time since previous test, the percussion element lot shall be subjected to and must satisfactorily pass the check test for deterioration specified in Specification MIL-P-20449 immediately before the percussion element lot is assembled into the primer head assembly. The test shall be performed by the contractor on assemblies selected by the Government inspector at the facility assembling the complete primer (see 6.5).

4.2.3.5 Heat seal test of sealed bag (see dwg. 8846856). Major defect–Code No. 09004. Sampling, acceptance criteria and test procedures for this test shall be as prescribed in Specification MIL-P-116 for the "Heat Seal Test."

4.2.4 *Inspection equipment.* Index of Inspection Equipment Number IEL 8839485 identifies the inspection equipment required to perform the examinations and test prescribed in this section. The contractor shall design inspection equipment in accordance with the instructions in paragraph 6.3.

4.2.4.1 *Government rights to documentation.* Inspection equipment drawings and lists provided and revised in accordance with the requirements of the IEL may be used by DOD activities for design, procurement, manufacture, testing, evaluation, production and receiving inspection, overhaul, shipping, storage, identification of stock, ordering and storage of replacement parts, inspection of items at overhaul, general maintenance of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:03Z
Check the source to verify that this is the current version before use.

equipment, construction, survey and whenever inspection equipment drawings are needed.

4.2.4.2 *Supply and maintenance.* Supply and maintenance of the equipment listed on the IEL shall be in accordance with Specification MIL-I-45607.

4.2.4.3 *Government use of contractor's inspection equipment.* The contractor shall as required make available to the Government all inspection equipment necessary for determining conformance with contract requirements. Personnel for operating the equipment and verification of its accuracy shall be supplied by the contractor, when required by the Government in performance of its examination or test.

4.3 **Test methods and procedures**

4.3.1 *Head assembly.*

4.3.1.1 *Nonfunctioning.* The head assembly shall be assembled to the applicable test fixture specified in 4.2.4 so that the firing pin will strike the percussion element. A steel ball weighing 7.94 plus or minus .02 ounces shall be dropped on the firing pin from a height of 6 inches, minimum (min.). The height of drop shall be measured as the height from the top of the firing pin to the bottom of the ball. Any head assembly which functions shall be classed defective. Head assemblies used in this test shall not be returned to the lot.

4.3.1.2 *Functioning.* The test shall be performed as specified in 4.3.1.1, using the same steel ball, except that the height of drop shall be 20 inches, max. Any head assembly which fails to function shall be classed defective.

4.3.2 *Primer assembly functioning.* This test shall be performed at a Government proving ground. The sample primers shall be assembled to complete rounds for which the primer was designed and fired from a gun for which the round is standard.

4.3.3 *Moisture content*

4.3.3.1 *Black powder.* The moisture content of the black powder shall be determined in accordance with the procedure specified in Specification MIL-P-223.

4.3.3.2 *Benite strands.* The moisture content of the benite strands shall be determined in accordance with the procedure specified in Specification MIL-B-45451.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging

5.1.1 *Level B.* The primers shall be packaged in accordance with dwg. 8846856. Barrier bag protection is required (see 6.4).

5.1.2 *Level C.* The primers shall be packaged in accordance with dwg. 8846856. The use of the barrier bag is not required.

5.2 Packing and marking

5.2.1 *Packing Level C.* Primers packaged as described in 5.1.1 or 5.1.2 shall be packed in accordance with dwg. 8846855.

5.2.2 *Marking.* The packing box shall be marked in accordance with dwg. 8846855.

5.3 Data cards. Data cards shall be prepared for each lot in accordance with the information specified in Specification MIL-A-2550.

6. NOTES

6.1 Ordering data. Procurement documents shall specify the following:

(a) Title, number and date of this specification.
(b) Level of preservation and packing required (see 6.4).

6.2 Inspection code numbers. The five digit code numbers assigned to the inspections herein are to facilitate future data collection and analysis by the Government.

6.3 Inspection equipment. The contractor shall design inspection equipment as required by the referenced Inspection Equipment Lists (IEL) in accordance with the instructions of 6.3.1 through 6.3.7.

6.3.1 *Inspection equipment lists.* Inspection equipment lists indicate the availability of inspection equipment designs by showing in

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:03Z
Check the source to verify that this is the current version before use.

the "number" column of the list of inspection equipment (00 Form 1242-3) the numbers of drawings of existing equipment designs or codes as indicated in 6.3.2. Design action required of the contractor with respect to the different types of drawings that may be listed is described in 6.3.3 and 6.3.4. Action required by the contractor with respect to commercial inspection equipment is described in 6.3.5. The contractor will be required to prepare detailed drawings in accordance with 6.3.6 for all the equipment coded as "contractor design" in the number column. These contractor designs must be approved by the Government prior to fabrication or procuring of the equipment. Designs shall be submitted for approval as specified in 6.3.7.

6.3.2 *Inspection equipment list codes.* The inspection equipment as defined in 6.3.3, 6.3.4, 6.3.5, and 6.3.6 will be designated in the Inspection Equipment List by the following codes:

CDOF —Contractor's design responsibility on Ordnance format; ORDM-608-12.
CDCF —Contractor's design responsibility on contractor format.
OD —Ordnance design.
ODMU —Ordnance design, mandatory for use.
CE —Commercial equipment.
SCD —Specification Control Drawing.

6.3.3 *Ordnance designs.* Ordnance designs are reflected on detailed drawings which completely depict all the information necessary for the fabrication of the item of inspection equipment. The contractor need provide no design when an Ordnance design is listed for an item of inspection equipment. Ordnance designs fall into two basic classifications: mandatory and nonmandatory. When an inspection equipment list references mandatory Ordnance designs, the contractor shall comply with, and use these designs accordingly. The contractor may, however, in connection with nonmandatory designs and with the approval of the Government, design alternate inspection equipment or use comparable commercial equipment to facilitate his operations. Such contractor prepared designs or commercial equipment selections must be approved by the Government prior to fabrication or procuring of the equipment. Designs shall be submitted for approval as specified in 6.3.7.

6.3.4 *Specification control drawings.* Specification control drawings depict the minimum equipment requirements in outline, descriptive, diagrammatic, or pictorial form only and specify the required performance or other characteristics. Contractors must prepare detailed drawings (see 6.3.6) of their designs in support of specification control drawings. These contractor prepared designs must be approved by the Government prior to the fabrication or procuring of the equipment. Commercial equipment meeting the requirements of specification control drawings may be approved if described in sufficient detail to permit identification and evaluation by the Government. Designs shall be submitted for approval as specified in 6.3.7.

6.3.5 *Commercial equipment.* Commercial equipment is inspection equipment that has universal application for a specific function. It is comprised of items commonly used by industry and government. Contractors are not required to furnish drawings of commercial inspection equipment but a list of such equipment must be approved by the Government. Lists shall be submitted for approval to the inspection element of the agency administering the contract.

6.3.6 *Contractor designs.* Contractor designs are designs of inspection equipment for which the Government has assigned design responsibility to the contractor. Contractor designs shall be supported by detailed drawings which depict all information necessary to completely fabricate, calibrate and operate an item of inspection equipment. This requires that the necessary views, dimensions, materials, finish, notes, operating and calibration instructions be properly depicted in accordance with approved practices to the extent that further calculation or clarifica-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:03Z
Check the source to verify that this is the current version before use.

tion will not be required. Contractor designs identified as CDCF may be developed on the format the contractor normally employs in his equipment design procedure provided such format reflects the detail and information specified above. Contractor designs identified as CDOF shall comply with the format and requirements of ORDM 608–12, and, in addition, contain the detail and information specified above.

6.3.7 *Submission of contractor designs.* Designs shall be submitted for approval to the Commanding Officer, Picatinny Arsenal, ATTN: SMUPA–ND. Design review will normally be accomplished within one month after receipt by Picatinny Arsenal. Partial submission of inspection equipment designs is permissible and encouraged. However, the Arsenal completion date for design review will be based on the date of the final submission of designs.

6.4 **Level B packaging and packing.** In the event the expected storage time of the primers is in excess of 180 days, the barrier bag shall be used as specified on the applicable drawing. Expected storage time shall be determined by the procuring agency.

6.5 **Cost of check test.** The contracting officer will arrange for the contractor to be reimbursed for the expense incurred in performance of the check test. The test shall be conducted at Government expense without cost to the contractor who loaded the percussion elements or to the contractor assembling the percussion elements into the primer assemblies and shall not constitute a basis of rejection against either contractor except where deterioration has occurred as a direct result of carelessness in handling, storage, etc., permitted while the percussion element lots were under the jurisdiction of either contractor.

6.6 **Check test for possible deterioration of M79 Primer.** The following tests are designed to prevent loading major ammunition items with primers which have deteriorated. The tests should be performed on each lot of M79 Primers which have been stored for more than two years or which have been subjected to any adverse conditions, however brief, within that period of time. If the specification for the ammunition item into which the M79 Primer is assembled, does not require the performance of the following check test, the contracting officer shall contractually provide for compliance of the check test requirements.

6.6.1 *Head assembly.*

6.6.1.1 Nonfunctioning (see 3.3.1). The sampling plan for this test shall be in accordance with table I. The body and head assembly shall be separated in a manner that will not damage the head assembly to the extent that the validity of the test results would be questionable. The test shall be performed as specified in 4.3.1.1, using test equipment specified in 4.2.4. Head assemblies used in this test shall not be returned to the lot. If the total number of defective primers is equal to or exceeds the appropriate rejection number the lot shall be rejected.

TABLE I

Sample	Sample size	Cumulative sample size	Combined sample acceptance No.	Rejection No.
First	20	20	(*)	2
Second	20	40	(*)	2
Third	20	60	0	2
Fourth	20	80	1	3
Fifth	20	100	1	3
Sixth	20	120	1	3
Seventh	20	140	2	3

*No acceptance on first or second sample.

6.6.1.2 Functioning (see 3.3.2). The sampling plan for this test shall be in accordance with table II. The body and head assembly shall be separated in a manner that will not damage the head assembly to the extent that the validity of the test results would be questionable. The test shall be performed as specified in 4.3.1.2, using test equipment specified in 4.2.4. If the total number of defective primers is equal to or exceeds the appropriate rejection number the lot shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:03Z
Check the source to verify that this is the current version before use.

TABLE II

Sample	Sample size	Cumulative sample size	Combined sample acceptance No.	Rejection No.
First	75	75	(*)	2
Second	75	150	0	3
Third	75	225	0	3
Fourth	75	300	1	4
Fifth	75	375	2	5
Sixth	75	450	2	5
Seventh	75	525	4	5

*No acceptance on first sample.

6.6.2 *Moisture content of benite strands.* Twenty-five samples of benite strands shall be selected from each lot for this test. The benite strands shall be selected from the primers disassembled for the test specified in 6.6.1.2. The moisture content and method of test shall be in accordance with Specification MIL–B–45451. If the moisture content of the benite strands tested exceeds the maximum permissable in Specification MIL–B–45451 the lot of primers shall be rejected.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army—MU

Preparing activity:
Army—MU
Project No. 1390–A323

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:03Z
Check the source to verify that this is the current version before use.

ARTILLERY PRIMERS
STANDARDS FOR PAINT CONDITIONS IN FLASH HOLES

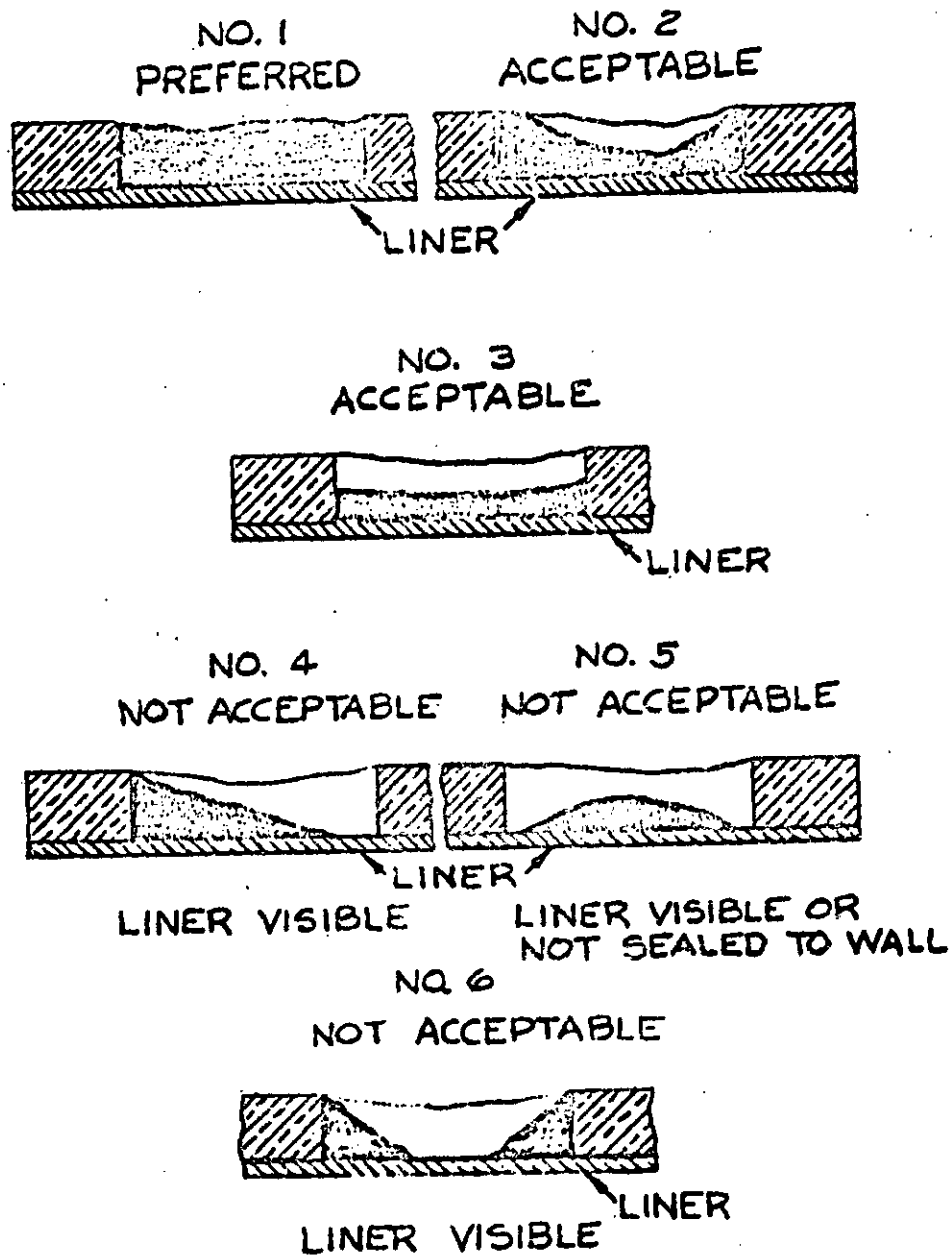


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:03Z
Check the source to verify that this is the current version before use.