
INCH-POUND
MIL-PRF-23419/10C
w/AMENDMENT 3
10 May 2024
SUPERSEDING
MIL-PRF-23419/10C
w/AMENDMENT 2
28 February 2024

PERFORMANCE SPECIFICATION SHEET

FUSES, CARTRIDGE, INSTRUMENT TYPE, STYLE FM10, (NONINDICATING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-23419.

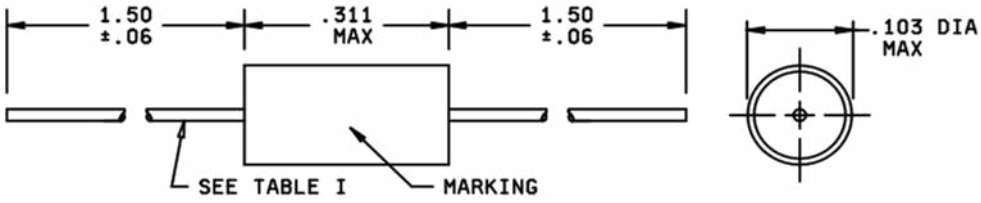

Inches	mm	Inches	mm
.06	1.5	.311	7.90
.103	2.62	1.50	38.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style FM10 fuses.

AMSC N/A
FSC 5920
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Applicable fuseholder: Grayhill Type 2-42, ultra miniature test clip or equivalent. For 7, 10, and 15 ampere fuses, use Grayhill Push-post number 29-100 or equivalent.

Case material: Ceramic or glass.

Finish: Epoxy coating.

Outgassing: When tested as specified in ASTM E595, the polymer sample shall meet the following requirements:

Total mass loss (TML): Shall not exceed 1.0 percent.
Volatile condensable material (VCM): Shall not exceed 0.1 percent.

Samples of any polymeric materials used shall be cut into pieces having 0.38 inch (9.65 mm) maximum dimension. A sample of 100 to 300 milligrams of material shall be weighed and then placed in a vacuum chamber under the following conditions:

Pressure: 10^{-6} torr or less.

Temperature of specimen: Maximum operating temperature of device.

Exposure time: 24 hours.

During this exposure, a collector plate 9.7 inches (246.4 mm) in diameter shall be held at $25^{O}C \pm 1^{O}C$ near the sample. Immediately upon removal of the specimen and the collector plate from the chamber, they shall be weighed. The total mass loss (TML) is sample mass before exposure minus sample mass after exposure divided by the initial sample mass (expressed in percent change). The volatile condensable material (VCM) is the increase in the weight of the collector plate divided by the mass of sample (expressed in percent).

Outgassing (option): As an option for inspection to outgassing requirements (as stated above), a minimum of 10 grams of each polymeric material in its final processed condition may be submitted to the following NASA installation for outgassing test: Director, Material and Processes Laboratory, EH41, Marshall Space Flight Center, Huntsville, AL 35812. As an alternate, a minimum of a single device utilizing each material may be submitted to the Marshall Space Flight Center for outgassing tests.

Terminals:

Material: Caps, 90/10, commercial brass; leads, copper.

Finish: Caps, silver or bright alloy plate; leads solder coated.

Strength: 7 pounds along terminal axis.

Current rating, nominal: See table I.

Characteristic: See table I.

Voltage rating: See table I.

Current-carrying capacity: 100 percent at $+25^{O}C$; 110 percent at $-55^{O}C$; 80 percent at $+125^{O}C$. The temperature of the case, body, or terminals, at no point, shall rise more than $70^{O}C$ above the ambient air temperature. For 10 and 15 ampere fuses, the maximum temperature rise shall be $85^{O}C$.

Resistance: See table I. Cold resistance is measured at 10 percent or less of rated current.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:49Z
Check the source to verify that this is the current version before use.

Overload interrupt: Percentage of nominal rating, interrupt time -55°C through +125°C, 200 percent in 0 to 5 seconds; 300 percent in 0 to 0.1 second. Interrupt time for 15 ampere fuse shall be 10 seconds maximum at 200 percent of rated current and 0.3 second maximum at 300 percent of rated current.

Short circuit interrupt: 300 amperes at maximum voltage dc. Fifty amperes at a power factor of 1.0 at maximum voltage ac.

Shock: Method I of MIL-PRF-23419.

Thermal shock: MIL-STD-202-107, test condition B.

Marking: Fuses shall be marked with the manufacturer's name or trademark, current rating and FM10A.

Part or Identifying Number (PIN): The PIN shall be derived from table I. An example of a complete PIN designation: FM10A125V1/2A.

TABLE I. PIN designation identification.

PIN designation				Maximum cold resistance (ohms)	Lead diameter	
Style	Characteristic	Maximum voltage (volts)	Current rating (amperes)		inches (±.002)	mm (±.05)
FM10	A	125V	1/16A	9.10	.025	.64
		125V	1/8A	2.700	.025	.64
		125V	1/4A	.960	.025	.64
		125V	3/8A	.560	.025	.64
		125V	1/2A	.365	.025	.64
		125V	3/4A	.215	.025	.64
		125V	1A	.165	.025	.64
		125V	1-1/2A	.105	.025	.64
		125V	2A	.072	.025	.64
		125V	3A	.047	.025	.64
		125V	4A	.029	.025	.64
		125V	5A	.019	.025	.64
		125V	7A	.013	.025	.64
		125V	10A	.008	.025	.64
		32V	5A	.019	.032	.82
		32V	7A	.013	.032	.82
		32V	10A	.008	.032	.82
		32V	15A	.0053	.032	.82

Qualification and group C inspection:

Inspection routine: The number of group II samples for qualification, and subgroup 2 samples for group C inspection, shall be as shown in table II. (If required, the minimum number of sample size shall be adjusted to cover all tests under Qualification inspection or group C inspection of MIL-PRF-23419).

TABLE II. Group II and subgroup 2 samples.

Inspection	Number of sample fuses
Group II and subgroup 2	16
Terminal strength	4
Overload interrupt	
200 percent at -55°C	4
200 percent at +125°C	4
300 percent at -55°C	4
300 percent at +125°C	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:49Z
Check the source to verify that this is the current version before use.

The number of group III samples for qualification or subgroup 1 for group C inspection, shall consist of four sample fuses of each of the current ratings as shown in table III. Short circuit interrupt tests shall be conducted at the direct current voltage indicated, and the fuses shall be capable of withstanding a minimum short circuit current as shown in table III.

TABLE III. Short circuit tests.

Fuse style	Current rating	Short circuit current (dc)	Voltage	Short circuit current (ac)
FM10	10A	300A	125V	50A
	15A		32V	

Referenced documents. In addition to MIL-PRF-23419, this document references the following:

ASTM E595
MIL-STD-202-107

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project: 5920-2024-030)

Review activities:
Army - AR, CR4, MI
Navy - AS, MC, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:49Z
Check the source to verify that this is the current version before use.