
MILITARY SPECIFICATION SHEET

FUSE, CARTRIDGE, INSTRUMENT TYPE, STYLE FM08

(SUBMINIATURE - HIGH PERFORMANCE)

The requirement for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-23419.

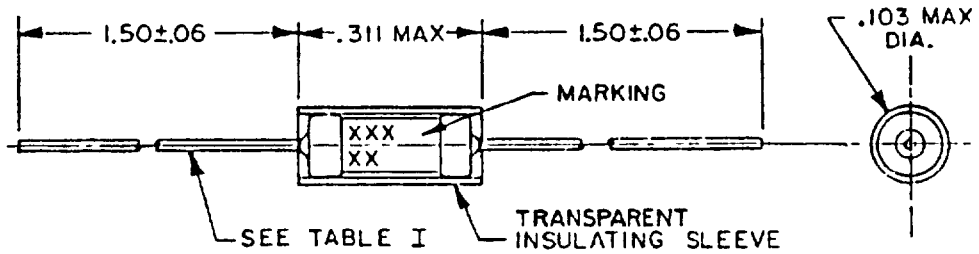

Inches	mm
.06	1.52
.103	2.62
.311	7.90
1.50	38.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style FM08 fuses.

(F) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration. See figure 1.

Applicable fuseholder. Grayhill type 2-42, miniature test clip (or equivalent). For 7, 10, and 15 ampere fuses use Grayhill pushpost number 29YY2126-0 or equivalent.

Case material. Ceramic or glass.

(F) Terminals.

Materials: Caps, 90/10, commercial bronze; leads, copper.

Finish: For gold finish leads, caps shall have a gold finish. Caps and leads shall be gold plated in accordance with MIL-G-45204, type II, class 1. For solder finish leads, caps shall have a silver or bright alloy plate finish (see table I).

Strength. 5 pounds along terminal axis

Current rating. See table I.

Characteristic: See table I.

Voltage rating: See table I.

Current carrying capacity. 100 percent at +25°C; 110 percent at -55°C; 80 percent at +125°C. The temperature of the case, body, or terminals shall, at no point, rise more than +70°C above the ambient air temperature. The maximum temperature rise for 10 and 15 ampere fuses shall be +85°C.

Resistance. See table I.

Overload interrupt: Percentage of nominal rating, interrupt time -55°C through +125°C, 200 percent in 0 to 5 seconds; 300 percent in 0 to 0.1 second. Interrupt time for 15 ampere fuses shall be 10 seconds maximum at 200 percent of rated current and .3 second maximum at 300 percent of rated current.

Short circuit interrupt. 300 amperes at maximum voltage dc, minimum insulation resistance 10,000 ohms.

Shock Method I of MIL-F-23419.

Thermal shock: Method 107, test condition B, MIL-STD-202.

Qualification. Qualification may be granted to style FM08 fuses to those qualified for style FM04 fuses, provided they meet the quality assurance requirements shown below.

Quality assurance. The following tests shall be conducted on 100 percent of the units, in the order shown, prior to any tests referenced in MIL-F-23419. Nonconforming units shall be removed from the lot.

a. Seal - Immerse in a clear mineral oil bath at +125°C for 1 minute. No bubbles shall be detected. (see MIL-STD-202, method 112A, test condition A.)

b. Voltage drop - See table I.

c. Resistance - See table I.

d. Visual and mechanical - Inspection shall be by 3X minimum magnification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:49Z
Check the source to verify that this is the current version before use.

(F) Extent of qualification Qualification may be extended to style FM04 fuses to those qualified for style FM08 fuses.

(F) Solderability. Fuses shall be tested in accordance with MIL-F-23419. Gold plated leads shall have the gold removed by single or double dipping into a flowing or nonflowing hot solder of sufficient volume to assure complete gold removal.

(F) Resistance to soldering heat: Fuses shall be tested in accordance with MIL-F-23419.

Marking: Fuses shall be marked with the manufacturer's name or trademark and current rating only.

(F) TABLE I. Type designations, electrical parameters, and lead dimensions.

Type designation 1/ 2/				Cold resistance (ohms) 3/		Voltage drop (volts) 4/		Lead diameter	
Style	Characteristic	Maximum voltage	Current rating (amperes)	Minimum	Maximum	Minimum	Maximum	Inches (±0.002)	mm (±0.05)
FM08	A	125V	1/8A	1.89	2.31	.850	1.15	.025	.64
FM08	A	125V	1/4A	.639	.781	.590	.800	.025	.64
FM08	A	125V	3/8A	.378	.462	.527	.713	.025	.64
FM08	A	125V	1/2A	.252	.308	.488	.660	.025	.64
FM08	A	125V	3/4A	.153	.187	.145	.197	.025	.64
FM08	A	125V	1A	.112	.138	.157	.213	.025	.64
FM08	A	125V	1.5A	.072	.088	.153	.207	.025	.64
FM08	A	125V	2A	.0495	.0605	.144	.196	.025	.64
FM08	A	125V	2.5A	.0378	.0462	.125	.169	.025	.64
FM08	A	125V	3A	.0315	.0388	.139	.187	.025	.64
FM08	A	125V	4A	.0207	.0253	.110	.150	.025	.64
FM08	A	125V	5A	.0126	.0154	.087	.118	.025	.64
FM08	A	125V	7A	.0090	.0110	.087	.118	.025	.64
FM08	A	125V	10A	.0059	.0070	.085	.110	.025	.64
FM08	A	32V	15A	.0036	.0044	.065	.087	.032	.82

1/ Add "T" suffix to type designation if optional solder coated leads are required.

2/ Example of complete type designation with optional lead finish. FM08A125V1/2AT.

3/ Cold resistance is measured at 10 percent or less of rated current.

4/ Voltage drop is measured after the fuse has been subjected to rated current for not less than 5 minutes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:49Z
Check the source to verify that this is the current version before use.

Qualification inspection.

Inspection routine Group II samples shall be as shown in table II below

TABLE II. Group II samples.

Inspection	No. of sample fuses
Group II	16
Terminal strength	4
Overload interrupt	
200% at -55°C	4
200% at +85°C	4
300% at -55°C	4
300% at +85°C	4
Insulation resistance	16

The number of group III samples for qualification (or first article) testing shall consist of four sample fuses of each of the current ratings as shown in table III. Short circuit interrupt tests shall be conducted at the direct current voltage indicated, and the fuses shall be capable of withstanding a minimum short circuit current as shown in table III. Insulation resistance test shall be as specified in MIL-F-23419.

TABLE III. Short circuit tests.

Fuse type	Current rating	Short circuit current	DC type voltage
FM08	10A	300A	125
FM08	15A	300A	32

Ⓕ TABLE IV. Supersession information.

Superseding type designation	Superseded numbers in accordance with MIL-F-23419/8E 1 August 1986	Superseded numbers in accordance with MIL-F-23419/8B 25 November 1975	Superseded numbers in accordance with MIL-F-23419/8A 18 November 1970	Superseded numbers in accordance with MIL-F-23419/8 17 October 1968
FM08A125V1/8A		FM08125V1/8A	FM08-125V-1/8A	FM08-1/8A
FM08A125V1/4A		FM08125V1/4A	FM08-125V-1/4A	FM08-1/4A
FM08A125V3/8A		FM08125V3/8A	FM08-125V-3/8A	FM08-3/8A
FM08A125V1/2A		FM08125V1/2A	FM08-125V-1/2A	FM08-1/2A
FM08A125V3/4A		FM08125V3/4A	FM08-125V-3/4A	FM08-3/4A
FM08A125V1A		FM08125V1A	FM08-125V-1A	FM08-1A
FM08A125V1.5A	FM08A125V1-1/2A	FM08125V1-1/2A	FM08-125V-1-1/2A	FM08-1-1/2A
FM08A125V2A		FM08125V2A	FM08-125V-2A	FM08-2A
FM08A125V2.5A	FM08A125V2-1/2A	FM08125V2-1/2A	FM08-125V2-1/2A	FM08-2-1/2A
FM08A125V3A		FM08125V3A	FM08-125V-3A	FM08-3A
FM08A125V4A		FM08125V4A	FM08-125V-4A	FM08-4A
FM08A125V5A		FM08125V5A	FM08-125V-5A	FM08-5A
FM08A125V7A		FM08125V7A		
FM08A125V10A		FM08125V10A		
FM08A125V15A		FM08125V15A		

Source: https://assist.dla.mil -- Downloaded: 202640-19T16:49Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, SH
Air Force - 11, 99
DLA - ES
NS

User activity:
Navy - OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5920-0445-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:49Z
Check the source to verify that this is the current version before use.