MIL-S-17000/7A(SH)
2 May 1983
SUPERSEDING
MIL-S-17000/7(SH)
30 April 1980

MILITARY SPECIFICATION

(A) SWITCHING EQUIPMENT, COMBAT SYSTEM; COMMAND AND CONTROL, FIRE CONTROL AND INTERIOR COMMUNICATION SWITCHBOARD, SURFACE SHIP, DECK-MOUNTED, DIGITAL SWITCHING (PLUG CONNECTED), TYPE VIII

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switchboard described herein shall consist of this document and the latest issue of MIL-S-17000.

REQUIREMENTS:

Switchboard section: Each switchboard section shall provide space for mounting of up to 24 style DLS switch assemblies in accordance with Drawing 803-4680149 in a frame arranged as shown on figure 1. One switch control and relay panel assembly shall be provided as required.

Size: Size of the switchboard section shall be as shown on figure 1.

Mounting: Switchboard enclosure shall be provided with mounting bolt clearance holes as shown on figure 1.

Panel-mounted assemblies: Style DLS switch assemblies and the switch control relay panel assembly shall have the panel mounting screws located as shown on figure 1.

Switch control and relay panel: Switch control and relay panel assembly shall be in accordance with requirement 19 of MIL-STD-1657.

Preparing activity:
Navy - SH
(Project 1290-N383)


(A) denotes changes.

FSC 1290


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:40Z
Check the source to verify that this is the current version before use.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm. DIMENSIONS IN [ ] ARE MILLIMETERS.
3. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE .XX ±.03, .XXX±.010, AND ANGLES ± 30°.
4. INTERIOR AND EXTERIOR SURFACES OF ENCLOSURE SHALL BE PAINTED IN ACCORDANCE WITH REQUIREMENTS OF MIL-S-17000.
5. STRUCTURE SHALL BE IN ACCORDANCE WITH MIL-S-17000.
6. THE GEOMETRIC CHARACTERISTIC SYMBOLS USED ON THIS FIGURE ARE DEFINED IN ANSI Y14.5.

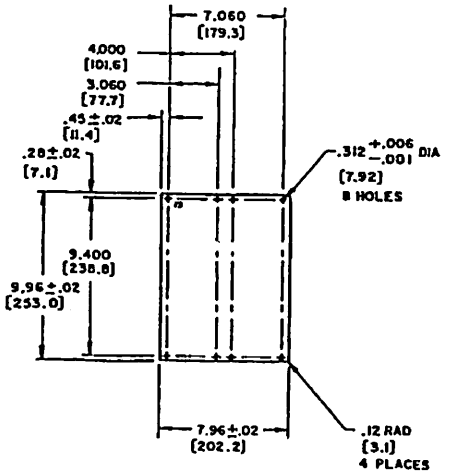

DETAIL A
FRONT MOUNTING PLATE

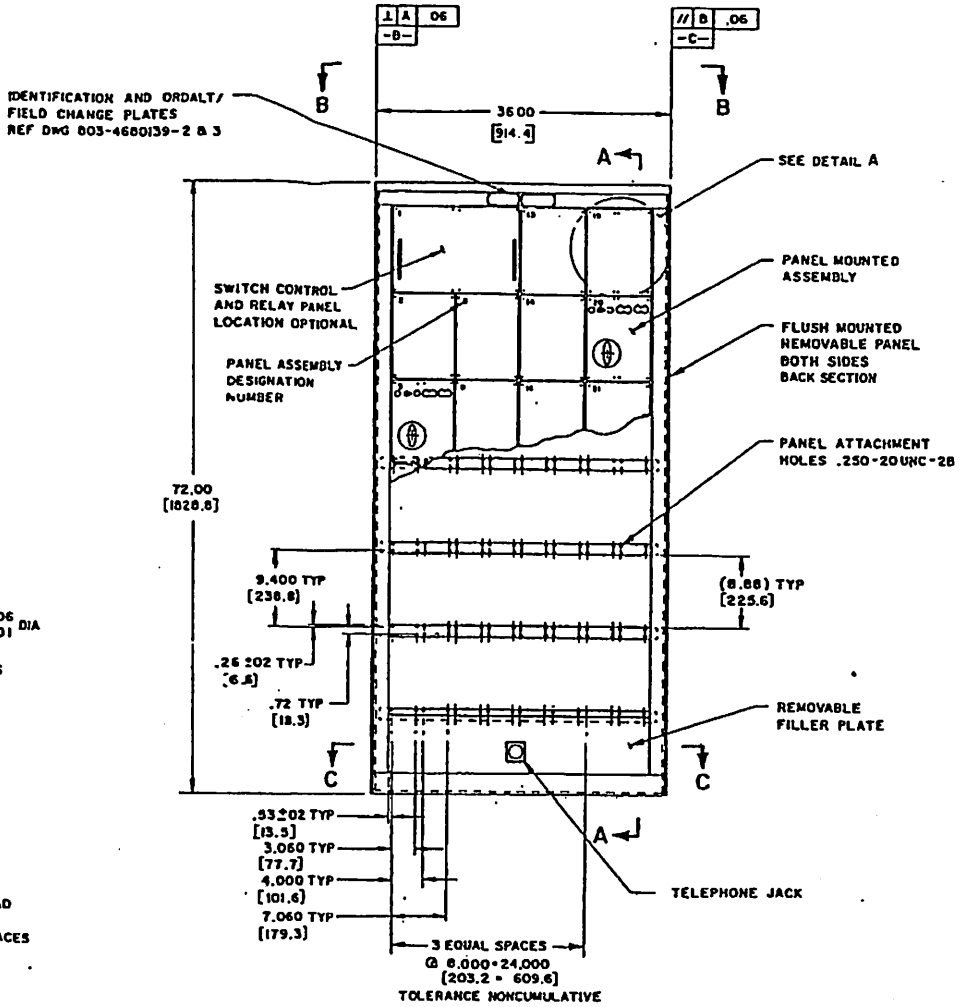


FRONT VIEW


SH 11504

Source: https://assist.dla.mil -- Downloaded: 20260-18T09:40Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:40Z
Check the source to verify that this is the current version before use.

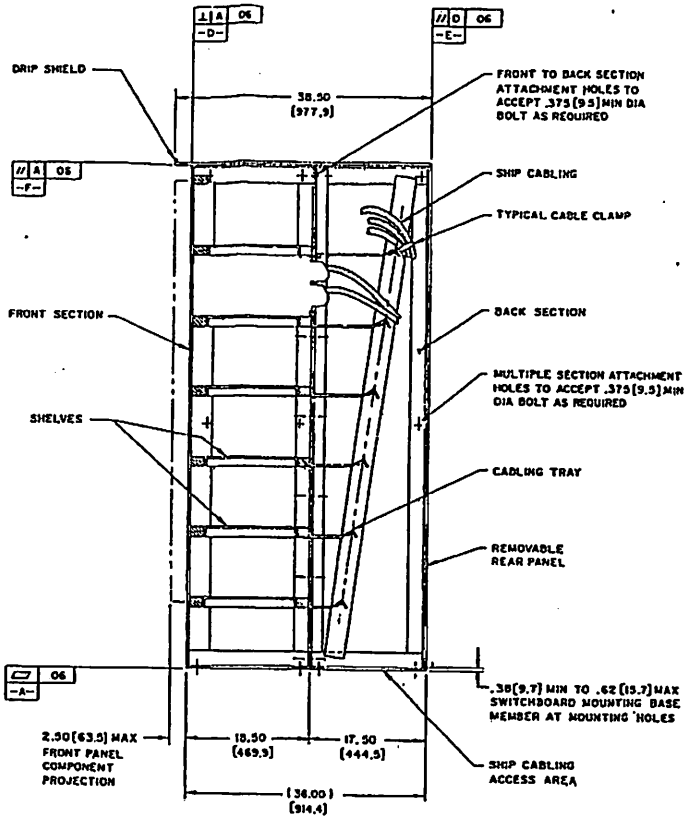


SECTION A-A

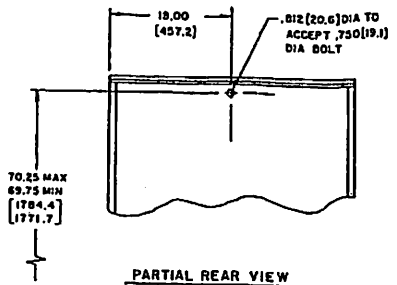

PARTIAL REAR VIEW
SWAY BRACE MOUNTING LOCATED ON REAR OF EACH BACK SECTION

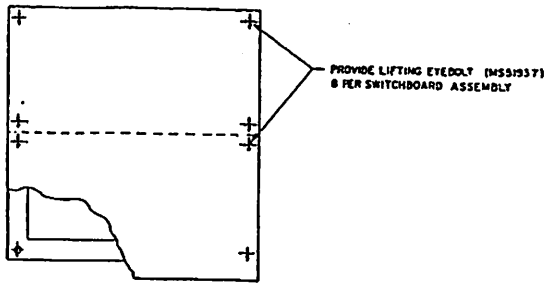

VIEW B-B

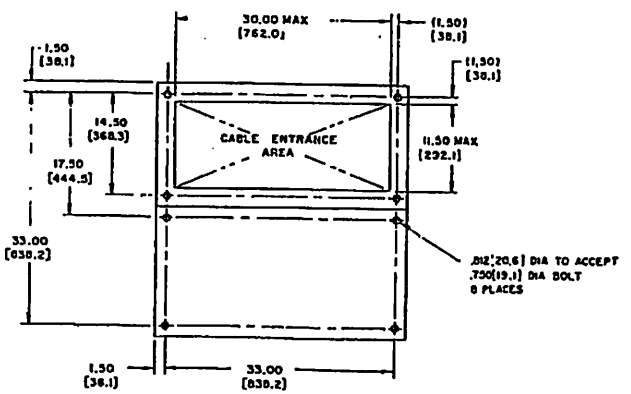

SECTION C-C
MOUNTING HOLE PATTERN
PRIMARY STRUCTURE DELETED FOR CLARITY

FIGURE 1. Switchboard type VIII.