MIL-D-575G(YD)
7 February 1983
SUPERSEDING
MIL-D-575F(YD)
10 February 1977

MILITARY SPECIFICATION

DISTRIBUTORS, BITUMINOUS MATERIAL, TANK TYPE

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers truck-mounted distributors of bituminous material.

1.2 Classification. The distributors shall be of the following sizes, as specified (see 6.2).

Size II - 1,000 gallon capacity.
Size III - 1,250 gallon capacity.
Size IV - 2,000 gallon capacity.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified (see 6.2), the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

VV-F-800 - Fuel Oil, Diesel.
O-E-915 - Extinguishers, Fire, Dry Chemical (Hand-Portable).

Beneficial comments (recommendations, additions, deletions) and any pertinent data that may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 3895

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

KKK-T-2108 - Trucks and Truck Tractors, Commercial, Diesel and Gasoline Engine Driven, 24,000 to 32,000 Pounds GVW, 4x2.
KKK-T-2109 - Truck and Truck Tractors, Commercial, Diesel Engine Driven, 34,500 to 66,000 Pounds GVW, 6x4.

MILITARY

MIL-D-771 - Distributors, Bitumen and Water, Packaging of.
MIL-C-1283 - Can, Gasoline, Military 5-Gallon.
MIL-T-1285 - Spout, Can, Flexible.

STANDARDS

MILITARY

MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-209 - Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-1223 - Non-Tactical Wheeled Vehicles Treatment, Painting, Rustproofing, Identification Marking & Data Plate Standards.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents form a part of this specification to the extent specified herein.

DEPARTMENT OF TRANSPOPTATION (DoT)

Federal Motor Vehicle Safety Standards and Regulations.
Motor Carrier Safety Regulations.

(Application for copies of DoT should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. The issues of the documents that are indicated as DoD-adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. Each distributor shall consist of a tank, heating system, bitumen pumping unit, full-circulating spray bar, hand spray attachment, and all accessory equipment necessary to make a complete distributor. The bitumen pump shall be actuated by a hydrostatic drive system (see 3.11). Distributor shall be mounted by the contractor on a contractor-furnished truck chassis (see 3.27). For truck chassis requirements (see 3.28), the overall width of the complete distributor, when the spray bar is in a folded position. shall be not greater than 96 inches.

3.2 First article. When specified (see 6.2), the contractor shall furnish a distributor for first article inspection and approval (see 4.2.1 and 6.3).

3.3 Standard commercial product. The distributor shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features that are not specifically prohibited by this specification, but are a part of the manufacturer's standard commercial product, shall be included in the distributor being furnished. A standard commercial product is a product that has been sold or is being currently offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures and represents the latest production model.

3.4 Materials. Materials used shall be free from defects that would adversely affect the performance or maintainability of individual components or the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials that have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

3.5 Interchangeability. All distributors of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

3.6 Ease of maintenance. Design of distributor shall permit ready accessibility to all parts for maintenance and repair by the use of conventional

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

general-purpose handtools. Replacement and adjustment of component parts and accessories shall be accomplished with minimum drainage requirements and disturbance to other elements on the distributor. Ease of maintenance provisions shall incorporate features insuring clearances between adjacent components to facilitate maintenance and servicing operation.

3.7 Safety. All moving, hot, or electrical parts that are hazardous shall be sufficiently enclosed or insulated to prevent danger to operating personnel. When enclosures or insulation are not feasible, adequate warning sign(s) shall be conspicuously affixed. Suitably located nonskid steel plate with nonslip tread or abrasive surfaces shall be furnished to provide access from either side of the machine to the operating position.

3.8 Bitumen tank. The tank shall be an elliptical cylinder constructed of No. 10 gage sheet steel. The heads shall be constructed of No. 8 gage sheet steel and shall be flanged and welded both inside and outside. The heads may be flat and reinforced, concave, or convex, and all welded seams shall be bitumen tight. Surge plate or plates of the same gage sheet steel as the tank shell shall be provided and welded in place. The spacing between surge plates and between surge plate and tank ends shall provide adequate strength and proper surge control, but shall not exceed 48 inches. The surge plates shall be the full size of the tank cross-section and shall be dished or reinforced to withstand the surge pressure. Openings in the surge plates shall be provided and shall be staggered to prevent sudden surge of material throughout the length of the tank. These openings shall be eliptical and the minor axis shall be not less than 16 inches. A manhole shall be provided with a diameter of not less than 18 inches. The manhole shall be equipped with a basket-type removable steel strainer not less than 12 inches deep. The strainer shall be sized, shaped, and located so that all material entering through the manhole must pass through the strainer. A quick-clamp-type, bitumen-tight cover that can be opened with one hand shall be provided. The cover shall be constructed to prevent accumulation of water. A well for a thermometer shall be provided in one side of the tank, shall be inclined at a slight angle from the horizontal, and shall be located so that a thermometer inserted in the well will register the average temperature reading of the contents of the tank. A well cap shall be furnished, screwed on the outside end of the well tube, and provided with a retaining chain. The thermometer shall be an integral part of the well cap (see 3.18.3).

3.9 Insulation. The cylinder and heads of the tank shall be covered with a fiberous insulating material not less than 2 inches in thickness and shall have a minimum K-factor rating of 0.33 at 150° Fahrenheit (F) per inch of thickness. The insulating material shall be installed in such a manner as to prevent packing or shifting during use or travel. The insulation shall be protected by a weathertight sheath constructed of not less than No. 20 gage sheet steel for the side shell and jacket heads.

3.9.1 Overflow. A 3-inch overflow shall be provided for the tank. The overflow shall be located not less than 4 inches above the top of the tank in a dome near the centerline of the tank and shall conduct overflowing bitumen to a point beneath the tank. The manhole may serve as the overflow dome. The bottom of the overflow shall be provided with an extension to prevent any discharge coming in contact with any part of the chassis including the drive train.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

3.9.2 Drain. A 3-inch outlet that will completely drain the tank shall be located so that the discharge will clear the distributor. The outlet shall be fitted with a 3-inch, lever-operated-type plug valve.

3.10 Heating system. The heating system shall consist of flues, burners, fuel system, blower, and portable burner.

3.10.1 Heating flues. The tank shall be equipped with either U-type or continuous-heating flues with a minimum outside diameter of 8 inches at the burner end. When U-type flues are provided, there shall be not less than two sets extending the entire length of the tank. The flues shall be of seamless steel tubing, welded steel tubing, or spiral butt-welded pipe arranged so as to effectively heat the bitumen. The flues shall be supported in the tank in a manner that will minimize vibration and yet allow for expansion and contraction.

3.10.2 Burners. The heat shall be supplied by two low-pressure air-atomizing-type burners using diesel fuel conforming to VV-F-800. The burners shall be located so as to be accessible for adjustment and cleaning. The tank shall be equipped with one of the following: shields, flue liners, or combustion chambers. The heat supplied shall be sufficient to raise the temperature at a rate not less than 1°F per minute for size II, not less than 0.8°F per minute for size III, and not less than 0.5°F per minute for size IV. The fuel consumption for each burner shall be adjustable to include all flow rates from shutoff to maximum required fuel consumption. A burner lighting torch of the asbestos-wick type that has a metal handle not less than 12 inches long and a receptacle for storing the torch shall be provided.

3.10.3 Fuel system. The fuel system shall consist of a fuel tank, fuel pump, and fuel line and shall be manufactured to FHWA requirements in accordance with DoT Motor Carrier Safety Regulations, sections 393.65 and 393.67.

3.10.3.1 Fuel tank. A fuel tank having a capacity of not less than 25 gallons shall be provided, and marked: "FILL WITH DIESEL FUEL ONLY." The tank shall be provided with air vent, drain valve, a fuel level indicator, and a fuel line valve. The tank shall be located to minimize fire hazard caused by spilling overflow, or drainage.

3.10.3.2 Fuel pump. A pump shall be provided to supply fuel to both burners at constant pressure. The pump shall be connected to the power source so that pumping will be accomplished only when the burner blower is operating.

3.10.3.3 Fuel line. The fuel line shall be of seamless metal tubing or oil-resistant hose, and shall be equipped with a screen strainer and a bypass or a combination bypass and strainer, a pressure regulator, a pressure gage, and a valve for regulating the volume of fuel supplied. The fuel lines shall be mounted so as to prevent damage from vibration.

3.10.4 Blower. A blower shall be provided to supply enough air for maximum combustion when both burners are operating at full capacity. The blower shall be of the positive-pressure, rotary type and shall be hydraulic motor driven. Control of the motor drive for the blower shall be independent of the bitumen pump. An air cleaner ahead of the blower shall be provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

3.10.5 Portable burner. A portable generating-type burner that burns fuel conforming to VV-F-800 shall be furnished. The burner shall be used for heating the pump or the tank-car connections. The burner at maximum firing rate shall burn not less than 1/2 gallon of fuel per hour and shall have a fuel-tank capacity of not less than 4 gallons. The tank shall be marked: "FILL WITH DIESEL FUEL ONLY." Provisions shall be made for carrying the burner on the distributor.

3.11 Pumping Unit. The bitumen pumping unit shall consist of a power take-off unit installed on the truck transmission, a variable displacement hydrostatic hydraulic pump, a hydraulic fluid reservoir, a constant displacement hydraulic motor, a positive displacement bitumen pump, hydraulic lines, filters, valves, safety devices, and controls.

3.11.1 Pump. The bitumen pump shall be of the positive-displacement, rotary type having a minimum capacity of 375 gallons per minute (gpm). The pump shall be enclosed in a metal housing equipped with access doors. Provision shall be made for heating the pump with the portable burner. The housing with access doors shall be constructed and located so that, when the portable burner is inserted for heating the pump, the burner flame will not come in contact with or damage the pump packing or bearings. The pump shall supply bitumen through the spray bar to the ground at a maximum rate that will apply not less than 1.0 gallon per square yard (gal/sq yd) over the full 24-foot width when the distributor is traveling at a forward speed of not less than 88 feet per minute (fpm). The pump shall supply bitumen to a 24-foot spray bar with sufficient pressure to produce an even, fan-like spray from all nozzles at all rates of application within the distribution range. The pump shall be equipped with a bypass or other means to prevent damage to the lines when the discharge is closed. The bitumen pump shall be driven by a hydraulic motor as specified in 3.11 and controlled by an independent hydraulic control valve. The pump drive-shaft coupling shall be secured with a connection that will fail before damage occurs to the pump or hydraulic motor. If a shear pin is used, it shall be installed so that when shearing action occurs, shaft alinement is maintained.

3.12 Spray bar and piping. The spray bar shall be a full-circulating type and shall consist of a center section and two foldup end sections with positive locking extensions at each end of the spray bar to make a total spray bar length of 24 feet. The length of the center section with two unfolded end sections shall be 12 feet long. Each extension shall be not greater than 2 feet long. The spray bar shall be designed to meet the distribution requirements of 3.16. The spray bar shall circulate bitumen through the full 24-foot length without the temperature of the bitumen varying more than 10°F throughout the length of the spray bar. Provisions shall be made for travel to fold up the end sections of the spray bar with or without extensions. When folded, the spray bar shall not exceed a width of 96 inches. The spray bar shall lock in this folded position. The spray bar shall be adjustable for both positive and negative road crown. When the spray bar is set for no crown, the elevation of the spray bar nozzle shall not vary by more than $\pm$1/2 inch throughout the length of the 24-foot spray bar. Spray bar supports shall be provided to prevent damage or permanent deformation to the spray bar when operating at any of the spray bar widths. The extended portions of the spray bar shall swing horizontally without damage to the spray bar or other parts of the distributor when they strike an obstruction while

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

the distributor is moving forward. The spray bar shall be equipped with a complete set of dripless 1/2-inch nozzles with 1/8-inch slot openings (or with nozzles having equivalent spraying characteristics) and spaced on 4-inch centers. An individual, dripless valve shall be furnished for each nozzle so that flow from any individual nozzle can be stopped without stopping the flow from an adjacent nozzle or nozzles. All the nozzle valves shall be linked together so that they can be opened or closed simultaneously by a single lever operation. The spray bar end section shall fold up or fold back and lock in this position to allow application of bitumen through the center section only. When an end section, with or without extensions, is folded up or back, as applicable, the nozzle valve linkage shall automatically shut off all valves in the end section, and nozzle valve linkage in the folded end section shall automatically become inoperative without manual disconnect. The spray bar ends may be shut off at any point up to the fully folded position. Nozzle valve linkage in the unfolded center section of the spray bar shall remain responsive to single-lever operation. When the folded end section is extended, the nozzle valve linkage in the end section shall automatically become responsive to single-lever operations. The spray bar shall be laterally and vertically adjustable by means of mechanical linkages or hydraulic controls operable from the operator's platform. Lateral adjustment from the center shall be not less than 8 inches. The vertical adjustment range shall be from 2 inches below normal operating height to raised travel position. The normal operating height shall be established by the contractor and shall be marked so as to be obtainable by the operator without measuring. Provisions shall be made by reverse pumping or equivalent valving to transfer the unsprayed bitumen from the spray bar and piping back into the tank. Piping shall be arranged so that the spray bar, all piping, and the pump can be flushed and cleaned by introducing a flushing oil into the circulating system. No flushing oil shall enter the bitumen tank during flushing. All piping and connections for loading, transferring, circulating, and hand-spraying bituminous materials shall be furnished. All flexible hose incorporated in piping shall be seamless steel and shall have a single, wire-braid, protective covering. The hose bursting pressure shall be not less than 700 pounds per square inch (psi). All couplings used with the flexible hose shall be those furnished by the hose manufacturer. The couplings shall be installed as recommended by the hose manufacturer, and any hose bending radius shall be not less than that recommended by the hose manufacturer. Loading- and transfer-line piping shall be not less than 3-inch inside diameter pipe. All valves subjected to pumping pressure shall be the leakproof type. The system shall be arranged so that the pump and all the pipes may be drained without draining the bitumen tank.

3.13 Metering device. A metering device protected from heat shall be furnished. The device shall meter the bitumen either volumetrically or by pressure as specified (see 6.2). Volumetric metering shall be by means of a pump tachometer calibrated to register in gpm. Pressure metering shall be by means of a pressure gage and suitable controls.

3.14 Controls. All necessary controls for spray application and spray bar circulation shall be accessible to the operator standing on the rear operator's platform and from operator's station in truck cab. All other controls necessary to perform the operations specified herein shall be accessible without removal of any housing or part. All controls shall be clearly identified

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

as to function and operation with permanently affixed identification. Material used for identification marking shall be corrosion resistant. Controls shall be provided to permit the following operations:

a. Pump bitumen from an external source into the bitumen tank.
b. Pump bitumen from an external source to another external source without bitumen entering the tank.
c. Pump bitumen from the bitumen tank back to the bitumen tank without the bitumen entering the spray bar.
d. Pump bitumen from the bitumen tank through the spray bar back to the bitumen tank.
e. Pump bitumen out of the bitumen tank to an external source without the bitumen entering the spray bar.
f. Pump bitumen out of the bitumen tank through the spray bar and out the nozzles.
g. Pump bitumen out of the bitumen tank to the hand-spray attachment.
h. Withdraw bitumen from the spray bar and all piping and return it to the bitumen tank.
i. Pump flushing oil through all piping and the spray bar without the flushing oil entering the bitumen tank.
j. Withdraw bitumen from the hand-spray attachment or blow out hand-spray attachment.

3.15 Speed-and-distance-indicating device. A speed-and-distance-indicating device shall be furnished and shall provide the following:

a. Traveling-speed indicator reading in fpm from 0 to not less than 1,500, graduated in increments of not more than 20. The accuracy of this indicator shall be such that the indicated speed shall be within 5 percent of the actual speed.
b. Cumulative-distance indicator reading to 99,999 feet.
c. Trip indicator reading to 9,999 feet, resettable to zero. The accuracy of this indicator shall be such that the indicated distance traveled shall be within 5 percent of the actual distance traveled.

The indicators shall be operated by a pneumatic or semipneumatic rubber-tired, ground-contact wheel. The wheel shall be both lowered to the ground contact position and raised to the travel position by a control in the cab of the truck. The wheel shall positively lock in the raised position. Ground contact of the wheel shall be maintained at all times during spraying operation. The clearance, when the wheel is locked in the raised position, shall be not less than the interaxle ground clearance of the truck. The indicators shall be located in the cab of the truck visible to the truck operator when he is in his normal operating position.

3.16 Distribution. The width of distribution shall be 4 feet, 8 feet, and from 8 feet through the full width of the spray bar in increments of not greater than 2 feet. The rates of application shall be from 0.1 gallon through 1.0 gal/sq yd in increments of 0.1 gal/sq yd. The truck-mounted distributor shall apply bitumen through the spray bar to the surface being sprayed at all combinations of specified widths and rates. The accuracy of distribution over a given area shall be within ± 5 percent. The application

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

at all rates and widths shall be accomplished without streaking or puddling. The forward speed for any distribution rate shall be not less than 88 fpm and shall be not more than 1,350 fpm.

3.17 Distribution chart. In order to adjust the rate of application of bitumen, three variables shall be controlled. These variables are bitumen pump rate (gpm), vehicle speed (fpm), and width of the spray bar (ft). Charts shall provide combinations of settings for pump rate and vehicle speed given predetermined values for rate of application and width of the spray bar. These charts shall be plastic sealed and permanently mounted in the operator's area.

3.18 Accessories. Two filling hoses with the same type couplings on each end, a tank gage, a thermometer, a tank-car valve and couplings, a complete hand-spray attachment, and fittings shall be furnished with each distributor. Provisions shall be made to carry the accessories on the distributor when they are not in use. Accessories shall remain in their carrying places when the distributor is transported and operated as specified herein.

3.18.1 Filling hose. The filling hoses shall be 15-foot lengths of 3-inch, flexible, galvanized steel hose, high-temperature type. The hoses shall be fitted on both ends with hose-end components for a 3-inch quick-disconnect coupling.

3.18.2 Tank gage. The gage shall be of the mechanical type and shall indicate the amount of bitumen in the tank. The gage shall be calibrated in gallons from zero to tank capacity in increments of not more than 50 gallons. The gage shall have accuracy such that the indicated amount of bitumen shall be within 25 gallons of the actual amount of bitumen in the tank. The gage shall be protected from breakage and shall be located so as to be readable from the operator's platform.

3.18.3 Thermometer. The thermometer shall be an armored, pencil type and shall have a range of from 50°F to 600°F, and shall be suitable for use in the thermometer well as specified in 3.8. A supplemental dial type thermometer shall be furnished and located adjacent to the pencil type thermometer when specified (see 6.2).

3.18.4 Tank-car valve and couplings. A tank-car valve shall be furnished in the loading line and shall be vented. The valve shall be either a quick-acting gate valve or a lever-operated plug valve. The loading line and transfer line shall each be fitted with faucet end and chain-secured dust cap for a 3-inch, quick-disconnect coupling.

3.18.5 Hand-spray attachment. The hand-spray attachment shall consist of a tube with a spray nozzle, control cock on the handle, cutoff valve, and a half coupling for connection to the spray hose. The hose shall be 1-inch diameter, metallic hose. The hose shall be 25 feet long, nonclad, and furnished with quick-disconnect coupling on each end. The spray line on the distributor shall be equipped with a faucet-end half coupling for connection to the hose and a chain-secured dust cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

3.18.6 Fittings. All components of the 3-inch, quick-disconnect couplings specified herein shall be manufacturer's standard. The following additional components shall be furnished:

a. Two double adapters for a 3-inch, quick-disconnect coupler.
b. One faucet end with chain-secured dust cap for a 3-inch quick-disconnect coupler.

3.19 Platforms, catwalks, and steps. Platforms, catwalks, and steps shall be made of raised-pattern steel plate. On truck-mounted distributors, location or configuration of these items shall not restrict access to the truck chassis fuel tank or tanks. Clearance shall permit emptying the contents of a fuel can conforming to MIL-C-1283 equipped with a spout conforming to MIL-T-1285 into the truck chassis fuel tank or tanks.

3.19.1 Operator's platform. A rear platform for the operator shall be provided.

3.19.2 Catwalks. Full-length catwalks shall be provided on both sides of the bitumen tank when tank configuration permits.

3.19.3 Steps. Steps shall be provided on both sides of the distributor for access to the operator's platform, and when the catwalks and operator's platform are at different elevations, steps shall be provided between platform and catwalks. Steps shall be not less than 5-1/2 inches wide and shall be flanged. A ladder or rungs shall be provided on the tank for access to the manhole on top of the tank.

3.20 Grabrails or guardrails. Steel pipe grabrails shall be mounted on both sides of the bitumen tank and shall extend the full length of the tank. The grabrails shall be of a height to be accessible to the operator when the operator is standing on a catwalk or going from the operator's platform to a catwalk. Guardrails shall be installed at a height above the platform of not less than 30 inches around the perimeter of the operator's platform. Guardrails need not be installed at perimeter locations where a part of the distributor restricts access by the operator. Guardrails shall have openings at step locations to provide access to and from the platform and catwalks and to and from the ground and platform. Detachable chains shall be provided at openings.

3.21 Signal system. A mechanical signal bell or an electric signal system, operable from the operator's rear platform, shall be furnished.

3.22 Lubrication. Means for lubrication shall be in accordance with the manufacturer's standard practice. The lubricating points shall be easily visible and accessible. All parts requiring lubrication shall be properly lubricated as specified in section 5. Hydraulic lubrication fittings shall be in accordance with SAE J534. Where use of high-pressure lubricating equipment, 1,000 psi or higher, will damage grease seals or other parts, a suitable warning shall be affixed to the equipment in a conspicuous location.

3.23 Lifting and tie-down attachments. The equipment shall be equipped with lifting and tie-down attachments. Lifting and tie-down attachments

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

shall conform to type II or type III of MIL-STD-209. A nonferrous transportation plate shall be provided and mechanically attached to the equipment. Transportation plates shall be inscribed with a diagram showing the lifting attachments and lifting slings, the capacity of each attachment, and the required length and size of each sling cable. A silhouette of the item furnished showing the center of gravity shall be provided on the transportation plate. Tie-down attachments may be identified by stenciling or other suitable marking. Tie-down marking shall clearly indicate that the attachments are intended for the tie down of the equipment on the carrier when shipped.

3.24 Ground clearance. Equipment ground clearance shall be sufficient to negotiate the 100-foot bow ramp of figure 1 in the fully lowered position.

3.25 Electromagnetic interference characteristics. When specified (see 6.2), the equipment shall conform to the electromagnetic characteristic requirements and test limits of SAE J551.

3.26 Toolbox. The distributor shall be provided with a toolbox made of No. 14 gage sheet steel. The toolbox shall have an overlapping hinged lid that prevents the entry of rain and dirt. The lid shall be held closed with two tension-type fasteners.

3.27 Distributor mounting. The distributor tank and equipment shall be installed on the vehicle frame so that distributor performance and operation, as specified herein, shall not cause permanent deformation of the distributor vehicle or of the distributor tank and equipment. The distributor shall be mounted on the chassis with not less than four mounting devices per side. Hardwood filler blocks shall be placed inside the chassis frame rails at each mounting point unless the mounting point is located at a full-depth frame crossmember. Blocks shall incorporate a keeper strap or groove for mounting bolt or stud and shall be of a width to assure retention in the frame rail. A hardwood breaker strip, not less than 1 inch finished thickness and not less than 3 inches wide, shall be installed between longitudinal distributor sills and longitudinal chassis sills. Breaker strips shall run not less than 24 inches forward of the front U-bolt or twin stud and shall have a taper on the bottom of 1 inch in 18 inches at the forward end tapering up and forward. Additional mounting devices of a type required to restrict transverse and longitudinal movement between distributor and chassis shall be installed. The chassis frame shall not be welded or extended. The distributor shall be mounted without drilling holes in the chassis, unless prior approval is obtained from the vehicle manufacturer. The alinement between the distributor chassis and bitumen tank shall be maintained, and the mounting devices shall not be permanently deformed or broken when the fully loaded distributor is subjected to travel over paved and gravel roads and subjected to sudden stops when traveling at forward speeds up to 10 miles per hour (mph) or at maximum reverse speeds.

3.28 Truck chassis. The distributor shall be mounted on a contractor-furnished truck chassis of adequate capacity and compatibility for the purpose. Under no circumstances, for the size II and III distributors, shall the truck chassis be lighter than 28,000 gross vehicle weight (gvw), 4x2, diesel-engine driven, commercial conforming to the latest issue of KKK-T-2108, type I, class B, group 2. Under no circumstances, for the size IV distributor, shall the truck chassis be lighter than 34,500 gvw, 6x4, diesel-engine driven,

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

commercial conforming to the latest issue of KKK-T-2109, type I, class A. The truck shall have not less than 5 forward speeds, a reinforced frame if required, disk wheels, and a combination rear view mirror on each side. When an ether-starting system is used in lieu of a glow plug, it shall be of the measured shot type, controlled from the driver's compartment, with a reservoir of not less than 12 fluid ounces and shall not be operative with the engine warm.

3.28.1 Spare-tire carrier. The spare tire carrier shall be installed on the distributor. The carrier shall be mounted in an accessible location that shall permit removal and replacement of the spare tire and wheel using only the tools supplied with the truck. The carrier shall be mounted and braced to prevent damage to the tank or other parts of the distributor. A spare wheel and inflated tire shall be mounted in the carrier.

3.28.2 Fenders. The fenders for the rear wheels on each side of the truck shall be constructed of number II gage sheet steel. The tire-to-fender clearance shall be in accordance with SAE J683. The fenders shall cover the width of the tires. The top of the fenders may serve as the catwalks.

3.28.3 Electrical system. The electrical system shall consist of the truck manufacturer's commercial electrical system and the additional components and wiring necessary to meet all requirements of the DoT Motor Carrier Safety Regulations. All lights shall be mounted in protected locations with the lens and housing guarded and shall remain visible under all conditions of operation. Identification, sidemarker, and clearance lights shall be the armored or flush-mounted type and shall include shock-resistance mountings to protect the bulbs.

3.29 Fire extinguisher. The distributor shall be provided with a fire extinguisher and mounting bracket conforming to O-E-915, type II, class 2, size 20.

3.30 Cleaning, treatment, and painting. Surfaces normally painted in good commercial practice shall be cleaned, treated, and painted as specified herein. The color of the finish coat shall be as specified (see 6.2). Surfaces to be painted shall be cleaned and dried to insure that they are free from contaminants such as oil, grease, welding slag and spatter, loose mill scale, water, dirt, corrosion product, or any other contaminating substances. As soon as practicable after cleaning, and before any corrosion product or other contamination can result, the surfaces shall be prepared or treated to insure the adhesion of the coating system. The painting shall consist of at least one coat of primer and one finish coat. The primer shall be applied to a clean, dry surface as soon as practicable after cleaning and treating. Painting shall be with manufacturer's current materials according to manufacturer's current processes and the total dry film thickness shall be not less than 2.5 mils over the entire surface. The paint shall be free from runs, sags, orange peel, or other defects.

3.30.1 Rustproofing. Truck chassis shall be rustproofed in accordance with MIL-STD-1223.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

3.31 Identification plate. An identification plate will be furnished by the contracting officer for each distributor. The contractor shall stamp all necessary data in the blank spaces of the plate provided for that purpose and securely affix a plate to each distributor in a conspicuous place with non-ferrous screws or bolts not less than 1/8 inch in diameter. The applicable nomenclature contained in the contract item description shall be placed in the top blank.

3.32 Workmanship.

3.32.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions that would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

3.32.2 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice and all bolts, nuts, and screws shall be tight.

3.32.3 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of approved shape and of uniform size for the same diameter of rivet. Rivet heads shall be full, neatly made, concentric with the rivet holes and in full contact with the surface of the member.

3.32.4 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings.

3.32.5 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect that reduces the ability of the casting to perform its intended function.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

4.1.1 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one complete unit when a first article is required (see 3.2 and 6.3). This inspection shall include the examination of 4.3, the tests of 4.4, and, when specified (see 6.2), the preproduction pack inspection of 4.5. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.3, the tests of 4.4.14, and the packaging inspection of 4.5. This inspection shall be performed on each distributor.

4.3 Examination. Each distributor shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the contractor's standard product to comply with specified requirements or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.4 Tests.

4.4.1 Tank-capacity and tank-gage accuracy. Fill the bitumen tank approximately half full with bitumen, grade 85-100 penetration. Read the tank gage and record the indicated volume of bitumen. Determine and record the weight of the bitumen contained in the tank. Then, completely fill the tank with bitumen, grade 85-100 penetration. Read the tank gage and record the indicated volume of bitumen. Determine the actual volume of bitumen for approximately half full and full conditions by converting total weight to volume by use of unit weight. Indicated volume by tank gage not being within 25 gallons of actual volume of bitumen shall constitute failure of this test.

4.4.2 Burner heating. The burner heating and fuel consumption tests shall be run with the bitumen tank filled to not less than rated capacity with bitumen, grade 85-100 penetration. Burners shall use diesel fuel conforming to VV-F-800. Start the burners and adjust to give maximum fuel consumption and still maintain a bright, smokeless flame. Raise the temperature of the bitumen in the tank from a starting temperature not greater than 200°F to a temperature of 300°F. Record the temperature of the bitumen at the start and end of the test and at 5-minute intervals during the test. An average temperature

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

rise per minute of less than that specified in 3.10.2 shall constitute failure of this test.

4.4.3 Spray-bar circulation. With the bitumen tank filled with bitumen, grade 85-100 penetration, heat to a temperature of not less than 300°F. Then, shut off the burners. Circulate the bitumen from the tank through the 24-foot spray bar and back into the tank for a period of not less than 5 minutes and not more than 20 minutes. Record the temperature of the bitumen at the center and at both ends of the spray bar during the last 5 minutes of the circulation period. A temperature variation of more than 10°F throughout the length of the spray bar shall constitute failure of this test.

4.4.4 Pump-capacity test. Spray bitumen, grade 85-100 penetration, at a temperature to provide a viscosity of 10 to 60 Saybolt furol seconds through the full 24-foot width spray bar into a container for 60 seconds at maximum spray rate. The 60-second time period shall be determined by a stopwatch and the volume of bitumen shall be determined by weight using weight-to-volume conversion. A volume of bitumen of less than 350 gallons sprayed into the container during this 60-second period shall constitute failure of this test.

4.4.5 Portable burner. Start the burner and fire at maximum rate. Insert the burner into the pump housing and observe the impingement of the flame. Determine the rate of fuel consumption for a period of not less than 15 minutes. Impingement of the flame on the pump packing or bearings or fuel consumption of less than 1/2-gallon per hour shall constitute failure of this test.

4.4.6 Application and distribution. Operate the truck-mounted distributor in a manner that will demonstrate its ability to apply 85-100 penetration bitumen through the 24-foot spray bar at rates of 0.4, 0.8, and 1.0 gal/sq yd, and through 4 feet of spray bar at a rate of 0.1 gal/sq yd. The following procedure shall be followed for testing at the specified rates:

a. Weigh the truck-mounted distributor filled with bitumen.
b. Spray the bitumen at the required rate of application. (The metering device reading or setting should be obtained from the distribution chart specified herein.)
c. Using a stopwatch, determine the length of time for the spray period.
d. Weigh the truck-mounted distributor.
e. Determine the amount of bitumen sprayed by the difference in weight before and after test and convert to gallons (use applicable specific gravity versus temperature curve).
f. Compute theoretical rate of application in gal/sq yd by utilizing amount of bitumen sprayed, length of time of spray, and theoretical distance traveled corresponding to length of time at specified rate and using forward speeds as indicated on the application chart.

With the spray bar extended to maximum length, apply bitumen at a rate of 0.4 gal/sq yd. Repeat for the rates of 0.8 and 1.0 gal/sq yd. With the spray bar set at a 4-foot spray width, apply bitumen at a rate of 0.1 gal/sq yd. Minimum distance for application shall be not less than 100 feet. Observe spray pattern during all rates of application and observe applied bitumen

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

after each application for streaking or puddling. Examine the nozzles for drip after shutoff. With the spray bar at maximum width, operate the truck-mounted distributor at the speed required for an application rate of 0.1 gal/sq yd and bring one end of the spray bar into contact with a rigid obstacle. Observe the horizontal swing breakaway feature. Individually shut off one nozzle in the center section of the spray bar to demonstrate this feature. Then fold and lock the 24-foot spray bar and apply bitumen through the center section only. Any of the following shall constitute failure of this test: Computed rate of bitumen applied not within ± 5 percent of predetermined rate; spray from any nozzle not extending to the centerline of adjacent nozzles; streaking or puddling of applied bitumen; extended end section of the spray bar not swinging horizontally without damage to the spray bar or other parts of the distributor when the extended section strikes a rigid obstacle; the extended end sections of the spray bar not folding or locking in folded position as specified; extended end section valve linkage not automatically disconnected, or nozzles valves not closing and remaining in closed position when extended section of the spray bar is locked in folded position; spray bar valve linkage not operating as required when spray bar is either folded or extended; nozzles dripping after shutoff; or flow from individual nozzle not being shut off.

4.4.7 Spray bar adjustments and alinement. Adjust the spray bar laterally and vertically throughout the full range for each adjustment and measure the range of adjustment. Then adjust the 24-foot spray bar for no crown and measure the elevation of nozzles at the center and both ends of the spray bar. Fold up the extended ends of the 24-foot spray bar into its travel position and measure the spray bar width. Spray bar lateral adjustment or vertical adjustment less than specified, elevation of any nozzle not within $\pm 1/2$ inch of any other nozzle, spray bar not folded up and locked as specified, or width of spray bar in travel position greater than 96 inches shall constitute failure of this test.

4.4.8 Operations. The following operations shall be performed:

a. Pump bitumen from an external source into the bitumen tank.
b. Pump bitumen from the bitumen tank back to the bitumen tank without the bitumen entering the spray bar.
c. Pump bitumen out of the bitumen tank to an external source without the bitumen entering the spray bar.
d. Pump bitumen out of the bitumen tank to the hand-spray attachment. Spray bitumen using hand-spray attachment.
e. Withdraw bitumen from the spray bar and all piping and return it to the bitumen tank.
f. Pump flushing oil through all piping and the spray bar without the flushing oil entering the bitumen tank.

Inability of the distributor to perform any of these operations shall constitute failure of this test.

4.4.9 Speed and indicating device. Drive the truck-mounted distributor over a measured distance of not less than 5,000 feet at an indicated speed corresponding to a spray rate of 1.0 gal/sq yd. Determine by a stopwatch and record the time required to travel the measured distance at the indicated

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

speed. Record the trip-indicator reading at the start and at the end of the measured distance traveled. Repeat for forward speeds corresponding to a spray rate of 0.1 gal/sq yd. Indicated speed not within 5 percent of actual speed, or indicated distance traveled not within 5 percent of actual distance traveled shall constitute failure of this test.

4.4.10 Road test. Drive the fully loaded, truck-mounted distributor for 50 miles over paved and gravel roads with at least 30 miles over gravel roads. Then subject the fully loaded, truck-mounted distributor to a series of forward and reverse sudden stops as follows:

a. Accelerate forward from rest to 10 mph as quickly as possible, then apply brakes to stop suddenly. When forward motion has stopped, immediately accelerate to 10 mph. Repeat the acceleration-forward and sudden-stop procedure 10 consecutive times.
b. Accelerate backward from rest to maximum reverse speed as quickly as possible, then apply the brakes to stop suddenly. When reverse motion has stopped, immediately accelerate to maximum reverse speed. Repeat the reverse-acceleration and sudden-stop procedure 10 consecutive times.

Evidence of permanently deformed or broken mounting devices, misalinement between distributor and chassis, or accessories not remaining in their carrying places shall constitute failure of this test.

4.4.11 Lifting and tying down attachment test. When furnished, lifting and tying down attachments shall be tested to determine conformance to 3.23. The manufacturer may furnish certified engineering calculations in lieu of a test to prove that the lifting and tying down attachments offered meets the requirements set forth in MIL-STD-209.

4.4.12 Ground clearance test. The contractor shall demonstrate the ability to negotiate the break-over and departure angles of the 100-foot bow ramp of figure 1. In lieu of this test and with Government approval, the contractor may submit calculations to show the ability of the delivered item(s) to meet the ground clearance requirement.

4.4.13 Measurement of electromagnetic radiation. When electromagnetic radiation suppression is required, to determine conformance to 3.25, electromagnetic radiation shall be measured in accordance with SAE J551. When suppressed to conform to 3.25, the manufacturer may furnish a certification in lieu of the test that the distributor meets the requirements, together with a list of the suppression devices installed. The list shall be sufficiently detailed to allow visual determination that the devices are installed.

4.4.14 Performance test. Fill each distributor with high-viscosity fuel oil and operate the distributor for a run-in period of 60 minutes. Check the distributor for leaks, demonstrate operation of all controls, and make necessary adjustment prior to shipment. Any leak or malfunction of any component that cannot be corrected by adjustment shall constitute failure of this test.

4.5 Packaging inspection. The inspection of the preservation, packing, and marking shall be in accordance with the requirements of section 4 of

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

MIL-D-771. The inspection shall consist of the quality conformance inspection; and, when specified (see 6.2), a preproduction pack shall be furnished for examination and test within the time frame required (see 6.2).

5. PACKAGING

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be in accordance with the requirements of MIL-D-771 with the level of preservation and the level of packing as specified (see 6.2).

5.1.1 Preservation. The preservation-packaging shall be level A or commercial, as specified (see 6.2).

5.1.1.1 Level A. The complete distributor shall be preserved and packaged in accordance with level A of MIL-D-771.

5.1.1.2 Commercial. The complete distributor shall be preserved and packaged in a manner that will insure adequate protection against deterioration and damage during shipment. This level may conform to the supplier's commercial practice when such meets the requirements of this level.

5.1.2 Packing. The packing shall be level A, B, or commercial as specified (see 6.2).

5.1.2.1 Level A. The complete distributor shall be packed in accordance with level A of MIL-D-771.

5.1.2.2 Level B. The complete distributor shall be packed in accordance with level B of MIL-D-771.

5.1.2.3 Commercial. The equipment shall be prepared for shipment in a manner that will insure arrival at destination in a satisfactory condition. Preparation for delivery shall comply with applicable carrier rules and regulations.

5.1.3 Marking. The marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The distributors are primarily intended for use in accurately applying bitumen during formation of bituminous surfaces and during certain types of soil stabilization processes. The distributors can also be used to transport or transfer bitumens or for application of bitumen for dust alleviation.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Size of distributor required (see 1.2).
c. Issue of document required if other than as specified (see 2.1.1).
d. When a first article is required (see 3.2).
e. Which metering device is required (see 3.13).
f. When a supplemental thermometer is required (see 3.18.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

g. When conformance to electromagnetic interference characteristics and test limits are required (see 3.25).
h. Color of finish coat (see 3.30).
i. When a preproduction pack inspection is required and within the time frame required for submission (see 4.2.1 and 4.5).
j. Level of preservation and level of packing required (see 5.1 and 5.1.2).

6.2.1 Data requirements. When this specification is used in an acquisition that incorporates a DD Form 1423, Contract Data Requirements List (CDRL) and invokes the provisions of paragraph 7-104.9(n) of the Defense Acquisition Regulations (DAR), the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL (DD Form 1423 incorporated into the contract. When the provisions of DAR 7-104.9(n) are not invoked, the data shall be delivered in accordance with the contract requirements.

6.3 First article. When a first article inspection is required, the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.4 Cross-reference. Two changes have been made in requirements under the specification. Requirements for trailer-mounted distributors and for 800- gallon capacity distributors have been eliminated. As a result, type classification has been eliminated and one size classification has been eliminated.

MIL-D-575F	MIL-D-575G
Type I	Eliminated
Type II	Eliminated
Size I	Eliminated
Size II	Size II
Size III	Size III
Size IV	Size IV

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing activity:

Navy - YD

Project No. 3895-N208

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

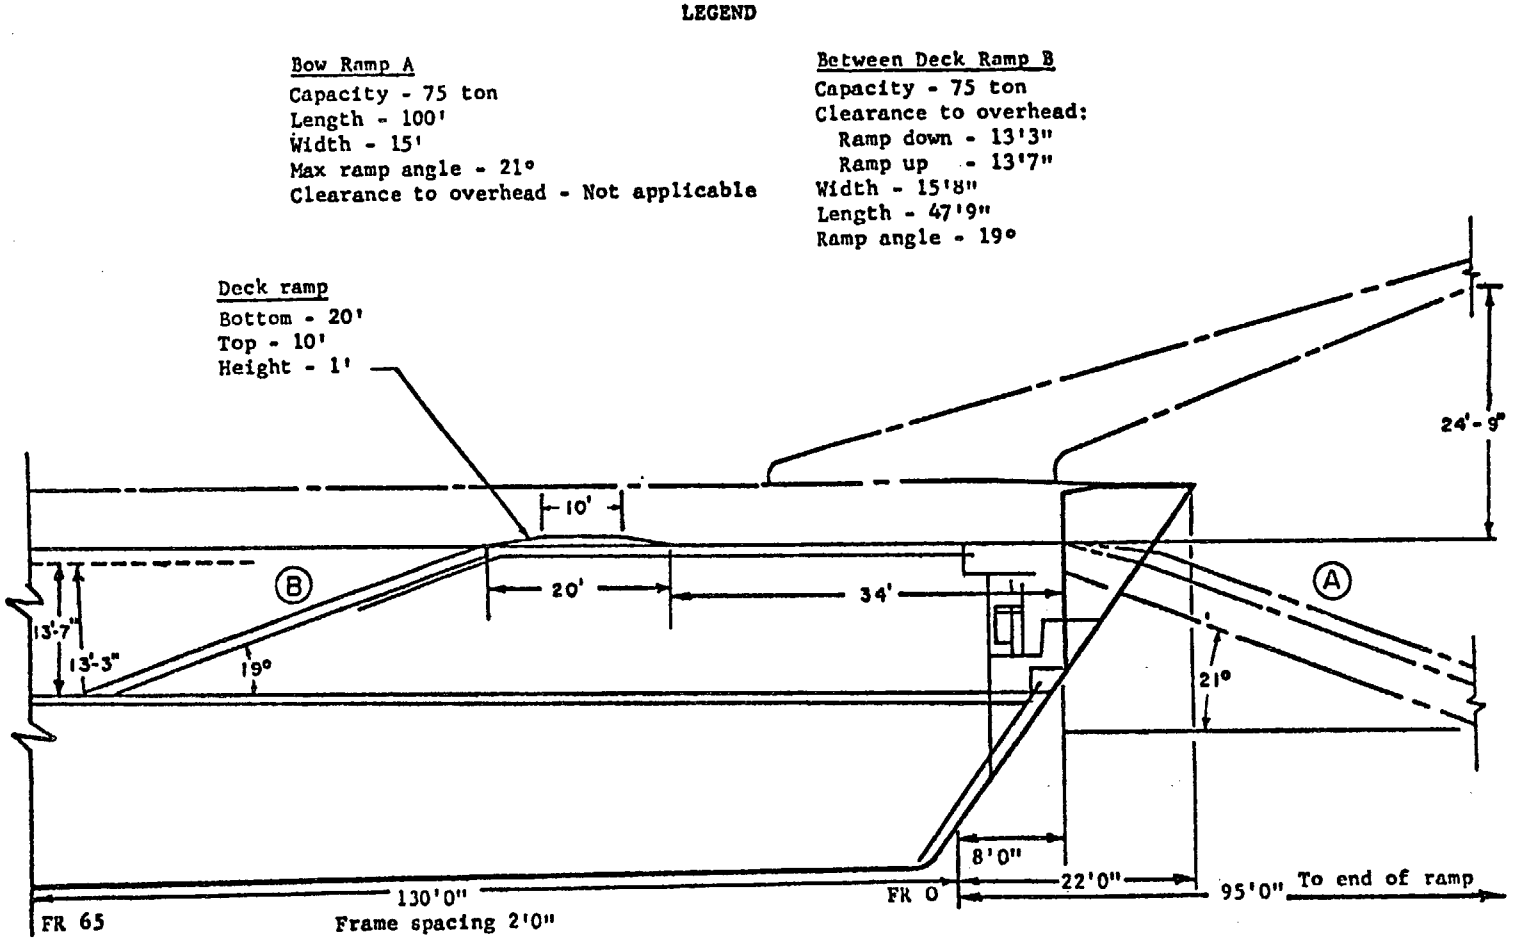


FIGURE 1. Profile, LST 1179 class bow.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDING OFFICER (156)
NAVAL CONSTRUCTION BATTALION CENTER
PORT HUENEME, CA 93043

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. 3895-N208

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-D-575G(YD) - DISTRIBUTORS, BITUMINOUS MATERIAL, TANK TYPE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:49Z
Check the source to verify that this is the current version before use.