BY ORDER OF THE COMMANDER
CREECH AIR FORCE BASE

CREECH AFB INSTRUCTION 11-250

23 APRIL 2026

Flying Operations

LOCAL FLYING PROCEDURES AND AIRFIELD OPERATIONS

COMPLIANCE WITH THIS PUBLICATION IS MANDATORY

ACCESSIBILITY: This publication is available for downloading or ordering on the e-Publishing website at **www.e-Publishing.af.mil**

RELEASABILITY: There are no releasability restrictions on this publication

---

OPR: 432OSS/OSA

Certified by: 432WG/CC
(Colonel Trevor T. Merrell)

Supersedes: CREECHAFBI11-250, 16 April 2019

Pages: 83

This instruction implements Air Force Policy Directive (AFPD) 11-2, *Aircraft Rules and Procedures,* Air Force Manual (AFMAN) 11-202V3, *Flight Operations*, AFMAN 13-204V1, *Management of Airfield Operations*, AFMAN 13-204V2, *Airfield Management*, AFI 13-213, *Airfield Driving*, and related supplements. It contains local information and directives pertaining to air operations at Creech Air Force Base (CAFB). This instruction applies to all units associated with, and involved in, flying operations at CAFB. It also applies to all organizations whose personnel operate vehicles on or around the CAFB flight line. This publication applies to Air Force Reserve Command (AFRC) units conducting flight operations at CAFB. Ensure all records generated as a result of processes prescribed in this publication adhere to Air Force Instruction (AFI) 33-322, Records Management and Information Governance Program, and are disposed of in accordance with the Air Force Records Disposition Schedule, which is located in the Air Force Records Information Management System. Refer recommended changes and questions about this publication to the office of primary responsibility (OPR) using the DAF Form 847, Recommendation for Change of Product; route DAF Forms 847 from the field through the appropriate functional chain of command.

SUMMARY OF CHANGES

This document has been substantially revised to meet the requirements of daily operations as well as complying with updated guidance. A complete review of this document is required to ensure compliance.

Chapter 1—GENERAL INFORMATION **6**

1.1. Authority. 6

1.2. Application. 6

1.3. Administration. 6

1.4. Airfield Operations Board (AOB). 6

Table 1.1. Mandatory Members. 7

Table 1.2. Optional Members. 7

1.5. Airfield Operating Hours. 8

1.6. Quiet Hours Requests. 9

1.7. Noise Abatement Procedures. 9

1.8. Airfield Photography. 10

1.9. Navigational Aids (NAVAIDs). 10

1.10. Backup Power. 10

1.11. Prohibited Activities. 10

1.12. Fire Suppression. 10

1.13. Transient Alert. 10

Chapter 2—AIRFIELD MANAGEMENT **12**

2.1. Runway Information. 12

2.2. Runway Suspension and Closure. 12

2.3. Permanently Closed/Unusable Areas. 12

2.4. Airfield Inspections and Checks. 13

2.5. Bird Watch Condition. 13

2.6. Notice to Airmen (NOTAM). 14

2.7. Flight Information Publications (FLIP). 14

2.8. Airfield Lighting Systems. 15

2.9. Flight Planning. 15

2.10. Prior Permission Required (PPR). 16

2.11. Civil Aircraft Landing Requirements. 16

2.12. Aero Club. 17

2.13. Airfield Construction. 17

2.14. Airfield Maintenance. 18

2.15. Airfield Waivers. 19

2.16. Aircraft Arresting Systems. 20

2.17. Airfield Driving. 20

Chapter 3—AIR TRAFFIC CONTROL **21**

3.1. Air Traffic Control (ATC) Services. 21

3.2. Active Runway Selection. 21

3.3. Locally Assigned Frequencies. 21

Table 3.1. Frequencies. 22

3.4. Local Aircraft Priorities. 22

3.5. Opposite Direction Arrivals/Departures. 22

3.6. Lost Radio Communications Instructions. 23

3.7. Break Out/Go Around/Missed Approach Procedures. 23

Figure 3.1. Break Out Maneuver. 23

3.8. Civilian Aircraft Operations. 24

3.9. Automated Terminal Information Service (ATIS) Procedures. 24

3.10. SOF Operating from the Tower. 24

Chapter 4—GROUND OPERATIONS **25**

4.1. General. 25

4.2. Controlled Movement Area. 25

4.3. Emergency Procedures. 25

4.4. Taxiway And Ramp Restrictions. 25

Table 4.1. Taxiway Restrictions. 26

Table 4.2. Parking Areas. 26

4.5. Aircraft parking spots on the North Ramp are restricted to RPA only. 26

4.6. Taxi Procedures. 27

4.7. Aerospace Ground Equipment (AGE) Ready Line Sub-Pool. 28

4.8. Towing/Maintenance Taxi Procedures. 28

4.9. Engine Run Procedures. 28

Chapter 5—GENERAL FLYING PROCEDURES **30**

5.1. Flying Operations. 30

5.2. Local Flying Area/Designation of Airspace. 30

5.3. VFR Local Training Areas. 30

5.4. VFR Traffic Procedures. 30

Table 5.1. Pattern Altitudes. 31

Table 5.2. Aircraft pattern Altitudes. 31
5.5. Standard Climb-Out Instructions (Not applicable to RPA). 31
5.6. IFR Procedures. 32
5.7. Automatic Takeoff and Landing Capability/Automatic Takeoff Land (ATLC/ATOL)..... 32
5.8. Special Procedures. 32
5.9. Reduced Same Runway Separation Procedures (RSRS). 35
5.10. Intersection Departures. 35
5.11. Crosswind Runway Separation Procedures. 35
5.12. Formation Flying. 36
5.13. Protection of the 360-degree Overhead Pattern. 36
5.14. Range Entry/Exit Procedures. 36
5.15. Unmanned Aerial System (UAS)..... 37
Chapter 6—EMERGENCY PROCEDURES 38
6.1. Emergency Declaration. 38
6.2. Crash Alarms Systems. 38
Table 6.1. PCAS Agencies..... 38
6.3. Emergency Response Procedures. 39
6.4. Closed Airfield. 41
6.5. External Stores Jettison Area Procedures. 41
6.6. Emergency Arresting/Barrier Gear Procedures. 41
6.7. Hot Brake Area and Procedures. 42
6.8. Abandonment of Aircraft. 42
6.9. Aircraft Impoundment. 42
6.10. Emergency Locator Transmitter (ELT) Response Procedures. 42
6.11. Hung Ordnance Procedures. 43
6.12. Flame Out Procedures. 43
6.13. Precautionary Approaches. 43
6.14. F-16 Hydrazine Procedures..... 43
6.15. Request for Explosive Ordnance Disposal (EOD) assistance. 43
6.16. Downed Aircraft and Search and Rescue (SAR) Procedures. 43
6.17. Wind Limitations on Control Tower..... 44
6.18. Alternate Facility/Evacuation Procedures. 44

Chapter 7—SPECIAL OPERATIONS **46**

7.1. Hazardous/Dangerous Cargo. 46

7.2. Live/Inert Armament. 46

7.3. Distinguished Visitor (DV) Procedures. 46

7.4. Aeromedical Airlift Support. 47

7.5. Fuel Dumping. 47

7.6. Exercises. 47

7.7. Unusual Maneuvers. 47

Chapter 8—WEATHER SUPPORT AND PROCEDURES **48**

8.1. General. 48

8.2. Designators. 48

8.3. Shortfalls and Limiting Factors. 48

8.4. Operating Hours and Contact Information. 48

8.5. BIFRÖST. 48

8.6. Weather Dissemination and Coordination Procedures. 48

8.7. Hazardous/Severe Weather Notification. 49

8.8. Extreme Weather Operations. 49

8.9. High Wind Operations. 49

Attachment 1—GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION **50**

Attachment 2—USAF AERIAL DEMONSTRATION SQUADRON (USAFADS) PROCEDURES **57**

Attachment 3—BLACK OUT PROCEDURES **60**

Attachment 4—CREECH AFB BARRIER CERTIFICATION PROCEDURES **62**

Attachment 5—RPA OPERATIONS **64**

Attachment 6—AIRFIELD DIAGRAM **73**

Attachment 7—LOCAL AREA **74**

Attachment 8—RPA MARSA WITHIN 432 WG GRR/NTTR AIRSPACE **81**

Chapter 1

GENERAL INFORMATION

1.1. Authority.

1.1.1. This publication supplements Federal Aviation Administration (FAA) Joint Order 7110.65, *Air Traffic Control* (FAA JO 7110.65), Department of the Air Force Manual 13-204 Volume 1, *Management of Airfield Operations* (DAFMAN 13-204V1), Department of the Air Force Manual 13-204 Volume 2, *Airfield Management* (DAFMAN 13-204V2), Department of the Air Force Manual 13-204 Volume 3, *Air Traffic Control* (DAFMAN 13-204V3), and other directives of higher authority. HQ ACC/A3AO has reviewed this instruction for compliance with Federal Aviation Administration (FAA) and Air Force Air Traffic Control (ATC) directives. Deviations are authorized when directed by ATC or in emergency situations where adherence would jeopardize safety of flying operations.

1.2. Application.

1.2.1. These procedures are directive in nature for 432d Wing aircraft, tenant flying units, and all flying units deployed to Creech AFB or Geographically Separate Units (GSU) (hereafter referred to as local flying units or locally assigned aircraft). Procedures are also directive in nature for tenant personnel with responsibilities tasked by this publication.

1.3. Administration.

1.3.1. The 432 WG/CC may initiate waivers or immediate action changes to this regulation when necessary for accomplishment of normal or special mission requirements. All procedural changes affecting Airfield Management (AM), or ATC must be forwarded to HQ ACC/A3AO for review and approval before implementation IAW DAFMAN 13-204V1, DAFMAN 13-204V2, and DAFMAN 13-204V3.

1.3.2. Creech AFB Instruction 11-250 Recommended Changes. Forward recommended changes to 432OSS/OSA or 432 OG/OGV, or equivalent A-staff function. Changes to this publication will either be categorized as time critical or annual review.

1.3.3. Changes to this instruction impacting safety are considered time critical. 432OSS/OSA will coordinate time critical changes with 432 OG/OGV, or equivalent A-staff function, to generate a Flight Crew Information File (FCIF) change; formal interim changes will be accomplished IAW DAFI 90-160, *Publications and Forms Management*.

1.4. Airfield Operations Board (AOB).

1.4.1. This board is for discussing and tracking airfield status, airfield projects, and all airfield operations. The AOB is chaired by the 432d Wing Deputy Commander (CD) or designated representative; not to be delegated lower than the senior operations commander or equivalent.

1.4.2. Schedule. The AOB will convene quarterly, typically in January, April, July, and October.

1.4.3. Membership. 432 OG/CC, or equivalent A-staff function, determines AOB membership and may add or remove individuals as required. Unit commanders are responsible for assessing quarterly agenda items and ensuring appropriate representation from their organizations in order to discuss pertinent issues and their potential resolutions.

1.4.4. Due to the unique nature of Creech AFB operations and the number of Geographically Separated Units (GSUs) to include the 25 ATKW, 57 WG, NTTR, and 53 TEG, mandatory members are limited to those who are reasonably able to attend in-person meetings. Optional members may attend either in person or remote means. If a GSU is presenting an issue for resolution during the AOB, a member from that unit must attend either in person or via remote means.

1.4.5. Mandatory Members.

Table 1.1. Mandatory Members.

432 OG/CC	**25 ATKW/A4**	**432 OG/OGV**	**432OSS/CC**
432OSS/OSA	RSSII Airfield Manager	RSSII Air Traffic Manager	432 WG/SE

1.4.6. Optional Members.

Table 1.2. Optional Members.

732 OG/CC	25 ATKW/DCO	432 MSG/CC	432 CS/CC
432 CS	432 CS/CES	432 CS/CEF	432OSS/OSW
25 ATKW/A3V	NTTR/RSC	TERPS	11 ATKS
20 ATKS	26 WPS	30 RS	44 RS
89 ATKS	482 ATKS	42 ATKS	15 TES
556 TES	756 TEG	732 OG/OGV	726 OG/CC
RSII/CE	15 ATKS	18 ATKS	22 ATKS
78 ATKS	91 ATKS	867 ATKS	NATCF
USAFADS	FAA ATREP	50 ATKS	482 ATKS
17 ATKS	732 OSS		

1.4.7. Mandatory Annual Review Items.

1.4.7.1. January. Review the listing and effective dates of letters of procedure (LOPs) affecting the local airfield/flight environment (airfield operating instruction, letters of agreement, operating instructions, operations letters, quick reaction checklists, and operations plan taskings as applicable to the airfield environment, etc.) Complete MICT Checklists. Submit completion to HQACC/A3AO.

1.4.7.2. March. Review training operating instructions, local position certification guides, training evaluation checklists, and newcomer indoctrination program.

1.4.7.3. June. Review and validate grid maps/visibility checkpoint, and Magnetic variation with Civil Engineering (CE), Weather, NATCF, and TERPS.

1.4.7.4. July. Airfield Certification and Safety Inspection. Submit completion of Airfield Suitability and Restrictions Report (ASSR) to HQ AMC/A3AS

1.4.7.5. September. Review Airfield waivers, Aircraft Parking Plan, and submit to HQ ACC/A3AO

1.4.7.6. Semi-annually. Complete required MICT checklists. Conduct and complete the ASSR.

1.5. Airfield Operating Hours.

1.5.1. Published Hours. Unless modified by Notice to Airmen (NOTAM) or Department of Defense (DoD) Flight Information Publications (FLIP), the airfield is open 2230L (PST) on Sunday through 2215L (PST) on Friday. The airfield is closed on weekends, holidays, ACC or 432 WG down days unless otherwise approved by the 432 OG/CC.

1.5.1.1. All airfield services are performed by employees under the Range Support Services (RSS) contract. Due to the Fair Labor Standards Act, any airfield operation performed outside of normal operating hours is subject to overtime charges at the rate of time and one-half. Federal holidays are charged at double-time and one-half. All overtime costs are the responsibility of the supported organization and have minimums due to the RSS contract Performance Work Statement (such as a 4-hour minimum per day due to shift schedules). NTTR/PM provides the RSS contract coordination with the 432OSS authorized representative.

1.5.1.2. Procedures for Opening. Airfield Management Operations (AMOPS) is the agency responsible for opening the airfield. When the airfield is ready to be opened, ATC will notify NATCF and Nellis-Creech Fire Department. ATC will notify NATCF, Creech Emergency Communications Center (ECC), Nellis Command Post (CP), and Security Forces when the airfield is closed. Prior to any aircraft operations, AMOPS will perform an airfield opening inspection IAW RSSII Form 1, Airfield Inspection and Checks.

1.5.2. After-Hours Support. Any unit that requires the airfield to open outside of published hours must coordinate for 432 OG/CC approval. Make requests through Airfield Operations Manager (AOM) at Defense Switching Network (DSN) 384-0339 Comm (702) 404-0339. Requests should be received at least 96 hours in advance. During periods when the airfield is closed, i.e., weekends, wing down days and holidays, contact Nellis CP at (702) 652-2446. **NOTE:** Airfield hours will not be extended without an RSSII contract modification coordinated through NTTR/PM and approved by the 432OSS Contracting Officer Representative.

1.5.2.1. Units/aircraft that do not originate from Nellis or Creech but utilize NTTR airspace will comply with the NTTR Business Management Process and make financial arrangements through their assigned project officer to open Creech airfield beyond published hours. POC: NTTR/DO.

1.5.2.1.1. All deployed operations from Creech AFB require coordination with 432 WG/XP (A589) and 432OSS/OSA. The 432d Operations Group Commander (432 OG/CC) is the approval authority for deployed operations.

1.5.3. Uncontrolled Operations. Unless approved in writing by ACC/A3 in advance, CAFB does not operate as an uncontrolled airfield.

1.6. Quiet Hours Requests.

1.6.1. Air Combat Command observed quiet hours are from 2230-0600L daily. Transient aircraft arrivals and departure during quiet hours require 432 OG/CC approval.

1.6.2. Requests for quiet hours for ceremonies, parades and other events shall be forwarded in writing to 432OSS/OSOS (Wing Scheduling) for processing and coordination. 432OSS/OSOS will forward the request to 432 OG/CC for approval and determination of flying restrictions. Once approved, 432OSS/OSOS will forward the information via email to Airfield Management at **432OSS.OSAA.1@us.af.mil**.

1.6.2.1. Ceremonies. Airfield Management shall issue the following NOTAM 72 hours prior to the start of quiet hours. "*QUIET HOURS/RAMP FREEZE IN EFFECT AT CREECH AFB. NO DEPARTURES OR ARRIVALS. AIRCRAFT ALLOWED TO RECOVER MUST ACCOMPLISH STRAIGHT IN, FULL-STOP LANDINGS DURING THE QUIET HOUR PERIOD AND REMAIN ON TAXIWAY ALPHA OR ECHO HAMMERHEAD UNTIL END OF QUIET HOURS. NO AIRCRAFT ENGINE RUNS, TAXIING, OR GROUND SUPPORT EQUIPMENT. NO FLIGHTLINE VEHICLE OPERATIONS IN THE VACINITY OF EVENT. VEHICLES RESPONDING TO EMERGENCIES ARE EXEMPT.*" **NOTE:** Changes to NOTAM verbiage must be approved by 432 OG/CC.

1.6.2.2. Airfield Management will notify appropriate agencies when quiet hours NOTAMs are processed. Emergency arrivals are exempt from quiet hour(s) restrictions.

1.7. Noise Abatement Procedures.

1.7.1. Avoid overflight (within a 1 NM radius) of the town of Indian Springs below 10,000 feet MSL (Exception: USAFADS overflight at or above 500 feet AGL when conducting training operations at Creech Airfield). Fly all patterns, including climb outs to any part of the SFO/PFO pattern, to the north of the airfield to the maximum extent possible. Do not initiate afterburner in the pattern unless necessary for safety of flight. When departing CAFB, fly runway heading for 1 NM past the departure end of the runway before turning out of traffic to the south. Avoid the town of Cactus Springs 3 NM west of the field.

1.7.2. Noise Complaints. Refer noise complaints to the Public Affairs office (432 WG/PA) DSN 384-1618 or **432WG.PA@US.AF.MIL**.

1.8. Airfield Photography.

1.8.1. Personnel are prohibited from taking photographs on the flightline without prior coordination and approval. 432OSS/CC is the approval authority for flightline photography. Media will be escorted by 432 WG/PA.

1.9. Navigational Aids (NAVAIDs).

1.9.1. Tactical Air Navigation (TACAN). The TACAN Remote Status Indicator (RSI) is located in the Control Tower and is monitored during Tower operating hours. The TACAN RSI will be checked prior to opening the facility to include checking all the status lights and station identifier. Periodic Maintenance Inspection (PMI) times are published in the IFR supplement. Notify Creech Tower prior to conducting PMI. Unscheduled outages will be passed to Creech AMOPS for NOTAM action and to NATCF. Scheduled outages, other than PMI times, will be approved by the 432 OG/CC.

1.9.2. Schedule. Scheduled TACAN Flight Checks are conducted every three years. Contact FAA Flight Inspection Scheduler a minimum of six months in advance. NTTR range times must be scheduled for a 10 and 25 NM arc about the Creech TACAN.

1.9.3. Checkpoints. TACAN checkpoints are located on the Southeast and Southwest of the airfield at Taxiways Alpha and Echo.

1.9.3.1. Checkpoint information. Taxiway Echo/channel 87, BRG 247 at 0.9 NM, ELEV3134’ MSL. Taxiway Alpha/channel 87, BRG 108 AT 0.4 NM, ELEV 3103’ MSL.

1.10. Backup Power.

1.10.1. Generator power is available as back-up to commercial power.

1.11. Prohibited Activities.

1.11.1. Wear of Hats. The CAFB flightline is a no hat area.

1.11.2. Flightline Smoking Policy. Smoking is prohibited on the flightline IAW DAFMAN 91-203, *Air Force Occupational Safety, Fire, and Health Standards*.

1.12. Fire Suppression.

1.12.1. Prior to wing flying, Fire Department will ensure at least one major crash vehicle is serviceable. Fire Department will notify AMOPS whenever firefighting capability is reduced.

1.12.2. AMOPS will publish a NOTAM detailing reduced firefighting capability and airfield restrictions as determined by the 432 WG/CC.

1.13. Transient Alert.

1.13.1. Transient Services. Transient Alert (TA) Services are available at Creech AFB during normal duty hours 0545-2215L (PST) or as scheduled during extended hours. TA personnel are not authorized to perform technical order guided maintenance or inspections. TA services available are parking, refueling, towing, and arm/de-arm.

1.13.2. No fleet services are available.

1.13.3. The following services are available: Launch/Recovery of aircraft, towing, servicing of liquid oxygen (LOX) refuel, engine oils and hydraulic systems, arm/de-arm of aircraft weapons and egress systems.

1.13.4. The following equipment is available: Powered Aircraft Ground Equipment (AGE) consisting of 2x -60 generators, 2x -86 generators, 4x floodlights, and 1x hydraulic test stand. Non-powered AGE consisting of 1x B1 stand, 1x C1 stand, and 1x B4 stand.

1.13.5. After Hours Transient Support. Only when authorized.

1.13.6. Transient Parking. Transient aircraft will be parked in Area 1 and Area 2 or in a location designated by the Airfield Manager.

Chapter 2

AIRFIELD MANAGEMENT

2.1. Runway Information.

2.1.1. Location and Designation. Creech AFB is located 36 NM northwest of Nellis AFB with a field elevation of 3,134 feet MSL.

2.1.2. RWY 08/26 is a Class B runway (primary runway for all airfield operations). It is 9,002 feet long by 150 feet wide with 1,000-foot overruns (See **Attachment 6**). RWY 26 is the preferred runway for operations.

2.1.3. RWY 13/31 is a Class A Day VFR runway normally utilized for Remotely Piloted Aircraft (RPA) and helicopters. It is for fixed wing transient emergency use only. RWY 31 is 5,002 feet long by 100 feet wide. Because RWY 31 has a displaced threshold, RWY 13 is 5,468 feet long by 100 feet wide. RWY 13/31 has 200-foot overruns on each end. **NOTE:** RPAs are authorized night operations on RWY 13/31.

2.1.4. Creech AFB is not suitable for B-52 operations or F-35B STOVL operations.

2.2. Runway Suspension and Closure.

2.2.1. Runway Operations Suspended. Runway operations will be suspended when an aircraft is disabled on the runway, or when debris or other hazardous material might be left on the runway. The Controller-In-Charge (CIC) and AMOPS personnel have the authority to suspend runway operations. Runway operations will be suspended immediately following In-Flight Emergencies (IFE). Exception, if the Supervisor of Flying (SOF) waives the foreign object damage (FOD) check, runway operations will not be suspended. The CIC will relay runway suspension time and expected duration to NATCF and Nellis/Creech SOF. NATCF will transmit runway suspension on Guard frequency utilizing all up-range repeaters.

2.2.1.1. If a known FOD item or lost object is suspected or reported lost on the runway, the SOF may delay suspension of runway operations to recover emergency aircraft or aircraft with a fuel-critical state. After the aircraft is/are recovered, runway operations will be suspended to allow search for the FOD.

2.2.2. The following personnel have the authority to close the runway: 432 WG/CC, 432 WG/CD 432 OG/CC and AMOPS. AMOPS is the only agency authorized to open the runway. AMOPS will advise ATC when the runway is open.

2.2.2.1. AMOPS closes the runways and taxiways for unsafe conditions. NOTAM(s) will be published for extended periods of closure. AMOPS will ensure the applicable NOTAM(s) are published (normally no earlier than 3 days in advance) and advise all agencies concerned IAW AMOPS Quick Reaction Checklists. ATC will notify NATCF of unscheduled runway closures and estimated duration. Upon correction of the unsafe condition, AMOPS will cancel the applicable NOTAM and normal operations will resume.

2.3. Permanently Closed/Unusable Areas.

2.3.1. An unusable runway extension for RWY 13/31 exists between Taxiway Echo and RWY 26. This area is marked with a faded yellow X and is not to be used for taxi operations, takeoffs, or landings.

2.4. Airfield Inspections and Checks.

2.4.1. Daily Airfield Inspection. The Airfield Manager (AFM) or qualified AMOPS personnel will conduct a minimum of one airfield inspection per day. The AFM will ensure personnel authorized to perform airfield inspections are knowledgeable and understand required distances for obstacles in relation to the runway, taxiways, and parking aprons.

2.4.1.1. AMOPS will accomplish airfield inspections and checks IAW DAFMAN 13-204V2 *Airfield Management*, Chapter 5, and applicable supplements.

2.4.2. Airfield Lighting. AMOPS personnel will inspect the airfield lighting systems daily. Discrepancies will be recorded on the Airfield Inspection checklist and reported to CE Customer Service for repair actions and a work order job number.

2.4.2.1. AMOPS will reference the Air Force Flight Standard Agency allowable outages chart.

2.4.2.2. Airfield lighting personnel will perform a weekly inspection of all airfield lighting systems. Airfield Lighting will check in/out with AMOPS to receive an updated list of all outages or problem areas prior to starting their inspection. Results of inspection discrepancies or repair actions will be briefed to AMOPS to determine possible trends.

2.4.3. Runway Surface Condition (RSC) and Runway Condition Reading (RCR) Values. AMOPS shall conduct a runway check anytime the RSC is suspected to have changed.

2.4.3.1. RSC will be determined IAW Creech Airfield Standard Operating Procedures publication as directed by DAFMAN 13-204V2.

2.4.3.2. AMOPS will call the runway either WET or DRY depending on the predominate condition of the runway and may include additional information to include areas where the runway is patchy wet.

2.4.3.2.1. If the runway is predominately WET, it will be reported “Wet Runway”. A NOTAM will be issued, and it will be reported on the Automated Terminal Information Service (ATIS).

2.4.3.3. Airfield Snow Removal Operations. Due to the climate, Creech AFB does not experience snow accumulation and does not have procedures for snow removal operations.

2.4.4. Additional checks. Airfield checks will be conducted every 2 to 3 hours and must not exceed 3 hours between checks IAW DAFMAN 13-204V2.

2.4.4.1. Runway and adjacent taxiway operations will be suspended after heavy aircraft arrivals/departures until a FOD check can be accomplished by AMOPS.

2.4.5. Emergency checks. AMOPS will check the runway immediately following any emergency landing. In the case of an airfield ground emergency, this check shall encompass all of the affected area. Unless a runway check has been specifically waived by the SOF, runway operations will be suspended after all IFE until resumed by AMOPS. AMOPS will log SOF runway check waivers on AF Form 3616, *Daily Record of Facility Operation*.

2.5. Bird Watch Condition.

2.5.1. See CAFB PLAN 17, *Bird Wildlife Aircraft Strike Hazard (BASH) Plan*, managed by 432 WG/SE, for detailed information.

2.5.2. Creech AFB is not located in any major bird migratory areas. Therefore, it is a Phase 1 airfield year-round. However, NAFB, CAFB, and the NTTR lies on the eastern side of the Pacific Flyway. While the land area directly around CAFB does not contain water sources that are attractants to many birds, migratory and resident birds should not be overlooked.

2.5.3. Avian radars are approved for use on Air Force airfields and ranges provided they are fielded in accordance with DAFI 91-212, *Bird/Wildlife Aircraft Strike Hazard (BASH) Management Program*. Coordinate installation and use for inclusion in installation Airfield Operations instruction and Airfield personnel.

2.5.4. Bird Watch Conditions. The SOF is primarily responsible for determining the Bird Watch Condition (BWC). The SOF and AMOPS have the authority to declare the BWC. AMOPS will declare the BWC when the SOF is not on duty.

2.5.4.1. BWC Low, Normal; bird activity; low probability of a strike.

2.5.4.2. BWC Moderate, Concentration of birds near the runway or in a location to create a probable hazard to flying, update status at least once an hour.

2.5.4.2.1. SOF will limit touch-and-goes and low approaches to the minimum number required for RPA training. Transient pilots will be particularly cognizant of bird activity when on final approach and will initiate an immediate go-around if a bird strike is anticipated.

2.5.4.3. BWC Severe, heavy concentration of birds on or immediately above the runway or in a location to create an immediate hazard to flying; high potential for a strike; thoroughly evaluating mission need. Update status at least every 15 minutes.

2.5.4.3.1. Full-stop landings only. Formation takeoffs are prohibited. The SOF may consider changing runways, delaying takeoffs and landings, changing pattern altitude, etc.

2.5.5. Bird Watch Alert. In addition to the above bird watch conditions, ATC, AMOPS, or SOF can declare a Bird Watch Alert. All aircrew should be aware of the increased likelihood of bird hazards to flight safety.

2.6. Notice to Airmen (NOTAM).

2.6.1. AMOPS is the NOTAM issuing facility. Forward NOTAM requests for local airfield information to AMOPS.

2.6.2. AMOPS publishes “Safety” or “Local” NOTAMS via Digital NOTAM System. The secondary means, if there is a COMM outage is to contact Holloman or Shaw Airfield Management to process the NOTAMs for Creech.

2.7. Flight Information Publications (FLIP).

2.7.1. Airfield Management maintains a limited supply of FLIP for local flight planning and transient aircrew reference. Additional products are available for download from the National Geospatial-Intelligence Agency (NGA) website **https://aeronautical.nga.mil/login**. Contact Airfield Management to request a change of information regarding Creech in FLIP products.

2.8. Airfield Lighting Systems.

2.8.1. Runway 08/26 has a non-standard lighting system and is only equipped with the following:

2.8.1.1. Medium Intensity Runway Lights (MIRL).

2.8.1.2. Threshold Lights.

2.8.1.3. Precision Approach Path Indicators (PAPI).

2.8.1.4. Runway Distance Remaining Markers.

2.8.1.5. Aircraft Arresting System (Moon) Markers.

2.8.2. Runway 13/31 does not have a lighting system.

2.8.3. Taxiway Lighting. Conventional taxiway lighting is installed on TWY Alpha, Bravo, Charlie, Foxtrot (between TWY Bravo and TWY Golf), Echo, and TWY Golf north of Foxtrot. Solar taxiway lighting is installed on TWY Foxtrot between TWY Alpha and TWY Bravo. Taxiway lighting is not available on TWY Delta, TWY Bravo north of the Foxtrot LOLA, or TWY Golf south of Foxtrot. Taxiing on unlighted taxiways during hours of darkness is prohibited. Locally based RPA operations are exempt if the RPA is equipped with operational IR camera(s). **NOTE:** Solar taxiway lights illuminate continuously during hours of darkness even when the airfield is closed.

2.8.4. Light Emitting Diode (LED) Obstruction Lights. LED obstruction lights are installed on numerous structures.

2.8.5. Operation of Airfield Lighting. Airfield lighting shall be operated IAW FAAO 7110.65 and DAFMAN 13-204V2.

2.8.6. During normal duty hours or whenever the Tower is operating, Creech Tower controls runway lighting. When Creech Tower is not operating, runway lighting can be remotely operated via radio control. See IFR Supplement for details.

2.9. Flight Planning.

2.9.1. All arrivals and departures must have a valid FAA or military flight plan on file.

2.9.2. Use Department of Defense (DoD), DD Form 1801, *DoD International Flight Plan*, or other authorized forms according to AFMAN 11-202, Vol 3, *Flight Operations* and DoD FLIP *General Planning*.

2.9.3. Original flight plans may not be accepted via radio.

2.9.4. Transient crews utilizing ForeFlight, Mattermost™, or TACC Flight Management flights plans will not be amended by AMOPS personnel. Transient crews must call home station to correct or modify original flight plans filed. **NOTE:** Aircrew must email a copy of the 1801 to AMOPS (**432oss.osaa.1@us.af.mil**).

2.9.5. Local units will submit a copy of standard approved DD Form 1801 flight plans for file by AMOPS. Local Units may call AMOPS to activate any of their designated DD Forms 1801 on file (DSN 384-0308/0309 or commercial (702) 404-0308/0309). Flight plans must be filed NLT two hours prior to proposed departure time. DD Form 1801 must be maintained on file by AMOPS in accordance with Air Force Records Disposition Schedule.

2.9.6. In lieu of submitting a hard copy flight plan to AMOPS, AMOPS mid-shift personnel will use the flying schedule and the most current callsign/beacon code chart to create stereo flight plans for local RPA flights.

2.9.6.1. Flight crews are still required to call AMOPS under the following circumstances.

2.9.6.1.1. Callsign/beacon code differs from In-Flight Guide (IFG) Chart.

2.9.6.1.2. Estimate time of departure changes by more than 2 hours.

2.9.6.1.3. Certificate of Authorizations (COAs) – must still file DD Form 1801 to the AMOPS org box at **432oss.osaa.1@us.af.mil**.

2.9.7. No-Flight Plan Arrivals. If ATC cannot locate a flight plan in the ATC system, ATC will advise AMOPS and tell the pilot to contact AMOPS on pilot-to-dispatch. AMOPS will attempt to verify a valid flight plan by contacting the appropriate Flight Service Station, Command Post, ATC and/or point of departure. If AMOPS is unable to verify the flight plan, a landing clearance will not be issued unless the aircraft declares an emergency.

2.10. Prior Permission Required (PPR).

2.10.1. The PPR process enables AMOPS to manage the flow of transient aircraft to match current airfield capacity. All transient aircraft require a PPR number except aircraft with a Distinguished Visitor (DV) Code of six or higher, aircraft emergencies, or diverts. Aeromedical Evacuation or Special Air Missions are exempt from official business only (OBO) restrictions but must obtain a PPR number for tracking/notification.

2.10.2. Contact AMOPS at DSN 384-0308/0309 or commercial (702) 404-0308/0309 to obtain a PPR.

2.10.3. If the aircraft does not have a valid PPR number, ATC will not issue landing clearance until authorized by AMOPS or the pilot declares an emergency. Services and parking may not be available for non-PPR arrivals.

2.10.3.1. Unscheduled Aircraft Arrivals. Unauthorized aircraft landing/unscheduled aircraft procedures are contained in AMOPS Quick Reaction Checklist (Unauthorized Aircraft Landing), Creech AFB Plan 13-207, *Unauthorized Aircraft Movement, Tampering, Theft or Hijack*, and AFI 10-1801, *Foreign Governmental Aircraft landings at United States Air Force Installations*.

2.11. Civil Aircraft Landing Requirements.

2.11.1. Except for emergencies, civil aircraft may not touch down unless the pilot-in-command has accomplished the requirements of AFI 10-1001, *Civil Aircraft Landing Permits.* Civil Air Patrol (CAP) missions (indicated by the use of CAP or PARD callsign) are considered military flights and are exempt from the requirements of this section.

2.11.2. The 432 WG/CC or designated representatives may approve or disapprove civil aircraft landing applications (DD Forms 2400, *Civil Aircraft Certificate of Insurance*; 2401, *Civil Aircraft Landing Permit*; and 2402, *Civil Aircraft Hold Harmless Agreement*). Contact AMOPS for assistance.

2.11.3. Civilian Aircraft Operations. Use of military airfield facilities by civil aircraft will be IAW AFI 10-1001, traffic permitting. Civilian aircraft are only authorized low approaches or full stop.

2.11.3.1. Civil Use of Military NAVAIDs. There are no restrictions on the use of the Creech TACAN.

2.11.4. Foreign Aircraft. Foreign aircraft requires Aircraft Landing Authorization Numbers (ALAN), All requests from HAF/A3OXR (DSN 575-5147) for a blanket ALAN will be given to the AFM and/or AOM for coordination and approval. When a foreign military/government aircraft requests a PPR number, ensure the following:

2.11.4.1. If there is an approved ALAN on file for the requester, issue a PPR number.

2.11.4.2. If there is not an approved ALAN on file for the requester, contact the SAF/IA office to see if they have it on file. If so, ask them to fax it and follow the procedures above to issue a PPR number.

2.11.4.3. If SAF/IA does not have an approved ALAN on file for the requester, give the caller the contact information for SAF/IA office to call.

2.11.5. Foreign Civil Aircraft Operations. Foreign civil aircraft operations will be IAW AFI 10-1001 and AFI 10-1801, *Foreign Governmental Aircraft Landing at United States Air Force Installations*. Refer any questions or requests concerning foreign civil aircraft operations to the AFM. For a foreign civil aircraft to operate at CAFB, the following will apply:

2.11.5.1. The aircraft must be exempt from the landing permit criteria (See AFI 10-1001) or has an authorized landing permit.

2.11.5.2. The aircraft must operate under the approved landing permit's authorized purpose of use.

2.11.5.3. The aircraft must obtain a PPR.

2.11.6. Unauthorized landings. Unauthorized landings will be categorized as emergency, inadvertent, or intentional and will be handled in accordance with AFI 10-1001 and appropriate ATC/AMOPS checklists. 432 WG/CC action may include armed Security Forces response, landing fees, punitive fees, aircraft detention, and supply and service charges.

2.12. Aero Club.

2.12.1. There is no Aero Club at Creech Air Force Base.

2.13. Airfield Construction.

2.13.1. Coordination. Any work on or near taxiways, runways, or ramps shall be coordinated through the AFM or designated representative. Construction or installation work affecting the use of airfield facilities and/or environment shall not be made without prior coordination with AMOPS.

2.13.2. Obstacle Penetration. If planned vertical construction or vertically prominent equipment (i.e., cranes, drills, and towers) on the airfield that has the potential to penetrate a flight safety zone, 432 SPTS/CES will coordinate for a TERPs review of the activity. Any unit that suspects a possible safety zone penetration should include AMOPS RSSII on their activity coordination package. All activity must obtain a TERPs review in accordance with 14 CFR Part 77, *Safe, Efficient Use and Preservation of Navigable Airspace and Air Force Instructions*.

2.13.2.1. Equipment that violates airfield clearance criteria during construction projects requires a waiver approved by the 432 WG/CC.

2.13.2.2. FAA Form 7460-1, *Notice of Proposed Construction or Alteration* and Air Force Form 505, *Request for Waiver to Airfield and Airspace Criteria* is required for equipment violating airfield clearance criteria during construction.

2.13.3. Responsibilities.

2.13.3.1. The Airfield Manager will participate in projects from planning phase through project completion to ensure contractors comply with contract obligations and airfield procedures. Airfield Management does not provide escorts for airfield projects.

2.13.3.2. 432 SPTS/CES, 432 WG/SE, and the Airfield Manager shall conduct joint inspections, with emphasis on waiver impact, of affected construction area(s) before and after completion of any major runway, taxiway, apron construction, exercise or changes affecting existing aircraft parking/taxi procedures.

2.13.3.3. If airfield projects are contracted, 432 SPTS/CES and 432 MSG/CONS shall ensure contracts comply with construction planning and safety requirements in Unified Facilities Code 3-260-01, *Airfield and Heliport Planning and Design Criteria*, Section 14, Construction Phasing Plan and Operational Safety on Airfields During Construction.

2.13.3.4. At a minimum, a meeting must be held at least 90 days prior to the start of a contracted airfield project. A representative from the following agencies shall be present; 432 MSG/CONS, 432 WG/SEF, 432 SPTS/CEN, 432OSS/OSA, and the contractor(s).

2.14. Airfield Maintenance.

2.14.1. Sweepers. A dedicated sweeper operator is available during the hours of flying Monday through Friday and can be reached via the Tower Net. The sweeper will complete specific shift areas of responsibility per the Creech Airfield Sweeping Plan but will respond to any area requiring immediate attention.

2.14.2. Vegetation. CAFB does not have mowing operations. If vegetation requires removal for non-waivered areas AMOPS will contact RSSII CE via service call.

2.14.3. AMOPS will contact RSSII CE via service call with issues that require immediate attention. Maintenance requirements will be placed in priority sequence. The higher priorities are based on the take-off, landings, and aircraft maneuverability issues while on ground and airfield lighting. Mid-level priorities are based on aircraft support including maintenance and shelter. The lowest priority deals with vehicular traffic and personnel access. In depth information regarding airfield maintenance can be found in the RSSII Creech Airfield Maintenance Plan.

2.15. Airfield Waivers.

2.15.1. Construction and air show waivers must be approved by the 432 WG/CC. HQ ACC/CD is the approval authority for all other waivers to airfield criteria. 432 SPTS/CES will process, coordinate, and submit airfield waiver and clear zone/accident potential zone siting requests to the appropriate approving authority IAW Unified Facilities Criteria (UFC) 3-260-01, UFC 3-535-01, AFMAN 10-1004, UFC 3-260-04 and AFH 32-7084 to include submitting a copy of wing-approved temporary waivers for construction activities, air shows, or temporary installation of an aircraft arresting system via the HQ ACC/A4CI SharePoint. An approved waiver and/or citing approval from the appropriate authority shall be secured before construction or alteration work is started.

2.15.2. 432 MSG Contracting (432 MSG/CONS) and 432d Support Squadron Civil Engineering Squadron (432 SPTS/CES) is responsible for ensuring contracts for airfield construction meet UFC 3-260-01, contain safety and marking guidance found in Engineering Technical Letter (ETL) 94-1, *Standard Airfield Pavement Marking Schemes*; AC 150/5340-1, *Standards for Airport Markings*; and AC 150/5370-2, *Operational Safety on Airports During Construction*.

2.15.2.1. 432 SPTS/CES will also hold meetings at least 1 month prior to airfield projects. The following agencies will be present: Airfield Manager or designated representative, 432 WG/SE, Fire Department, and contractor(s). The following agencies are recommended to be present: 432 WG Scheduling, 25 AMXS, 25 MXS, and 432 SFS.

2.15.2.2. All contractors working on the airfield will sign in and out at AMOPS prior to accessing and departing the airfield. Additionally, the Airfield Manager and AMOPS personnel will conduct an inspection of construction sites during daily airfield inspections and perform random spot checks to verify compliance with the established construction safety plan.

2.15.3. 432 SPTS/CES maintains approved airfield waivers. A copy of airfield waivers must also be on file with Airfield Manager and accessible to AMOPS personnel conducting airfield inspections and checks.

2.15.4. 432 SPTS/CES, 432 WG/SEF, and 432OSS/OSA must conduct a biennial review of waivers to airfield and airspace standards.

2.15.5. Waivers to Airfield/Airspace Criteria. Agencies proposing waivers to airfield criteria should contact the Nellis AFB Community Planner. **NOTE:** CE will submit the biennial airfield waiver review to the 432 WG/CC within 90 days of a new Wing Commander accepting command. CE and the Airfield Manager will maintain and ensure the accuracy of the airfield obstructions (waivers, permissible deviations, and exemptions) data on Creech's GeoBase Portal Map. CE will submit airfield waiver reviews of existing HQ-approved waivers to ACC, brief the Airfield Operations Board and the Facilities Board.

2.15.5.1. Agencies wishing to nominate proposals for waivers to airspace criteria should contact Nellis AFB Airspace Manager (57 OSS/OSM).

2.16. Aircraft Arresting Systems.

2.16.1. Barrier Types. E-5 arresting systems are installed at both ends of RWY 08/26. RWY 26 E-5 is located 35 feet into the departure end overrun, RWY 08 E-5 is 135 feet into the departure end overrun.

2.16.2. A BAK-12/14 is installed on the approach end of RWY 26 1,200 feet from the threshold and 1,400 feet from the threshold on the approach end of RWY 08.

2.16.3. RWY 13/31 does not have a barrier arresting system.

2.16.4. Configuration. The standard arresting system configuration is for the approach end E-5 to be disconnected and removed and/or BAK-12/14 in the down position during RPA training operations. Airfield overtime will not be incurred to reconfigure E-5 barriers at airfield closing.

2.16.5. Certification. Creech barrier certification will be coordinated through AMOPS IAW procedures outlined in **Attachment 4**.

2.17. Airfield Driving.

2.17.1. Flightline Vehicle/Pedestrian Operations. All Creech AFB airfield vehicle and pedestrian operations are addressed in DAFI 13-213 CAFB SUP, *Airfield Driving Instruction*.

Chapter 3

AIR TRAFFIC CONTROL

3.1. Air Traffic Control (ATC) Services.

3.1.1. ATC Staffing. The Control Tower will be staffed IAW DAFMAN 13-204V3 and applicable FAA regulations.

3.1.1.1. Tower Assigned Airspace.

3.1.2. Creech AFB is located on the southern edge of R-4806W. Creech AFB Tower Airspace includes Class D airspace outside the NTTR and airspace within the NTTR (See **Attachment 7**, **Figure A7.1**.). All aircraft will obtain permission from CAFB Tower prior to entering Tower-controlled airspace.

3.1.3. The Class D airspace extends from surface up to and including 5,700 feet MSL within a 5 NM radius of Creech AFB, excluding restricted area R-4806W.

3.1.4. Creech Tower-controlled airspace within R-4806W extends from the surface up to and including 7,000 feet MSL within the area depicted on **Attachment 7**, **Figure A7.1**.

3.1.5. Creech Tower Airspace Boundaries. Creech Tower airspace consists of portions of Range 64 in R4806, and Class D airspace located south of R4806. **NOTE:** RPA are authorized to use all parts of the Class D airspace.

3.2. Active Runway Selection.

3.2.1. The CIC will change the active runway in accordance with FAAO JO 7110.65, and coordinate the runway change with the SOF.

3.2.2. ATC will notify Nellis ATC Facility (NATCF), Nellis Command Post, Creech Weather, and AMOPS when the runway change is complete.

3.2.3. In the event of an unplanned runway closure or suspended operations to a runway, ATC will notify the above listed agencies including Nellis SOF and broadcast the runway configuration on Guard.

3.2.4. AMOPS will notify 99th Air Base Wing Command Post of the change.

3.3. Locally Assigned Frequencies.

Table 3.1. Frequencies.

Agency	UHF	VHF
ATIS	290.45	
Blackjack	377.80	123.55
Creech Ground	275.80	118.3
CAFB SFA/Fire Chief	285.525	
Creech SOF		148.175
Creech Tower	360.625	118.3
NATCF/Nellis APPCH	254.40	119.35
Nellis CP (Raymond 22)	381.3	
Pilot to Dispatch	372.2	

3.4. Local Aircraft Priorities.

3.4.1. Aircraft will be given priority for taxi, takeoff, and landing IAW FAAO JO 7110.65 and applicable supplemental publications. FAAO JO 7110.65 priorities will take precedence over local priorities, which are listed below. **NOTE:** these priorities are guidelines and should not take the place of controller judgment or SOF input, as required.

3.4.1.1. RPA.

3.4.1.2. DV/VIP.

3.4.1.3. Thunderbirds.

3.4.1.4. Transient Arrivals/Departures.

3.4.1.5. Large/Small scale Exercises.

3.4.1.6. Deployed Operational Units.

3.4.1.7. Non-contract Civil Aviation.

3.5. Opposite Direction Arrivals/Departures.

3.5.1. Authorization. Simultaneous opposite direction traffic applies to VFR, IFR, or a combination of aircraft. It is authorized as long as conditions in the FAAO JO 7110.65 and DAFMAN 13-204V3 and at least one of the following conditions are met:

3.5.1.1. Arrival versus Arrival - The first arriving aircraft must be on the runway prior to the second aircraft reaching 10 NM final to the opposite runway.

3.5.1.2. Arrival versus Departure, Low Approach, etc. Departing aircraft must be airborne and in a turn to avert conflict prior to the arriving aircraft reaching 10 NM final to the opposite runway.

3.6. Lost Radio Communications Instructions.

3.6.1. Manned Aircraft - Follow procedures specified in Flight Information Handbook.

3.6.2. RPAs - Call the Creech SOF via landline to coordinate with ATC.

3.7. Break Out/Go Around/Missed Approach Procedures.


3.7.1. Break Out. During instances of unintentional reduced separation of aircraft in the pattern or on approach, the PIC may elect to execute a Break Out maneuver to the south of the field. Additionally, ATC may direct a Break Out in order to ensure the safe separation of aircraft. This maneuver differs from a Go Around in that the aircraft executing this procedure should rapidly reposition to the south of the field in an expeditious manner, to a range of 0.25NM offset from the runway. Once offset, return to a ground track parallel to the runway and cross parallel to the intersection of runways 26 and 31 at or above 4,000' MSL. ATC will provide further directions to rejoin the pattern. If the PIC elects to perform a Break Out, inform tower via radio comms, *"TOWER, PANTHER01 BREAK OUT."* PICs will follow this call with intentions, "*TOWER, PANTHER01 4,000' REQUEST STRAIGHT AHEAD TO REJOIN THE PATTERN."*

3.7.1.1. Break Out does not apply to MQ-9s utilizing ATLC. This procedure is directed at higher performance aircraft capable of maintaining situational awareness and safety of flight while executing this maneuver (i.e., F-16, F-35, RQ-170, etc.).

3.7.1.2. Break out is utilized when a dangerous situation has developed and either ATC or the PIC wish to utilize this maneuver to avoid a potential mishap.

3.7.1.3. ATC may amend a break out call with additional directions, if required.

Figure 3.1. Break Out Maneuver.

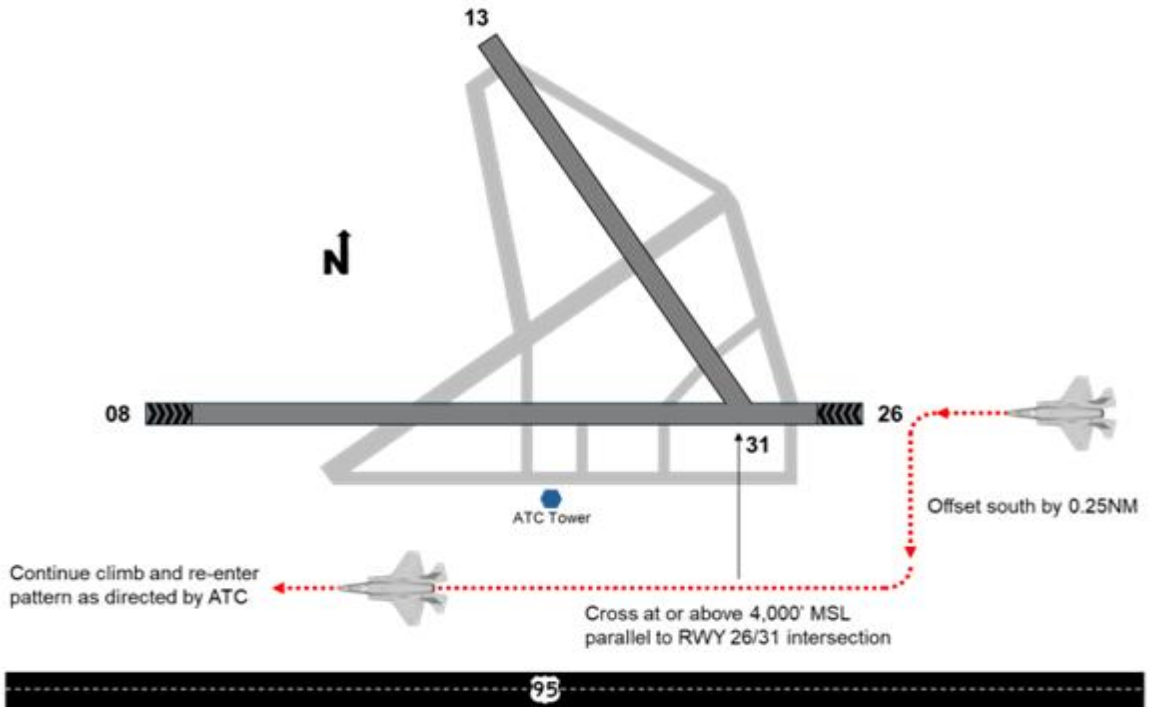

3.7.2. Go Around. A go around may be called by ATC or the PIC anytime a safe landing is not assured. Since Creech AFB does not have an instrument approach, RPAs should execute an appropriate climb from their position and continue to track straight ahead over the airfield. PICs will state their intentions to Tower, *"TOWER, REAPER11 4,100' REQUEST STRAIGHT AHEAD TO REJOIN THE PATTERN."* All other aircraft will execute appropriate Go Around procedures as defined by their MAJCOM and/or MDS-specific guidance.

3.7.3. Missed Approach. Creech AFB does not have any instrument approaches. Missed Approach procedures do not apply.

3.8. Civilian Aircraft Operations.

3.8.1. Use of military airfield facilities by civil aircraft will be IAW AFI 10-1001, traffic permitting. Civilian aircraft are only authorized low approaches or full stop.

3.9. Automated Terminal Information Service (ATIS) Procedures.

3.9.1. ATIS is available on UHF 290.45 and operates continuously but is only updated during tower operating hours.

3.10. SOF Operating from the Tower.

3.10.1. The SOF is the direct representative of the 432 OG/CC and focal point for command and control of flight operations. The SOF oversees flight operations. Decision authority is delegated to this position to accomplish the mission. CAFB SOF responsibilities are contained in AFI 11-418, 432WG Supplement, *Operations Supervision*. **NOTE:** The SOF may rely on unit Operations Supervisors for specific mission design series (MDS) expertise.

3.10.2. The SOF's primary location is in the Tower during MQ-9 operations.

3.10.3. IAW DAFMAN 13-204V3, paragraph 8.2., the SOF must not perform ATC functions or transmit ATC instructions or clearances to an aircraft. A person who commandeers an ATC frequency assumes responsibility for separation of aircraft. **NOTE:** CAFB SOFs are solely trained in MQ-9 operations and are responsible for all CAFB flight operations.

3.10.4. No SOF on duty. TDY aircrew operating from Creech when a local SOF is unavailable must provide a SOF (or equivalent). Waiver authority is 432 OG/CC.

3.10.5. Weather Recall. Weather recalls are initiated by the SOF in coordination with 432 OG/CC. Aircrew will terminate the mission and contact the SOF for instructions. SOF will contact TDY unit Operations Supervisor(s) to coordinate recall.

Chapter 4

GROUND OPERATIONS

4.1. General.

4.1.1. Preflight planning and briefing requirements will be in accordance with current directives. Unit operations sections and aircrews will file flight plans with AMOPS and confirm range space restrictions with NTTR Operations Center (Blackjack) in accordance with DAFMAN 13-212V1, ACCSUP, NTTRSUP, ADD A, *Range Planning and Operations*.

4.2. Controlled Movement Area.

4.2.1. The designated Controlled Movement Area (CMA) consists of the runway, overruns, and any area within 100 feet of the runway and overrun edge. Two-way radio communication and approval from ATC is required for access to the CMA.

4.2.1.1. VFR hold lines protect the runway from vehicle/aircraft, authorization to enter the CMA must be received from Creech Tower prior to entry. Unless otherwise authorized, only vehicles in direct radio contact with Creech Tower or escorted by a radio-equipped vehicle in direct radio contact with Creech Tower will be authorized in the CMA.

4.2.1.2. All vehicle operators on the airfield require a Certificate of Competency Airfield Driving card (AF IMT 483) and a Restricted Area Badge (AF Form 1199B). Authorization to enter the CMA must be received from ATC prior to entry.

4.2.1.3. Runway crossing when Tower is closed. Prior to driving on the airfield contact AMOPS at 404-0308/0309 to confirm the airfield is closed. Stop at the CMA Hold Line and request Tower approval to cross the CMA. The request will be repeated three (3) times on a LMR radio. If no response from the Tower, announce on the airfield LMR that *"Call Sign XXX is crossing RWY XXX at TWY XXX."* Report off at TWY XXX when crossing is complete. **NOTE:** Do not enter the CMA until you have verified it is closed.

4.2.2. Vehicles on the airfield shall be operated IAW DAFI 13-213 CAFB Supplement.

4.3. Emergency Procedures.

4.3.1. Light gun signals will be used for emergency purposes only. Vehicle operators experiencing radio failure while in the CMA will immediately exit the CMA and remain clear until reestablishing radio contact with Creech Tower.

4.3.2. In the event of radio failure and ATC requires the runway cleared, ATC will flash the runway edge lights from the lowest to the highest intensity until all vehicle operators working within the movement area are alerted. When continuous cycling of the lights is observed, vehicle operators will depart the CMA and transmit in the blind when all personnel/equipment are clear of the CMA. ATC will also solicit AMOPS and Security Forces assistance. AMOPS will be dispatched to notify vehicle operators who do not respond to light signals.

4.4. Taxiway And Ramp Restrictions.

4.4.1. See **Table 4.1** below for taxiway restrictions Area Planning 1 (AP/1) for more information. Contact the Airfield Manager for a copy at DSN 384-0211.

Table 4.1. Taxiway Restrictions.

Taxiway	Wingspan Restriction	Notes and Exceptions
A	None	AN-124 not authorized on Alpha
B	None	B North between LOLA restricted to 132’ or less
C	None	
D	132’	
E	132’	
F	None	
G	None	

4.4.2. AMOPS will assign all transient aircraft parking locations.

4.4.2.1. Parking aircraft on taxiways requires 432 OG/CC approval.

4.4.3. 432 OG/CC and 25 ATKW/A4 maintain final authority for all parking ramp assignments. Specific ramps are assigned to local organizations. The primary users of parking ramps are listed below in **Table 4.2**. See **Attachment 6** for parking locations.

4.4.4. Restricted/Controlled Areas on the Airfield. Aircraft Parking Areas 1 and 2 and Foxtrot LOLA are considered restricted areas when priority aircraft are present. Entry and exit will be through entry/exit control points only. The Main RPA Ramp (North Ramp) is a controlled ramp.

Table 4.2. Parking Areas.

Location	Primary User
Area 1	Transient Aircraft (432 OG/CC)
Area 2	Transient Aircraft (432 OG/CC)
Area 3	RPA (25 ATKW/A4), Transient (432 OG/CC)
Foxtrot LOLA	432 OG/CC
RPA LOLA East and West	25 ATKW/A4
Main RPA Ramp (North Ramp)	25 ATKW/A4, Transient (432 OG/CC)
1000 Series Hangars	25 ATKW/A4

4.4.5. The Airfield Manager, Civil Engineering, and Aircraft Maintenance are responsible for developing the Creech Aircraft Parking Plan. The parking plan will ensure wingtip clearances and jet blast safe distance requirements are maintained to protect personnel, aircraft, facilities, and equipment (see DAFMAN 13-204V2).

4.5. Aircraft parking spots on the North Ramp are restricted to RPA only. Exceptions must be coordinated with AMOPS at DSN 384-0308/0309.

4.5.1. Distance from centerline to nearest obstacle is 106 feet.

4.5.1.1. Distance from centerline to building 1131 is 50 feet.

4.5.1.1.1. Distance from centerline (Northeast S9) to obstacle is 48 feet.

4.5.1.2. Taxiway Delta is restricted to aircraft with wingspan 132 feet or smaller.

4.5.1.3. Taxiway Echo is restricted to aircraft with wingspan 132 feet or smaller.

4.5.1.4. Aircraft taxi is prohibited east of Sunshade 4 on the South Ramp Area 3.

4.5.2. Hazardous Parking. The Foxtrot LOLA is located on Taxiway Foxtrot between Taxiway Bravo and Runway 13/31. The RPA LOLA is located on the north end of Taxiway Bravo. It is the primary LOLA for RPAs and is restricted to RPA only. RPA use of the Foxtrot LOLA is permitted with prior coordination through Airfield Management.

4.5.2.1. Hot brake areas are located on Taxiway Alpha and Echo.

4.5.2.2. Hydrazine areas are located on Taxiway Alpha and Echo.

4.6. Taxi Procedures.

4.6.1. Aircraft Taxi Procedures. All aircraft will contact Creech Tower when ready to taxi. Advise Tower when planned takeoff spacing is more than 20 seconds between aircraft within a flight or of any deviation from standard departure procedures.

4.6.2. Portions of Taxiway Delta and the southern taxi lane south of Area 1 are not visible from the Tower. Taxi with caution.

4.6.3. Taxi spacing will be in accordance with MDS operating procedures. Landing helicopters have priority over taxiing aircraft. Do not direct engine exhaust at hovering or air taxiing helicopters.

4.6.4. All aircraft will give way to emergency response vehicles. If taxiing near an emergency power unit (EPU) activation or hydrazine spill, switching to 100 percent oxygen until clear of the area is recommended.

4.6.5. If radio failure occurs during taxi, turn on taxi lights and taxi to parking.

4.6.6. The normal taxi routes for heavy aircraft are to taxi from parking to the active runway via Taxiway Bravo or Charlie then back taxi to the appropriate runway.

4.6.6.1. To reduce FOD potential on taxiways after landing, large/heavy (C-130s, C-17s, KC/C-135s, E-3s and other four-engine aircraft) will taxi with outboard engines at idle or off unless operational necessity dictates otherwise.

4.6.6.2. Wide body aircraft with wingspans greater than 132 feet will not be allowed to taxi on Taxiway Echo. Transient Alert must ensure that sufficient wingtip clearance is available and provide wing-walkers. **NOTE:** 180-degree end of runway (EOR) turns for wide-body aircraft are at the discretion of the ATC.

4.6.6.3. Runway and adjacent taxiway operations will be suspended after heavy aircraft arrivals/departures until a FOD check can be accomplished by AMOPS. Heavy aircraft commanders will be aware of the hazards associated with jet blast and FOD when taking the runway and preparing for departure.

4.7. Aerospace Ground Equipment (AGE) Ready Line Sub-Pool.

4.7.1. AGE Ready Line Sub-Pool is a designated parking area for AGE that is ready for use; a sub-pool is a designated, temporary holding area used as a pickup/drop-off point for AGE.

4.7.2. AGE Ready Lines and Sub-Pools will utilize the following areas for ready line, sub-pool, storage, or maintenance activities:

4.7.2.1. The AGE ready line is situated on the concrete pad directly west of the aircraft sunshades located to the north-west of Hangar 1003. AGE will utilize the space parallel of the southern edge of sunshade 0 and will continue to the furthest northern edge of the concrete pad.

4.7.2.2. The AGE ready line for MJ-1 series munitions lift trucks only will be within the fenced area of building 1011 (SE corner) – this is to maintain positive control of Nuclear Certified Equipment assets.

4.7.2.3. The AGE ready line is located north of Hangar 1003 at the edge of the aircraft ramp.

4.7.2.4. The AGE ready line for non-powered assets will be within the fenced area of building 1011 (SW corner).

4.7.2.5. The AGE sub-pools are located between both RPA LOLA sunshades inside the white painted lines.

4.7.2.6. The AGE storage and maintenance space is located within the fenced area of building 1011 and bldg. 791.

4.7.2.7. Transient Alert AGE storage and maintenance space is located south of Alpha at building 91.

4.7.3. The Northern Taxiway Line on Taxiway Foxtrot between runway 13/31 and Taxiway Bravo is used when the Foxtrot LOLA is in use. It is restricted to aircraft with a wingspan of 75 feet or less. Aircraft will enter and exit this Northern Taxiway Line just east of the Taxiway Bravo/Foxtrot intersection and just west of the Runway 13/31 and Foxtrot intersection.

4.8. Towing/Maintenance Taxi Procedures.

4.8.1. Contact Creech Tower for permission to tow an aircraft that will enter an active taxiway or CMA. Ground movement of aircraft weighing less than 500,000 lbs. is available through Transient Alert using an MD-1 Universal Tow Bar and MB-2 Aircraft Tow Tractor.

4.9. Engine Run Procedures.

4.9.1. Power Restrictions. Engine runs can be conducted in parking spots under low power conditions. If increased power is required, the engine run will be done on the turn-around-pad with tail/exhaust facing to the north. Creech Tower will restrict engine runs where exhaust could impact RPAs. Coordinate all engine runs with Transient Alert and AMOPS. Contact Creech Tower for clearance to conduct engine runs. (RPA engine runs are exempt from the above power restrictions).

4.9.2. High-power engine runs must be conducted at the turn around pad near the departure end of RWY 26. Fighter aircraft may conduct engine runs above 80% power on Taxiway Alpha or Echo.

4.9.3. Engine runs are not authorized in Area 2 (in front of Airfield Management building).

4.9.4. Transient aircraft will observe quiet hours from 2200-0600L (PST) daily for full power engine test/run-up unless granted approval by 432 OG/CC.

Chapter 5

GENERAL FLYING PROCEDURES

5.1. Flying Operations.

5.1.1. The 432 OG/CC is delegated airfield operational control authority. Any deviations to this chapter require 432 OG/CC approval.

5.2. Local Flying Area/Designation of Airspace.

5.2.1. Creech Tower Airspace Boundaries. Creech Tower airspace consists of portions of Range 64 in R4806, and Class D airspace located south of R4806. **NOTE:** RPA aircraft are authorized to all parts of the class D airspace. (See **Attachment 7**, **Figure A7.1**.).

5.2.1.1. The Creech Tower airspace located within Range 64 extends from surface up to and including 7,000 feet MSL. The lateral space extends from the south border of R4806 to the N36-36.37 line and spans from Range 65D in the west to 36˚ 37.569'N 115 35.152'W in the east. For a visual reference, this line corresponds to the north side of the hill approximately 1.5 NM north of RWY 08/26 (N36-36.21 W115-40.09).

5.2.1.2. Creech Tower Class D Airspace includes the airspace (surface to 5,700ft MSL) south of the restricted area contained within a 5 NM arc centered on RWY 08/26 and Taxiway Bravo intersection (Centered at 36 35'11" N, 115 40'39" W - 303ft (92m) to the south, 1223ft (373m) to the west). **NOTE:** Aircraft below 5,700ft MSL to the south of the airfield will not penetrate within 5 NM of the airfield without prior Creech AFB Tower approval. Aircraft operating in Range 64C will not penetrate below 7,000ft MSL without Creech AFB Tower approval.

5.2.1.3. NATCF provides approach control services into Creech AFB.

5.2.1.4. High Terrain. Beacon Hill located 2 NM off the approach end of Runway 26 (3,809 feet MSL).

5.3. VFR Local Training Areas.

5.3.1. North Las Vegas (VGT) Training Area. A high-density VFR civilian aircraft training area is located north of the Las Vegas (LAS) 260º radial, west of Highway 95, and from approximately 15 to 30 NM from LAS VORTAC. The training area extends north to edge of Creech AFB Class D airspace and includes altitudes from the surface to 7,500 feet MSL.

5.3.2. IR 286. Aircraft operating on IR-286 between points A and B should be alert for aircraft leaving PIUTE Initial Approach Fix (IAF) (INS 243/21 DME) at 10,000 feet MSL on approach to Creech AFB. (See **Attachment 7**, **Figure A7.8**.).

5.3.3. Desert Rock Airfield-NV65 (DRA). Aircraft in the Low Altitude Tactical Navigation (LATN) West area must use caution for aircraft on approach to or departure from DRA located 20 NM west of Creech AFB. Use caution for frequent parachute drop operations in vicinity of DRA. (See **Attachment 7**, **Figure A7.9**.).

5.4. VFR Traffic Procedures.

5.4.1. VFR Weather Minimums. Creech AFB VFR minimums are 1,500ft Ceiling/3 Statute Miles Visibility.

5.4.2. VFR Traffic Patterns. (See **Attachment 7**, Figure **A7.10 - A7.12**.).

5.4.2.1. VFR Traffic Patterns. RWY 08/26 is the primary runway. Creech Field Elevation – 3,134ft.

Table 5.1. Pattern Altitudes.

Crewed Aircraft Patterns	MSL	AGL
Overhead/Initial	5,100’	1,966’
Rectangular	4,600’	1,466’
Light Aircraft/Helicopter Rectangular/Closed	4,000’	866’

Table 5.2. Aircraft pattern Altitudes.

RPA Patterns	MSL	AGL
RQ-170	4,600’	1,466’
MQ-9 ATLC Outside Downwind	5,100’	1,966’
MQ-9/RQ-170 Initial	5,100	1,966’
MQ-9 Outside Downwind	5,600’	2,466’
RQ-170 Outside Downwind	6,100’	3,066’

5.4.2.2. Standard Break. Initiate all breaks to the north unless directed otherwise. Intercept downwind at pattern altitude.

5.4.2.3. Overhead Patterns. Overhead patterns are identified by the terms “Overhead,” “Initial,” and “Break.” Fly initial to RWY 08/26 at 300 KIAS or less if not otherwise instructed. Night overheads are not authorized without 432 OG/CC approval (exception: locally assigned RPA).

5.4.2.4. Initial is defined as 1-3 NM from the approach end of the runway at 5,100ft MSL.

5.4.2.5. Outside downwind is designated for RPA lateral separation and transition to extended downwind, SFO pattern, and departure in the vertical.

5.4.2.6. Traffic pattern activities with live ordnance is prohibited. Aircraft with live ordnance will fly a straight-in approach to a full stop.

5.4.2.7. Aircraft with inert munitions are approved to conduct the minimum amount of pattern operations required to accomplish training or currencies.

5.5. Standard Climb-Out Instructions (Not applicable to RPA).

5.5.1. VMC.

5.5.1.1. RWY 26: Fly runway heading, turn left 1 NM past departure end of runway.

5.5.1.2. RWY 08: Fly runway heading, turn right 1 NM past departure end of runway.

5.5.1.3. Arrival versus Departure, Low Approach, etc. Departing aircraft must be airborne and in a turn to avert conflict prior to the arriving aircraft reaching 10 NM final to the opposite runway.

5.6. IFR Procedures.

5.6.1. Radar Traffic Patterns. N/A. Creech AFB is a VFR airfield.

5.6.2. Availability/Restrictions for Airborne Surveillance Radar Approaches and Precision Approach Radar Approaches/Monitoring. N/A. Creech AFB is a VFR airfield.

5.6.3. Local Departure Procedure.

5.6.3.1. Taxi and VFR climb-out instructions will normally be issued on Ground Control frequency.

5.6.3.2. Aircraft will depart VFR (pilot is responsible for terrain/obstacle avoidance). It is the pilot's responsibility to visually clear all obstacles when departing Creech AFB.

5.6.4. Radar Vector to Initial Procedures. Radar vectors to initial are available from NATCF, workload permitting.

5.6.5. RPAs Departing to National Airspace. RPAs with a filed IFR flight plan (DD Form 1801) will receive their assigned IFR squawk from Creech Tower. Aircrew will receive their IFR clearance from NATCF once airborne. Departures from Creech AFB will remain VFR.

5.7. Automatic Takeoff and Landing Capability/Automatic Takeoff Land (ATLC/ATOL).

5.7.1. Aircrew will advise tower when they plan to depart the pattern from the ATLC ground track/altitudes. While using ATLC, crews should set 4,600ft for the MSA. Only one aircraft with Lost Link Land enabled may have ATLC turned on at a time. Crews will not enable ATLC until they are cleared to land by Tower. (**NOTE:** Not applicable to RQ-170 ATOL).

5.7.2. RWY 26 Restrictions: 4600ft MSL high terrain at departure end.

5.7.3. RWY 08 Restrictions: 3800ft MSL high terrain at departure end. Crews should disengage ATLC prior to reaching Waypoint 10.

5.7.4. RWY 13 Restrictions: 3500ft Initial Lost Link Altitude (ILLA). Crews should avoid overflying populated areas to the max extent possible. Crews must verify TOLD to ensure the a/c will come to a stop 200 feet prior to the end of the runway.

5.7.5. RWY 31 Restrictions: 3500ft ILLA. Crews should avoid overflying populated areas to the max extent possible. Crews must verify TOLD to ensure the aircraft will come to a stop 200 feet prior to the end of the runway.

5.8. Special Procedures.

5.8.1. F-16 Simulated Flameout (SFO) and F-35 Precautionary Flameout (PFO) (See **Attachment 7**, **Figure A7.13**.). Provision of this service by ATC does not in any way absolve the pilot from his/her responsibilities.

5.8.1.1. SFO/PFO Restrictions. Practice SFO/PFOs will only be approved during the period between sunrise and sunset and when both NATCF and Creech Tower are operational. The reported ceiling will be at least 1,000 feet above the highest altitude to be flown, and flight and ground visibility will be at least 5 NM. SFO/PFOs will terminate in a low approach. A practice SFO/PFO may be disapproved by ATC because of traffic or other reasons either before or after the start of the maneuver. Tower controllers must have visual contact or see the aircraft on the tower radar display by 3 NM or the Straight-In SFO (SI-SFO) will be broken out. Break out instructions will be issued by Tower as necessary. Pilots will be aware of the potential conflicts within R-4806 since Creech Tower does not control the airspace above 7,000 feet MSL. Additionally, delays may occur due to ongoing RPA operations.

5.8.1.1.1. RPA Deconfliction Procedures. During RPA pattern operations, Creech Tower controllers will coordinate with Creech SOF/RPA pilot before approving SFO/PFO.

5.8.1.2. Overhead SFO/PFO. F-16 Alternate entry overhead SFO/PFOs are prohibited. Pilots will request the SFO/PFO and desired high key altitude (MSL) with NATCF or Creech Tower. Aircraft will provide Creech Tower with beacon code and squawk Mode 3-C while conducting SFO/PFO. The maximum high key altitude is 14,000 feet MSL. Minimum low-key altitude is 5,200 feet MSL. NATCF will transfer aircraft to Creech Tower by 5 NM for overhead SFO/PFO. All SFO/PFOs begin at High Key. NATCF is responsible for aircraft deconfliction above 7,000 feet MSL while SFO/PFO airspace is active.

5.8.1.2.1. Pilot phraseology: *"NELLIS CONTROL (OR CREECH TOWER), MIG 1, REQUEST OVERHEAD SFO/PFO HIGH KEY (MSL ALTITUDE), SQUAWKING(assigned beacon code)."* If approved, Controller phraseology: *"MIG 1, OVERHEAD SFO/PFO APPROVED, REPORT HIGH KEY."* Pilots will report "high key", "low key", and "base key, gear down, low approach" (Creech Tower will issue low approach clearance and/or other instructions when the pilot calls "low key").

5.8.1.2.2. SFO/PFOs may be flown to either RWY 08 or 26. All patterns will be flown to the north at airspeeds of 200-240 knots. Aircraft will remain within 4 NM of the approach end of the runway in use. Do not overfly the Munitions Storage Area located 1/2 mile to the north of the airfield abeam the approach end of RWY 08.

5.8.1.2.3. There will be no more than 3 aircraft under Creech Tower control during SFO/PFO operations. No more than 2 aircraft will perform the SFO/PFO procedure simultaneously. The second aircraft will not descend out of high key until the preceding aircraft reports low key unless the second aircraft is a flight member.

5.8.1.2.4. The CAFB Tower ATC cutoff point for SFO/PFOs is 10 NM. Arriving aircraft to the same runway shall proceed no closer than 10 NM to the runway until the SFO/PFO aircraft reports low key. Overhead patterns will not be allowed while SFO/PFOs are taking place.

5.8.1.2.5. SFO/PFO aircraft will have arriving aircraft in sight. If the SFO/PFO aircraft does not have the arriving aircraft in sight prior to 5 NM final, the SFO/PFO aircraft will not descend below base key. If no other aircraft are conducting an SFO/PFO, the pilot can climb to low key, high key, or break out. If a second aircraft is in an SFO/PFO, the first SFO/PFO aircraft will break out.

5.8.1.2.6. Break out instructions: Terminate SFO/PFO and maintain VFR. A pilot may request to break out after reporting low key.

5.8.1.2.7. Controller phraseology: *"MIG 1 BREAK OUT (reason if applicable) MAINTAIN VFR."*

5.8.1.3. Straight-in SFO/PFO (SI-SFO/PFO). Pilots will request SI-SFO/PFO approaches from NATCF on initial contact or NLT 15 NM from CAFB. If holding is required, expect to hold VFR or as directed by NATCF. Once cleared for the approach, proceed direct to 11 DME (10 NM) SFO/PFO final.

5.8.1.3.1. Pilot phraseology: *"NELLIS CONTROL, CALLSIGN, REQUESTSTRAIGHT-IN SFO/PFO, CREECH RUNWAY 08/26."* If approved, Controller phraseology: *"CALLSIGN, STRAIGHT-IN SFO/PFO RUNWAY 08/26 APPROVED, PROCEED DIRECT 10 MILE SFO/PFO FINAL (or other routing if necessary)."* If disapproved *"CALLSIGN, UNABLE STRAIGHT-IN SFO/PFO (reason, if able), say intentions."* If holding is required: *"CALLSIGN, HOLD (position and altitude), MAINTAIN VFR."*

5.8.1.3.2. Frequency change to Creech Tower will be NLT 13 DME (12 NM) final. Pilots will report position and altitude to Creech Tower on initial contact. When cleared for the approach, pilots will maneuver so as to arrive at 11 DME SFO/PFO final between 9,500 feet and 12,500 feet MSL. Altitude at 5 DME final will be between 7,000 feet and 10,000 feet MSL.

5.8.1.3.3. Pilot phraseology: *"CREECH TOWER, CALLSIGN, (altitude), (miles) STRAIGHT-IN SFO/PFO RWY 08/26."* Controller phraseology: *"CALLSIGN 1, CREECH TOWER, REPORT 10 MILE SIMULATED FLAMEOUT/PRECAUTIONARY FLAMEOUT FINAL."*

5.8.1.3.4. At 11 DME final: Pilot phraseology: *"CALLSIGN, 10 MILE SFO/PFO FINAL."* Controller phraseology: *"CALLSIGN, REPORT 5 MILE SIMULATED FLAMEOUT/PRECAUTIONARY FLAMEOUT FINAL."*

5.8.1.3.5. At 6 DME final: Pilot phraseology: *"CALLSIGN, 5 MILE SFO/PFO FINAL, GEAR DOWN, LOW APPROACH."* Controller phraseology: *"CALLSIGN, RUNWAY (08/26), WIND (direction/speed, if applicable), CLEARED LOW APPROACH (or other instructions as necessary)."*

5.8.1.3.6. If a breakout is required, the SI-SFO/PFO aircraft will be instructed to break out and maintain VFR. The controller will add instructions as necessary.

5.8.1.3.7. The ATC deconfliction cutoff point for the SI-SFO/PFO is 10 NM SFO/PFO final. When the pilot reports 10 NM, there shall be no preceding aircraft established on final/initial. When the pilot reports 5 NM, departures off the same runway must be airborne. To ensure aircraft remain clear of restricted airspace, pilots will follow a ground track to remain south of HWY 95. The intent is to ensure aircraft do not enter R-4806. Once established in tower airspace, the pilot may align with runway heading. If desired, pilots may coordinate with NATCF to begin the SI-SFO/PFO in R-4806, aligning with the runway heading at 11 DME. NATCF will accomplish required coordination with Blackjack Control for entry into R-4806. Pilots will not enter R- 4806 without clearance. **NOTE:** Due to run-in restrictions to avoid R-4806, all Creech SI-SFO/PFOs qualify as Alternate Entry.

5.8.2. Thunderbird Demonstration. When Thunderbird airspace over the field is "ACTIVE," Creech AFB Airfield/Tower is for emergency use only (See **Attachment 2**).

5.8.3. Helicopters.

5.8.3.1. Helicopter Operations. Traffic pattern altitude at CAFB for helicopters is 4,000 feet MSL. Advise Creech Tower of intended autorotation.

5.8.3.2. Hover operations are limited to paved surfaces for FOD control and are not authorized in the vicinity of any manned aircraft or RPA without Creech Tower authorization.

5.8.3.2.1. Alternate locations for hover operations include:

5.8.3.2.1.1. Local Site 4: N3635.70 W11538.80 (1 mile northeast of airfield).

5.8.3.2.1.2. Peanut Hill: N3636.34 W11540.22.

5.8.3.2.1.3. Black Rock: N3637.94 W11543.19.

5.8.4. Drop Zone Procedures. N/A.

5.8.5. Short Takeoff and Vertical Landing (STOVL) Operations. STOVL aircraft will perform normal rolling takeoffs/landings.

5.8.6. Functional Check Flight (FCF). FCFs will be conducted in R-4806 if airspace is available.

5.9. Reduced Same Runway Separation Procedures (RSRS).

5.9.1. RSRS Authority. RSRS will be conducted IAW AFMAN 11-202V3 ACCSUP.

5.10. Intersection Departures.

5.10.1. Intersection departures are authorized for RWY 08/26. Intersection departures for RWY 08 are at Taxiways Alpha, Bravo, and Foxtrot. Intersection departures for RWY 26 are at Taxiways Bravo, Charlie, and Delta (See **Attachment 6**).

5.11. Crosswind Runway Separation Procedures.

5.11.1. Runway 13/31 Procedures. Due to RPA characteristics and limitations (see and avoid capability, speed, and climb criteria), the following conditions must be met:

5.11.1.1. Simultaneous runway (RWY 08/26 and RWY 13/31) operations are not authorized.

5.11.1.2. Takeoff RWY 13/31 versus Arrival RWY 08/26: Departing RPA must be airborne and in a turn to avoid arriving aircraft prior to a fixed wing aircraft reaching 10 NM final or prior to a rotary aircraft reaching 5 NM final.

5.11.1.3. Land RWY 13/31 versus Departure RWY 08/26: Arriving RPA must have taxied clear of the runway prior to the aircraft beginning takeoff roll.

5.11.1.4. RWY 13/31 operations versus VFR Aircraft. Operations will be in accordance with FAAO 7110.65.

5.12. Formation Flying.

5.12.1. Standard and Nonstandard Formations. All fixed wing aircraft will fly standard formation unless the flight lead has requested, and ATC has approved a nonstandard formation. Departing flights of 3 or more will automatically be considered a non-standard formation.

5.12.1.1. The last element member of a flight in non-standard formation will squawk normal Mode 3-C. Flights entering the NTTR will squawk sequential Mode 3.

5.12.1.2. Flights departing the local airspace will have the trail aircraft squawk the first two digits of lead's Mode 3 and 00 (i.e., if lead's Mode 3 is 5411, the last aircraft squawks 5400).

5.12.2. Dissimilar Formation Flights. Nellis Based units and aircrew assigned or TDY to Creech AFB are authorized to fly in dissimilar formations during departures and recoveries. No more than four aircraft may fly in a dissimilar formation. Flight members (similar or dissimilar) will ensure safe runway separation is maintained. This does not preclude ATC from taking action in the event of an unsafe condition.

5.13. Protection of the 360-degree Overhead Pattern.

5.13.1. During periods when the overhead pattern is in use, Creech Tower will direct all departures to cross the departure end of the runway at or below 4,100 feet (See **Attachment 7**, **Figures A7.10**.).

5.14. Range Entry/Exit Procedures.

5.14.1. Entering NTTR Direct from Creech. Since the primary runway at CAFB resides within R-4806, aircrew will confirm range times, obtain range restrictions, and confirm ordnance expenditures with Blackjack prior to stepping to aircraft. When ready to taxi, request Creech Tower obtain departure instructions and squawk from NATCF and range entry clearance from Blackjack. When cleared by Creech Tower, taxi aircraft to the hold line and request takeoff clearance. Tower will respond with takeoff clearance and squawk. If departing CAFB directly into the range, request frequency change to Blackjack from Tower while in Tower-controlled airspace.

5.14.2. Entering NTTR Under ATC Control. Aircraft are provided ATC separation until entering the boundary of their scheduled Special Use Airspace at the ATC-assigned headings and altitudes. Aircraft may not depart assigned altitude until within the confines of the NTTR. Upon entering the NTTR, all aircraft in the flight will squawk their assigned tactical Mode 3-C and obtain range restrictions from Blackjack.

5.14.3. Ordnance Reporting. See AFMAN 13-212V1, ACCSUP, NTTRSUP, ADD A.

5.14.4. NTTR Clearance. See AFMAN 13-212V1, ACCSUP, NTTRSUP, ADD A.

5.14.5. Early Entry. See AFMAN 13-212V1, ACCSUP, NTTRSUP, ADD A.

5.14.6. Range Extensions. See AFMAN 13-212V1, ACCSUP, NTTRSUP, ADD A.

5.14.7. Training Area Operations. Aircrew must remain in their scheduled or assigned airspace. NATCF or Blackjack will transmit advisories on Guard when aircraft exceed the perimeter boundaries of the NTTR. Blackjack will transmit advisories for aircraft approaching boundaries on the range frequency if possible, and on Guard if required. Ground Control Intercept and Blackjack will assist aircrew to remain within assigned airspace.

5.14.8. Scheduling. NTTR Scheduling is the scheduling authority for special use airspace under the jurisdiction of the USAF Warfare Center. Blackjack is the scheduling agency for real-time airspace use. For up-to-date target information consult the NTTR target website at: **https://wwwmil.nellis.af.mil/units/range/targets/casFilter/Default.aspx**.

5.15. Unmanned Aerial System (UAS).

5.15.1. Small Unmanned Aerial System (sUAS) Operations (sUAS Category–Groups 1-3). 57 OSS/OSOP is the Point of Contact (POC) for sUAS (Drone) operations on or near Creech AFB assigned airspace.

5.15.1.1. All on-base drone operators must meet requirements specified in AFMAN 11-502 prior to conducting flight ops on Creech AFB.

5.15.1.2. General. Entities that desire to operate any sUAS on or near Creech AFB must contact 57 OSS/OSOP, via email, **57OSS.OSOP.OSOP@us.af.mil** or phone, 702-652-6490 NLT three (3) duty days prior to the proposed operation.

5.15.1.3. Requests for sUAS operations shall include site-specific procedures/supporting data, emergency procedures to terminate sUAS mission/recall airspace, landing location and altitude caps/limitations. In addition, provide the following minimum information:

5.15.1.3.1. Schedule of flight (date, time, and duration).

5.15.1.3.2. Location where flight will occur (map with coordinates and radius) to include sUAS start area (start area may be designated by OSOP so as to minimize impact to flying operations).

5.15.1.3.3. Requested altitude. Communication details (e.g. cell phone contact number).

5.15.1.3.4. Approval for sUAS flights is completely dependent upon mission impact.

5.15.1.3.5. 57 OSS/OSOP will coordinate approved sUAS/RPA operations with 432OSS/OSA as required to ensure timely ATC training/familiarization. **NOTE:** DoD UAS/RPA Categories are defined in AFMAN 11-502.

5.15.1.3.6. A sub-working sUAS group will be held following each quarterly AOB. The sUAS working group will review sUAS policies and processes for the installation and will be comprised of 432OSS, RSSII Airfield Operations, 432 SFS, and 99 ABW/CP personnel.

Chapter 6

EMERGENCY PROCEDURES

6.1. Emergency Declaration.

6.1.1. An emergency is a distress or urgency condition when aircraft or aircrew safety is questionable, and fire and rescue assistance and/or priority traffic sequencing is required to minimize the risk. If there is any doubt whether a situation is an emergency, it should be handled as an emergency. The pilot, SOF, ATC personnel, maintenance personnel, 432 OG/CC, or 432 WG/CC may declare an aircraft emergency.

6.2. Crash Alarms Systems.

6.2.1. Primary Crash Alarm System (PCAS). ATC activates the PCAS. Agencies on the primary network include Flight Medicine/Ambulatory Services, Fire Department, and AMOPS.

Table 6.1. PCAS Agencies.

Agency	Number
Creech Tower Recorded Lines	404-0349/0283
Emergency Control Center Recorded Lines	404-0213/0214
AMOPS	404-0308/0309
Medical Clinic	404-1142

6.2.1.1. Personnel receiving information on the PCAS shall acknowledge receipt by stating their initials.

6.2.1.2. If any agency does not answer the crash phone when activated, attempt to contact them by telephone (phone numbers available in **Table 6.1**.). This will ensure the reason for their not answering was other than line/circuit failure. ATC will make an entry in the Facility Log explaining the negative response and findings.

6.2.2. First-In Aircraft Emergency System (AES).

6.2.2.1. This system has not been approved for ATC Tower use by the FAA or Air Force Flight Standards Agency (AFFSA). AFFSA has placed the onus of operating the AES on Creech AFB with the stipulation that the AES is to be used only as an additional information channel and will not be utilized as a replacement of the PCAS.

6.2.2.2. Creech Tower controllers will utilize the PCAS as the primary means of communication. If time permits tower will utilize the AES to notify the Creech Fire Stations.

6.2.2.3. Creech Tower Controller in Charge (CIC) will contact the Creech Fire Department Chief , time and workload permitting, for any AES issues.

6.2.2.4. The 432OSS will provide no financial responsibility or funding for the AES system. All financial responsibility for the AES system resides with the Creech Fire & Emergency Services (CF&ES). All equipment will be provided by CF&ES. CF&ES will be responsible for troubleshooting, maintaining, updating/upgrading, and replacing the AES system as needed. System training and associated costs are the responsibility of CF&ES.

6.2.3. Secondary Crash Net (SCN). AMOPS activates the SCN whenever the primary crash net is activated. If AMOPS receives emergency information from a source other than the Control Tower, they will immediately activate the Secondary Crash Net and then pass the information to Creech Tower. If the Secondary Crash Net is inoperative, AMOPS will call each agency by telephone. Agencies on the SCN are 432OSS/CC, RSSII Site Manager, Barrier Maintenance, Safety, Transient Alert, MOCC, Weather, Nellis Command Post, Civil Engineering, Security Forces, Alternate MOCC, and Ambulatory Services. If the Secondary Crash Net is inoperative, AMOPS will call each agency by telephone.

6.2.3.1. IAW DAFMAN 13-204V2, the SCN will only be used to relay information critical to aircraft and airfield operations. Use other forms of communication to relay noncritical base information. Requests for additions/deletions to SCN must be coordinated through 432OSS/OSA and forwarded to the 432OSS/CC for approval/disapproval.

6.2.3.2. AMOPS will activate the SCN immediately following primary crash phone emergency notification.

6.2.3.3. AMOPS will test the SCN daily between 0800 – 0830L during normal operating hours or immediately upon opening during other than normal airfield operating hours.

6.2.4. Fire Department Land Mobile Radio Crash Net. Tower will monitor the crash net during emergencies and as needed/requested.

6.2.4.1. Tower will notify the Fire Department when on and off the Crash Net.

6.2.4.2. During emergencies, or when otherwise deemed necessary, the Fire Department will notify the Tower to monitor the crash net.

6.3. Emergency Response Procedures.

6.3.1. Activation of the PCAS. When an in-flight or ground emergency is declared, ATC will activate the PCAS. Activation of the PCAS will not be delayed for incomplete information. ATC will pass additional information as it becomes available. If the PCAS is inoperative, Creech Tower will notify all agencies on the PCAS by the most expeditious means available.

6.3.2. ATC shall activate the PCAS for the following:

6.3.2.1. Aircraft Emergencies or Mishaps on or off base.

6.3.2.2. Simulated aircraft emergencies/mishaps on or off base. For simulated accidents, ATC shall precede and conclude transmission with “EXERCISE, EXERCISE, EXERCISE.”

6.3.2.3. Hijack/theft alerts.

6.3.2.4. Hot Brakes.

6.3.2.5. No Radio (NORDO)/Lost Link Arrivals.

6.3.2.6. Jettisoning of external stores.

6.3.2.7. Unauthorized aircraft landings.

6.3.2.8. ATC Tower evacuations.

6.3.2.9. When deemed necessary by the CIC.

6.3.3. Aircraft Emergency situations may be declared by the PIC or CIC.

6.3.4. In-flight and Ground Emergencies. The SOF is the directing authority for all In-flight emergencies. The position may be assumed by the 432 OG/CC, 432 OG Brick Holder, or the 432 WG/CC at any time.

6.3.5. Ground Emergencies. The on-scene Incident Commander (IC) for ground emergencies is the Deputy Fire Chief/designated representative. The emergency becomes a ground emergency immediately when the aircraft is stopped on the ground. When communication between ATC and the aircrew are no longer required, ATC will direct the aircrew to contact the IC on the Creech discrete emergency frequency, 285.525. The IC makes the decision when the emergency is terminated on the ground. The IC is the designated responsible party until relieved or the incident is terminated.

6.3.5.1. Single Frequency Approach (SFA) Procedures. The primary discrete emergency frequency for Creech AFB is 285.525. Aircraft must remain on the assigned frequency until the emergency is terminated.

6.3.6. RPA Emergency Procedures. See **Attachment 5** for RPA Emergency Procedures.

6.3.7. Lost Communications Instructions. Follow procedures specified in Flight Information Handbook.

6.3.8. Actions Following an Aircraft Mishap.

6.3.8.1. The Airfield Operations Manager (AOM) will complete all aircraft mishap/incident actions IAW AFMAN 13-204V1.

6.3.8.2. ATC will initiate checklists and ensure completion of mishap notification checklists.

6.3.8.3. AMOPS will initiate and ensure the completion of all appropriate checklists, the AFM will compile all paperwork necessary for the Safety Investigation Board (SIB).

6.3.8.4. ATC and AMOPs will not disclose any information related to aircraft mishaps/incidents to any outside agency, all information/checklists/documentation must be requested through the AOM.

6.3.9. Emergency Termination. Only the on-scene IC will terminate the emergency and will notify ATC. ATC will relay the emergency termination time to AMOPS.

6.3.10. Runway Check Following Emergencies.

6.3.10.1. Runway operations will be suspended after an inflight emergency aircraft touches down and will not be resumed until AMOPS has inspected the landing area for damage/FOD and declared runway operations resumed. However, if the SOF waives the FOD check, do not suspend runway operations and refer to **paragraph 6.3.10.3** below.

6.3.10.2. In the case of an airfield ground emergencies, this check shall encompass all the affected areas.

6.3.10.3. The SOF may waive requirement for runway inspection for 432 WG aircraft following an emergency if, in his/her judgment, a FOD check is unnecessary. In such cases, SOF assumes responsibility for runway FOD condition until the next runway inspection/check is conducted. AMOPS will document SOF waivers in the AF Form 3616, Daily Events Log.

6.4. Closed Airfield.

6.4.1. If an aircraft must land when the airfield is closed, the Fire Department is manned 24/7 and will respond to aircraft emergencies.

6.4.2. Aircrew will inform NATCF of intention to recover to Creech AFB. NATCF will inform the 99 ABW Command Post of aircraft inbound to Creech AFB. 99 ABW Command Post will advise Nellis-Creech Fire Department of inbound aircraft. It is the aircrew's responsibility to ensure the runway is suitable for landing.

6.4.3. Creech Fire Department will disengage the aircraft from the arresting cable (if engaged) and pin and chock the aircraft on the runway.

6.4.4. AMOPS will publish a NOTAM in the event the runway is under construction while it is closed to prevent aircraft from landing on an unsuitable runway.

6.5. External Stores Jettison Area Procedures.

6.5.1. If possible, jettison external stores on range in restricted airspace. See AFMAN 13-212V1, ACCSUP, NTTRSUP, ADD A for further guidance.

6.5.2. Drag chutes will be retained until parking when practical. Otherwise, jettison at the discretion of the Tower Controller.

6.6. Emergency Arresting/Barrier Gear Procedures.

6.6.1. Arresting System Engagement Procedures. See **paragraph 2.16.4**.

6.6.2. Post-Barrier Engagement. Ensure rapid reopening of the runway after an arresting system engagement, follow these procedures:

6.6.2.1. To preclude damage to personnel and equipment, all aircrew actions (up to the point of being cleared to taxi) will be as directed by the ground IC via UHF radio or via hand signals as shown in AFMAN 11-218, *Aircraft Operation and Movement on the Ground*.

6.6.2.2. If cable disengagement cannot be accomplished or the aircraft is unable to taxi clear of the runway safely, the aircraft will be shut down on a signal from the IC. The recovery team will tow the aircraft clear of the runway.

6.6.2.3. Aircrew will stay in the cockpit during the towing operation to facilitate expeditious runway reopening.

6.6.2.4. The pilot will provide estimated aircraft gross weight and speed at time of cable engagement to the SOF or the Fire Department prior to leaving the scene.

6.7. Hot Brake Area and Procedures.

6.7.1. The designated hot brake area is the west end of Taxiway Alpha and east end of Taxiway Echo (See **Attachment 6**).

6.7.2. ATC will activate the PCAS/AES unless already activated for an emergency condition affecting the aircraft in question. ATC will direct the aircraft to a designated hot brake area and turn the aircraft into the wind. The PIC will determine if the brakes will be checked, or the aircraft will be shut down.

6.8. Abandonment of Aircraft.

6.8.1. Controlled Bailout. The primary controlled bailout area is Range 64B (INS 351/15). Should it become necessary to use this area, proceed to Range 64 at 15,000 feet MSL, (8,000 feet MSL for non-ejection seat equipped aircraft) turn to a heading of 345° and eject or bailout. Secondary controlled bailout area is over Range 63 (INS 087/39). The ejection or bailout altitudes and heading are the same as described for the primary bailout area.

6.8.1.1. Blackjack will plot aircraft coordinates and coordinate rescue operations.

6.9. Aircraft Impoundment.

6.9.1. Impoundment handling of aircraft will require coordination between 25th Attack Wing/A4, CAFB SOF, AMOPS, Transient Alert, and 432 WG/SE. Impounding agency will notify 99 ABW Command Post of any impoundment activity.

6.10. Emergency Locator Transmitter (ELT) Response Procedures.

6.10.1. Response to ELT Signals. Aircrew will inform appropriate ATC agencies upon detection of an emergency signal and assist in locating the source if possible.

6.10.2. ATC will:

6.10.2.1. Upon detection or notification of an ELT signal, contact NATCF to determine if a possible emergency exists and if assistance is required.

6.10.2.2. Advise 99 ABW Command Post of the time the signal was detected and the frequency.

6.10.2.3. Contact the 99 ABW Command Post and NATCF upon termination of the signal.

6.10.3. NATCF will:

6.10.3.1. Upon detection or notification of an ELT signal, inform the appropriate Air Route Traffic Control Centers (ARTCC) and Creech Tower.

6.10.3.2. Report termination to appropriate ARTCC.

6.10.3.3. Inform Creech Tower of termination of ELT.

6.10.4. 99th Air Base Wing Command Post will:

6.10.4.1. Upon detection or notification of an ELT signal, notify 57 WG Maintenance Operations Control (MOC) and 57 WG Life Support standby personnel during non-duty hours, or squadron life support during duty hours.

6.11. Hung Ordnance Procedures.

6.11.1. Unexpended Ordnance Recovery. There are no restrictions for aircraft with unexpended training ordnance, self-protection flares, captive missiles, or internally carried munitions when bomb bay doors are closed.

6.11.1.1. Aircraft configured with hung external/internal inert or live ordnance will fly a full stop straight-in approach to the active runway.

6.11.2. Creech Hung Ordnance Recovery. The following procedures apply to all recoveries with hung secure or hung unsecured ordnance.

6.11.2.1. Safe all armament switches and fly a straight-in approach with chase if available. All aircraft recovering at Creech with hung ordnance will be directed to the Foxtrot LOLA and park facing west. The pilot will avoid overflying populated areas with hung freefall and avoid pointing at populated areas with hung or misfired forward firing ordnance.

6.11.2.2. Declare an IFE for all hung or misfired ordnance, to include forward firing, live and unsecured.

6.11.2.3. Contact the SOF with status and recovery plan.

6.12. Flame Out Procedures.

6.12.1. See **paragraph 5.8.1**.

6.13. Precautionary Approaches.

6.13.1. Precautionary approaches will be provided normal sequencing until such time as the situation dictates otherwise.

6.14. F-16 Hydrazine Procedures.

6.14.1. For any ground or in-flight EPU activation or suspected hydrazine leak, the pilot will accomplish applicable checklists.

6.15. Request for Explosive Ordnance Disposal (EOD) assistance.

6.15.1. EOD assistance is only available from Nellis AFB. Requests for EOD assistance should be coordinated through 99 ABW Command Post. Expect a minimum of one-hour response time. Any request for EOD support to aircraft loaded with munitions or aircraft weapon systems will require the aircraft be shut down prior to EOD personnel approaching the aircraft.

6.16. Downed Aircraft and Search and Rescue (SAR) Procedures.

6.16.1. Use the following procedures when providing Rescue Combat Air Patrol (RESCAP) for a downed aircrew.

6.16.2. Broadcast an emergency distress call on Guard. Immediately following the emergency distress call, provide the following information to NATCF, Blackjack, 99 ABW Command Post, or the SOF:

6.16.2.1. Location of the crash site (TACAN Radial/DME, INS/GPS coordinates, geographic references).

6.16.2.2. Call sign of downed aircraft.

6.16.2.3. Other pertinent information.

6.16.3. Blackjack will become the Rescue Coordination Center for all SAR inside and around the NTTR for DoD assets. NATCF will provide all ATC services.

6.16.4. The IC will remain in charge of the situation until relieved by another aircraft or reaching bingo fuel. Have all nonessential aircraft return to base (RTB). A high RESCAP may be used to provide a radio relay.

6.16.5. Contact the downed aircrew on Guard; then coordinate a frequency change to 282.8.

6.17. Wind Limitations on Control Tower.

6.17.1. When wind velocities meet or exceed 60 knots, evacuate the Control Tower.

6.17.2. When the wind forecast exceeds 60 knots, ATC will provide notification, as required to the SOF.

6.18. Alternate Facility/Evacuation Procedures.

6.18.1. Tower Evacuation Procedures. The following will be accomplished, time permitting, when it becomes necessary to evacuate the Creech ATC Tower due to fire, bomb threat, high winds (60 knots), power outage etc.

6.18.1.1. Notify NATCF, 99 ABW Command Post, AOM, Creech and Nellis SOF, of situation and intentions.

6.18.1.2. Broadcast on all frequencies and the crash phone that the Tower is being evacuated.

6.18.1.2.1. Exit the Tower via the stairs (Do not use the elevator).

6.18.1.3. Assemble in Building 83 (AMOPS) and notify Creech Security Forces and Fire Department of your arrival and reason for evacuation. If Building 83 is evacuated, assemble at alternate location Building 1018.

6.18.1.4. Tower personnel will broadcast their evacuation intentions on all available frequencies to include Guard. Creech Tower airspace outside of R-4806 reverts to class E airspace when the Tower is evacuated.

6.18.1.5. Creech vehicle traffic will immediately exit the runways and remain off the runway until Tower is reestablished.

6.18.1.6. If the Tower experiences a total power failure at night, Creech Tower personnel will request an airfield lighting technician be dispatched to the lighting vault.

6.18.1.7. If landing at CAFB is the only option (IFE, alternate closed, low fuel, etc.), pilots will be responsible for their own separation. Pilots will broadcast on UHF Guard their intention to land. Aircraft will clear the active as soon as practical. Ground separation will be the responsibility of the PIC.

6.18.1.8. All landings will be to a full stop. Practice approaches are not authorized.

6.18.1.9. SFO/PFO patterns will be discontinued.

6.18.1.10. ATC and or AMOPS will relay changes in airfield status and NOTAM information to NATCF.

6.18.2. Evacuation of AMOPS Facility. The following will be accomplished, time permitting, when it becomes necessary to evacuate building 83 due to fire, bomb threat, power outage etc.

6.18.2.1. Notify the Tower (hotline/or landline).

6.18.2.2. If time/emergency permits activate the SCN and inform all agencies that AMOPS and Weather are evacuating the building.

6.18.2.3. If time/emergency does not permit for SCN activation contact Nellis Command Post at 652-2446.

6.18.3. AMOPS will relocate to Building 1018. AMOPS Shift Lead or AFM will ensure all duties are accomplished IAW AMOPS QRC #13 and logged on the AF Form 3616.

Chapter 7

SPECIAL OPERATIONS

7.1. Hazardous/Dangerous Cargo.

7.1.1. Aircraft carrying hazardous materials shall park on the LOLA located on Taxiway Foxtrot between Taxiway Bravo and Runway 13/31.

7.1.2. Dangerous/Hazardous Cargo must be approved during PPR notification. Limited services are available.

7.1.3. ATC will direct aircraft to avoid overflight of "hot cargo" mission aircraft and convoys.

7.1.4. Any agency aware of inbound explosive-loaded aircraft shall immediately notify AMOPS.

7.1.4.1. AMOPS will notify the following agencies 24 hours prior to commencing explosive cargo loading, unloading, or transport: Transient Alert, Fire Emergency Services, Security Forces, Weapons Safety, 99 ABW Command Post, and Tower.

7.1.5. When parking aircraft in explosive-sited areas, do not exceed the Net Explosive Weight for Quantity Distances (NEWQD) listed for the area.

7.1.6. Refer to 432 WG/SEW CES Tab D-8 map for additional NEWQD.

7.2. Live/Inert Armament.

7.2.1. ATC will notify AMOPS as soon as practical of divert arrivals with hot armament. Aircraft with hot armament (live munitions) will taxi to the Foxtrot LOLA.

7.2.2. RPAs may arm/de-arm in the chocks at the LOLAs instead of taxiing to the specified arm/de-arm areas. All other aircraft will comply with using the appropriate arm/de-arm areas.

7.2.3. The arm/de-arm areas are located on the southwest end of Taxiway Alpha and the southeast end of Taxiway Echo. Taxiway Bravo North may be used for RPA de-arm only.

7.2.3.1. RPAs with only inert training munitions onboard maybe loaded/unloaded in any aircraft parking area.

7.3. Distinguished Visitor (DV) Procedures.

7.3.1. Security. For security reasons, DV arrival and departure coordination shall be limited to the DV code, aircraft call sign, and pertinent movement/position information, and ATC instructions. A DV's name, rank, title, duty position, and business shall never be transmitted.

7.3.2. Arrival Notification. ATC will notify AMOPS as soon as the DV flights "inbound". AMOPS will notify 99 ABW Command Post and Transient Alert immediately after receiving the "inbound" from ATC.

7.3.3. AMOPS will use all procedures contained in the QRC Checklist.

7.4. Aeromedical Airlift Support.

7.4.1. Arrivals. AMOPS will provide type aircraft, estimated time of arrival (ETA), parking location, total patient load information i.e., number of litters, ambulatory, and pertinent additional information to ATC, Med Aid Clinic, 99 ABW Command Post, Transient Alert, and Fire Department. ATC will inform AMOPS when the aircraft arrives in the local area and will provide ATC priority handling according to FAAOJ 7110.65.

7.4.2. Departures. AMOPS will relay the estimated time of departure (ETD), patient load information i.e., number of litters, ambulatory, and other pertinent information to the ATC, Med Aid Clinic, 99 ABW Command Post, and Fire Department.

7.4.3. Coordination. Inbound and outbound aeromedical evacuation flights take priority over local training operations. The SOF should work with ATC to coordinate an appropriate gameplan to ensure there are minimal delays to these critical operations.

7.5. Fuel Dumping.

7.5.1. Fuel dump location and altitude is at the discretion of the aircrew with prior coordination with the appropriate ATC facility to provide required separation.

7.5.2. Aircrew should avoid populated areas, agricultural areas, or water sources.

7.5.3. Except in an emergency, aircraft commanders shall notify the SOF and ATC prior to dumping fuel.

7.6. Exercises.

7.6.1. The 432OSS/OSA AOM and RSSII Contracted Airfield Manager must be briefed at least 30 days in advance of any exercise or inspection such as an Combat Readiness Exercise (CRE), Combat Readiness Inspection (CRI), or Major Accident Response Exercise (MARE) that involves Airfield Operations personnel or airfield facilities. The AOM and Amentum Operations Manager must approve, in advance, exercises that include relocating airfield operations personnel to alternate facilities or to shelter in place areas.

7.6.2. The Air Traffic Manager must ensure ATC facility participation does not degrade services. The CIC may interrupt or discontinue facility participation in any exercise if flight safety is in question or it interferes with the recovery of emergency aircraft.

7.7. Unusual Maneuvers.

7.7.1. 432 WG/A589 will submit requests for flybys, aerial demonstrations, and simulated airfield attacks to the 432 OG/CC for approval.

7.7.2. 432 WG/CC approval is required for any deviations of airfield clearance criteria IAW UFC 3-260-01, paragraph B1-2.3.4, AFMAN 11-246, *Air Force Aircraft Demonstrations*, and AFMAN 11-246V1, *Air Force Fighter Aircraft Demonstrations (A-10, F-16, F-22, F-35)*.

Chapter 8

WEATHER SUPPORT AND PROCEDURES

8.1. General.

8.1.1. The 432OSS/OSW is the official weather information agency and provides weather services to the 432 WG and other units assigned to Creech AFB NV. The Davis-Monthan 25 OWS is the back-up provider of weather services in emergencies. Basic concepts and procedures are outlined in Air Force and Air Combat Command directives.

8.1.2. Weather Recall. Weather recalls are initiated by the SOF in coordination with the 432 OG/CC. Aircrew will terminate the mission and contact the SOF for instructions. SOF will contact TDY unit Operations Supervisor to coordinate recall.

8.2. Designators.

8.2.1. All weather products disseminated by or for Creech AFB will use KINS as the ICAO location indicator. The World Meteorological Organization (WMO) index number is 72387.

8.3. Shortfalls and Limiting Factors.

8.3.1. None.

8.4. Operating Hours and Contact Information.

8.4.1. Staff services are available from 0830-1600L, Monday through Friday, except federal holidays and authorized down days. 432OSS/OSW leadership can be contacted at DSN 384-0339/Commercial 702-404-1227 or DSN 384-1254/Commercial 702-404-1254. The Nellis Command Post disseminates weather watches and warnings to base agencies 24 hours per day when directed by 25 OWS or 432OSS/OSW.

8.4.2. Weather forecasters are available in the local Weather Flight to provide weather services when the airfield is open (see **paragraph 1.5**.). Additional weather support outside of these hours must be coordinated with 432OSS/OSW leadership in advance to ensure personnel availability.

8.4.3. 432OSS/OSW local weather services can be reached at the following numbers: DSN 384-1463/Commercial 702-404-0559 or DSN 384-1723/Commercial 702-404-1723.

8.5. BIFRÖST.

8.5.1. The 432OSS/OSW is the only agency on Creech AFB that receives weather data (i.e., watches, warning, advisories, and forecasts) via BIFRÖST. All supported agencies on Creech AFB receive weather data from the 432OSS/OSW or Nellis AFB Command Post via telephone and/or LAN. In the event the 432OSS/OSW must evacuate, supported agencies will continue to receive weather data via telephone and/or LAN.

8.6. Weather Dissemination and Coordination Procedures.

8.6.1. Dissemination of Observations. The 432OSS/OSW is considered an automated weather station. The Air Force Weather approved observation dissemination system FMQ-19 will take and disseminate observations 24 hours a day, 7 days a week.

8.6.2. Runway 13 wind determinations are derived from the departure end of the runway.

8.7. Hazardous/Severe Weather Notification.

8.7.1. Weather notification and lightning response procedures are located in CAFBI 15-129, *Weather Support*, CAFB AMOI 13-204, *Airfield Management Operating Instruction*, and CAFB13-204, *Airfield Management Standard of Procedures*.

8.7.2. 432OSS/OSW or 25th Operational Weather Squadron (25 OWS) at Davis-Monthan AFB AZ will notify AMOPS, SOF, and 432 MOCC of any hazardous weather condition. AMOPS will notify the 432OSS/CC, 432 WG/SE, Security Forces, Transient Alert, Civil Engineering, Fire Department, Barriers, Contract Site Manager, Deployed Operations, Fuel, and the Creech Tower of hazardous weather conditions. AMOPS will activate the Secondary Crash Net for all weather warnings.

8.7.3. When 432OSS/OSW or 25 OWS declares "lightning within 5 NM", take the following action:

8.7.3.1. Aircraft in the Chocks. Aircraft at their parking space will be expeditiously shut down after which ground personnel will take shelter. The decision to remain in the aircraft or seek shelter rests with the pilot in command.

8.7.3.2. Taxiing Aircraft. Aircraft taxiing to arming or during arming will taxi back to the chocks. Armed aircraft on the ground will hold in the appropriate arm/de-arm area. Contact the SOF to determine the anticipated length of delay.

8.7.3.3. Airborne Aircraft. Creech Tower will make hazardous weather notification to all aircraft on Guard frequency. The SOF will then determine the proper course of action and direct aircraft to land, if appropriate. The SOF, in coordination with the 432OSS/OSW, should consider weather cell location and direction of movement. Without additional guidance from the SOF, airborne aircraft expect to either hold or divert.

8.8. Extreme Weather Operations.

8.8.1. Creech AFB's location and the surrounding desert environment often cause aircrew to operate under extreme weather conditions to include heat, high winds, and lightning.

8.8.2. General guidance for Fighter Index of Thermal Stress zones is outlined in DAFI 48-151, *Thermal Stress Program.*

8.9. High Wind Operations.

8.9.1. Creech AFB often experiences high winds year-round. When operating under high winds, takeoffs for ejection seat aircraft will be suspended when the observed wind, including gusts, exceeds MDS specific limits.

TREVOR T. MERRELL, Colonel, USAF
Commander

Attachment 1

GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION

References

AFI 10-1801, *Foreign Governmental Aircraft Landings at United States Air Force Installations*, 25 September 2018

AFMAN 11-202V3, *General Flight Rules*, 09 January 2022

AFMAN 11-2MQ-9V3, *MQ-9 Operations Procedures*, 11 January 2023

AFMAN11-218, *Aircraft Operation and Movement on the Ground*, 5 April 2019 (Chg. 1, 24 May 2023)

AFI 11-418, *Operations Supervision*, 22 December 2021 (Chg. 1, 3 August 2023)

DAFMAN 13-201, *Airspace Management*, 10 December 2020

AFMAN 13-204V1, *Management of Airfield Operations*, 22 July 2020 (AFGM 15 April 2024)

DAFMAN 13-204V2, *Airfield Management*, 20 September 2024 (Chg. 1, 17 December 2024)
DAFMAN 13-204V3, *Air Traffic Control*, 26 April 2024

DAFMAN 13-204V4, *Radar, Airfield, and Weather Systems*, 13 May 2024

AFI 13-207-O, *Preventing and Resisting Aircraft Piracy (Hijacking)*, 04 February 2019

AFI 13-212V1_NTTRSUP, Addendum A, *Range Planning and Operations*, 11 January 2023
DAFI 13-213, *Airfield Driving*, 4 February 2020 (Chg. 1, 24 March 2022)

DAFI 21-101, *Aircraft and Equipment Maintenance Management*, 16 January 2020 (Chg 1. 20 December 2023)

AFMAN 17-1302-O, *Communications Security (COMSEC) Operations*, 12 December 2024
DAFI 90-160, *Publications and Forms Management*, 14 April 2022 (Chg. 1, 21 June 2023)

DAFI 91-202, *The Department of the Air Force (DAF) Mishap Prevention Program*, 20 March 2020 (Chg 1. 10 April 2024)

DAFMAN 91-203, *Air Force Occupational Safety, Fire, and Health Standards*, 25 March 2022
AFMAN 15-111, *Surface Weather Observations*, 12 March 2019 (Chg 1. 26 January 2024)

AFMAN 15-124, *Meteorological Codes*, 16 January 2019

DAFMAN 15-129, *Air and Space Weather Operations*, 7 September 2023 AFMAN 32-1040, *Civil Engineer Airfield Infrastructure Systems*, 23 August 2019

DAFI 91-212, *Bird/Wildlife Aircraft Strike Hazard (BASH) Management Program*, 13 April 2023 DAFPD 15-1, *Weather Operations*, 28 May 2024

DAFI 48-151, *Thermal Stress Program,* 2 May 2022

UFC 3-260-01, *Airfield and Heliport Planning and Design*, 4 February 2019 (Chg. 1 5 May 2020) FAA Handbook 7400.2, *Procedures for Handling Airspace Matters*, 5 September 2024

FAA Order 7110.65BB, *Air Traffic Control*, 20 February 2025

Prescribed Forms

None

Adopted Forms

RSSII Form 1, *Airfield Inspection and Checks*

DAF Form 847, *Recommendation for Change of Publication*

DD Form 1801, *International Flight Plan*

DD Form 2400, *Civil Aircraft Certificate of Insurance*

DD Form 2401, *Civil Aircraft Landing Permit*

DD Form 2402, *Civil Aircraft Hold Harmless Agreement*

AF Form 3616, *Daily Record of Facility Operation*

FAA Form 7460-1, *Notice of Proposed Construction or Alteration*

Abbreviations and Acronyms

ACFT MISHAP—Aircraft Mishap

AGL—Above Ground Level

AM—Airfield Manager

AMOPS—Airfield Management Operations

AOB—Airfield Operations Board

AOI—Airfield Operations Instruction

ARTCC—Air Route Traffic Control Center

ATC—Air Traffic Control

ATIS—Automatic Terminal Information Service

ATKS—Attack Squadron

ATLC—Automatic Takeoff and Landing Capability

BASH—Bird Aircraft Strike Hazard

BLOS—Beyond Line of Sight

CAFB—Creech Air Force Base

CMA—Controlled Movement Area

CP—Nellis Command Post

CTAF—Common Traffic Advisory Frequency

DV—Distinguished Visitor

EO—Electro-Optics

ELT—Electronic Locator Transmitter

EOD—Explosive Ordnance Disposal

EOR—End of Runway

EPU—Emergency Power Unit

ETA—Estimated Time of Arrival

ETD—Estimated Time of Departure

FAA—Federal Aviation Administration

FAAO—Federal Aviation Administration Order

FCF—Functional Check Flight

FD—Flight Data

FFO—Forward Firing Ordnance

FITS—Fighter Index of Thermal Stress

FL—Flight Level

FLIP—Flight Information Publications

FM—Frequency Modulation

FOD—Foreign Object Damage

GCS—Ground Control Station

IAF—Initial Approach Fix

IAW—In Accordance With

IC—Incident Commander

ICAO—International Civil Aviation Organization

IFE—In-Flight Emergency

IFF—Identification Friend or Foe

IFR—Instrument Flight Rules

IMC—Instrument Meteorological Conditions

INS—Creech AFB TACAN Identifier (ICAO: KINS)

IR—Infrared

IRC—Instrument Refresher Course

JET—Joint Environmental Toolkit

KIAS—Knots Indicated Airspeed

KIO—Knock It Off

KT—Knot

KTAS—Knots True Airspeed

LAS—Las Vegas VORTAC Identifier

LATN—Low Altitude Tactical Navigation

LOLA—Live Ordnance Loading Area

LOS—Line of Sight

LSV—Nellis AFB TACAN Identifier (ICAO: KLSV)

MAJCOM—Major Command

MARSA—Military Assumes Responsibility for Separation of Aircraft

MDS—Mission Design Series

MGCS—Mobile Ground Control Station

MOA—Military Operations Area

MOC—Maintenance Operations Center

MSL—Mean Sea Level

N/A—Not applicable

NATCF—Nellis Air Traffic Control Facility

NLT—No Later Than/Negative Lead Time

NET—No Earlier Than

NM—Nautical Mile(s)

NOFORN—Foreign nationals

NORDO—No Radio (Radio Out)

NOTAM—Notice to Air Missions

NTTR—Nevada Test and Training Range

NVD—Night Vision Device

NWS—National Weather Service

OPR—Office of Primary Responsibility

OSS—Operations Support Squadron

PAPI—Precision Approach Path Indicators

PCAS—Primary Crash Alert System

PFO—Precautionary Flameout

PIC—Pilot in Command

PIREP—Pilot Weather Report

PAPI—Precision Approach Path Indicators

PPR—Prior Permission Required

RESCAP—Rescue Combat Air Patrol

RCR—Runway Condition Reading

RPA—Remotely Piloted Aircraft

RPM—Revolutions per Minute

RS—Reconnaissance Squadron

RSC—Runway Surface Condition

RSI—Remote Status Indicator

RSRS—Reduced Same Runway Separation

RTB—Return to Base

RVR—Runway Visual Range

RWY—Runway

SAR—Search and Rescue

SC—Senior Controller

SDO—Squadron Duty Officer

SFA—Single Frequency Approach

SFO—Simulated Flameout

SLR—SATCOM Launch and Recovery

SOF—Supervisor of Flying

SOP—Standing Operating Procedures

TA—Transient Alert

TACAN—Tactical Aid to Navigation

TMOS-P—Tactical Meteorological Observing System-Pole Mounted

TO—Technical Order

TWY—Taxiway

UHF—Ultra High Frequency

USAFADS—USAF Aerial Demonstration Squadron

VFR—Visual Flight Rules

VGT—North Las Vegas Identifier (ICAO: KVGT)

VHF—Very High Frequency

VMC—Visual Meteorological Conditions

WA—Weather Advisory

WX—Weather

Terms

Aircraft Mishap—Term used to denote any event resulting in damage to, or destruction of any aircraft to include lightning strikes, inadvertent departure from the paved runway or taxiway surface, aircraft or Aerospace Ground Equipment (AGE) fires, and forced landings due to in-flight emergencies.

Airfield—The area of the base on which fixed wing aircraft and helicopters are operated, including the runways, taxiways, helipads, parking ramps, hangars, and all open areas surrounding the runways, taxiways, and parking ramps.

Amendment—Used as a message modifier when transmitting an aerodrome forecast amendment.

Controlled Movement Area—Both runways, overruns, and the area within 100 feet of the runways, overruns and helipads.

Emergency Response Vehicles—For the purpose of this instruction, the term "Emergency Response Vehicle" applies only when these vehicles are responding to an actual emergency or an approved exercise. These vehicles will follow normal flightline vehicle or airfield service routes and air traffic control regulations at all times.

Flightline—For the purpose of this instruction, the term "flightline" includes runways, infields, taxiways, helipads, aircraft parking ramps, hangars, and associated maintenance/servicing areas where aircraft may be encountered.

Foreign Object Damage (FOD) checks—Inspection of vehicles prior to entering the flightline to ensure they are free of loose debris that may fall out of the vehicle and present a FOD hazard. This includes the tire tread, nuts, bolts, straps, packing materials, rocks, cups, cans, paper, etc.

Forward Firing Ordnance (FFO)—Weapon systems or munitions (guns, rockets, and missiles) that pose an additional hazard because of their directional response and potential long range if inadvertently activated on the ground.

General Purpose Vehicles—Those vehicles of commercial design and manufacture such as pickup trucks and sedans.

Heavyweight Ordnance—Ordnance that is 500 pounds or greater.

Hung Ordnance—Munition items that fail to deploy when a release pulse is initiated from the cockpit.

Inadvertent Release—Ordnance fired or dropped without command from the aircrew (system induced).

Inert Ordnance—Munition items or components whose explosives material has been replaced by an inert material.

Live Ordnance—All munition items or components filled with or containing explosives or incendiary materials.

Simulated Flameout—Practice approach by a jet aircraft at idle thrust to runway.

Special Purpose Vehicles—Vehicles designed and used for a specific purpose during aircraft servicing and maintenance such as forklifts, tugs, golf carts, tractors, multi-purpose servicing units, bomb lifts, etc.

Training Ordnance—Empty or inert munitions items or components used solely for classroom or weapons load training or training demonstrations.

Unexpended Ordnance—Ordnance retained onboard with no attempted release.

Unintentional Release—Ordnance fired or dropped through aircrew error (aircrew induced).

Weapon—Any instrument used to dispense or deploy a munitions item or component whether inert or live.

Attachment 2

USAF AERIAL DEMONSTRATION SQUADRON (USAFADS) PROCEDURES

A2.1. Purpose. This attachment outlines and establishes USAFADS flying procedures for Creech Air Force Base.

A2.2. Reference. DAFMAN 13-204V1-3, AFI 13-212V1_NTTRSUP.

A2.3. Responsibilities. All Control Tower personnel will comply with the procedures contained in this attachment.

A2.4. Thunderbirds NTTR Training Area Procedures.

A2.4.1. USAFADS will schedule Ranges 64C and 65C SFC-18,000ft MSL for training missions. The Thunderbirds will remain north of the N36-38 line of latitude. When active, the entire area is designated as the Thunderbird Training Area (TTA).

A2.4.2. Approaching the NTTR, Thunderbird 1 is "*CLEARED SCHEDULED*" by NATCF and pushed to Blackjack and/or safety monitor [Thunderbird Control (TC)] frequency.


A2.4.3. USAFADS shall transition in the RPA corridor and above Creech Class D airspace at 8,500ft MSL (into) and 9,500ft MSL (out) on Blackjack/TC frequency. (See **Attachment 7**, **Figure A7.6**.).

A2.4.4. NLT one minute prior to scheduled airspace time, TC will contact Blackjack to confirm the airspace over TTA is clear of any traffic and relay any issues to Thunderbird 1 on the safety monitor frequency.

A2.4.5. Use of RWY 13/31 (other than emergency) is not authorized while USAFADS TTA is active.

A2.4.6. Thunderbird 1 will notify Blackjack when exiting TTA below 13,000ft MSL.

Figure A2.1. Thunderbird Training Airspace.

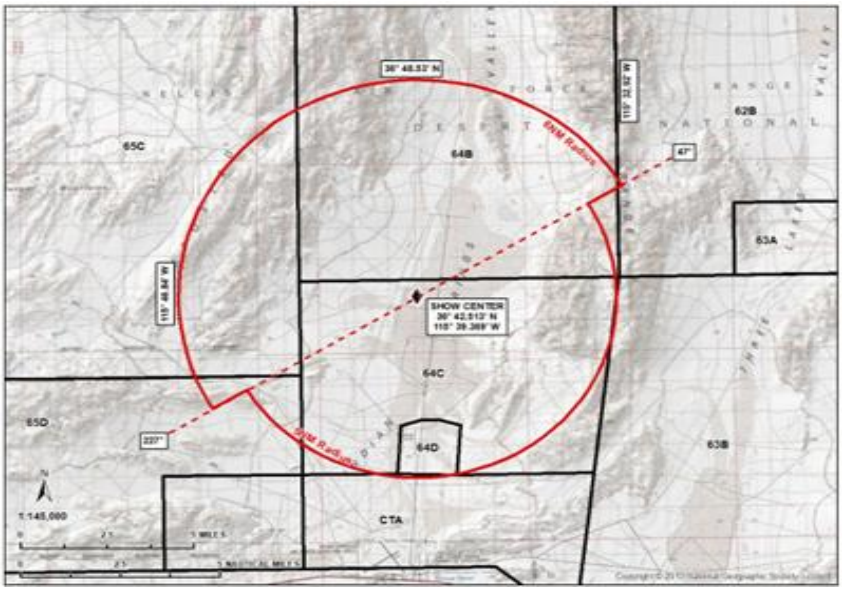

A2.5. Thunderbirds Creech AFB Over the Field (OTF) Procedures.

A2.5.1. USAFADS will confirm the week's flying activity at Creech AFB with Creech AMOPS/432 WG Scheduling NLT 1500 the Friday prior. Creech AFB AMOPS will ensure NOTAMs are published outlining active Thunderbird airspace at least 24 hours prior to use.

A2.5.2. USAFADS is responsible for scheduling all range airspace through NTTR Scheduling. Entry and departure clearance will be provided by NATCF.

A2.5.3. USAFADS aircraft are cleared to perform all maneuvers IAW the FAA approved Thunderbird Maneuvers Package and FAA waivers.

A2.5.4. Vehicular traffic in the Creech Controlled Movement Area is limited during USAFADS Demonstrations. Vehicle traffic will be notified via LMR NET. Ground movement restrictions apply when USAFDS aerobatic box is centered over CAFB.

A2.5.5. NATCF will notify Creech Tower when Thunderbirds are inbound to Creech. Prior to arrival, NATCF will activate "Thunderbird Airspace." "Thunderbird Airspace" is defined as surface to 18,000ft MSL within a 5 NM radius of RWY 08/26 and the intersection of TWY BRAVO including portions of R-64. Permissible hours of operations include 30 minutes after sunrise to 30 minutes before sunset.


A2.5.6. Upon arrival of Thunderbird aircraft, Creech Tower will clear the airspace of traffic and relinquish control of "Thunderbird Airspace" to Thunderbird Control (TC). TC is the USAFADS safety observer who acts as coordinator between Creech Tower and the USAFADS flight. TC will exercise control of all USAFADS flight operations upon approval of Creech Tower and assumes control of aircraft activities for all USAFADS maneuvers, practice demonstrations, and flight demonstrations. TC will maintain radio contact with Creech Tower and Thunderbird aircraft.

A2.5.7. TC will ensure all aircraft remain within the boundaries of "Thunderbird Airspace" while performing USAFADS maneuvers.

A2.5.8. TC will relinquish control of "Thunderbird Airspace" to Creech Tower upon termination of maneuvers or when an emergency is declared requiring use of the airfield. Creech Tower will advise NATCF when the airfield is closed/open.

A2.5.9. NATCF will provide traffic advisories to controlled aircraft in the vicinity of Creech AFB. Creech Tower will monitor all aircraft operating in the vicinity of Creech AFB and provide advisories to TC of any aircraft that fly into the "Thunderbird Airspace."

Figure A2.2. Thunderbird OTF Creech AFB Area.

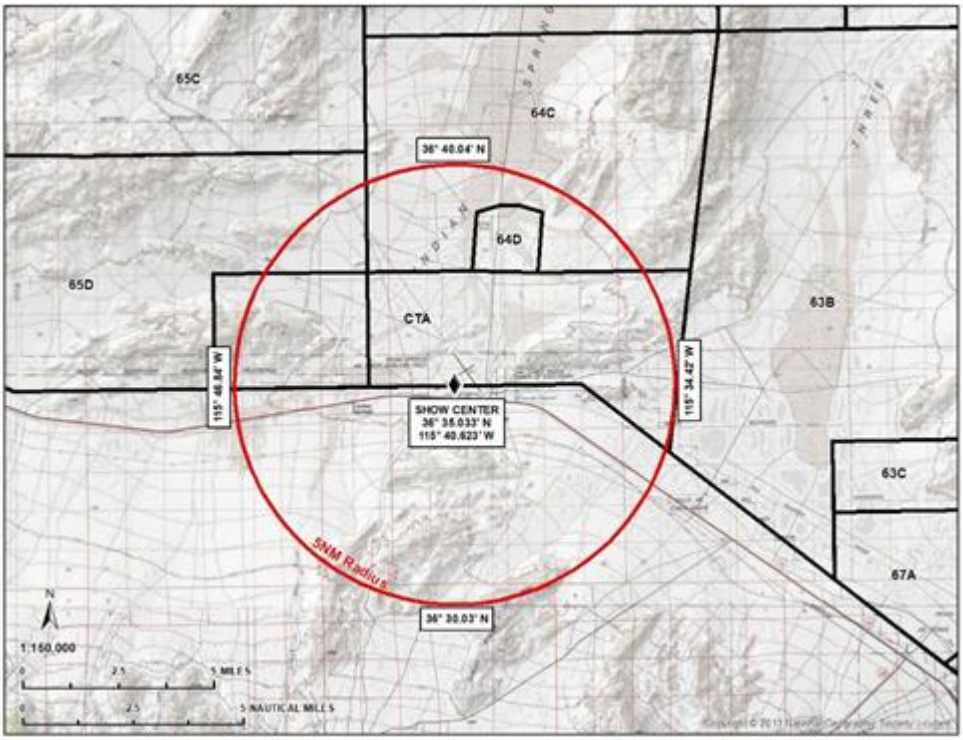

Attachment 3

BLACK OUT PROCEDURES

A3.1. Purpose. This attachment outlines and establishes black out procedures for Creech Airfield. Black out operations are defined as operations with airfield lighting extinguished. This also encompasses Night Vision Device (NVD) operations.

A3.2. Reference. AFMAN 13-204V1, AFMAN 13-204V3 ACCSUP, and DAFI 13-213.

A3.3. Responsibilities. All Control Tower personnel will comply with the procedures contained in this attachment.

A3.3.1. Notification/Coordination Requirements. AMOPS will issue a NOTAM for scheduled black out operations, and an advisory will be broadcast on Creech ATIS.

A3.4. Procedures.

A3.4.1. Blacked Out Landings at Creech airfield will be authorized on a non-interference basis only and during VFR weather conditions only.

A3.4.2. Aircrew Responsibilities.

A3.4.2.1. Ensure the requested procedure is IAW all higher headquarters (AFIs, DAFI, AFMAN, DAFMAN, AFH, MAJCOM supplements, etc.) guidance as they relate to blacked out airfield operations (i.e., takeoffs, landings, touch and goes, etc.).

A3.4.2.2. Coordinate and clarify intentions with CIC prior to departure from or arrival to Creech AFB.

A3.4.2.3. Ensure landing gear is down and locked.

A3.4.3. ATC Procedures.

A3.4.3.1. Approval by Creech Tower will be based on existing traffic and controller workload. The CIC is the safety observer and, as such, can terminate operations at any time for emergencies, existing traffic, controller workload, etc.

A3.4.3.2. Unless otherwise directed by ATC, when the pilot requests the airfield lights off, the Tower will turn off the PAPIs, approach lights, MIRLs, runway edge lights and taxiway lights. Taxiway lights will remain on if ground operations are in progress. Solar taxiway lights cannot be extinguished.

A3.4.3.3. Aircraft will not be explicitly cleared for a night vision device (NVD) procedure; however, ATC will approve requests for NVD operations and issue a "*CHECK WHEELS DOWN*" and remind pilots that they are to "*PROCEED AT THEIR OWN RISK*."

A3.4.3.4. ATC will ensure AMOPS conducts an airfield check prior to and after black out operations. **NOTE:** Pilots can make their gear down call on final (with overt landing light on). ATC will respond *"GOOD LANDING LIGHT"* when visually confirmed. Pilots will then turn off the overt landing light and proceed with covert taxi light. A3.4.3.5. Controllers are not authorized to wear night vision devices.

A3.4.4. Traffic Pattern/Flow Restriction.

A3.4.4.1. NVD taxi routes and NVD traffic patterns including entry/reentry points shall adhere to established Creech taxi routes and traffic patterns outlined in Chapters **1 and 2**. Operations will only be scheduled when all wing flying has terminated for the day or minimal impact on flying operations will occur. Wing flying will not be delayed for NVD operations.

A3.4.4.2. Off-station and base-assigned aircraft are authorized to conduct NVD operations. Non-participating aircraft will not mix with participating NVD aircraft in any traffic pattern or on any controlled movement area.

A3.4.4.3. If non-participating aircraft are inbound for arrival, they will hold outside of Creech Tower's airspace as directed by NATCF or Tower controllers until NVD operations are terminated.

A3.4.4.4. Lights-out vehicle operations are not authorized. Vehicle operations during lights-out operations will be kept to a minimum. Contact Airfield Management for additional information.

A3.4.5. Emergency Termination/Knock it off (KIO).

A3.4.5.1. The CIC or pilot-in-command can terminate lights-out operations in the interest of flying safety. **NOTE:** If lost communications occur, blackout procedures are terminated and all lights will be immediately returned to normal operation. All pilots will remove NVDs, terminate operations, and proceed with lost communication procedures (N/A for rotary wing aircraft).

A3.4.5.2. Standard air traffic control light signals should be used if radio communications cannot be established. A go-around may also be signaled by a flashing red light gun signal or a radio call to the pilot. Emergency signals must be coordinated and thoroughly briefed between the CIC and participating aircrew.

A3.4.5.3. Emergency aircraft have priority over all other operations.

A3.4.6. Transition between Airfield Lighting Configurations.

A3.4.6.1. Lights will be returned to normal setting when NVD operations have terminated or for non-participating inbound aircraft coordinated by NATCF.

A3.4.6.2. Creech Tower will broadcast to all aircraft before returning lights to normal settings once NVD operations are concluded.

Attachment 4

CREECH AFB BARRIER CERTIFICATION PROCEDURES

A4.1. Purpose. This attachment outlines and establishes barrier certification procedures for Creech Air Force Base.

A4.2. Reference. AFMAN 32-1040, *Civil Engineer Airfield Infrastructure Systems*.

A4.3. Responsibilities. All barrier maintenance personnel will comply with the procedures contained in this attachment.

A4.4. Procedures.

A4.4.1. Barrier maintenance will request barrier certification from AMOPS.

A4.4.2. The AFM (or designated representative) will:

A4.4.2.1. Review barrier certification and maintenance records and coordinate with 432OSS/OSOS through 57 OSS/OSOS for scheduling of barrier annual certification.

A4.4.2.2. Notify the agencies in **Table A4.1** of the aircraft type and call sign prior to each engagement.

Table A4.1. Barrier Engagement Notification.

Barrier Engagement Notification	
Flight Safety	Tower
TA	SOF
Fire Protection	Sweeper
Barrier Maintenance	Airfield Lighting
Nellis Command Post	NATCF

A4.4.3. Procedures. Airfield Manager (AFM) or Airfield Management Liaison of Operations will brief participating aircrew prior to the engagement.

A4.4.3.1. Aircraft returning from a flight will de-arm, then follow AMOPS directions. Prior to the engagement, AMOPS and barrier maintenance will confirm the aircraft's gross weight with the aircraft commander, then compute engagement speed according to AFI 32-1043. The aircrew will target the engagement for a minimum speed of 75 knots ground regardless of aircraft gross weight.

A4.4.3.2. The aircraft will be in flyable condition, canopy(s) closed, and tail hook shear pin installed (F-16 only). Aircraft will be cleared into position and specifically cleared to engage the cable by AMOPS through Tower. Unless otherwise briefed, conduct certification on pre-coordinated frequency.

A4.4.3.3. Aircraft will stabilize engines at partial power, release brakes, then track down the runway and attempt to engage barrier within 5 feet of runway centerline. The pilot will retract tailhook on signal from barrier crew, notify the Tower of actual speed, gross weight, callsign, and tail number. The aircraft will be cleared to taxi to parking on signal from barrier crew. If taxiing the aircraft after a barrier certification is not possible, the aircraft will shut down and be towed off the runway. “Slingshot” procedures are authorized only during in-flight emergencies that require rapid removal of an aircraft from a cable.

Attachment 5

RPA OPERATIONS

A5.1. Introduction. This attachment prescribes standard operating procedures for all RPA aircrew under the operational control of the 432 WG or tenant units of Creech AFB. This attachment is directive in nature with intent to standardize local procedures while not restricting mission accomplishment. Where procedures contained in this chapter are more restrictive than the basic publication, procedures herein have precedence.

A5.2. General Policy.

A5.2.1. ATC provides air traffic services to RPA operations within the delegated airspace IAW appropriate UAS DoD/DoT guidance and specific Letters of Agreement (LOA), Certificates of Authorizations (COA), and Airspace Access Authorizations (AAA). NOTAM requirements are as directed by each COA. RPA LOA/COAs are reviewed for currency IAW AFMAN 13-204.

A5.2.2. FAA restrictions, Air Force directives, and intelligence oversight principles govern the operation of the MQ-9, RQ-170, and other RPA aircraft. RPA squadron commanders will ensure operations are IAW established regulatory guidance, waivers, policy letters, and procedures. Safety is a primary concern in RPA operations. No operation should endanger people in the air or on the ground. For flight supervision purposes, supervisory structure will comply with AFI 11-418, *Operations Supervision*, and applicable supplements.

A5.2.3. The primary point of contact for command and control of RPA missions is the squadron Operations Supervisor. All communication with the crew not directly associated with the mission will be routed through the Ops Sup.

A5.2.4. RPA Separation.

A5.2.4.1. RPAs are unable to accept see and avoid clearances. Therefore, ATC must be more vigilant of separation when potential conflicts arise and shall notify all aircraft involved immediately. ATC shall not ask aircrew to maintain visual separation. However, aircrew can report the runway in sight for continuation of VFR maneuvers. Other than the aforementioned, ATC shall handle RPAs in a similar fashion to manned aircraft.

A5.2.4.2. Tower may direct other non-standard de-confliction orbits or pattern altitudes when required.

A5.2.5. Deviations. Aircrew will not deviate from this publication unless there is an emergency or safety of flight incident. Deviations and waivers will be approved by the 432d Operations Group Commander (432 OG/CC) as applicable.

A5.2.6. Command and Control (C2). The Creech Supervisor of Flying (SOF) supervises flying activities for all aircraft under the authority of the 432 OG/CC and is the primary C2 agency during an IFE. SOF requirements and duty location will be IAW AFI 11-418 432 WG Supplement guidance for all local flying units.

A5.3. Ground Operations.

A5.3.1. Designated Start Areas. There are four designated MQ-9 start points: the Main RPA Ramp, Bravo LOLA, Foxtrot LOLA, and South Ramp Area 3. There are two designated RQ-170 start points: the RPA North Ramp and TWY GOLF South.

A5.3.2. Taxi Procedures.

A5.3.2.1. When taxiing out of parking or into congested or non-standard areas, aircrew will utilize a marshaller/wing walker to guide the aircraft until established on a taxiway centerline and clear of obstructions.

A5.3.2.2. Aircrew will maintain visual contact and, when possible, radio contact with the marshaller. If visual contact is lost prior to being established on the taxi line or clear of obstructions, aircrew will stop the aircraft until visual contact is regained.

A5.3.2.3. When the aircraft has cleared all obstructions and is established on the taxi line, the marshaller will give the *"ALL CLEAR"* hand signal or radio call.

A5.3.3. Live Ordnance Taxi/Ground Procedures. If unable to arm/de-arm in the LOLA, aircrew will coordinate with Airfield Management to identify an alternate location on the airfield. This process must be coordinated in advance and aircrew should not expect Airfield Management to be able to accommodate a day-of change.

A5.4. Flying Operations.

A5.4.1. Radio Procedures:

A5.4.1.1. Primary communication between Creech Tower and local RPAs will be UHF and VHF radio with back-up telephonic and Tower Net capability.

A5.4.1.2. RPA aircrew will monitor the SOF, VHF Guard, and UHF Guard frequencies while in Creech Tower airspace.

A5.4.2. Minimum Runway Length.

A5.4.2.1. Minimum runway length for RQ-170 operations is 8,000 feet IAW DAFMAN 11-2RQ-170V3.

A5.4.2.2. Minimum runway length for MQ-9 aircraft is 5,000 ft and may not exceed 80% of total available runway for a training sortie manual takeoff, IAW DAFMAN 11-2MQ-9V3.

A5.4.3. Pattern Operations. RPA pattern operations will be flown IAW **Chapter 2** and **figure A7.4** of this document. VFR reporting points are added to assist aircraft in reaching an extended final:

A5.4.3.1. HOOK: N 36° 36' 32.7", W 115° 45' 23.0"

A5.4.3.1.1. DEUCE: N 36° 36' 14.9", W 115° 36' 11.2"

A5.4.3.1.1.1. Local pattern deconfliction procedures.

A5.4.3.1.1.1.1. All aircraft will delay turning south from outside downwind until at or above 5,100' MSL.

A5.4.3.1.2. Straight-in approaches. Aircraft flying the straight-in from HOOK or DEUCE will notify tower at 3 miles from the approach end of runway final for deconfliction.

A5.4.3.1.3. Closed pull-up. Crews will pull closed after being cleared by Tower at the departure end of the runway unless they have been cleared "*PRESENT POSITION CLOSED*." RQ-170s will pull closed between 1 and 2 miles past the departure end of the runway, above 3,900 ft.

A5.4.3.1.4. Patterns flown to RWY 08/RWY 13 will be left hand turns and patterns to RWY 26/RWY 31 will be right hand turns.

A5.4.3.1.5. Base turn conflict. If an aircraft reports base while another aircraft is on a 3 mile or less straight-in approach, the aircraft turning base will be directed to execute a go-around or other deconfliction maneuver at ATC discretion.

A5.4.3.2. MQ-9 ATLC Procedures. Aircrew will advise tower when they plan to depart the pattern from the ATLC ground track/altitudes. While using ATLC, crews should set 4,600ft for the MSA. Only one aircraft with Lost Link Land enabled may have ATLC turned on at a time. Crews will not enable ATLC until they are cleared to land by Tower.

A5.4.3.3. RPA SFO Restrictions.

A5.4.3.3.1. Aircrew flying the outside downwind track for the SFO will not turn south from outside downwind towards high key until reaching their respective aircraft's high key altitude.

A5.4.3.3.2. No more than two RPAs will be allowed to execute SFO procedures simultaneously.

A5.4.3.3.3. SFOs are not authorized with more than 3 aircraft being controlled by Tower simultaneously.

A5.4.3.3.4. Provision of this service by ATC does not in any way absolve the pilot from his/her responsibilities. The reported ceiling will be at least 1,000 feet above the highest altitude to be flown. Flight and ground visibility will be at least 5 NM. A practice SFO/PFO may be disapproved by ATC due to traffic or other reasons either before or after the start of the maneuver.

A5.4.3.4. Tower will provide VFR separation and will not allow more than two types of dissimilar RPAs (dissimilar types being identified as MQ-9, RQ-170, or any other transient RPAs) in the Creech pattern at one time. For limitations identified in this paragraph, aircraft are considered in the "Creech pattern" if they are controlled by Creech Tower in Tower's airspace and performing any operation other than a single approach for a planned full stop or takeoff to an immediate departure. For example, it is not necessary to land the3rd dissimilar aircraft in the pattern if an RQ-170 will be departing direct to their working area following a takeoff or arriving for single full stop.

A5.4.3.5. If more than two types of dissimilar RPAs are anticipated to be in the Creech pattern, the SOF will coordinate with the 432 OG brick holder to determine priorities and will direct aircraft to depart tower airspace or land, as required.

A5.4.3.6. Simulated Flame-Out Patterns. (**Figure A7.11**.).

A5.4.3.6.1. Radio Calls. *"TOWER, (CALLSIGN), REQUEST HIGH KEY."* If cleared, Tower will relay, *"(CALLSIGN), REPORT HIGH KEY,"* along with any other instructions. At High Key, pilots will report, *"(CALLSIGN), HIGH KEY."* Tower will clear aircraft to fly the SFO by transmitting, *"(CALLSIGN), REPORT LOW KEY,"* or issue appropriate instructions otherwise (e.g. *"(CALLSIGN), HOLD AT HIGH KEY FOR SPACING"*). At Low Key, pilots will report, *"(CALLSIGN), LOW KEY, GEAR DOWN, LOW APPROACH."* Creech Tower will then issue low approach clearance and any other restrictions following LOW KEY call.

A5.4.3.6.2. High key altitude. High key altitude is 5,600 ft. MSL for MQ-9 and 6,100 ft. MSL for RQ-170 and is located at the approach end of the landing runway.

A5.4.3.6.3. Low key altitude. Per T.O. guidance, the recommended altitude is 1,000 ft. AGL (4,100 ft. MSL) for MQ-9 and 4,500 ft. MSL for RQ-170. **NOTE:** MQ-9 low key altitudes may be higher when the descent rate exceeds 800 fpm.

A5.4.3.6.4. SFOs flown to RWY 08/RWY 13 will be left hand turns and SFOs to RWY 26/RWY 31 will be right hand turns.

A5.4.3.6.5. Climb/descend to HIGH KEY altitude utilizing the outside downwind ground track while performing simulated engine-out procedures. During the SFO, aircraft should remain within the inside downwind ground track to the maximum extent possible and maintain an airspeed of 60-110 knots, respective of aircraft type.

A5.4.3.6.6. Cutoff points. For simultaneous SFOs, the second aircraft will not descend from HIGH KEY until the preceding aircraft reports LOW KEY. ATC will not allow a departure once an SFO has reported LOW KEY. Aircraft on straight-in approaches will not be allowed a closer than 5 mile final once an SFO has reported HIGH KEY. Overhead patterns will not be allowed while SFOs are taking place.

A5.4.3.6.7. Break Out/Go-Around procedures. In the event ATC issues a break out or go-around for traffic or other reasons, the SFO aircraft will execute as directed and standby for further instructions from ATC, as necessary. See 3.7 Break Out/Go Around/Missed Approach Procedures.

A5.4.3.7. Night SFO.

A5.4.3.7.1. ACC-possessed MQ-9 and RQ-170 aircraft are authorized to conduct SFO operations between sunset and sunrise with the following restrictions:

A5.4.3.7.1.1. Night SFOs will be conducted to RWY 08/26 only with all turns at high key to the north. The entire SFO will begin and terminate within restricted airspace (R4806) at Creech AFB.

A5.4.3.7.1.2. MQ-9 infrared nose camera or sensor will be fully operational and used. EO video sources are not authorized for use during night SFOs. This restriction does not apply to RQ-170.

A5.4.3.8. Practice Approaches (NOT FOR USE IN IMC). Locally produced approaches will be flown under VMC with VFR weather in Creech Tower airspace. The PIC is responsible for terrain/obstacle avoidance. **NOTE:** Use caution when Thunderbirds are training in R-64. Thunderbirds transition on and off range through the eastern portion of Creech Tower Airspace.

Figure A5.1. RPA SFO Patterns.



A5.5. Local Airspace Procedures.

A5.5.1. Departures/Arrivals (See **Attachment 7**, Figure **A7.1 – A7.5**.).

A5.5.1.1. Conflicts. Weather, GRR restrictions, and other real-world events may restrict the usage of the primary or alternate departure/arrival procedures. Aircrew may be required to deconflict their departure and arrival in real time. Coordinate with the SOF for any planned deviations.

A5.5.1.2. Creech ATIS is the primary notification method for the active departure/arrival procedure. Alternatively, crews may contact the SOF for the most current procedure. Aircrew should be aware that the departure/arrival procedure may change while in flight due to weather conditions and should make every effort to account for these changes prior to initiating recovery at Creech AFB.

A5.5.1.3. The primary route of departure from Creech Tower Airspace (CTA) is to Range 65D, west of Creech AFB, regardless of active runway. Aircraft will climb in the transition zone in 65D (SFC-25,000’ MSL). There is no minimum altitude requirement to reach before departing 65D unless one is specified on the NTTR Graphical Range Restriction (GRR) chart. Airspace in R65D above 25,000’ MSL is designated as working airspace. All departing aircraft intending to remain within the confines of the NTTR will utilize this departure to the maximum extent possible. Aircraft departing Creech AFB for the National Airspace System (NAS) may elect to alter this departure in order to comply with routing requirements per filed 1801. Aircrew will inform the SOF of their intentions in addition to requesting the desired departure from Tower before takeoff.

A5.5.1.3.1. Radio Calls. "*TOWER, (CALLSIGN), REQUEST DEPARTURE TO THE WEST."* If departing RWY26, Tower will relay, *"(CALLSIGN), REPORT WISKY."* If departing RWY08, Tower will relay, "*(CALLSIGN), FLY THE OUTSIDE DOWNWIND TRACK, REPORT WISKY."* At WISKY, pilots will report, "*(CALLSIGN), WISKY."* Tower will then provide any necessary traffic information and transmit "*(CALLSIGN), FREQUENCY CHANGED APPROVED.*

A5.5.1.3.2. WISKY will be used as a positional reporting point for Tower to clear aircrew to switch radio frequencies. Altitude is at PIC discretion to safely avoid terrain. If aircrew need to switch to another frequency prior to WISKY to safely coordinate their departure to the NTTR, they may make that request with Tower (e.g. "*TOWER, (CALLSIGN), REQUEST FREQUENCY CHANGE."* Aircraft are expected to depart CTA as expeditiously as possible. If aircraft need to loiter in CTA, aircrew must coordinate with the request (e.g. ("*CALLSIGN), REQUEST CLIMB TO 5,500' IN THE OUTSIDE DOWNWIND TRACK."*).

A5.5.1.4. The alternate route of departure from Creech Tower Airspace is dependent upon weather conditions in the surrounding area:

A5.5.1.4.1. Alternate Departure Alpha. RPAs departing Creech AFB will utilize the Southern RPA Corridor (7,000'-14,000' MSL in CTA, 5,000'-14,000' MSL in Range 63B) to enter the NTTR. Aircraft will maintain at or below 7,000'-7,500' MSL in the corridor until they arrive in Range 63DH, south of the crosshair, and will begin a climb to 18,000' MSL or higher before departing for assigned working airspace.

A5.5.1.4.2. Radio Calls. "*TOWER, (CALLSIGN), REQUEST DEPARTURE TO THE EAST."* If departing RWY08, Tower will relay, *"(CALLSIGN), REPORT EDSEL."* If departing RWY26, Tower will transmit "*(CALLSIGN), FLY THE OUTSIDE DOWNWIND TRACK, REPORT EDSEL."* At EDSEL, pilots will report, "*(CALLSIGN), EDSEL."* Tower will then provide any traffic necessary traffic information and transmit "*(CALLSIGN), FREQUENCY CHANGED APPROVED*.

A5.5.1.4.3. Alternate Departure Bravo. RPAs departing Creech AFB will utilize Range 65D to enter the NTTR. Once in R65D, departing aircraft will maintain east of the crosshair and climb to an altitude no greater than 18,000' MSL before departing for assigned working airspace.

A5.5.1.5. The primary route of arrival into Creech Tower Airspace is via Range 63DH and the Southern RPA Corridor (7,000'-14,000' MSL in CTA, 5,000'-14,000' MSL in Range 63B). Aircraft will enter R63DH at 25,000' MSL or lower to begin their descent. Once at 14,000' MSL or lower, aircraft will continue into the Southern RPA Corridor until they enter CTA for recovery.

A5.5.1.5.1. Radio Calls. Example: *"TOWER, (CALLSIGN), WITH ATIS, XNM TO THE EAST OF THE FIELD AT XX THOUSAND FEET, REQUEST OUTSIDE DOWNWIND TRACK FOR HOOK FULL-STOP."* Tower may then direct aircrew to report EDSEL at a specific altitude for sequencing or approve the request.

A5.5.1.6. The alternate route of arrival into Creech Tower Airspace is dependent upon weather conditions in the surrounding area:

A5.5.1.6.1. Alternate Arrival Alpha. RPAs arriving into Creech Tower Airspace will utilize R63DH and the Southern RPA Corridor (7,000'-14,000' MSL in CTA, 5,000'-14,000' MSL in Range 63B). Aircraft will enter R63DH below 18,000' MSL and remain north of the crosshair while descending. Once established between 8,000'-8,500' MSL, aircraft will continue into the corridor until contact has been made with Creech Tower to enter CTA for recovery.

A5.5.1.6.2. Alternate Arrival Bravo. RPAs arriving into Creech Tower Airspace will utilize R65D. Aircraft must arrive in R65D above 18,000' MSL and maintain west of the crosshair prior to initiating a descent. Once established in a descent, aircrew will contact Creech Tower and request recovery into CTA. Do not enter the eastern portion of R65D, as defined by the crosshair, until cleared into CTA by Creech Tower.

A5.5.1.7. Reporting points. The below points may be used by Tower to facilitate coordination with Tower.

A5.5.1.7.1. WISKY N 36° 35' 50.24", W 115° 47' 21.53"

A5.5.1.7.2. EDSEL N 36° 35' 15.14", W 115° 35' 39.56"

A5.5.1.7.3. NICKEL N 36° 37' 08.2", W 115° 39' 44.6"

A5.6. Abnormal Procedures.

A5.6.1. Tower Radar Display. If the Tower Radar Display is out of service, the number of RPAs allowed in the pattern will be limited to a maximum of three. Notification will be made via ATIS and the SOF.

A5.6.2. RPA Emergency Procedures.

A5.6.2.1. The PIC is the primary IFE decision authority. Under special circumstances, ATC, or the SOF (on behalf of a returning aircraft), may also declare an emergency.

A5.6.2.1.1. Once an emergency is declared for an aircraft system issue, only the Incident Commander (IC) (callsign-Chief 4 or Chief 5) can terminate the emergency. Aircrew will make every effort to contact the responding Fire Officer (UHF 285.525) to coordinate aircrew and fire department post-landing checklist items, as required. For non-aircraft system emergencies (i.e., cockpit, datalink, lost link, etc.), the SOF can terminate the emergency while the aircraft is inflight if the emergency has been resolved or an alternate system can be used (i.e., a different cockpit, using a different type of control link, link has been regained and aircraft is back in assigned airspace, etc.).

A5.6.2.1.2. Aircrew will not leave the cockpit or terminate communications until the IC has terminated the emergency and post-mishap safety procedures have been complied with (as applicable). Taxi-back requests will only be approved upon termination of the emergency.

A5.6.2.1.3. If a cockpit emergency requires Fire Department assistance (Smoke, Fumes, or Fire), aircrew (or Ops Sup/Top-3 as necessary) will call 911 and be prepared to provide the building number, squadron, and cockpit number. Do not declare an aircraft ground emergency with Tower for "smoke, fumes, or fire in the cockpit." Make advisory calls to Tower, as able, in the event the aircraft will be stopped on a taxiway or the runway due to evacuating the cockpit.

A5.6.3. Loss of Link.

A5.6.3.1. Pilots are responsible for maintaining emergency missions (MQ-9) or mission plans (RQ-170) that deconflict from traffic and weather. Emergency missions/mission plans will contain the appropriate Mode 3 squawk and should comply with clearances, ATC intentions, and allow for link troubleshooting prior to fuel starvation. In the case of lost link, the pilot will call affected controlling agencies as soon as practical to notify them of the lost link status and expected aircraft route, altitude, and timing. If aircraft are operating on the NTTR and do not have access to a usable radio, crews will call the SOF first then Blackjack to notify them of lost link status. SOFs will communicate on RPA common the lost link aircraft status.

A5.6.3.2. Lost Link Mode 3. Unless specifically instructed otherwise, set lost link Mode 3 to 7400. This is in accordance with FAA National Beacon Code Allocation Plan (NBCAP) Order 7110.66E, 8 June 2015 and facilitates normalizing RPA operations in the National Airspace System.

A5.6.3.3. MQ-9 Terminal lost link altitudes will be coordinated through the SOF. Lost link altitude should match working altitude to avoid altitude changes while lost link. MQ-9 crews will notify the SOF and all local players on RPA Common and GUARD immediately after losing link with the aircraft to ensure deconfliction. Minimum required information to be broadcast includes current working airspace, altitude, time until aircraft transits to its hold orbit, and hold airspace.

A5.6.3.4. RQ-170 lost link procedures are dissimilar from MQ-9. RQ-170 crews will set a lost comm waypoint that matches their current working altitude and location for the specific phase of flight. RQ-170 crews will notify the SOF and all local players on RPA Common and GUARD immediately after losing link with the aircraft to ensure deconfliction. Minimum required information to be broadcast includes current working airspace, altitude, time until aircraft transits to its hold orbit, and hold airspace.

A5.6.3.5. Other RPA lost link procedures can be referenced in the 432d OG In-Flight Guide.

A5.6.3.6. Routing to terminal area will proceed via authorized/assigned airspace to the maximum extent possible. Aircraft that are Lost Link are considered emergency aircraft and may deviate outside of authorized/assigned airspace though aircrew should do everything in their control to ensure that this does not occur. Ensure deconfliction occurs to the maximum extent possible via RPA Common, GUARD, and SOF.

A5.6.3.7. 432 OG/OGV maintains and validates Lost Link profiles for Creech AFB assigned MQ-9s, RQ-170s, and other RPAs. The most current profiles can be referenced in the Creech AFB In-Flight Guide available on the 432 OG/OGV SharePoint.

A5.6.3.7.1. MQ-9 Lost Link. MQ-9s that are Lost Link will maintain their working altitude and airspace for 30 minutes before transiting to R64C. Once in R64C, the aircraft will descend to its assigned Lost Link altitude and hold for a predetermined amount of time (as assigned by the SOF) before returning to CTA for an automatic landing. Contact 432 OG/OGV for additional specific data.

A5.6.3.7.2. RQ-170 Lost Link. RQ-170s that are Lost Link will transit at their working altitude to R63DH. Once in R63DH, the aircraft will descend to below 10,000’ MSL and transit into R63B for an automatic straight-in landing at Creech AFB. Contact 432 OG/OGV for additional specific data.


A5.7. Tower Letter of Procedure. N/A. This document defines local RPA flying procedures.

A5.8. Security Forces Training. AMOPS will provide training to identify unique RPA airfield familiarization through the Creech Security Forces NCOIC.

Attachment 6

AIRFIELD DIAGRAM

Figure A6.1. Creech AFB Airfield Diagram.

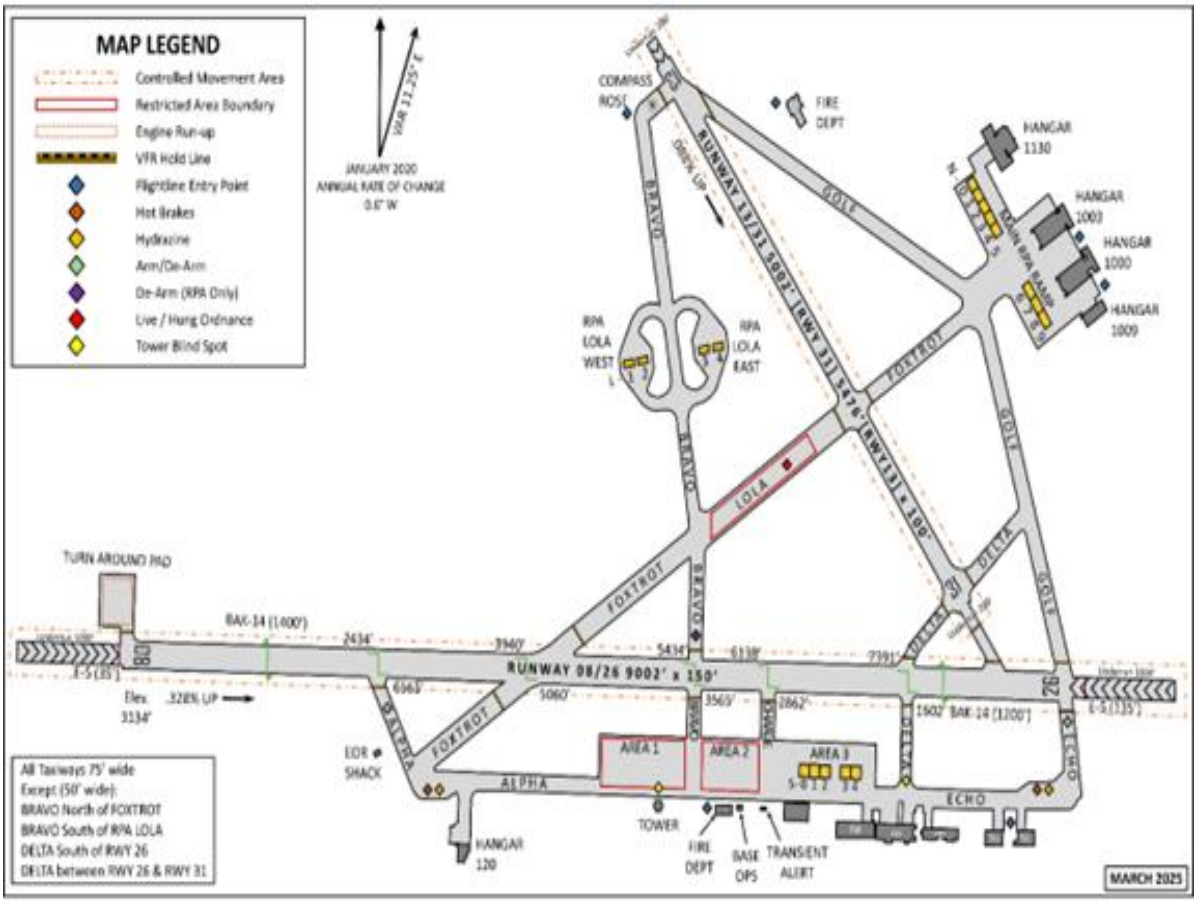

A6.1. Field Elevation – 3134'.

A6.2. Gradient – Runway 08/26 .328%, Runway 13/31 .088%.

A6.3. Runway Surface Type – PEM (Part Concrete/Part Asphalt).

Attachment 7

LOCAL AREA

Figure A7.1. Primary Departure.

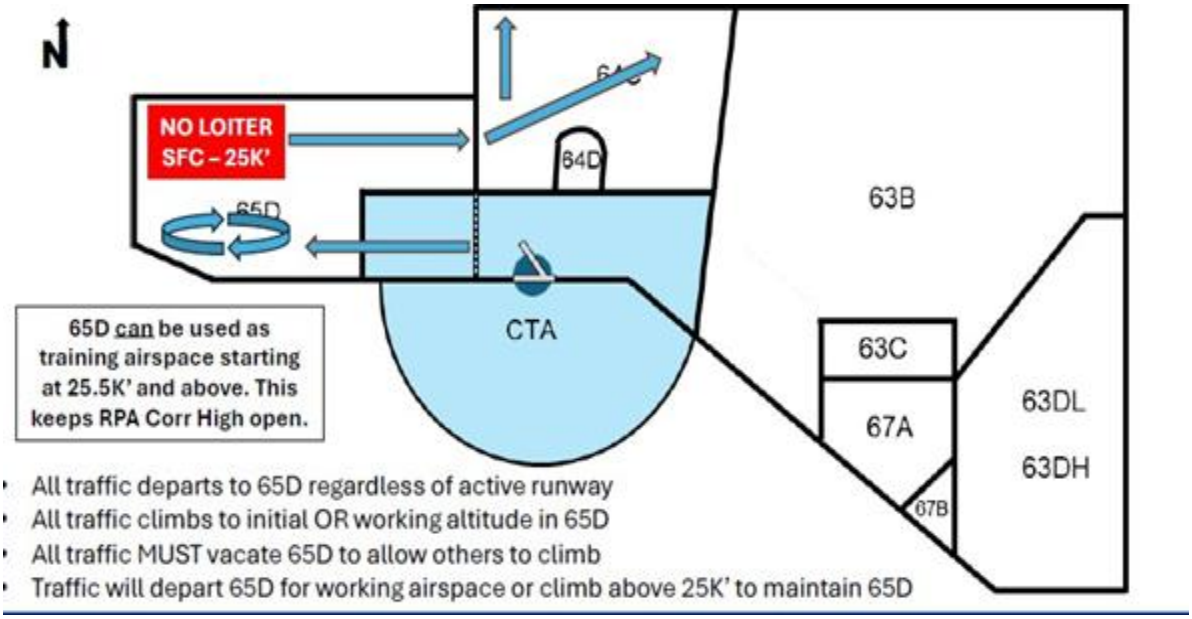


Figure A7.2. Primary Departure (X-Ray).

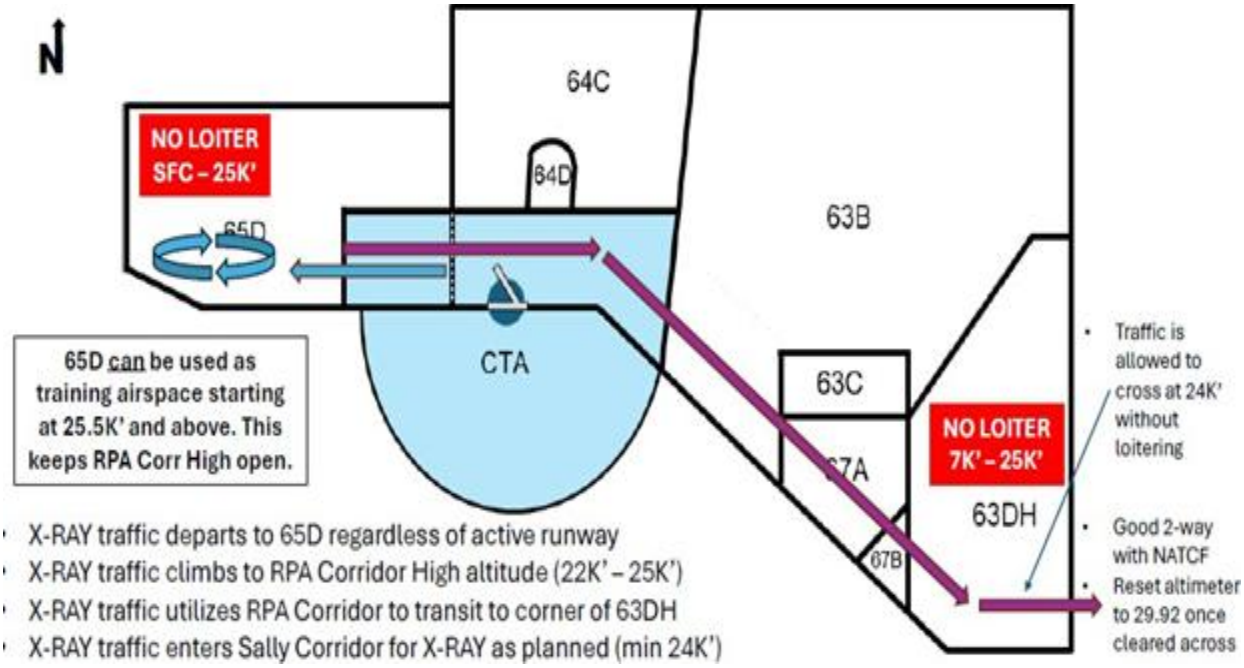


Figure A7.3. Primary Arrival.

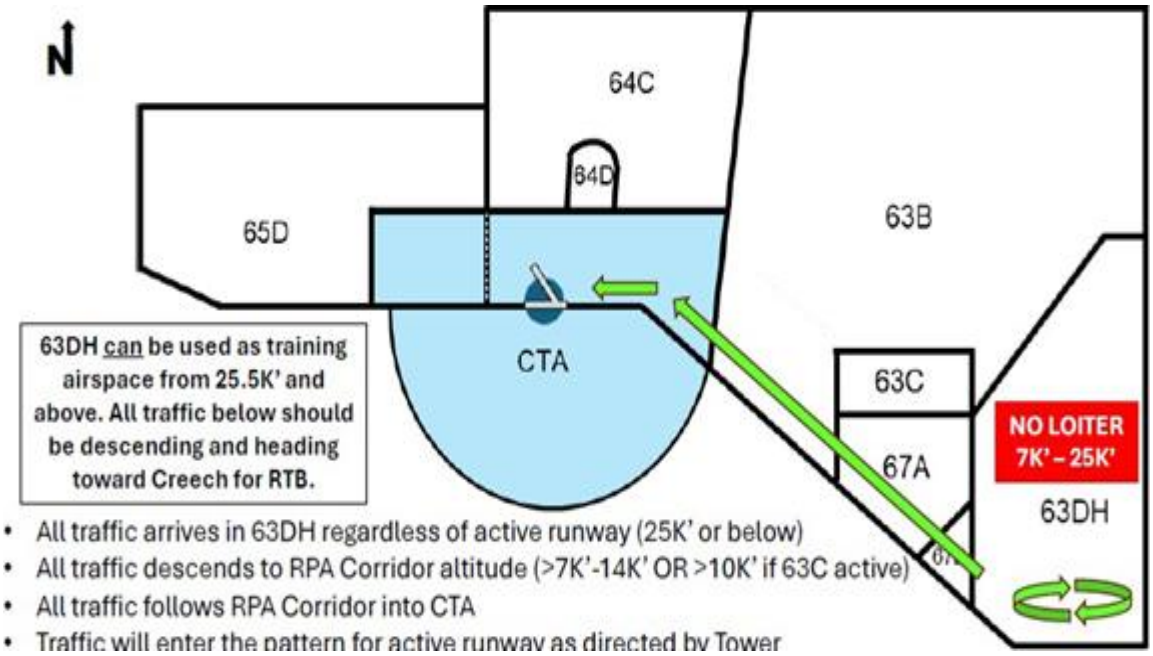


Figure A7.4. Alternate Arrival/Departure (ALPHA).

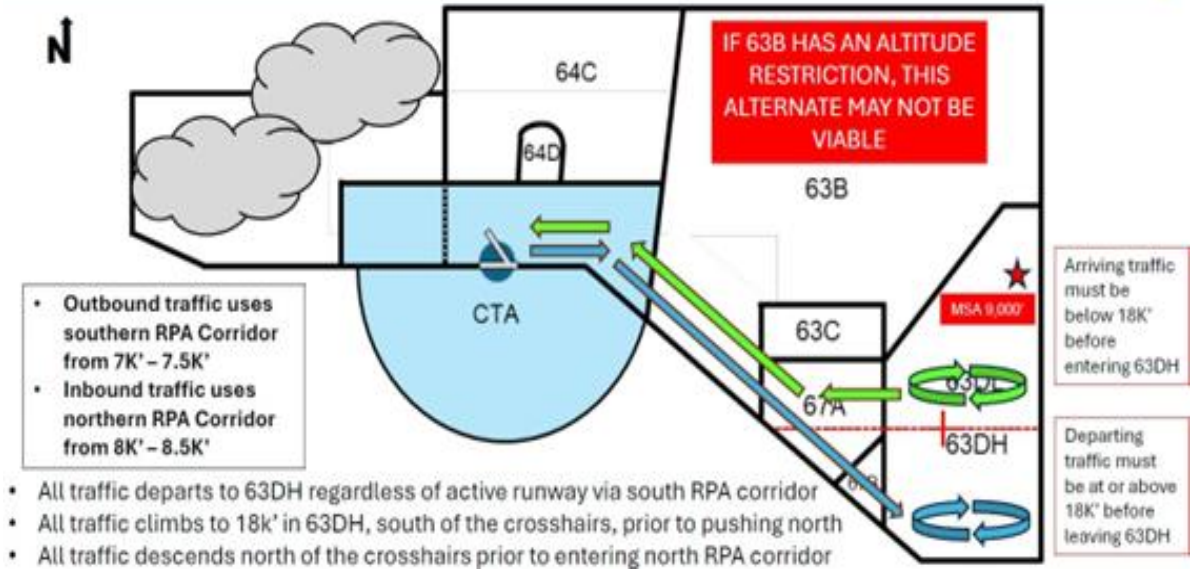


Figure A7.5. Alternate Arrival/Departure (BRAVO).

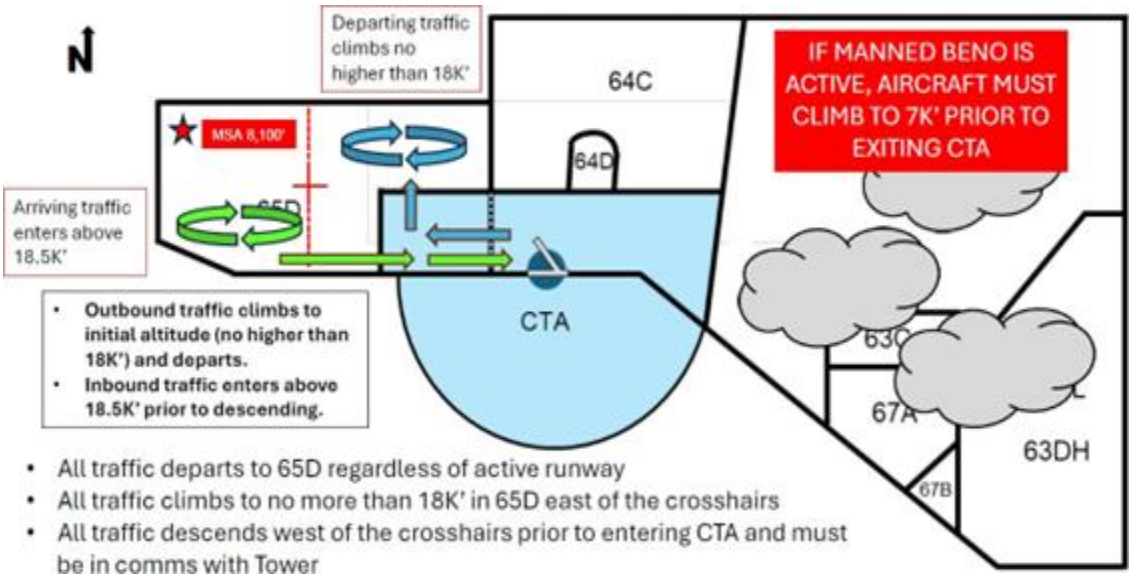


Figure A7.6. CTA airspace and Corridors.

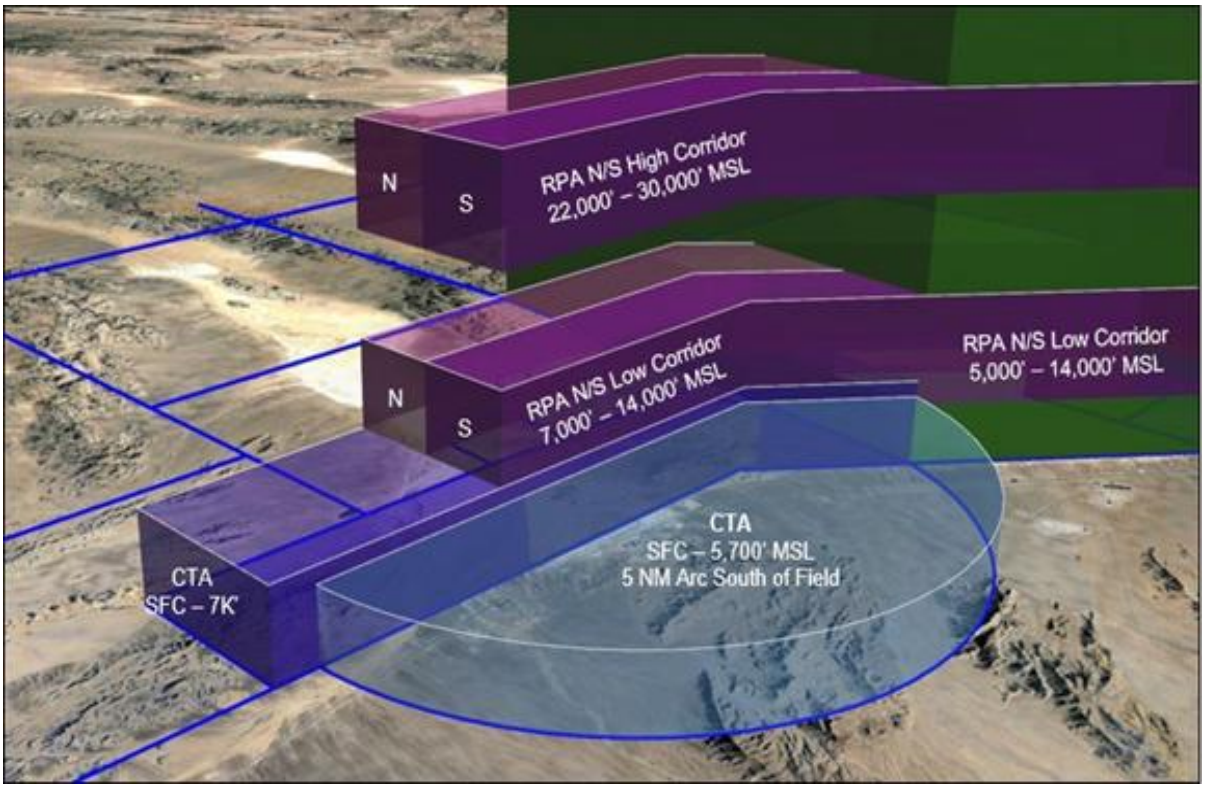


Figure A7.7. CTA AIRSPACE AND CORRIDORS AND NTTR.

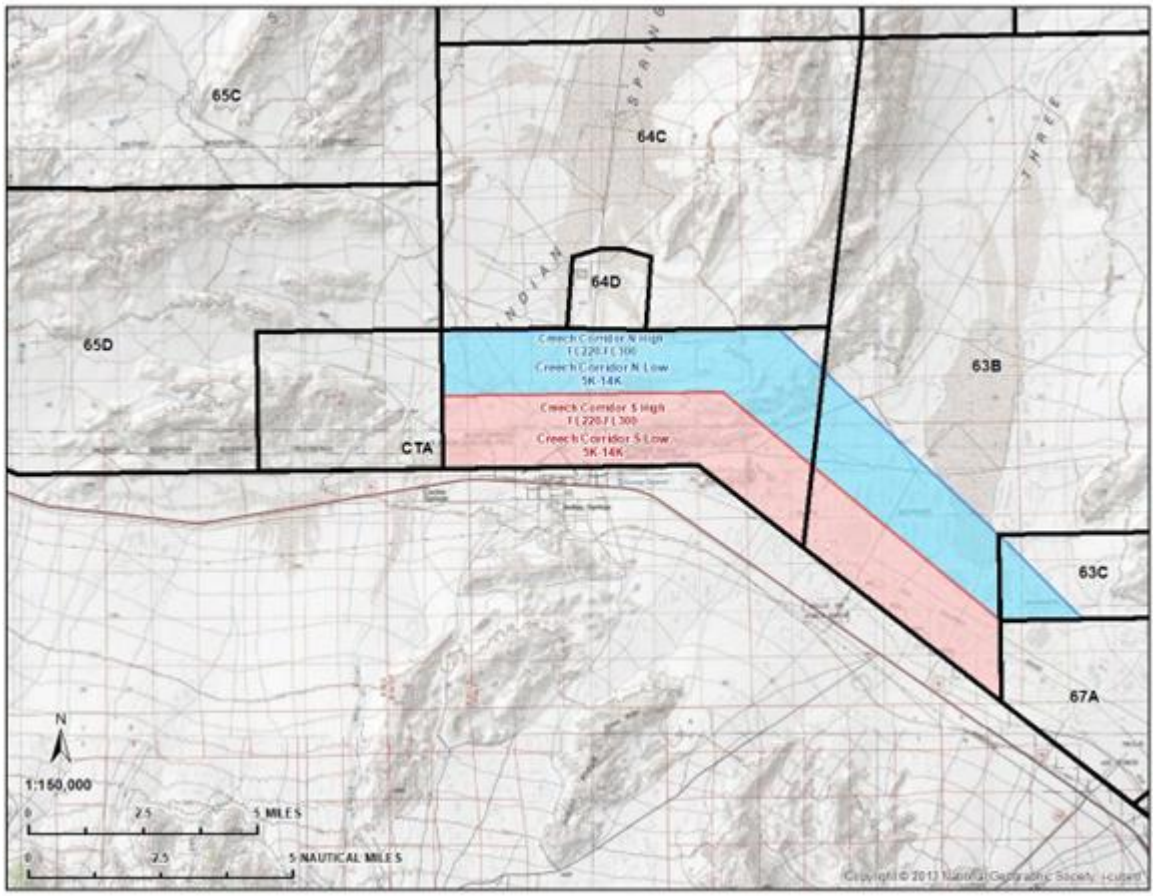


Figure A7.8. IR 286 Entry.

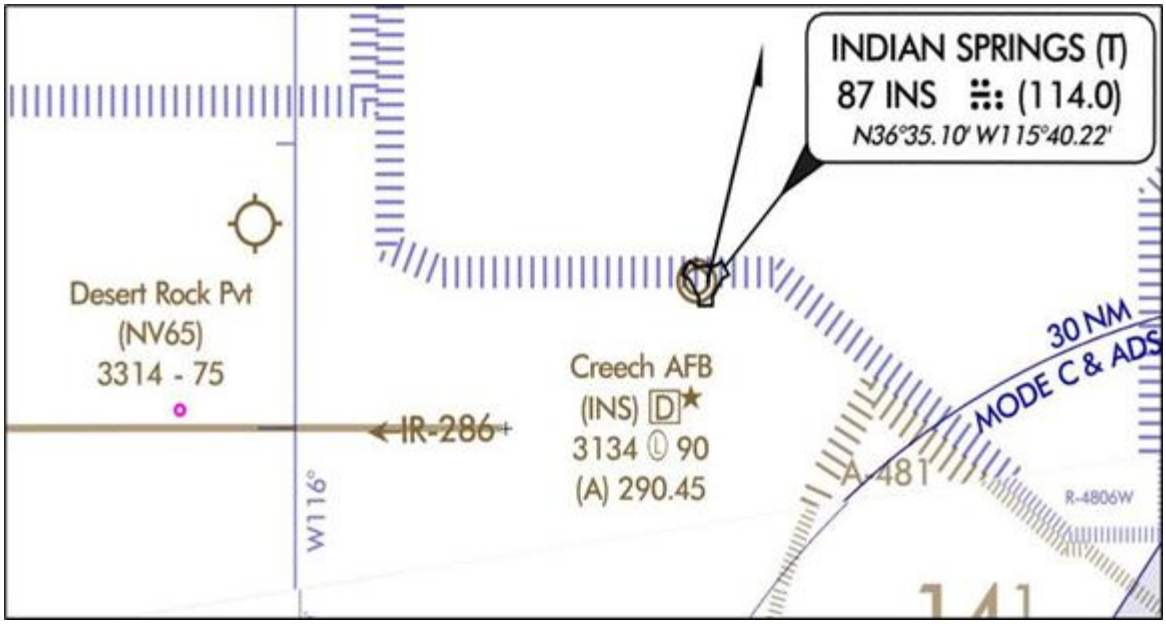


Figure A7.9. Low Altitude Tactical Navigation (LATN) Areas.

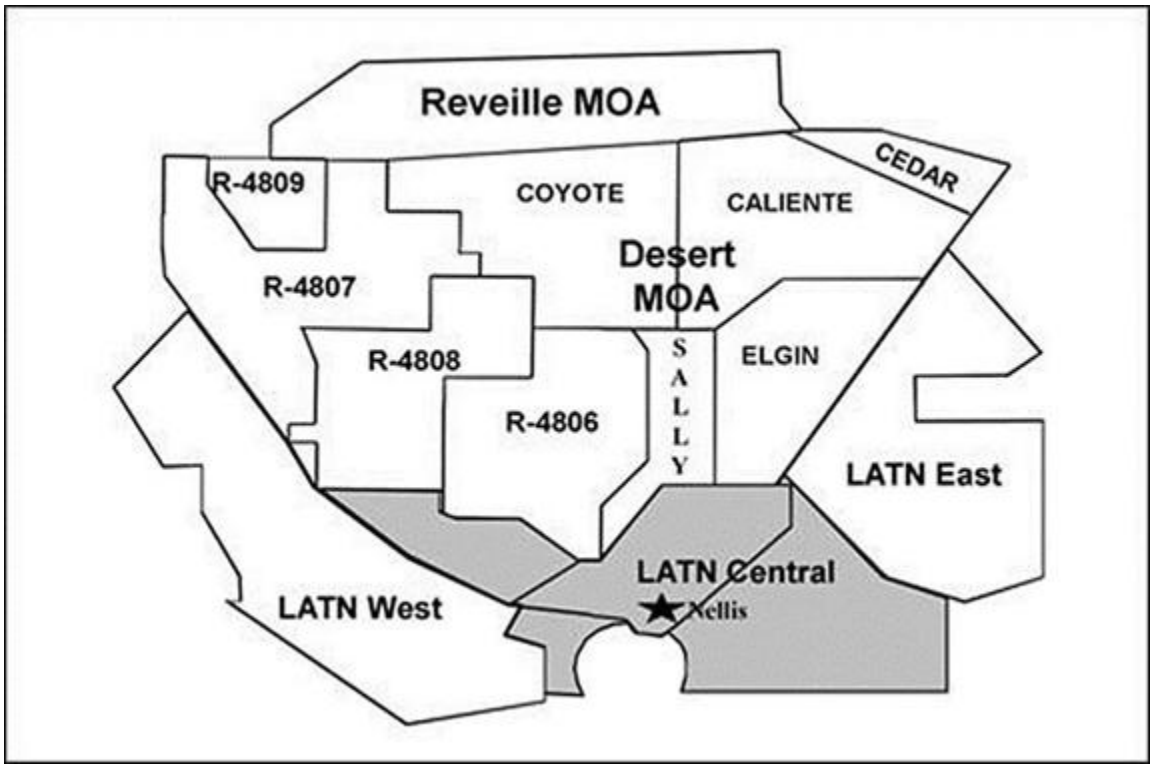


Figure A7.10. Creech RPA RWY 08/26 and 13/31 Patterns.



Figure A7.11. Creech RPA Patterns.

RPA PATTERNS	MSL	AGL
MQ-9 & RQ-170 Closed Pattern	4,600’	1,466’
MQ-9 ATLC Pattern	5,100’	1,966’
MQ-9 and RQ-170 Initial & Straight In	5,100’	1,966’
MQ-9 SFO	5,600’	2,466’
RQ-170 SFO	6,100’	3,066’

Figure A7.12. Creech RWY 13/31 Pattern.


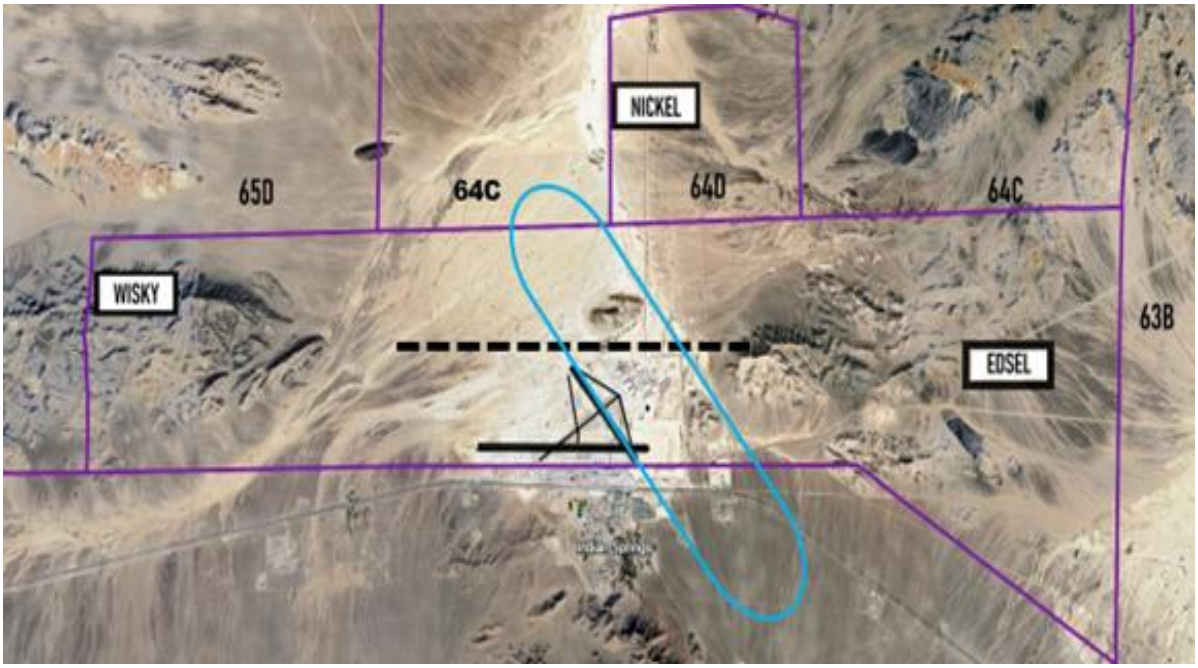


Figure A7.13. F-16 Simulated Flameout/F-35 Precautionary Flameout Pattern.

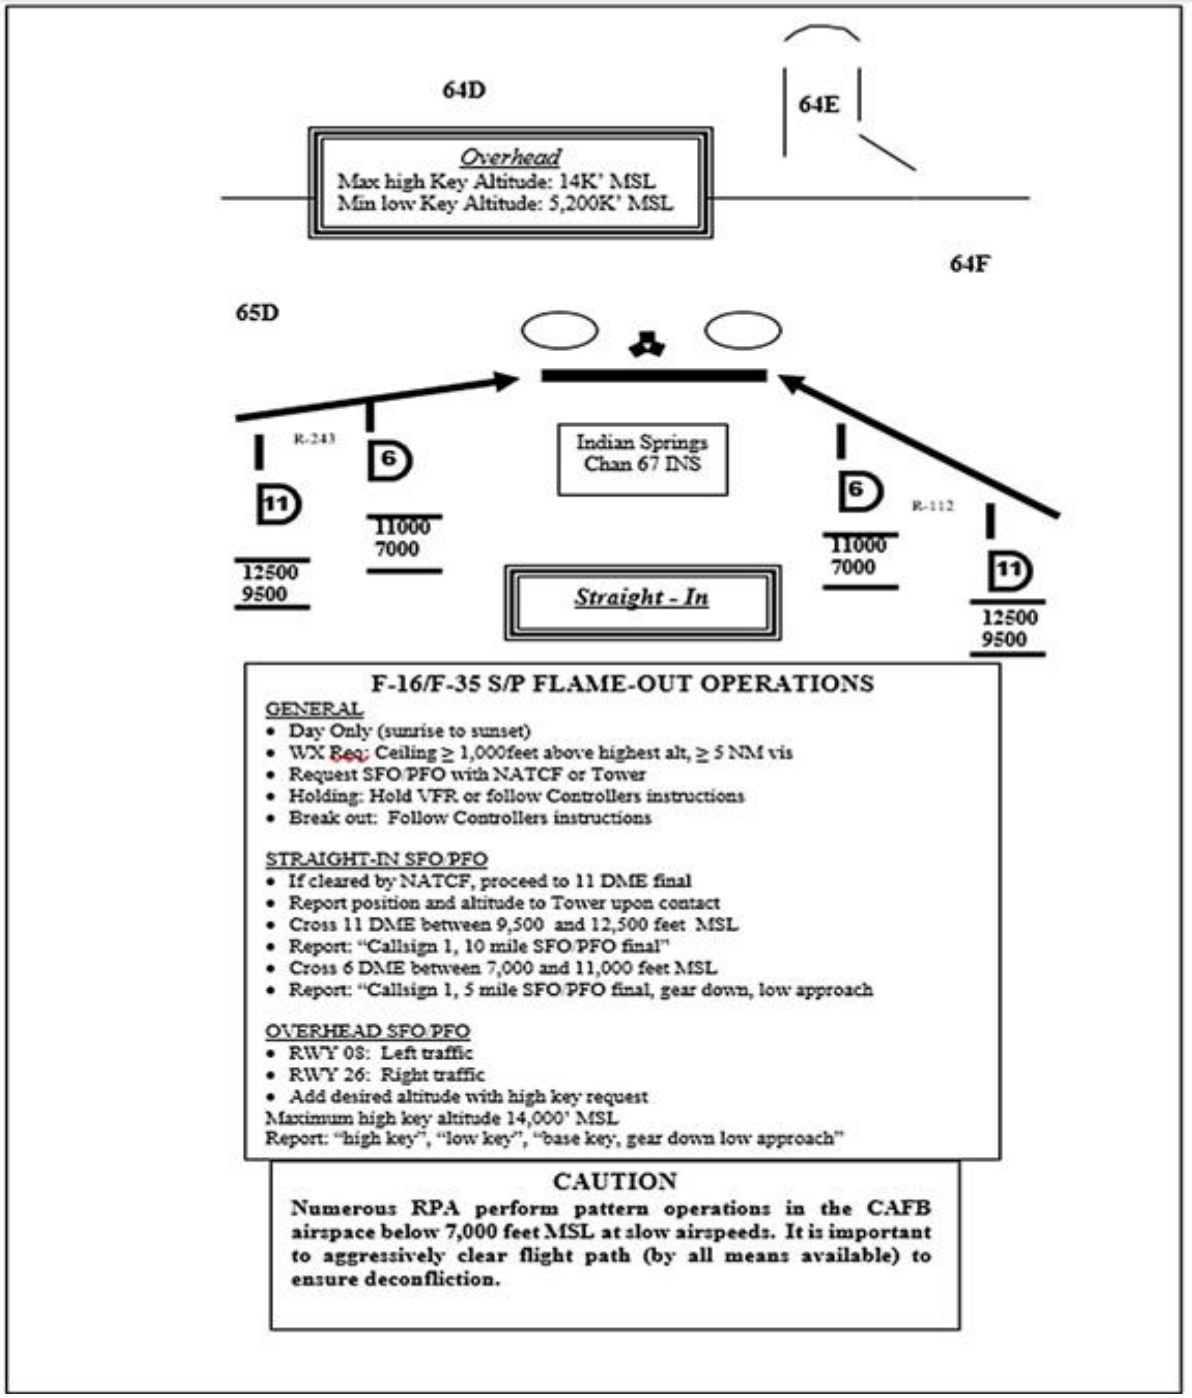

Attachment 8

RPA MARSA WITHIN 432 WG GRR/NTTR AIRSPACE

A8.1. NTTR Airspace.

A8.1.1. NTTR Airspace operating procedures can be found in the AFMAN13-212v1 ACC Sup NTTR Range Planning and Operations. The section outlined below applies to RPA MARSA operations within the NTTR surrounding Creech AFB.

A8.2. Range Altimeter.

A8.2.1. All RPAs utilizing NTTR airspace will utilize the range altimeter provided by BLACKJACK. Aircrew flying in the NTTR for durations greater than one hour will query BLACKJACK at a minimum every 90 minutes for an updated range altimeter setting.

A8.2.1.1. Aircrew will not refer to flying at Flight Levels while flying in the NTTR. Report all altitudes in thousands of feet.

A8.3. Identifying MARSA Aircraft.

A8.3.1. 432 WG GRR airspace is maintained by 432OSS. 432 WG airspace as annotated on the GRR includes each callsign that could fly during a 24-hour period. These time periods do not reflect takeoff and land times for each individual aircraft. GRR airspace should not be used for building situational awareness regarding the number of RPAs flying at any given time. The 432d Wing Flying Schedule and the 25th Attack Wing flying schedule will be used in conjunction with the GRR to establish accurate account of takeoff and land times for RPAs utilizing the same airspace.

A8.3.1.1. The 432d Wing Flying Schedule and the 25th Attack Wing flying schedule should be used to filter which aircraft will be flying during any given time. The takeoff and land times listed on the Wing Flying Schedule will be used during mission planning to understand which RPAs will be in 432 WG/25 ATWG GRR airspace.

A8.3.1.2. The SOF shall be contacted prior to takeoff to account for changes in the Wing Flying Schedule due to ground aborts, cancelations, aircraft departing the NTTR, etc.

A8.3.1.3. Before departing Creech Tower Airspace into 432 WG/25 ATWG GRR airspace, aircrew must account for each aircraft they will be MARSA with. This should be accomplished prior to departing CTA. Aircrew intending to remain in the pattern or who are more than ten minutes from requesting takeoff clearance will refrain from requesting a stack update to minimize radio traffic on RPA Common.

A8.4. Communications Prior to Takeoff.

A8.4.1. Aircrew will contact the SOF prior to departure. Aircrew will provide the SOF intended takeoff time, working altitude, and working airspace. The SOF will provide which aircraft have taken off, canceled, or departed the NTTR. MQ-9s will receive their Lost Link Land deconfliction loiter timer assignment when contacting the SOF.

A8.5. RPA Common Calls.

A8.5.1. Purpose. The verbiage listed in this section is intended to provide aircrew with a baseline standard of communication while utilizing RPA Common. What is listed is not all inclusive and is not intended to limit what calls aircrew may need to make to maintain safety of flight and MARSA.

A8.5.2. Airspace. Once aircraft are established at their working altitude, it is assumed they will be utilizing all airspace assigned to them on the GRR. It is not required to give position reports on RPA common when crossing boundaries in assigned airspace (e.g., crossing from 63B to 64C when both boundaries are assigned on the GRR). Coordination is required if a MARSA deconfliction is needed.

A8.5.3. Responses. Aircrew will verbally respond to RPA Common calls if a response is required. At no time will a radio "double-click" or similar response be used in lieu of verbal acknowledgement.

A8.5.4. Situational Awareness. RPA Common serves as one layer of situational awareness in addition to providing a means by which to coordinate with other RPAs to maintain safety of flight. It is the responsibility of each aircrew member to ensure that they always maintain situational awareness of other players.

A8.5.5. Departure from CTA. When able, either once Tower authorizes a change of frequency or as soon as desired for aircraft with multiple radios, aircrew will make their initial call on RPA Common to inform other players of their departure and climb plan. Regardless of technique, a call on RPA Common to declare intentions to enter 65D (or applicable departure airspace) must be made prior to entering said airspace. Example: *ALL PLAYERS, REAPER 11 DEPARTING CREECH, ENTERING 65D AT 7,500, CLIMBING 15,000.*

A8.5.5.1. Aircraft established in the NTTR will provide a position report to aircraft departing Creech AFB for situational awareness. Minimum position reports will include current airspace and altitude. Aircraft are considered factor traffic if they occupy the same airspace and altitude at any point along intended path of flight (i.e., aircraft departing CTA westerly for 65D at 27K' and another aircraft is loitering in 65D at 26K').

A8.5.6. Establishing Level. Once established at a working altitude, aircraft will make an established call. Once this call is made, other aircraft will be expected to deconflict from working at this altitude to the maximum extent.

A8.5.6.1. Example: "*REAPER 11, ESTABLISHED 22,000."* NOTE: Aircraft are not expected to respond to an established call unless deconfliction is required.

A8.5.7. Elevator. Prior to beginning climbs or descents, aircrew will ensure proper MARSA deconfliction is accomplished on RPA Common. Aircraft that are factor traffic will utilize the deconfliction crosshairs in the airspace to ensure they have lateral deconfliction.

A8.5.7.1. Example: "*BANG 01, 63B, 28,000, DESCENDING 22,000." "HOOTER 11, 63B, 24,000. REQUEST YOU DESCEND NORTH OF THE CROSSHAIRS." "BANG 01, COPY. WILL REMAIN NORTH OF THE CROSSHAIRS. 28,000 DESCENDING 22,000. WILL CALL WHEN PASSING 23,500." "BANG 01, PASSING 23,500." "HOOTER 11, COPY."" BANG 01 ESTABLISHED 22,000."*

A8.5.8. Entering MARSA Airspace. Any RPA that enters shared MARSA airspace shall make a radio call on RPA common stating position, altitude, and intentions prior to entering shared airspace. Example: A 26 WPS MQ-9 utilizing a tactical frequency in airspace only assigned to the 26 WPS must make a radio call to enter airspace that is also assigned to the 432 WG.

A8.5.9. Arrivals. Aircrew intending to recover at Creech AFB should utilize the standard arrival procedure (or alternates, as directed by SOF/ATIS). Once inside 63DH at or below 25,000', aircrew will ensure they announce their intentions to descend and recover via the RPA Corridor.

A8.5.9.1. Example: "*ALL PLAYERS, CROW 22, 63DH, 24,000 DESCENDING 7,500, RTB CREECH." "ALL PLAYERS, CROW 22, LEVEL 7,500 RTB CREECH, FINAL CALL."*

A8.5.9.2. Aircrew shall coordinate for their arrival with Tower prior to entering Creech Tower Airspace.