BY ORDER OF THE COMMANDER WRIGHT PATTERSON AIR FORCE BASE

WRIGHT PATTERSON AIR FORCE BASE INSTRUCTION 13-204

21 JULY 2026

Nuclear, Space, Missile, Command and Control

AIRFIELD OPERATIONS

COMPLIANCE WITH THIS PUBLICATION IS MANDATORY

ACCESSIBILITY: This publication is available for downloading or ordering on the e-Publishing website at **www.e-Publishing.af.mil**

RELEASABILITY: There are no releasability restrictions on this publication

---

OPR: 88OSS/OSA

Certified by: 88OSS/CC
(Lt Col Rodney J. Fangmann)

Supersedes: WRIGHTPATTERSONAFBI13-204, 14 September 2022

Pages: 90

This instruction implements AFPD 13-2, *Air Traffic, Airfield, Airspace and Range Management,* DAFMAN 13-204V1, *Management of Airfield Operations*, DAFMAN 13-204V2, *Airfield Management*, and DAFMAN 13-204V3, *Air Traffic Control*. It describes procedures to be used for airfield operations at Wright-Patterson AFB, Ohio (WPAFB). It is a directive for all assigned, attached, or transient units and flight crews, but not intended to replace sound judgment in the interest of safety. Refer recommended changes and questions about this publication to the Office of Primary Responsibility (OPR) using the AF Form 847, *Recommendation for Change of Publication*; route AF Form 847s from the field through the appropriate functional's chain of command. Ensure that all records created as a result of processes prescribed in this publication are maintained in accordance with (IAW) Air Force Manual (AFMAN) 33-364, *Management of Records*, and disposed of IAW Air Force Records Information Management System (AFRIMS) Records Disposition Schedule (RDS).

SUMMARY OF CHANGES

This document has been substantially revised and must be completely reviewed. This revision corrected numerous content inconsistencies and reference errors throughout the document.

Chapter 1—GENERAL INFORMATION REGARDING AIRFIELD FACILITIES 7

1.1. Runways and Taxiways. 7
1.2. Parking Plan. 8
1.3. Permanently Closed Airfield Surfaces. 9
1.4. Runway Selection Procedures. 11
1.5. Aircraft Arresting Systems (AAS) (See Attachment 3). 11
1.6. Airfield Lighting Systems. 12
1.7. Control of Ground Traffic in the Controlled Movement Area (CMA). 14
1.8. Air traffic Control (ATC)/Airfield Management Operations (AMOPS) Facilities and Airfield Services. 14
1.9. Local frequencies/Channelization. 14
Table 1.1. Local Frequencies. 15
1.10. Automated Terminal Information Service (ATIS) Procedures. 15
1.11. Navigational Aids (NAVAIDs). 15
1.12. Auxiliary Power for RAWS Facilities: 16
1.13. Civil Use of Military RAWS: 16
1.14. Procedures for Protecting Precision Approach Critical Areas. 16
1.15. Precision Obstacle Free Zone (POFZ) (See Attachment 6). 16
1.16. Airfield Restrictions. 17
1.17. Restricted Areas on the Airfield (See Attachment 3). 17
1.18. Procedures for Suspending and Resuming Runway Operations. 17
1.19. Procedures for Opening and Closing the Runway. 18
1.20. All airfield maintenance/construction will be pre-coordinated with the AFM IAW DAFMAN 13-204V2. 18
1.21. Aircraft Special Operations Areas/Ramps. 18
1.22. Aircraft Towing Procedures. 19
1.23. Aircraft Taxiing Requirements/Routes. 19
1.24. Engine Test/Run-Up Procedures. 19
1.25. Noise Abatement Procedures. 21
1.26. Ramp Isolation (ISO) and Quiet Hour Procedures. 21
1.27. Human Remains Movement: 22
1.28. Aircraft Rescue and Fire Fighting Capabilities (ARFF). 22
Table 1.2. Fire Fighting Personnel/Agent Requirements and ARFF Vehicle Sets. 22

Table 1.3. ARFF Definitions. 23
1.29. Air Traffic Control Tower (Tower) Blind Spots. 24
1.30. Conducting Runway Inspections/Checks. 24
1.31. Runway Surface Condition (RSC)/Runway Condition Reading (RCR) Procedures. 25
1.32. Airfield Snow Removal Operations. 26
1.33. Airfield Maintenance/Construction. 28
1.34. Digital Audio Legal Recorder (DALR). 29
1.35. Unmanned Aircraft Systems (UAS). 29
1.36. Radio Aircraft Modelers Society (RAMS) Club Operations at Wright Field. 29

Chapter 2—FLYING AREAS 30

2.1. Local Flying Area/Designation of Airspace (See Attachment 8). 30
2.2. Visual Flight Rule (VFR) Local Training Area. 30

Chapter 3—VISUAL FLIGHT RULES (VFR) PROCEDURES 31

3.1. VFR Weather Minimums. 31
3.2. VFR Traffic Patterns (See Attachment 9). 31
3.3. Special Procedures. 31
3.4. Tactical Arrival/Departure (TAD) Procedures. 32
3.5. AFMC Standardized Reduced Same Runway Separation (RSRS). 32
3.6. Intersection Departures. 32
Table 3.1. Runway Remaining for Intersection Takeoff. 32

Chapter 4—INSTRUMENT FLIGHT RULES (IFR) PROCEDURES 33

4.1. Radar Traffic Patterns. 33
4.2. Surveillance (ASR) and Precision Approach Radar (PAR) Approaches. 33
4.3. Local Departure Procedures. 33
4.4. Radar Vector to Initial Procedures. 33

Chapter 5—EMERGENCY PROCEDURES 34

5.1. Operation of the Primary Crash Alarm System (PCAS) and Secondary Crash Net (SCN). 34
5.2. Emergency Response Procedures. 35
5.3. External Stores Jettison Area Procedures. 36
5.4. Fuel Dumping. 37
5.5. Emergency Aircraft Arresting System Procedures. 37

5.6. Hot Brake Areas and Procedures (see Attachment 7). 38
5.7. Abandonment of Aircraft (Controlled Bail-Out). 38
5.8. Personnel Locator Beacon (PLB)/ Crash Position Indicator (CPI)/ Emergency Locator Transmitter (ELT) Response Procedures. 38
5.9. Hung Ordnance/Flare/Jammed Gun/Hot Gun Procedures (See Attachment 7). 39
5.10. Hydrazine Response Procedures. 39
5.11. Wind Limitations on Patterson Tower. 40
5.12. Evacuation of Airfield Operations Facilities. 40
5.13. Alternate Facility Procedures. 41
5.14. Earthquake Procedures. 42
5.15. Preventing and Resisting Aircraft Piracy (Hijacking) Procedures. 42

Chapter 6—OTHER EMERGENCY PROCEDURES AS LOCALLY DETERMINED (SIMULATED FLAME-OUT, PRECAUTIONARY APPROACHES) 43

6.1. Simulated Flame-out (SFO) Approaches (Overhead and Straight-in). 43

Chapter 7—FLIGHT PLANNING PROCEDURES 44

7.1. Flight Planning Procedures. 44

Chapter 8—MISCELLANEOUS PROCEDURES 46

8.1. Airfield Operations Board AOB Membership: 46
8.2. AOB Mandatory Review Board Briefing Requirements. 46
Table 8.1. AOB Annual Review Items. 47
8.3. Notice to Airmen (NOTAM) Procedures. 47
8.4. FLIP Accounts, Procedures for Requesting Changes. 47
8.5. Prior Permission Required (PPR) Procedures. 47
8.6. Air Evacuation Notification and Response Procedures. 47
8.7. Unscheduled/Unauthorized Aircraft Arrivals. 48
8.8. Distinguished Visitor (DV) Notification Procedures. 48
8.9. Dangerous/Hazardous Cargo. 48
Table 8.2. Authorized Parking Areas for Aircraft Carrying Explosives. 50
Figure 8.1. Hotel and India Row Explosives Safety Clear Zone. 52
Figure 8.2. West Ramp Explosives Safety Clear Zone. 53
8.10. Night Vision Device (NVD) Operations. 53
8.11. Local Aircraft Priorities: 53
8.12. Aircraft Lost Communications Instructions. 54

8.13. Standard “Climb-Out” Instructions. 54
8.14. Opposite Direction Take-Offs and Landings. 54
8.15. Breakout/Go Around/Missed Approach Procedures. 54
8.16. Civilian Aircraft Operations. 54
8.17. Commercial Gate 26A Cordon Operations. 55
8.18. Weather Dissemination and Coordination Procedures. 55
8.19. Variable Winds. 55
8.20. 445 AW Aircraft Ground Operations Concept Operations (CONOPS). 56
8.21. Explosive Ordnance Disposal (EOD) Range Procedures. 56
8.22. Bird/Wildlife Control: 59
8.23. Bird Watch Conditions (BWC). 59
8.24. Supervisor of Flying (SOF) Operating in the Tower. 60
8.25. Airfield Photography. 60
8.26. Wear of Hats/PPE. 60
8.27. Airfield Smoking Policy. 61
8.28. Military Assumes Responsibility for Separation of Aircraft (MARSA) Procedures. 61
8.29. Customs, Agriculture, and Immigration. 61
8.30. Aircraft Hurricane Evacuation (HUREVAC). 62

Chapter 9—CONTROLLED AREA 63

9.1. Airfield Controlled Area. 63

Attachment 1—GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION 65

Attachment 2—WRIGHT FIELD AIRFIELD DIAGRAM 76

Attachment 3—PATTERSON FIELD AIRFIELD DIAGRAM INCLUDING CONTROLLED MOVEMENT AREAS (CMA), RESTRICTED AREAS, AND ATC BLIND SPOTS 77

Attachment 4—PATTERSON FIELD EAST RAMP PARKING PLAN 78

Attachment 5—PATTERSON FIELD WEST PARKING PLAN 79

Attachment 6—PATTERSON FIELD RUNWAY 05L/23R PRECISION OBSTACLE FREE ZONE (POFZ) AND LOCALIZER CRITIAL AREA 80

Attachment 7—PATTERSON FIELD AIRFIELD SPECIAL OPERATIONS AREAS/RAMPS 82

Attachment 8—FLYING AREAS 83

Attachment 9—VFR TRAFFIC PATTERNS **84**

Attachment 10—STRAIGHT IN SIMULATED FLAME-OUT (SI-SFO) **85**

Attachment 11—OVERHEAD SIMULATED FLAME-OUT (SFO) **86**

Attachment 12—445 AW GROUND OPERATIONS **87**

Attachment 13—PATTERSON DROP ZONE **88**

Attachment 14—AIRFIELD SWEEPING PLAN **89**

Attachment 15—RAMS CLUB FLYING – WRIGHT FIELD (AREA B) **90**

Chapter 1

GENERAL INFORMATION REGARDING AIRFIELD FACILITIES

1.1. Runways and Taxiways.

1.1.1. The Wright-Patterson AFB airfield, hereafter referred to as "Patterson Field," has two active parallel runways oriented northeast/southwest. Distance between runway centerlines is 1,325 ft. Field elevation is 823 ft MSL as measured at the approach end of Runway (RWY) 23R (See **Attachment 3**).

1.1.1.1. RWY 05L/23R is a 12,600 ft long, 300 ft wide Class B precision runway with no shoulders and is grooved to USAF standards. It has a 900 ft overrun on the northeast end and 1,000 ft overrun on the southwest end. The first 2,600 ft of RWY 05L is concrete and is the only portion of the airfield where Vertical Takeoff and Landing (VTOL) aircraft operations are authorized. The remaining surface of RWY 05L/23R is asphalt.

1.1.1.2. RWY 05R/23L is a 7,000 ft long 150 ft wide Class A non-precision runway with no shoulders. It is a grooved asphalt runway with a 360 ft overrun on the southwest end. RWY 05R/23L may be closed during snow removal operations.

1.1.1.3. RWY 05R/23L contains a painted 3,624 ft long, 99 ft wide Landing Zone (LZ) (See **Attachment 3**). Transient aircraft requesting to use the LZ require a PPR 24-hours in advance.

1.1.2. Patterson Field has seven taxiways designated Alpha, Alpha 1, Alpha 2, Bravo, Bravo 1, Charlie, and Delta (See **Attachment 3**).

1.1.2.1. Taxiway Alpha is 75 ft wide and runs parallel to RWY 05L/23R for the full length of the runway's western edge. Pilots in Command (PIC) are cautioned not to mistake TWY Alpha for a runway.

1.1.2.2. TWY Alpha 1 is 75 ft wide and connects TWY Alpha with the northwest entrance to the West Ramp.

1.1.2.3. TWY Alpha 2 is 75 ft wide and connects TWY Alpha with the southwest entrance to the West Ramp.

1.1.2.4. TWY Bravo is 75 ft wide, except for TWY Bravo between RWY 05L/23R and 05R/23L (non-standard 300 ft at widest point). TWY Bravo crosses the approach end of RWY 23L. PICs and vehicle operators are cautioned as this crossing point can be deceptive.

1.1.2.5. TWY Bravo 1 is 75 ft wide and connects TWY B to the East Ramp.

1.1.2.6. TWY Charlie is 75 ft wide and intersects TWY Alpha, RWY 05L/23R, RWY 05R/23L, and TWY Bravo.

1.1.2.7. TWY Delta is 75 ft wide and intersects TWY Alpha, RWY 05L/23R, RWY 05R/23L and TWY Bravo.

1.1.3. Runway/Taxiway Limitations

1.1.3.1. Aircraft shall not use reversing maneuvers at TWY A and A2 intersection due to increased FOD potential.

1.1.3.2. During periods of excessive heat 180 degree turns on RWY 5R/23L are not authorized and 180 degree turns on RWY 5L/23R are only authorized on the SW end concrete surface. This restriction is activated via NOTAM by Airfield Management Operations (AMOPS).

1.1.3.3. There are no other current RWY/TWY restrictions for Department of Defense aircraft at WPAFB. AMOPS shall issue a NOTAM and update FIPS if any new restrictions are identified. **NOTE:** WPAFB has not been evaluated for suitability of future B747-800i operations. Any requests for B747-800i or larger aircraft will need prior coordination with the Airfield Manager (AFM).

1.2. Parking Plan.

1.2.1. East Ramp Parking Plan (See **Attachment 4**).

1.2.1.1. Delta parking row standard configuration is sited for A-10 aircraft and smaller.

1.2.1.2. Echo parking row standard configuration is sited for A-10 aircraft and smaller.

1.2.1.3. Foxtrot parking row standard configuration is sited for C-172 aircraft and smaller.

1.2.1.4. Golf parking row standard configuration is sited for C-21 aircraft and smaller.

1.2.1.5. Hotel parking row standard configuration is sited for C-17 aircraft and smaller. Aircraft with a wingspan larger than 174 ft will require a non-standard parking plan configuration.

1.2.1.6. India parking row standard configuration is sited for C-5 aircraft and smaller. **NOTE**: C-5 requires wing walkers if parking on India-2

1.2.1.7. November 1 standard configuration is sited for B-747/200 aircraft and smaller and is an alert pad.

1.2.1.8. Hot Cargo Pads1-4 (See **Table 8.2**.):

1.2.1.8.1. Any aircraft with a tail height of 49 ft or greater will not park on Hot Cargo Pad 2, as that will violate the 50:1 ratio of the Approach/Departure Clearance Surface (ADCS) for RWY 05R/23L.

1.2.2. West Ramp Parking Plan (See **Attachment 5**):

1.2.2.1. Parking spots A1-A14 are sited for C-17 aircraft.

1.2.3. All non-standard parking of aircraft must be prior coordinated and approved by the AFM or designated representative.

1.2.4. UAS Designated Start Areas: UAS aircraft will have parking spots (and startup areas if different from assigned parking) coordinated with AMOPS as part of the PPR process or prior to the aircraft being deployed on the airfield.

1.2.5. Transient Alert: Current Transient Alert info is published in US IFR SUPPLEMENT.

1.2.6. Wright Patterson does not currently have an Aero Club.

1.3. Permanently Closed Airfield Surfaces.

1.3.1. Wright Field (KDWF). Wright Field is closed. Prior coordination is required for delivery of aircraft to the National Museum of the U.S. Air Force (NMUSAF). Prior coordination is also required for operating procedures pertaining to balloons, blimps and other special aerial events. The NMUSAF originates the request to open Wright Field to the approval authority, HQ AFMC A3/6 for aircraft delivery. (See **Attachment 2**).

1.3.2. NMUSAF Aerial Events and Aircraft Delivery Responsibilities.

1.3.2.1. NMUSAF: Assumes overall responsibility and liability for the safety and security of each operation, aircraft, and personnel involved, and is accountable for planning and executing this plan.

1.3.2.1.1. Submits and obtains all MAJCOM and FAA waivers/approvals as required meeting all time constraints.

1.3.2.1.2. Addresses other participants in each Operations Plan submitted to HQ AFMC A3/6.

1.3.2.1.3. Originates all requests for flying operations to the approving authority, HQ AFMC A3/6 through 88 OSS/OSA.

1.3.3. Identifies an "Event Coordinator" responsible for the planning, preparation and general management of each event. Coordination with 88 OSS, 88 ABW/SE, 88 CEG, 88 SFS, and 88 ABW/CEM will be accomplished as necessary.

1.3.3.1. Provides a concept of operations to 88 OSS/OSA at least 90 days prior to the scheduled event.

1.3.3.1.1. For aerial events, the NMUSAF will comply with requirements IAW AFI 10-1001 and forward required documentation to Airfield Management for processing.

1.3.3.2. Airfield Management:

1.3.3.2.1. Acts as an advisor to the Event Coordinator.

1.3.4. The AFM, OSS Director of Special Operations, or designated representative shall determine if the runway or landing surface, approach/departure zones, or any obstructions/violations pose risks that must be repaired, mitigated, or waivered. Identify any areas of concern prior to any takeoff/landing of aircraft. The PIC must accept final responsibility.

1.3.4.1. Processes required documentation from the PIC IAW 10-1001 with the Event Coordinator as required.

1.3.4.1.1. Meets with the PIC and 88 ABW/SE at the earliest possible time to discuss procedures, limiting factors, and safe handling requirements.

1.3.5. NMUSAF Aircraft Delivery Procedures.

1.3.5.1. Landings on RWY 09 are preferred (elevation 830' MSL).

1.3.5.1.1. To preclude landing on RWY 09 with a tailwind, landings on RWY 27 are allowed when the calculated performance of the aircraft allows for safe operations:

1.3.5.1.1.1. Calculated turn radius keeps the aircraft clear of terrain and obstacles off the approach end of RWY 27 (may require a displaced threshold).

1.3.5.1.1.2. Calculated landing ground roll +500’ is less than the distance available.

1.3.5.2. The operation is conducted during:

1.3.5.2.1. Visual Meteorological Conditions (VMC).

1.3.5.2.2. Daylight hours, between morning and evening civil twilight.

1.3.5.2.3. Dry runway, or wet when the calculated landing ground roll (using an RCR of 12) +500’ is less than the distance available.

1.3.5.3. The length of RWY 09 (7147 x 150 ft) must be adequate to allow a safe landing for the type of aircraft concerned (runway is marked with yellow X’s spaced about 1,000 ft apart along its length and may be used by the PIC as a rough guide for runway distance remaining). RWY 09 runway surface is asphalt. RWY 09 runway markings are IAW UFC 3-260-04 for a closed runway.

1.3.5.4. The Base Weather Station (WX) will supply a portable anemometer to provide wind information for relay to the aircraft. Winds must be within safe limits for the type of aircraft concerned (as determined by the PIC).

1.3.5.5. AFM, OSS Director of Special Operations, or designated representative will:

1.3.5.5.1. Notify the Fire Department (FD) at least one working day in advance for fire/crash emergency vehicle standby at Wright Field.

1.3.5.5.2. Notify Security Forces (SFS) as soon as requirements are known but at least one working day in advance for crowd and vehicle control at Wright-Field.

1.3.5.5.3. Coordinate with Patterson Tower at least one business day in advance.

1.3.5.5.4. Coordinate with the Wing Safety Office (SE) and Public Affairs (PA).

1.3.5.5.5. Determine if foreign object debris (FOD) sweeping is required on RWY 09 prior to a landing and, if so, will coordinate with Base Civil Engineering (CE) to accomplish sweeping operations.

1.3.5.5.6. Brief the PIC on the following:

1.3.5.5.6.1. Traffic pattern direction (left-hand at Wright Field).

1.3.5.5.6.2. Traffic pattern altitude (same as Patterson Field for type of aircraft concerned).

1.3.5.5.7. Coordinate with Air Force Research Lab (AFRL), Bldg 622, DSN 785-6361, before a landing is made at Wright Field to de-conflict any possible laser activity encompassing RWY 09.

1.3.6. Be on-scene to inspect the runway before the landing, provide landing advisories to the arrival aircraft and overall event supervision.

1.3.6.1. Radio frequency for communication between aircraft and AMOPS vehicle use 88 ABW discrete UHF 289.4/VHF 134.1, if possible.

1.3.6.2. The aircraft normally lands at Patterson Field (KFFO) prior to USAF Museum delivery so the PIC may be taken to Wright Field for a visual inspection of RWY 09, with any hazards and obstructions specifically pointed out. If this is impractical, a visit by the aircrew to WPAFB prior to the delivery flight for a pre-site survey and/or a detailed visual presentation (i.e. video, PowerPoint, etc.) by the AFM or other authorized designated official of Wright Field's runway is required.

1.3.6.3. Flights originating at Patterson Field for a landing at Wright Field requires the PIC to file a flight plan with Patterson Field AMOPS.

1.3.7. USAF Museum point of contact is the Special Events Division (937) 255-8046, NMUSAF/MUS.

1.3.8. South arm/de-arm located on TWY B is unusable for aircraft parking.

1.4. Runway Selection Procedures.

1.4.1. RWYs 23L/R are designated the calm wind runways.

1.4.2. Tower Watch Supervisor (WS) shall coordinate with Columbus (CMH) Approach prior to changing the runway in use. Tower WS is the final authority for runway selection.

1.4.3. Tower shall update the Airfield Automation System (AFAS) and notify the following agencies when a RWY change is complete:

1.4.3.1. CMH

1.4.4. AMOPS

1.4.4.1. WX

1.4.4.2. FD

1.5. Aircraft Arresting Systems (AAS) (See Attachment 3).

1.5.1. Patterson Field has one installed AAS: a BAK-12(B)/TYPE H located 1,676 ft from the approach end of RWY 05L. The AAS cable is bi-directional and primarily operated by Tower.

1.5.2. There are two "Barrier Shacks" on either side of RWY 05L/23R in line with the installed South end cable and the removed North end cable (4 total) and are not equipped with evacuation bailout alarms.

1.5.3. The AAS cable is maintained in the down position unless requested by PIC or as required.

1.5.4. Barrier Maintenance (88 CEOFP) is responsible for daily AAS operating inspections, maintenance, and repair during normal duty hours (weekdays, between the hours of 0730L and 1600L). Fire Department is responsible for inspections on weekends, holidays or other base closures. (If Fire Dept is unable to perform inspections, AMOPS will perform AAS checks IAW DAFM 13-204V2). Results of all AAS daily checks will be reported to AMOPS to ensure Notice to Airmen (NOTAM) action is taken in the event of outages or status change. Barrier Maintenance must re-certify the AAS after each engagement regardless of date/time.

1.5.5. AMOPS will post AAS status on the AFAS. AMOPS will also perform visual checks of the AAS when Tower reports a suspected malfunction.

1.5.6. AAS Engagement:

1.5.6.1. Engagement of any AAS by an aircraft shall be treated as an emergency except for those instances of planned engagements for system tests and/or certifications. (See **paragraph 5.5**.).

1.5.7. AAS Certification Procedures (must be accomplished annually):

1.5.8. AMOPS will be on-site to coordinate operations between aircraft, Tower, Barrier Maintenance, FD and any other required responders. AMOPS will also ensure aircraft tug and tow bar are in place. AMOPS shall solicit aircraft's landing weight and speed of engagement from the PIC and relay information to Incident Commander (IC). PIC will remain on Tower frequency and Tower will relay information to AMOPS.

1.5.8.1. When aircraft is capable of taxiing, tail hook can be raised and if the arresting gear cable is clear of the hook, with concurrence from the IC and PIC, AMOPS will request the aircraft to taxi clear of the runway.

1.5.8.2. If the arresting system cable will not release from the tail hook, a slingshot procedure may be attempted. Clear the area fore and aft of the aircraft and ask the PIC to accelerate ahead slightly for a short distance using engine thrust, allowing the cable to reach its maximum run out distance and then reducing engine thrust to idle (aircraft brakes are not applied). The aircraft is gently pulled backward by a natural "slingshot" action of the cable, and the tail hook should "coast" clear of the cable. Slingshot procedures during in-flight emergencies that require rapid removal of an aircraft from a cable do not require approval from the ABW/CC, but PIC approval is required. For planned engagements and/or certifications, ABW/CC and PIC approval is required.

1.5.8.3. If aircraft engines are shut down, the tail hook cannot be raised for any reason, or the cable cannot be freed from the hook, then the aircraft must be towed.

1.5.8.4. If aircraft engines are not shut down, Transient Alert (TA) will pin landing gear as required when cleared by the IC. If cable is free of the tail hook and the hook can be raised, with IC and PIC concurrence, use a "*follow-me*" truck and have PIC taxi aircraft to the parking ramp.

1.5.8.5. When the aircraft is clear of the runway, AMOPS will inspect for FOD, ensure Barrier Maintenance inspects and resets the arresting system, and reopen the runway as soon as possible.

1.5.8.6. The AFM will maintain a record of arresting gear engagements to include date, time, aircraft type, tail number, speed and weight at engagement, arresting system used, distance the AAS tape traveled, and determine if aircraft is left/right or on runway centerline (RCL).

1.5.8.7. TA responsibilities: Respond with tug, tow bar, landing gear pins and other tools and equipment as required.

1.6. Airfield Lighting Systems.

1.6.1. RWY 05L/23R:

1.6.1.1. High Intensity Runway Lights (HIRL)

1.6.1.2. Runway Distance Markers (RDM)

1.6.1.3. Elevated Runway Guard Lights are located at TWY Alpha/RWY 23R VFR hold line, TWY Charlie/RWY 23L VFR hold line on the East side, TWY Bravo/RWY 23R VFR hold line, and TWY Bravo/RWY 23L VFR hold line. These lights are powered in conjunction with the runway edge lights.

1.6.1.4. Arresting Gear Markers (AGM). The AAS cable location is indicated by 40-inch diameter yellow disks (arresting gear markers) on each side of the runway which are internally illuminated for nighttime use.

1.6.1.5. Approach Lighting System with Sequence Flashing Lights (ALSF-1)

1.6.1.6. Precision Approach Path Indicator (PAPI)

1.6.1.6.1. RWY 23R PAPIs are non-standard as they are positioned on the right side of RWY 23R.

1.6.1.6.2. PAPIs are at a 3-degree angle coincidental to Instrument Landing System (ILS).

1.6.2. RWY 05R/23L:

1.6.2.1. Medium Intensity Runway Lights (MIRL). These lights are preset to the highest step for MIRLs and are not adjustable.

1.6.2.2. RDMs

1.6.2.3. PAPIs: PAPIs are at a 3-degree angle coincidental to ILS. **NOTE**: No ILS approach to RWY 05R/23L.

1.6.3. Patterson Field is also equipped with a rotating beacon, and security lighting for the East Ramp, West Ramp, and parking spot N-1.

1.6.4. In the event Tower is unmanned, either AMOPS or CE (via lighting valut) will need to take control of the airfield lighting. In the event of an emergency landing, AMOPS will ensure all of the necessary changes are made to the airfield lighting settings IAW FAA JO 7110.65, *Air Traffic Control*, Chapter 3 Section 4.

1.6.5. AMOPS will perform a daily check of the airfield lighting system to include the approach lights, north of Highway 235 (off base) (Bullpen). All lighting outages will be reported to Airfield lighting (LEX). (In the event off base access road to Bullpen is not accessible due to snow, thunderstorms, etc. the following NOTAM will be transmitted: RWY 23R APPROACH LIGHTING SYSTEM NOT INSPECTED DUE TO UNSTABLE ACCESS ROAD CONDITIONS. REPORT OUTAGES TO AIRFIELD MANAGEMENT.

1.6.6. AMOPS will accomplish an airfield lighting serviceability check IAW DAFMAN 13-204V2, *Airfield Management*, Chapter 5, and OSAM OI 13-201, *Airfield Management*. AMOPS will process an emergency work task if an outage significantly affects flying operations.

1.7. Control of Ground Traffic in the Controlled Movement Area (CMA).

1.7.1. Patterson Airfield's CMA is defined as runways, overruns and any area within 100 ft of these areas (See **Attachment 3**). All aircraft, vehicles and pedestrians must contact, receive authorization from and maintain two-way radio contact with Tower prior to entry and while in the CMA. Vehicle operators and pedestrians must also notify Tower immediately upon exiting the CMA.

1.7.2. Tower will ensure no personnel are working within the CMA of RWY 05R/23L when 133 ft or larger wingspan aircraft are utilizing RWY 05R/23L.

1.7.3. Lost Communications.

1.7.3.1. In the event of lost communications, Tower will control aircraft, vehicle and pedestrian traffic by light gun signals and/or flashing the runway edge lights on and off to alert vehicle operators/pedestrians to exit the runway immediately. If use of light gun signals and/or flashing lights is unsuccessful, Tower will contact AMOPS to have the vehicle/pedestrian traffic escorted a safe distance from the CMA.

1.7.3.2. Vehicle operators/pedestrians will exit the CMA immediately upon knowledge of lost communications, identification of light gun signals or flashing of runway edge lights and contact Tower or AMOPS immediately to advise off the CMA and include any pertinent information that might affect safe runway operations. If not able to communicate with Tower or AMOPS via radio, use other means of communication such as a cellular phone (when available) to call the tower watch supervisor at 937-257-7199 or AMOPS at 937-257-4492.

1.7.3.3. Vehicle operators/pedestrians will report all lost communication incidents to AMOPS.

1.7.4. Refer to WPAFBI13-213, *Airfield Driving* for all airfield vehicular/pedestrian traffic requirements and communication procedures to include examples of proper radio phraseology and a listing of standard vehicular call signs.

1.8. Air traffic Control (ATC)/Airfield Management Operations (AMOPS) Facilities and Airfield Services.

1.8.1. Patterson Tower and AMOPS are operational 24 hours daily unless otherwise specified by NOTAM or in the IFR Supplement.

1.8.2. TA is a contracted agency, reference U.S. IFR Supplement for hours of operation and contact information. Services are available during non-operational hours with a 1-hour prior coordination to AMOPS with TA approval.

1.8.3. Fleet Service is available with a 3-hour prior notification to AMOPS. Payment is required by AIRCARD or cash.

1.9. Local frequencies/Channelization.

Table 1.1. Local Frequencies.

Agency	VHF	UHF	
Local Control	127.8	281.45	UHF Backup-253.5
Ground Control	121.8	335.8	
ATIS	124.475	269.9	
Pilot to Dispatch	126.2	372.2	
Pilot to METRO	N/A	348.4	
Columbus APCH/DEPT	118.85	269.275	
445 AW Command Post		349.4	
88 ABW Special Events	134.1	289.4	
***NOTE**: The 88 ABW Special Events frequencies are for special events/contingencies and are available from 88 OSS Director of Special Operations on request.*			

1.10. Automated Terminal Information Service (ATIS) Procedures.

1.10.1. ATIS Frequencies:

1.10.1.1. VHF 124.475.

1.10.1.2. UHF 269.9.

1.10.2. ATIS normally broadcasts from 0700L – 2200L, daily, unless otherwise required for mission requirements.

1.10.3. Tower will notify AMOPS of any ATIS outages.

1.11. Navigational Aids (NAVAIDs).

1.11.1. Tower is designated as the primary NAVAID monitor facility. Tower is responsible for notifying AMOPS of all outages to ensure the proper submission of required NOTAMs

1.11.2. TACAN.

1.11.2.1. Class: Terminal.

1.11.2.2. Identification: FFO.

1.11.2.3. Frequency: Channel 29.

1.11.2.4. DME: Available on 115.2.

1.11.2.5. Location: On Patterson Field.

1.11.2.6. Restrictions: TACAN unusable between the 250 and 360 degree radials beyond 6NM below 5,000 ft MSL.

1.11.3. ILS RWY 23R:

1.11.3.1. Identification: I-FFO

1.11.3.2. Frequency: 109.7 MHz

1.11.4. ILS RWY 05L:

1.11.4.1. Identification: I-FAE

1.11.4.2. Frequency: 109.7 MHz

1.11.5. Preventative Maintenance Inspections (PMIs) are normally scheduled to occur annually by the CONUS Regional Maintenance Center (RMC), Oklahoma City.

1.11.6. Radar, Airfield & Weather Systems (RAWS) facilities are not equipped with evacuation bailout alarms.

1.12. Auxiliary Power for RAWS Facilities: All NAVAIDs are equipped with reliable auto-start auxiliary generators.

1.13. Civil Use of Military RAWS: Transient civil aircraft may use Patterson Airfield NAVAIDs for practice approach/training purposes although limited to low approaches only. These aircraft are handled as routine traffic and approved on a noninterference basis.

1.14. Procedures for Protecting Precision Approach Critical Areas.

1.14.1. There are two Instrument Landing System (ILS) critical areas. One is on TWY Alpha (north end) and the other is on TWY Bravo (south end) marked with instrument hold lines and internally lighted signs. One includes the overrun on the approach end of RWY 23R and the other is off the departure end of RWY 23R. These are rectangular areas that extend from the localizer transmitting antenna 2,000 ft toward the approach end of the RWY and 150 ft on each side of the RWY centerline. They include a 50 ft wide extension behind each localizer antenna.

1.14.2. Unless specific approval is obtained from Tower, aircraft and vehicles will hold short of the instrument (INST) hold lines/signs whenever any of the following conditions exists:

1.14.2.1. Advised to “HOLD SHORT OF ILS CRITICAL AREA” by Tower.

1.14.2.2. The reported ceiling is below 800 ft and/or the reported visibility is less than 2 miles.

1.14.2.2.1. Tower will visually verify that no vehicles are operating in the active ILS/GS critical area. All vehicles operating on the TWY must monitor the Tower NET (LMR) IAW WPAFBI 13-213. When Tower is unable to visually check or contact vehicles via two-way radio, AMOPS will be contacted to physically check the area.

1.14.2.2.2. When it has been determined that ILS critical areas shall be protected, Tower and AMOPS will make a broadcast announcement over both the BASE OPS and TOWER NETs (LMR) stating: “ILS CRITICAL AREAS ARE PROTECTED”. AMOPS will also inform personnel reporting entry onto the airfield, as applicable.

1.14.3. If in doubt, the vehicle operator will contact Tower for permission to enter any critical area.

1.14.4. Two-way radio contact must be maintained with Tower while operating in the ILS/GS critical area when any of the conditions in **paragraph 1.16.3** exist.

1.15. Precision Obstacle Free Zone (POFZ) (See Attachment 6).

1.15.1. The POFZ is an 800 ft wide by 200 ft long rectangular area centered on the RWY centerline, beginning at and extending outward from the threshold, designed to protect aircraft flying precision approaches from ground vehicles and other aircraft when the ceiling is less than 300 ft, or visibility is less than three-quarter (3/4) statute mile (or Runway Visual Range (RVR) below 4,000 ft).

1.15.2. Exception: vehicles less than 10 ft in height operating outside of the movement area and necessary for the maintenance of the airport and/or navigation facilities are allowed to traverse the POFZ. These vehicles will maintain radio contact with Tower when allowed to park in these areas. There are no normal vehicle operations in the POFZ except for mowers.

1.15.3. Prior to access into the POFZ, all personnel will be briefed by AMOPS.

1.15.4. Vehicles over 10 ft in height must remain outside of the POFZ during inclement weather. Vehicle operators must contact Tower to determine if the ceiling and visibility will restrict operations.

1.16. Airfield Restrictions.

1.16.1. Engine-Running Offload/On-load (ERO) or Engine-Running Crew Change (ERCC) involving aircraft on the east ramp require AFM approval.

1.16.2. For guidelines on parking an aircraft loaded with explosive materials and armament, see section 8.9.2.

1.17. Restricted Areas on the Airfield (See Attachment 3).

1.17.1. Restricted areas on Patterson Field are delineated by a red painted line on the surface of the pavement or with use of rope and stanchions. Access is through an established entry control point (ECP) marked with a sign or a break in the rope. Restricted areas are secured IAW DAFI 31-101, *Base Defense Operations*, operators entering restricted areas must be authorized and have the appropriate area designated on their AF Form 1199*, Air Force Entry Control Card*, or listed on an approved Entry Authorization List (EAL). Transient aircraft that require establishment of a temporary restricted area outside of these designated areas will be defined by rope and stanchions unless otherwise coordinated by the AFM for FOD and safety concerns

1.17.2. The West Ramp is a permanent Protection Level (PL) 3 restricted area.

1.17.2.1. November 1 located on the East Ramp is a (PL) 1 restricted area 30 minutes prior to arrival and 30 minutes after departure of asset.

1.17.2.2. Delta row 1-6, all Hot Cargo Pads and Hotel row 3-4 are considered restricted areas only when aircraft are parked in these locations.

1.18. Procedures for Suspending and Resuming Runway Operations.

1.18.1. AMOPS, Tower WS, or designated representative appointed by the 88 OSS/CC may suspend runway operations when any unsafe condition affects runway operations IAW DAFMAN 13-204V2. AMOPS/Tower WS will inform the other when runway operations are suspended.

1.18.2. Runway operations are automatically suspended immediately following the arrival of an emergency aircraft.

1.18.3. Airfield Management personnel will perform a runway check prior to resuming operations and are the sole authority for resuming runway operations.

1.19. Procedures for Opening and Closing the Runway.

1.19.1. AFM or designated representative shall temporarily close the runway when any unsafe condition affects runway operations IAW DAFMAN 13-204V2, Chapter 6, and complete local checklists/QRCs, as required.

1.19.2. Runway or airfield closures must be approved by the AFM.

1.19.3. AFM or designated representative shall perform a runway inspection prior to opening the runway and resuming normal runway operations.

1.20. All airfield maintenance/construction will be pre-coordinated with the AFM IAW DAFMAN 13-204V2.

1.20.1. AMOPS will:

1.20.2. Brief Tower prior to the start of all maintenance/construction on the airfield that will restrict flight/ground movement and/or pose a safety hazard to aircraft operations.

1.20.3. Close/suspend/restrict affected airfield surfaces as appropriate and issue applicable NOTAM(s).

1.20.4. Conduct and document construction checks as required per DAFMAN 13-204V2 and OSAM OI 13-201.

1.20.5. Maintenance/Construction personnel will:

1.20.5.1. Adhere to all airfield requirements outlined in WPAFBI 13-213.

1.20.5.2. Notify AMOPS upon airfield entry/exit.

1.20.6. The AFM or designate may close, suspend, restrict and resume taxiway/taxi lane operations IAW DAFMAN 13-204V2.

1.20.7. Close/suspend/restrict affected airfield surfaces as appropriate and issue applicable NOTAM(s).

1.21. Aircraft Special Operations Areas/Ramps.

1.21.1. Arm/De-Arm Areas (See **Attachment 7**).

1.21.1.1. Aircraft shall arm and de-arm their weapons in one of the following designated areas:

1.21.2. North end of TWY Bravo between RWY 23R approach end and RWY 23L APCH end. Armed aircraft shall be parked headed in a southwesterly direction. All non-associated aircraft and vehicular operations shall be suspended on TWY Bravo between RWY 23R APCH end and RWY 23L APCH end while arm/de-arm area is in use.

1.21.2.1. Hot Cargo Pad 4. Armed aircraft shall be parked headed in a southwesterly direction.

1.21.3. When arm/de-arm area on Hot Cargo Pad 4 is in use, all non-associated aircraft and vehicular operations shall be suspended on TWY Bravo south of Hot Cargo Pad 4.

1.21.4. Hot Cargo Pad 3 shall not be used for concurrent munitions handling if there are aircraft being armed/de-armed on Hot Cargo Pad 4.

1.21.5. Aircraft Drag Chute Procedures:

1.21.5.1. Drag chutes are jettisoned after exiting RWY 05L/23R at TWY Alpha or Bravo and before taxiing across RWY 05R/23L.

1.21.5.2. The PIC will notify Tower when aircraft chute is deployed.

1.21.5.3. TA will retrieve all transient aircraft chutes.

1.21.6. Hot Refueling Operations:

1.21.6.1. The designated parking spots authorized for hot refueling (including pit refueling) are November-1, India-1, Hotel-2, -3, and -4, Hot Cargo Pad 1, and the warm-up pad on TWY Alpha-1. Note: E4-B refueling on TWY Alpha-1 is not authorized. FD presence during hot refueling and hot liquid oxygen operations is determined by operating command directives. Other than E-4B aircraft, all aircraft will notify AMOPS 30 minutes prior to hot refueling operations and immediately upon termination. (See **Attachment 7**) for designated hot refueling locations.

1.22. Aircraft Towing Procedures.

1.22.1. All aircraft tows will be coordinated and approved by AMOPS. AMOPS will coordinate all aircraft movement with Tower via AFAS or landline.

1.22.2. All aircraft tows and related movements will receive permission to commence towing operation from Tower and maintain radio (LMR/Frequency) contact until tow is complete. Tower will be notified when the towing operation is complete.

1.22.3. Exception: 445th Maintenance Group tow operations involving 445th Airlift Wing aircraft that will remain on the West ramp only require AMOPS approval and Tower coordination is not needed.

1.23. Aircraft Taxiing Requirements/Routes.

1.23.1. Tower approval is required prior to aircraft engine start and/or taxi operations.

1.23.1.1. Contact will be made with Ground Control (GC) concerning the nature of the request and the aircraft location. The aircrew is required to follow progressive taxi instructions provided by GC and monitor the GC frequency until Tower provides direction to switch frequencies.

1.23.1.2. When arriving/departing the ramp, the PIC will follow the marshaller's direction.

1.23.1.3. Engine RPM above idle is only used when necessary.

1.23.2. Prior to aircraft movement all fire extinguisher bottles and aircraft ground equipment (AGE) must be greater than 10 ft from edge of wingtip.

1.24. Engine Test/Run-Up Procedures.

1.24.1. Engine Run-Up Areas:

1.24.1.1. TWYs adjacent to the RWYs are used to check aircraft engines and associated equipment before departure.

1.24.1.2. West Ramp

1.24.1.3. Warm-up pad adjacent to TWY Alpha 1

1.24.1.4. Hotel Row (idle engine runs only)

1.24.1.5. Parking spot N-1

1.24.2. Engine Run Procedures:

1.24.2.1. All aircraft will coordinate and gain approval from AMOPS prior to requesting engine run clearance from Tower. The requestor shall coordinate with AMOPS the type (high forward thrust, high reverse thrust, or low powered engine run), parking spot and the estimated engine run time.

1.24.2.1.1. Base/Tenant flying units will utilize their Maintenance Operations Center (MOC) to coordinate engine runs.

1.24.2.1.2. Transient aircrews will coordinate engine runs through TA.

1.24.1. Engine test or run-up procedures will be conducted between the hours of 0600L – 2200L, Monday through Saturday and 1200L – 2200L on Sundays and federal holidays. The 88 OSS/CC is the approval authority for all engine runs exceeding these criteria. Only mission essential requests will be approved outside of the above published hours. **NOTE:** 445 AW aircraft located on the West Ramp are authorized idle engine runs 24/7. Anything above idle outside of the hours stated above will require 88 OSS/CC approval. NAOC E-4B aircraft on alert are exempt from these restrictions.

1.24.1.1. Air traffic to RWY 05L/23R shall have priority over engine runs.

1.24.1.2. AMOPS will inform Tower of approved engine run requests and all pertinent information via AFAS or landline. Tower will notify AMOPS when engine runs are terminated. **NOTE**: NAOC E-4B alert aircraft may run engines as required without prior coordination.

1.24.1.3. Continuous radio contact (LMR/Frequencies) must be maintained between the aircraft and Tower during engine runs. Tower will suspend high power engine runs as needed for aircraft movement. Aircraft will notify Tower when the engine run is complete.

1.24.1.4. The West Ramp is certified for high power engine runs.

1.24.1.5. High power engine runs are defined as any run above idle.

1.24.1.6. High power engine runs warrant the following:

1.24.1.6.1. Tower shall approve or delay forward thrust high power engine runs based on traffic pattern activity.

1.24.1.6.2. Tower will suspend high power engine runs on the West Ramp when aircraft operations on RWY 05L/23R are in progress. Aircraft engaged in an engine run shall be at idle power prior to starting takeoff roll or arriving aircraft reaching a point that is 6 nautical mile final approach.

1.24.1.7. C-17 aircraft low power engine runs are defined as at idle.

1.24.1.8. Tower GC will broadcast a blanket advisory for all West Ramp engine runs on the Tower NET/Tower frequencies.

1.24.1.9. In non-designated engine run areas, power settings shall not exceed idle RPM plus 15 percent for turbojet aircraft or 1,500 propeller RPMs for turboprop or reciprocating engine aircraft.

1.25. Noise Abatement Procedures.

1.25.1. To decrease aircraft noise in the surrounding communities, the following restrictions apply to all training flights:

1.25.1.1. 0100L – 0600L – Only initial departures on outbound flight plans (no VFR/IFR pattern entry)/full-stop landings are permitted.

1.25.1.2. 2300L – 0100L – All training flights must be held to the absolute minimum necessary for mission requirements.

1.26. Ramp Isolation (ISO) and Quiet Hour Procedures.

1.26.1. Ramp ISO is defined as the act of isolating a portion of the airfield for non-essential aircraft, vehicles and personnel for all General Officers/Civilian equivalent, DV code 3 or above. The AFMC Commander is exempt unless traveling with a person of equal or higher rank.

1.26.1.1. Ramp ISO requests (i.e. airfield location, dates, times, etc.) will be coordinated and approved through AFM or designated representative.

1.26.2. Quiet hours are defined as the act of curtailment of noise producing activity in a designated area for special outdoor events. Operation of aircraft engines or AGE will be held to an absolute minimum and must be prior approved by the AFM or designated representative.

1.26.3. Ramp Isolation and Quiet Hours Procedures:

1.26.3.1. Ramp Isolation will encompass the area between the north and south ECP of Bldg. 206 and Golf row.

1.26.4. AMOPS will inform Tower, TA, transient aircrew, 445 AW Command Post, SFS, Fuels, Fire Department, NAOC (if on station), RAWS, and AFM. When informing Tower, AMOPS will pass aircraft call sign for whom ramp ISO will be established. Upon Termination of Ramp ISO, AMOPS will notify the same agencies.

1.26.5. AMOPS and TWR will make a blanket announcement on the Base Ops/Tower NETs respectively when Ramp ISO initiated and again upon termination.

1.26.6. Tower will direct all aircraft not in direct support of the event to remain clear of the ramp isolation area.

1.26.7. SFS will report to the airfield 15 minutes prior to the activation of ramp ISO to prevent all non-essential vehicles/pedestrians from accessing the affected ramp at applicable airfield gates, and/or surrounding areas. SFS will not impede aircraft operations or the detail supporting the event.

1.26.8. Quiet Hours:

1.26.8.1. Quiet Hours will encompass the entire airfield, any variations from this will be included in the published NOTAM. 88OSS/CC is the approval authority for Quiet hours and will approve or deny any requested modifications.

1.26.8.2. AMOPS will publish a NOTAM and notify TWR, TA, Fuels, Fire Department, NAOC (if on station), Transient Aircrews, 445 AW Command Post, and all contractors and or additional agencies working on or around the airfield that could be affected by the restriction.

1.26.8.3. AMOPS and TWR will make a blanket announcement on the LMR NET stating "Quiet Hours in effect until (time)" and "Quiet Hours Terminated".

1.27. Human Remains Movement: Human remains movements will be conducted IAW the AMOPS Human Remains checklist.

1.28. Aircraft Rescue and Fire Fighting Capabilities (ARFF).

1.28.1. WPAFB is postured to support USAF Set 4 aircraft in accordance with DAFI 32-2001 FIRE AND EMERGENCY SERVICES (F&ES) PROGRAM and the Air Force Fire and Emergency Services Technical Implementation Guide (AF TIG) 403-18. ARFF definitions covered in **Table 1.3** describe the 788 CES Fire and Emergency Services (F&ES) ability to support aircraft emergencies under optimal and sub-optimal conditions. The ratios calculate available F&ES manpower, ARFF vehicle readiness, and firefighting fluid onboard operational ARFF vehicles.

Table 1.2. Fire Fighting Personnel/Agent Requirements and ARFF Vehicle Sets.

Aircraft Type		Optimum Level of Service		Reduced Level of Service		Critical Level of Service		Inadequate Level of Service	
Aircraft	AF Vehicle Set	OLS - Firefighters	OLS - Gallons Q1+Q2+Q3	RLS - Firefighters	RLS -Gallons Q1+Q2	CLS - Firefighters	CLS - Gallons Q1	ILS - Firefighters	ILS - Gallons
A-10, C-21, F-15, F-16, F-22, F-35, F-117, T-37B, BQM-34, MQ-1A/B, T-38, AT-38, MQM-107, T-6A, UV-18, QF-4, CV-22, UH-1N, C-38A, T-1, RQ-4, and C-12	1	14	2,500 - 1,340	13 - 8	1,339 - 513	7	512 - 325	6 or below	324
C-20	2	14	4,000 - 2,760	13 - 8	2,759 - 1,316	7	1,315 - 752	6 or below	751
C-9, C-22, C-32, C-37, C-40, C-130, E-3, E-8, T-43, MH-53 and RC-135	3	14	5,000 - 4,880	13 - 8	4,879 - 3,027	7	3,026 - 1,322	6 or below	1,321
B-1, B-2, B-52, C-17, KC-46 and KC-135	4	16	8,000 - 7,780	15 - 8	7,779 - 4,364	7	4,363 - 1,732	6 or below	1,731
E-4 (747), KC-10 and VC-25	5	17	10,000 - 9,570	16 - 8	9,569 - 6,292	7	6,291 - 2,330	6 or below	2,329
C-5	6	18	13,000 - 12,626	17 - 8	12,625 - 7,508	7	7,507 - 2,589	6 or below	2,588
* Firefighter numbers are on a per shift basis									
** Below Optimum Level of Service – Aircrew Awareness (NOTAM)									
** Below Reduced Level of Service – Mission Commander or OG/CC approval									
** At or Below Critical Level of Service – Waiver approval as specified in paragraph 7.1									

Table 1.3. ARFF Definitions.

Optimum Level of Service (OLS)	100 to 90% (Green). The level of service where all authorized resources are available for emergency response within response time standards. OLS provides sufficient capability for quick response and sustained operations after arrival on scene. During OLS, emergency response forces shall accomplish all objectives when responding to emergency incidents.
Reduced Level of Service (RLS)	89 to 70%, (Yellow). The level of service when Emergency Response Capability (ERC) is less than OLS but greater than CLS. Sufficient capability is provided for initial response, scene assessment and implementation of mitigation tactics. This level of service represents increased risk/loss potential due to lack of ERC to perform rescue and sufficient mitigation tactics simultaneously. F&ES objectives may not be successful during situation where simultaneous rescue and firefighting activities are required
Critical Level of Service (CLS)	69 to 60% (Red). A CLS capability exists when 7 firefighters are available to respond to an emergency within the response time standards. Aircraft emergencies must meet established response time criteria for announced and unannounced emergencies. Upon arrival, the Incident Commander will determine the appropriate action to be taken depending upon their initial evaluation of the situation. Successful outcomes can only be expected when the incident can be quickly mitigated. Firefighters are expected to revert to defensive operations when the emergency cannot be quickly contained.
Inadequate Level of Service (ILS)	<60% (Black). ILS is when the ERC for a CLS is unavailable. The property involved in the fire is expected to be destroyed.

1.28.2. ARFF Procedures:

1.28.2.1. When ARFF is OLS (Green) or below, WPAFB Fire & Emergency Services (F&ES) will publish the daily crash vehicle status and distribute this information to the applicable base agencies, or as requested.

1.28.2.2. When ARFF falls to RLS (Yellow), F&ES will notify AMOPS. AMOPS will accomplish the appropriate checklist, transmit the applicable NOTAM, and notify Tower, AFMC Command Center, 445 AW Command Post, and transient aircrew on station. F&ES will provide an updated crash vehicle status with apparatus, gallonage, and/or personnel limitations with recouperation estimates to AMOPS.

1.28.2.3. When ARFF falls to CLS (Red), the actions in 1.28.2.2 will be accomplished again. Additionally, the 788 CES/CC will relay ARFF limitations and recouperation estimates to the 88 ABW/CC. Concurrently, the 88 OSS Tower will limit transient aircraft operations for the affected set to departures only or arrivals to a full stop. Transient aircraft within the affected set will cease maintenance, fueling and any air or ground training until ARFF returns to RLS or better, unless approved by the 88 OSS/CC.

1.28.2.4. As a standard flight planning activity, aircrew/mission planners are required to evaluate ARFF conditions and attain approval from a higher authority if ARFF is CLS. Mission dependent, the OG/CC, TACC (18 AF), the MAJCOM/A3, or the civilian airlift owner are responsible for approving increased risk for flights arriving or departing locations where ARFF is CLS or below. Typically, if the mission is a training flight, the aircrew will not utilize an installation with ARFF limitations. However, tasked missions may require an increased level of risk acceptance based on the importance of the mission. Examples of these risk acceptance authorities can be found in AMCI 11-208, or other MAJCOM specific flight publications.

1.28.2.5. Exception: 445AW assigned C-17 aircraft may continue to operate without limitation when ARFF vehicle agent available is 4,364 gallons or greater. When available agent levels drop below 4,364 gallons (CLS for 445AW C-17s), Fire Department will notify AMOPS. AMOPS will action on the appropriate checklist, transmit the applicable NOTAM, and notify Tower and the 445AW Command Post. 445AW Command Post will relay the updated ARFF status to the 445OG/CC who will make an operational risk determination to curtail or limit 445AW aircraft operations and/or accept risk.

1.29. Air Traffic Control Tower (Tower) Blind Spots.

1.29.1. Visual Blind Spots (See **Attachment 3**):

1.29.1.1. Southern Corner of the East Ramp.

1.29.1.2. East Ramp between all hangars/buildings.

1.29.1.3. Foxtrot 5-8.

1.29.1.4. Golf Row on East Ramp.

1.29.1.5. Hotel Row on East Ramp.

1.29.2. Radio Blind Spots:

1.29.2.1. Hotel parking spot one, intermittent LMR use only.

1.29.2.2. Between Hangar 206 North and Hangar 206 South on East Ramp, intermittent LMR use only.

1.30. Conducting Runway Inspections/Checks.

1.30.1. AFM or designated representative will perform an airfield inspection IAW DAFMAN 13-204V2.

1.30.2. When priority access is requested by AMOPS, airfield inspections/checks will have precedence over aircraft operations.

1.30.3. AMOPS will perform airfield checks IAW DAFMAN 13-204V2, in support of the following:

1.30.3.1. In-Flight Emergencies (IFE).

1.30.3.2. Ground Emergencies (GE). **NOTE:** WPAFB does not have any local policies that would exempt a physical response from AMOPS to IFEs or GEs. Additionally there are no Supervisors of Flight designated to waive this requirement.

1.30.3.3. Runway Surface Condition (RSC)/Runway Condition Reading (RCR).

1.30.3.4. FOD.

1.30.3.5. Bird Air Strike Hazard (BASH)/Wildlife habitat control, ponding, or any report of bird activity or wildlife on, near, or around the airfield.

1.30.3.6. Airfield lighting and marking retro-reflectivity check.

1.30.3.7. Uncommon airfield events, such as unauthorized landing, severe weather, snow/ice removal operations, cessation of construction activities for the day, etc.

1.30.3.8. Wide body/heavy aircraft arrivals and departures.

1.30.3.9. Check vegetation growth on or adjacent to the airfield (i.e., grass mowing, tree/brush trimming, etc.) is maintained IAW WPAFB BASH Plan. These areas include but are not limited to overruns, drainage, culverts/ditches, perimeter fencing, approach surfaces and areas around airfield lighting.

1.30.3.10. In support of Night Vison Device (NVD) operations.

1.31. Runway Surface Condition (RSC)/Runway Condition Reading (RCR) Procedures.

1.31.1. RSC will be determined and reported IAW DAFMAN 13-204V2.

1.31.1.1. AMOPS will:

1.31.1.1.1. Conduct a physical check of the runway to determine RSC Dry. A periodic check is required to monitor current RSC and ponding conditions on the airfield. Exception: RSC check will be delayed when there is a Weather Warning for Lightning within 5 NM.

1.31.1.1.2. Advise Tower, 445 AW Command Post, transient aircrew, and NAOC E-4B alert aircraft (if on station) of current RSC.

1.31.1.1.3. Process NOTAM when surface is other than dry.

1.31.1.1.4. Update AFAS.

1.31.1.1.5. Annotate all actions on the AF Form 3616.

1.31.2. RCR Procedures. WPAFB receives significant amounts of snowfall, freezing precipitation, and icing each year. AMOPS personnel utilize the RT3 Roadway Friction Tester or Bowmonk AFM2 to determine and report Air Force standard RCR IAW DAFMAN 13-204V2, Technical Order (T.O) 31-1-23*, Equipment and Procedures for Obtaining Runway Condition Readings*, Flight Information Handbook (FIH), Bowmonk AFM2 and RT3 Instructions and local checklists/QRCs.

1.31.2.1. AMOPS will:

1.31.2.1.1. Conduct RCR checks.

1.31.2.1.1.1. During changing conditions (e.g. temperature changes, snow fall, icing, and treatment of airfield surfaces), RCR checks must be completed every 2 hours or as mission dictates (from time of last completed check).

1.31.2.1.1.2. When RSC is reported as Wet Runway (WR) or Slush on Runway (SLR) and the possibility for freezing conditions exist, conduct RCR checks no less than every 2 hours or as often as mission dictates.

1.31.2.1.1.3. When the RCR is 12 or less, accomplish RCR checks as frequently as normal flying operations allow. During periods of slow activity, conduct RCR checks before each aircraft arrival/departure.

1.31.2.1.2. Report RCR value to Tower, E-4B Watch Officer if on station, 445 AW Command Post and tenant and transient flying units.

1.31.2.1.3. Update AFAS.

1.31.2.1.4. Process a Safety NOTAM as applicable to report RSC/RCR and other information essential to safe operations (e.g. depth and location of precipitation).

1.31.3. When chemicals are applied to airfield surfaces:

1.31.3.1. Notify Tower, TA, 445 MOCC, 445 AW Command Post, and transient aircrew.

1.31.3.2. Process a Safety NOTAM.

1.31.3.3. Annotate all actions on AF Form 3616.

1.31.3.4. Monitor runways to determine when chemicals evaporate or are no longer present to cancel NOTAM.

1.32. Airfield Snow Removal Operations.

1.32.1. General. Snow and ice can delay operational capability and present hazardous ground operating conditions for aircraft. *WPAFB Snow and Ice Control (S&IC) Plan* governs airfield snow and ice removal as well as anti-icing operations. Snow removal is normally operational from November through April and operates 24/7 as required.

1.32.2. The *WPAFB S&IC Plan* outlines three priority areas: Priority 1, Priority 2, and Priority 3. The AFM or designated representative may amend priority surfaces to ensure safe handling of mission essential airfield/aircraft operations.

1.32.3. Responsibilities below are in addition to those in *WPAFB S&IC Plan*:

1.32.3.1. The Chief, S&IC, or a representative, is the Snow Operations Crew Leader ("Snow 1") and will conduct airfield snow and ice removal according to the *WPAFB S&IC Plan*, current airfield operational needs, existing weather conditions, and available equipment.

1.32.3.2. Snow 1 shall:

1.32.3.2.1. Maintain close coordination with AMOPS regarding S&IC removal priorities, activities and progress to include notification of airfield entry and exit.

1.32.3.2.2. Maintain two-way radio communication at all times with Tower and all snow removal vehicles.

1.32.3.2.3. Report to Tower when all snow removal vehicles are off the runway.

1.32.3.2.4. Brief vehicle operators on runway entering/exiting procedures.

1.32.3.2.5. Notify Tower and AMOPS when:

1.32.3.2.5.1. Snow 1 changes (due to shift change, etc.)

1.32.3.2.5.2. Snow 1 is off the airfield and has another vehicle assume crew lead responsibilities

1.32.3.2.5.3. Snow 1 changes vehicles

1.32.3.2.6. Advise Tower and AMOPS when snow removal operations are suspended/terminated.

1.32.3.3. Snow Removal Vehicle Operators will:

1.32.3.3.1. Monitor the Control Tower NET (LMR) for essential information relating to the airfield environment.

1.32.3.3.2. In case of radio failure, vehicle operators shall inform Snow 1 immediately. Snow 1 will coordinate with Tower for removal of the vehicle from the CMA and taxiways until radio communication can be reestablished with Tower.

1.32.3.3.3. Check in with AMOPS upon entering and exiting the airfield.

1.32.3.4. Tower will:

1.32.3.4.1. Turn on all taxiway lights and place all runway edge lights on Step 3 when snow removal operations are in progress.

1.32.3.4.2. Request CMH Approach provide a 15 mile from landing advisory on all Patterson Field arriving aircraft, and in turn, relay this promptly to Snow 1.

1.32.3.4.3. Advise Snow 1 of all departing aircraft prior to taxi.

1.32.3.5. AFM or designated representative will:

1.32.3.5.1. Monitor airfield surfaces for snow/ice buildup during winter weather conditions. During changing weather conditions conduct more frequent airfield checks as needed.

1.32.3.5.2. As a general rule, begin snow or ice removal operations when airfield markings become obscured or at the onset of icing conditions; begin anti-icing operations when ground temperatures and precipitation conditions warrant. Contact CE Snow Desk or CE Service Call Desk.

1.32.3.5.3. Conduct airfield inspections/checks as snow or ice conditions require IAW DAFMAN 13-204V2. Ensure snow removal activities do not create wind rows on runways, taxiways, and aircraft parking aprons that violate wingtip clearances or impede aircraft operations. AMOPS personnel shall monitor airfield surfaces to ensure buildup of snow or ice does not exceed a height of 24 inches.

1.32.3.5.3.1. Runways, taxiways/aprons will be closed when pavement markings are completely covered, when the RCR Value is 6 or below (NIL braking action condition), or at the discretion of the AFM or designated representative.

1.32.3.5.4. Coordinate with base/tenant flying units concerning any interruption of flying operations necessitated by airfield snow and ice removal activity. Request base/tenant flying units to terminate training flights, if required. AMOPS will evaluate requests by base/tenant flying units for airfield snow removal and will notify Snow 1 of any priority changes.

1.32.3.5.5. Relay the current RSC and/or RCR data to Tower and AMOPS to include, restricted/suspended/closed taxiways, runways, and/or aircraft parking aprons, and location of windrows at or above 24 inches in height or that are creating wingtip clearance hazards.

1.32.4. Closing of RWY 05R/23L during snow removal operations:

1.32.4.1. When airfield snow removal is in progress and RWY 05R/23L is closed, snow removal vehicles may cross RWY 05R/23L without Tower authorization provided the following is accomplished:

1.32.4.2. Snow 1 coordinates with AMOPS to confirm the closure of RWY 05R/23L.

1.32.4.3. Snow 1 contacts the Tower to confirm that RWY 05R/23L is closed and advises Tower that vehicles will be crossing RWY 05R/23L to conduct snow removal operations.

1.33. Airfield Maintenance/Construction.

1.33.1. All airfield maintenance/construction will be pre-coordinated with the AFM IAW DAFMAN 13-204V2.

1.33.2. AMOPS will:

1.33.2.1. Brief Tower prior to the start of all maintenance/construction on the airfield that will restrict flight/ground movement and/or pose a safety hazard to aircraft operations.

1.33.2.2. Close/suspend/restrict affected airfield surfaces as appropriate and issue applicable NOTAM(s).

1.33.2.3. Conduct and document construction checks as required per DAFMAN 13-204V2 and OSAM OI 13-201.

1.33.3. Maintenance/Construction personnel will:

1.33.3.1. Adhere to all airfield requirements outlined in WPAFBI13-213.

1.33.3.2. Notify AMOPS upon airfield entry/exit.

1.33.4. Airfield Sweeping Plan.

1.33.4.1. Airfield Sweeper will report on the airfield by 0830L Mon – Fri. The schedule for the week is as follows (See **Attachment 14** for visual diagram):

1.33.4.1.1. Monday – 05L/23R, TWY B between the runways, approach end TWY A abeam 23R, TWY C from 23R to TWY A.

1.33.4.1.2. Tuesday – West Ramp, TWY A1, TWY A2, TWY A from TWY A1 to TWY C.

1.33.4.1.3. Wednesday – East Ramp, TWY C from TWY B to 23L, TWY B from Air Freight Terminal to 23L.

1.33.4.1.4. Thursday –TWY B from TWY C to approach end 05L, all Hot Cargo Pads, TWY D from TWY B to 23L, TWY B1, aircraft trim pad.

1.33.4.1.5. Friday – 05R/23L, TWY D from 23L to TWY A, TWY A from TWY C to approach end 05L. **EXCEPTION:** Sweeping operations falling on a federal holiday will be conducted the duty day before or after and will be coordinated with AMOPS.

1.33.4.1.6. Once a month or as needed – Airfield access roads.

1.33.5. AFM or designated representative will coordinate with sweeper regarding any additional requirements after the daily airfield inspection/checks have been completed. Daily sweeper schedule is subject to change based on mission requirements.

1.33.6. If a sweeper is needed after hours or weekends, AMOPS will notify CE Help Desk. Upon notification, Airfield CE personnel have up to one hour to respond.

1.33.7. Airfield Mowing Operations.

1.33.7.1. Mower operators will report on and off the airfield at the beginning and end of mowing activity and prior to leaving for lunch and upon returning. Airfield Mowers normally operate from April – October, Monday-Friday from 0730L – 1530L.

1.33.7.2. All areas on the airfield will be mowed to a height of 7 to 14 inches IAW DAFI 91-212.

1.33.7.3. Mowers will minimize driving on or crossing runways or taxiways due to FOD concerns. In the event the equipment produces FOD on a taxiway or runway, mowers will contact AMOPS immediately and advise them of the location.

1.34. Digital Audio Legal Recorder (DALR).

1.34.1. WPAFB utilizes the DALR system for recording communications IAW DAFMAN 13-204V1.

1.34.2. Tower will provide daily recording checks. Tower will notify AMOPS and RAWS if any AMOPS/Tower frequencies or landlines are not recording. Tower will provide AM Staff access to recordings upon request.

1.35. Unmanned Aircraft Systems (UAS). Small Unmanned Aerial Systems (sUAS) operations are conducted IAW *Wright- Patterson AFB sUAS Concept of Employment*.

1.36. Radio Aircraft Modelers Society (RAMS) Club Operations at Wright Field. The RAMS club is a recreational organization that operates small remote controlled aircraft under recreational guidance published by the FAA, an approved FAA COA, and the Academy of Model Aeronautics (AMA). RAMS club operations and procedures are outlined in approved FAA COAs in coordination with the Tower.

Chapter 2

FLYING AREAS

2.1. Local Flying Area/Designation of Airspace (See Attachment 8).

2.1.1. The Patterson Class D is defined as the airspace extending upward from the surface to and including 3,400 feet MSL within a 4.6-mile radius of Wright-Patterson AFB, and within 1.2 miles each side of the 046° bearing from the airport extending from the 4.6-mile radius to 5.2 miles northeast of the airport, and within 1.2 miles each side of the 228° bearing from the airport extending from the 4.6-mile radius to 4.8 miles southwest of the airport excluding that airspace within the Dayton, James M. Cox-Dayton International Airport, OH, Class C airspace area.

2.1.2. KFFO is bordered to the northwest by KDAY Class C airspace.

2.2. Visual Flight Rule (VFR) Local Training Area. Buckeye and Brushcreek Military Operations Areas (MOAs)/Air Traffic Control Assigned Airspace (ATCAA). Procedures for scheduling and hours of operations are listed in the Flight Information Publication (FLIP) AP 1/A and AP1/B.

Chapter 3

VISUAL FLIGHT RULES (VFR) PROCEDURES

3.1. VFR Weather Minimums.

3.1.1. The reported ceiling shall be at least 500 ft above the requested pattern altitude and the visibility at least 3 miles in order to operate in the VFR patterns (Exception: SVFR).

3.1.2. Tower may close any, or all, of the VFR patterns at the discretion of the Tower WS/ Senior Controller (SC) if controllers are not able to keep aircraft in sight, regardless of reported weather.

3.2. VFR Traffic Patterns (See Attachment 9).

3.2.1. VFR Patterns are normally flown right traffic to right runways and left traffic to left runways at the following altitudes:

3.2.1.1. Rectangular.

3.2.1.1.1. Fighter/tactical/trainer aircraft: 2,400 ft MSL.

3.2.1.1.2. Other turbojet/turboprop aircraft: 1,900 ft MSL.

3.2.1.2. Overhead: 2,400 ft MSL.

3.2.1.3. Overhead Protection. Tower shall amend "Climb-out" for departing aircraft to "MAINTAIN AT OR BELOW 1,900 UNTIL DEPARTURE END" when the overhead pattern is in use.

3.3. Special Procedures.

3.3.1. Aircraft Arresting System (AAS) Operations.

3.3.1.1. Departures. The departure end cable will be raised by Tower prior to tailhook equipped aircraft departing RWY 23R, unless otherwise requested by the PIC. Tower controller shall verbally relay the status of the cable to the aircraft upon issuing takeoff clearance.

3.3.1.2. Arrivals. The departure end cable will be raised by Tower prior to tailhook equipped aircraft making an approach to RWY 23R, unless otherwise requested by the PIC. Tower controller will verbally relay the status of the cable to the aircraft upon establishing communication.

3.3.1.3. Low-speed taxi rollovers must be kept to a minimum to prevent degradation of system performance. If the AAS is not required to stop the aircraft, Tower should lower the cable prior to rollover.

3.3.2. Helicopter Operations. Arrival/departure operations to/from any surface designated as an operational runway or taxiway is authorized. Arrival/departure to/from any portion of the parking apron is not authorized, unless prior coordinated with AMOPS.

3.3.3. Paradrop/Parajump Operations.

3.3.3.1. Paradrops are not authorized unless coordinated with AMOPS, Tower, and appropriate FAA agencies.

3.3.3.2. See **Attachment 13** for depiction of Patterson Drop Zone.

3.3.4. Functional Check Flights (FCFs). FCFs are not normally conducted. Prior coordination with Tower is required.

3.4. Tactical Arrival/Departure (TAD) Procedures. TAD maneuvers are conducted IAW TAD *Letter of Agreement* with the 445 AW and Columbus ATCT. TAD procedures are only authorized by units designated in the TAD *Letter of Agreement*.

3.5. AFMC Standardized Reduced Same Runway Separation (RSRS). Patterson Tower utilizes AFMC RSRS IAW DAFMAN 13-204V3.

3.6. Intersection Departures.

3.6.1. Intersection Departures are authorized IAW procedures outlined in FAAO JO 7110.65, *Air Traffic Control*.

3.6.2. PICs are responsible for determining if sufficient runway length is available to permit a safe departure, and may use the entire runway or a different intersection if they advise the Tower of their intentions and receive an appropriate ATC clearance. See **Attachment 3** or **Table 3.1** for runway remaining (in feet) distances.

3.6.3. RWY 23R at TWY Bravo is the standard departure point for all aircraft taxiing from the East ramp. Controllers are not required to issue the ft remaining to any aircraft departing from this departure point unless requested by the PIC.

Table 3.1. Runway Remaining for Intersection Takeoff.

RWY 23L	RWY 23R	RWY 05L	RWY 05R
TWY C 3,400 ft	TWY B (north end) 11,600 ft	TWY D 8,400 ft	TWY D 6,700 ft
TWY D NOT AUTHORIZED	TWY C 7,100 ft	TWY C 5,400 ft	TWY C 3,600 ft
	TWY D 4,100 ft	TWY B (north end) NOT AUTHORIZED	

Chapter 4

INSTRUMENT FLIGHT RULES (IFR) PROCEDURES

4.1. Radar Traffic Patterns.

4.1.1. CMH Approach controls the radar traffic pattern.

4.1.2. The pattern is normally flown southeast of Patterson Field at 3,000 ft MSL.

4.2. Surveillance (ASR) and Precision Approach Radar (PAR) Approaches. ASR and PAR approaches are not available at Patterson Field.

4.3. Local Departure Procedures.

4.3.1. Patterson Field has non-standard IFR take-off minimums and departure procedures published in the Terminal FLIP's.

4.3.2. Standard "Climb-out" for IFR departures is "FLY RUNWAY HEADING, CLIMB AND MAINTAIN 3,000."

4.3.3. Aircraft in the VFR pattern requesting to enter the radar pattern shall coordinate with Tower one pattern prior to entering the radar pattern. Tower shall coordinate a "Climb-out" clearance with CMH Approach and issue the following short range IFR clearance to the aircraft prior to radio transfer:

4.3.3.1. "CLEARED TO WRIGHT-PATTERSON AIRPORT VIA RADAR VECTORS, ON DEPARTURE FLY RUNWAY HEADING, MAINTAIN 3,000, SQUAWK (IF NEEDED)."

4.3.4. Tower shall amend "Climb-out" for departing aircraft to "MAINTAIN AT OR BELOW 1,900 UNTIL DEPARTURE END" when the overhead pattern is in use.

4.4. Radar Vector to Initial Procedures. CMH Approach provides vectors to initial upon pilot request.

Chapter 5

EMERGENCY PROCEDURES

5.1. Operation of the Primary Crash Alarm System (PCAS) and Secondary Crash Net (SCN).

5.1.1. The PCAS and SCN will be maintained and utilized in accordance with DAFMAN 13-204V2 and DAFMAN 13-204V3.

5.1.2. Both systems will be checked daily between 0830L-0845L.

5.1.3. PCAS:

5.1.3.1. The following agencies are on the PCAS:

5.1.3.1.1. Tower.

5.1.3.1.2. AMOPS.

5.1.3.1.3. WPAFB Medical Center Emergency Department.

5.1.3.1.4. Flight Surgeon. Will only answer during normal duty hours (0700L - 1600L, Monday-Friday, excluding holidays).

5.1.3.1.5. Fire Station 1.

5.1.3.1.6. Fire Station 2 (receive only).

5.1.4. Tower will activate the PCAS when, but not limited to:

5.1.4.1. Notified by the PIC, the agency responsible for the aircraft, or another ATC agency that an aircraft is experiencing an emergency.

5.1.4.1.1. Abnormal activity is seen on the aerodrome.

5.1.4.1.2. AAS engagement is expected or has occurred.

5.1.4.1.3. No radio (NORDO) aircraft is arriving.

5.1.4.1.4. Inbound aircraft intends to jettison external stores.

5.1.4.1.5. Fuel leak or hydrazine incident.

5.1.4.1.6. Unauthorized aircraft landing/movement.

5.1.4.1.7. Tower evacuation.

5.1.4.1.8. As necessary to update previously passed information.

5.1.5. The PCAS/SCN may be activated at the request of the EOC Director to support WPAFB IEMP 10-2 outlined in AFI 10-2501. The WPAFB IEMP 10-2 provides comprehensive guidance for emergency response to physical threats resulting from major accidents, natural disasters, conventional attacks, terrorist attack, and CBRN attacks.

5.1.5.1. PCAS Outage Procedures:

5.1.5.1.1. Tower will contact AMOPS via AMOPS direct line, BASE OPS NET (LMR), or landline and inform AMOPS that the SCN must be activated. Pass all pertinent information to AMOPS.

5.1.5.1.2. Tower will contact the Flight Surgeon via cell phone, (937) 608-1495, and provide pertinent information that would have been passed via the PCAS.

5.1.6. SCN:

5.1.6.1. AMOPS will activate the SCN to relay information received from Tower or other reliable sources that is critical to the safety and security of airfield/flight operations. Information received will be relayed verbatim.

5.1.6.2. AMOPS will activate the SCN when requested by Tower when the PCAS cannot be utilized. All information received will be relayed verbatim.

5.1.6.3. Agencies on the SCN include:

5.1.6.3.1. Fire Dept.

5.1.6.3.2. SFS.

5.1.6.3.3. AFMC Command Post.

5.1.6.3.4. Emergency Management.

5.1.6.3.5. TA.

5.1.6.3.6. 445 AW Command Post.

5.1.6.3.7. Safety.

5.1.6.3.8. Fuels.

5.1.6.3.9. Emergency Department

5.1.6.3.10. OPS Admin.

5.1.6.3.11. Weather.

5.1.6.3.12. Public Affairs.

5.1.6.3.13. CE.

5.1.6.3.14. 445 MX.

5.1.6.3.15. EOD.

5.2. Emergency Response Procedures.

5.2.1. Emergency response vehicles shall stage as directed by IC and IAW WPAFBI 13-213.

5.2.2. Emergency vehicles, Fire/Crash Recovery, Medical, AM, SE, and SFS responding to an aircraft emergency have priority over normal vehicular traffic. All in-flight/ground emergencies require a physical response by AM personnel.

5.2.3. Emergency vehicles will not enter the CMA without approval from Tower.

5.2.4. Tower will transmit on Tower Net and Crash/Fire NET (CFR1) when emergency aircraft is next to land: “EMERGENCY AIRCRAFT NEXT TO LAND.”

5.2.5. Once the aircraft has landed, runway operations are immediately suspended.

5.2.6. If feasible, communications between the IC and incident aircraft will be established utilizing frequency 123.225 or 289.4. The Ground Control frequency will not be used by the IC at any point.

5.2.7. The IC is responsible for advising Tower when all emergency response vehicles have exited the RWY at the conclusion of emergency response activities.

5.2.8. All personnel will ensure information and names of personnel allegedly involved in an aircraft incident/accident are not released to any agency outside of the official chain of command without 88 ABW Public Affairs approval.

5.2.9. On Base Emergency Procedures.

5.2.9.1. Tower will:

5.2.9.1.1. Activate PCAS.

5.2.9.1.2. Complete all actions IAW locally developed checklists.

5.2.9.2. AM will:

5.2.9.2.1. Activate SCN, pass information verbatim from PCAS.

5.2.9.2.2. Complete all actions IAW locally developed checklists.

5.2.10. Respond appropriately to all airfield emergencies unless specifically stated in this operating instruction.

5.2.11. Off Base Emergency Procedures.

5.2.11.1. Tower will:

5.2.11.1.1. Activate PCAS.

5.2.11.1.2. Complete all actions IAW locally developed checklists.

5.2.11.2. AM will:

5.2.12. Activate SCN, pass information verbatim from PCAS.

5.2.13. Complete all actions IAW locally developed checklists.

5.2.14. sUAS emergency response units utilize the base sUAS CONEMP in terms of emergency response procedures.

5.3. External Stores Jettison Area Procedures.

5.3.1. External Stores Jettison Area:

5.3.1.1. The infield between RWY 05L/23R and TWY Alpha, southwest of TWY Delta (see **Attachment 7**). This area is used when external stores can be jettisoned while the PIC keeps visual contact with the ground.

5.3.1.2. If the drop is at night, Tower defines TWY Delta for the PIC by turning out all taxiway lights west of RWY 23R except TWY Alpha and TWY Delta.

5.3.1.3. Tower and AMOPS will not be responsible for the jettison of external stores.

5.3.2. External Stores Jettison Procedures:

5.3.2.1. PIC:

5.3.2.1.1. Flies an IFR approach to RWY 23R, descending not lower than IFR approach minimums or safe stores separation altitude, whichever is higher, until the runway is visually acquired and then positions the aircraft between the RWY and TWY Alpha.

5.3.2.1.2. Keeps a safe separation altitude above the ground for the type stores involved while maintaining visual contact with the airfield.

5.3.2.1.3. Maintains aircraft release speed as specified in the current aircraft-operating manual.

5.3.2.1.4. Ensures all stores jettisoned/released are dropped "SAFE."

5.3.2.1.5. Jettisons/releases the stores upon passing TWY Delta (the drop point).

5.3.2.1.6. If the drop cannot be made, starts a right turn upon reaching the departure end of RWY 23R to enter closed traffic, avoiding populated areas and positions aircraft for a straight-in approach.

5.3.3. When notified of an impending jettison/release.

5.3.3.1. Tower will:

5.3.3.1.1. Activate the PCAS.

5.3.3.1.2. Broadcast a blanketed advisory over Tower NET, "ALL VEHICLES WEST OF RWY 05L/23R, EXIT THE AIRFIELD."

5.3.3.2. AMOPS will:

5.3.3.2.1. Activate the SCN.

5.3.3.2.2. Broadcast a blanketed advisory over BASE OPS NET "ALL VEHICLES WEST OF RWY 05L/23R, EXIT THE AIRFIELD."

5.3.3.2.3. If adequate time is available, AMOPS will ensure the drop area is free of personnel and equipment.

5.3.3.2.4. Respond and conduct an airfield check.

5.4. Fuel Dumping. Fuel dumping will be handled IAW FAAO JO 7110.65, *Air Traffic Control*. Facilities concerned shall broadcast an advisory on appropriate radio frequencies at 3-minute intervals until the dumping stops.

5.5. Emergency Aircraft Arresting System Procedures.

5.5.1. Tower will activate the PCAS for all unplanned engagements and automatically suspend runway operations upon engagement. AMOPS is the only authority to resume runway operations.

5.5.1.1. AMOPS personnel responding to the airfield will:

5.5.1.1.1. Key up frequency UHF 289.4/VHF 123.225 and monitor frequency.

5.5.1.1.2. Position the AMOPS vehicle to observe the engagement and ensure Fire/Crash personnel and aircraft tug and tow bar are standing by.

5.5.1.1.3. Request Transient Alert (TA) to send a tug and tow bar and give the location as needed.

5.5.1.1.4. Ensure Barrier Maintenance is called to inspect, re-rig and recertify the arresting gear.

5.5.1.1.5. Maintain a record of arresting gear engagements to include date, time, aircraft type, tail number, speed and weight at engagement, arresting system used, distance the AAS tape traveled, and determine if aircraft is left/right or on runway centerline (RCL).

5.5.2. After an AAS engagement, the average delay to re-rig and recertify an AAS is 20-25 minutes. The IC advises Tower if this time will be exceeded.

5.5.3. After Barrier Maintenance recertifies the AAS, AM will conduct an airfield check and resume RWY operations.

5.6. Hot Brake Areas and Procedures (see Attachment 7).

5.6.1. The primary hot brake areas are the north and south ends of TWY Alpha, TWY Bravo between RWY 05R/23L and RWY 05L/23R, or the south end of TWY Bravo.

5.6.2. Aircraft with hot brakes should be kept clear of other aircraft, equipment, and personnel.

5.7. Abandonment of Aircraft (Controlled Bail-Out).

5.7.1. Prior to bailout, PICs should notify an ATC facility of intentions.

5.7.2. Controlled Bail-Out Areas:

5.7.2.1. Primary: FFO 145 Radial, 45 NM fix.

5.7.2.2. Alternate: CVG 077 Radial, 63 NM fix.

5.7.3. Upon request of the IC or if bailout is in an area other than the designated bailout area, FFO Tower will obtain aircraft bailout information from CMH Approach and relay to emergency response personnel via PCAS.

5.8. Personnel Locator Beacon (PLB)/ Crash Position Indicator (CPI)/ Emergency Locator Transmitter (ELT) Response Procedures.

5.8.1. Scheduled operational ground testing of ELTs is authorized during the first five minutes of each hour and is restricted to no more than three audio sweeps.

5.8.2. Tower will notify the following agencies upon receipt of an unscheduled PLB, CPI, or ELT signal:

5.8.2.1. AMOPS. AMOPS will contact TA, 445 AW MOC, and NAOC E4-B alert aircraft (if on station) to request an inspection of all aircraft to verify if the transmission is originating at WPAFB.

5.8.2.2. CMH Approach Control.

5.8.2.3. Indianapolis ARTCC.

5.8.3. Tower will keep above agencies informed of changes in status of PLB, CPI or ELT signal.

5.9. Hung Ordnance/Flare/Jammed Gun/Hot Gun Procedures (See Attachment 7).

5.9.1. Aircraft landing or identified during post flight recovery with hung ordnance/jammed gun/hot gun or unsafe ordnance shall inform Tower of their weapon's status.

5.9.2. Aircraft with hung ordnance/jammed gun/hot gun shall taxi to Bravo South for safety pinning in Arm/De-Arm area with the aircraft headed in a southwesterly direction.

5.9.3. Tower will activate the PCAS whenever there are aircraft with hung ordnance/jammed gun/hot gun or unsafe ordnance.

5.9.4. AMOPS will:

5.9.4.1. Activate the SCN.

5.9.4.2. Notify SFS whenever there are such aircraft parked on Hot Cargo Pad 4.

5.9.4.3. Contact EOD to respond and pin aircraft only in emergency situations. After hours: contact AFMC Command Center to dispatch EOD.

5.9.5. Tower will avoid taxiing hung ordnance aircraft into an area or position that could threaten nearby personnel or equipment.

5.9.6. 788 CES/CEXD (EOD) will remove hung flare on the north warm-up pad if hung chaff/flares are discovered during post flight recovery of 445 AW assets. Secondary location for 445 AW asset hung flare will be Hot Cargo Pad 4.

5.10. Hydrazine Response Procedures.

5.10.1. If an F-16 reports Emergency Power Unit (EPU) activation, the FD will act to isolate the aircraft from personnel and will work to safe the aircraft and flight crew. **NOTE:** Hydrazine is a toxic and highly flammable liquid having the physical properties similar to oily water with an ammonia odor.

5.10.2. When a hydrazine incident such as an F-16 EPU activation or other hydrazine incident occurs:

5.10.2.1. Tower will:

5.10.2.1.1. Activate PCAS.

5.10.2.1.2. If the aircraft is able to taxi and the PIC concurs, instruct aircraft to the appropriate holding area (See **Attachment 7**):

5.10.2.1.2.1. Landing RWY 23R: Exit RWY and hold on TWY Bravo South until further instructions from FD.

5.10.2.1.2.2. If the aircraft is not able to taxi, direct aircraft to hold position on the RWY.

5.10.2.1.2.3. Landing RWY 05L: Exit RWY and hold on TWY Bravo between RWY 05L and RWY 05R until further instructions from FD.

5.10.2.1.3. Coordinate with the IC to isolate the aircraft from personnel obtain affected cordon with ECP and obtain crash grid coordinates.

5.10.2.1.4. Restrict airspace as appropriate and request AMOPS to send applicable NOTAM.

5.10.2.2. AMOPS will notify airfield users of hydrazine incident and relay the affected cordon/ECP location, adhere to OSAM OI 13-201 and complete the following: **NOTE:** Non-essential vehicles and personnel shall remain clear of the cordon.

5.10.2.2.1. AMOPS will not respond to the effected airfield area/cordon until the IC deems area "safe."

5.10.3. AFM or designated representative will coordinate with the IC for continued airfield operations.

5.10.4. Close/restrict/suspend affected airfield/airspace surfaces as appropriate.

5.10.5. The IC will accomplish the following:

5.10.5.1. Direct emergency response vehicles/operations. **NOTE:** The IC will not clear response vehicles into the CMAs. Responders still need to contact Tower for CMA access as needed.

5.10.5.1.1. Establish affected cordon, ECP, crash grid and coordinates.

5.10.5.1.2. Coordinate with Tower.

5.10.5.1.3. Request response from AM as necessary IAW Hydrazine Response Team (HRT) LOA.

5.10.5.1.4. Coordinate with the HRT.

5.10.5.1.5. Advise Tower and AFM of the estimated delay time until resumption of normal airfield operations is possible.

5.11. Wind Limitations on Patterson Tower.

5.11.1. Patterson Tower is able to withstand wind (gusts/sustained) up to 88 knots. Tower will evacuate at 70 knots (gusts/sustained). Tower WS may evacuate at a lower wind speed if it is deemed necessary for safety.

5.11.2. Tower personnel will relocate to AMOPS.

5.12. Evacuation of Airfield Operations Facilities.

5.12.1. Evacuation of Tower:

5.12.1.1. There is no fixed alternate Control Tower at WPAFB.

5.12.1.2. If Tower is evacuated, air traffic control services shall be suspended, and the airfield will temporarily close. In the event of a tornado, personnel will relocate to the designated tornado shelter in building 206. In the event of any other evacuation, Tower personnel will evacuate to designated areas as appropriate.

5.12.1.3. Tower evacuation procedures:

5.12.1.3.1. Tower will accomplish the following (time permitting):

5.12.1.3.1.1. Activate PCAS and relay all pertinent information, (i.e., reason for evacuation, traffic conditions, field conditions, etc.).

5.12.1.3.1.2. Notify CMH Approach Control of evacuation and relay all pertinent information and status of NAVAIDs.

5.12.1.3.1.3. Time permitting, broadcast an evacuation notice three times on all frequencies including 243.0/121.5.

5.12.1.3.1.4. Broadcast evacuation notice on the ATIS.

5.12.1.3.1.5. Turn on all taxiway lights and place all other airfield lighting on Step 3 for the active runway(s) configuration.

5.12.1.3.1.6. Time permitting; notify WX if evacuation is based on a significant weather observation.

5.12.1.4. AMOPS will accomplish the following:

5.12.1.4.1. Process NOTAMs as appropriate.

5.12.1.4.2. Notify local flying units and other base agencies that are affected.

5.12.2. Evacuation of AMOPS:

5.12.2.1. The primary evacuation facility is located at Building 101, Room L-116.

5.12.3. The 445 AW will provide AMOPS alternate facility IAW the LOA between 445 AW and 88 OSS, *Alternate Airfield Management Operations (AMOPS) Facility*:

5.12.3.1. Service restrictions/delays may be encountered due to limited resources (i.e., telephones, computers, FLIP's, etc.).

5.12.3.2. AMOPS will notify the following agencies of evacuation/arrival at alternate facility:

5.12.3.2.1. Tower.

5.12.4. AFMC Command Center

5.12.5. 445 AW Command Post.

5.12.5.1. FD.

5.12.5.2. AMOPS will complete the following:

5.12.5.2.1. Process NOTAMs as appropriate.

5.12.5.2.2. Complete applicable checklists/QRCs.

5.12.5.3. If Tower is not evacuating, maintain communication with Tower via LMR until AMOPS reports arrival at alternate facility.

5.12.5.4. Request Tower to monitor Pilot-To-Dispatch frequencies until AMOPS can monitor frequencies at evacuation site.

5.12.6. When it is safe to return to the primary facility, Tower and AMOPS will notify affected agencies when services are restored.

5.13. Alternate Facility Procedures.

5.13.1. Patterson Tower does not have a dedicated alternate facility.

5.13.2. AMOPS Procedures:

5.13.2.1. AMOPS alternate facility is located at Bldg 101, Room L-116. Complete all actions in **paragraph 5.12.2**, and locally derived checklists and QRCs IAW OSAM OI 13-201.

5.14. Earthquake Procedures.

5.14.1. Upon notification or observation of earthquake in progress, Tower will advise taxiing aircraft to stop and shut down engines until the airfield can be checked.

5.14.2. AMOPS will perform an airfield check prior to resuming airfield activities.

5.15. Preventing and Resisting Aircraft Piracy (Hijacking) Procedures. The 88 OSS/OSA, Airfield Operations Flight, will adhere to the WPAFB Preventing and Resisting Aircraft Piracy (Hijacking) Plan, AFI 13-207-O, *Preventing and Resisting Aircraft Piracy (Hijacking),* and FAA 7610.4, *Special Operations.*

Chapter 6

OTHER EMERGENCY PROCEDURES AS LOCALLY DETERMINED (SIMULATED FLAME-OUT, PRECAUTIONARY APPROACHES)

6.1. Simulated Flame-out (SFO) Approaches (Overhead and Straight-in).

6.1.1. SFO procedures currently only apply to F-16 aircraft assigned to the 180 FW from Toledo, OH. Procedures are documented in an LOA between the 180 FW, CMH Approach, and 88 ABW.

6.1.2. Other units requesting SFO procedures at WPAFB shall document procedures via LOA with the appropriate agencies.

Chapter 7

FLIGHT PLANNING PROCEDURES

7.1. Flight Planning Procedures. Flight plan procedures will be IAW AFMAN 11-213, DAFMAN 13-204V2, FLIP General Planning and applicable LOAs.

7.1.1. Aeronautical Information System – Replacement (AIS-R). AMOPS is equipped with the Federal Aviation Administration (FAA) AIS-R, worldwide telecommunications system and will utilize this system for the following:

7.1.2. AMOPS assumes all flight following and flight plan transmission duties and responsibilities through the AIS-R to include IFR/VFR flight plans, flight notification, enroute change of destination, and other relevant messages as applicable to appropriate ATC facilities, FAA Flight Service Stations (FSS), AMOPS facilities, and other interested agencies.

7.1.3. Original flight plans must be filed in person unless there is an exception noted below. Original flight plans will not be accepted via radio. All flight plan(s) must be filed with AMOPS IAW the following:

7.1.3.1. PIC Flight Planning Responsibilities:

7.1.3.1.1. Aircrews are authorized to utilize Foreflight and/or other electronic means for filing of flight plans in accordance with the below procedures.

7.1.3.1.1.1. When filing flight plans utilizing Foreflight, the PIC or designated representative will ensure AMOPS receive the flight plan via organizational email at **88OSS.BaseOPS@us.af.mil**. NOTE: This can be accomplished by entering the organizational email in the "send to" feature or utilizing it as the pilot's email address.

7.1.4. The electronic flight plan (e-FP) sent to AMOPS must contain all the required information necessary to process the e-FP (i.e. type aircraft, call-sign, tail number, proposed departure date/z- time, valid route of flight, estimated time enroute, aircrew names, and any requested services at the destination). NOTE: The original flight plan must be maintained at respective flying squadrons when filing through Foreflight.

7.1.4.1. The PIC or designated representative will verify receipt of the e-FP with AMOPS at extension 257-4492/3686. They will also verify the flight plan was accepted in the system.

7.1.4.1.1. The PIC understands that AMOPS is unable to edit e-FPs filed on Foreflight and will utilize the below primary and backup procedures for amending the e-FPs if necessary.

7.1.4.1.1.1. **1801 or other format.** will constitute as the "original flight plan". AM will process the original e-FP following established procedures. AM will print the e-FP and file in the same manner as an original DD 1801 flight plan. NOTE: AMOPS will retain any hard copy original signed flight plans for the appropriate records retention period for flight plans not originally filed online.

7.1.4.1.2. 445 AW will annotate engine running offload/onload (ERO), engine running crew changes (ERCC), call-sign changes, NVD ops in the remarks section of the DD Form 1801. Example: “ERO”, “ERCC”, “NVD”, etc.

7.1.4.2. Foreign Military. Must file an accurate flight plan (DD Form 1801) with an original signature, prior to engine start, taxi, and departure from Patterson Field.

7.1.4.3. Civilian Transient PICs must file an accurate flight plan (DD Form 1801) and/or hard copy of an electronic computer-generated flight plan) with AMOPS. If PIC filed an electronic computer generated flight plan, PIC must provide a copy of the flight plan prior to engine start, taxi, and departure from Patterson Field.

7.1.5. Any deviations from the original filed flight plan prior to ATC clearance issuance must be coordinated through AMOPS via telephone, fax, or radio. Tower will advise AMOPS of any deviations to the issued clearance (i.e. local pattern delays, route change, en-route time, etc.). **NOTE:** If Tower cannot locate a clearance contact AMOPS for coordination.

Chapter 8

MISCELLANEOUS PROCEDURES

8.1. Airfield Operations Board AOB Membership:

8.1.1. Mandatory Members:

8.1.1.1. 88th Air Base Wing Deputy Commander (88 ABW/CD, Board Chairperson)

8.1.1.2. 88th Mission Support Group Commander (88 MSG/CC) or representative

8.1.1.3. 88th Civil Engineering Group Director (88 CEG/CL) or representative

8.1.1.4. 445 Operations Group Commander or representative.

8.1.1.5. Flight Safety (88 ABW/SEF & 445 AW/SE)

8.1.1.6. 88th Operations Support Squadron Commander (88 OSS/CC) or representative

8.1.1.7. Airfield Operations Flight Commander (88 OSS/OSA) or representative

8.1.1.8. Chief Controller, Tower (88 OSS/OSAT)

8.1.1.9. Airfield Manager (88 OSS/OSAA)

8.1.1.10. Base Weather (88 OSS/OSW)

8.1.1.11. Civil Engineering (88 CEG)

8.1.1.12. Logistics Readiness (88 MSG/LGR)

8.1.1.13. RAWS (88 OSS/OSM)

8.1.1.14. sUAS Program Manager

8.1.2. Members Invited but Not Required to Attend:

8.1.2.1. Terminal Instrument Procedures Specialist (AFMC TERPS)

8.1.2.2. Columbus Terminal Radar Approach Control (FAA)

8.1.2.3. WPAFB E-4B Liaison (88 ABW/XPX)

8.1.2.4. Civil Air Patrol USAF local representative

8.2. AOB Mandatory Review Board Briefing Requirements.

8.2.1. Quarterly. The AOB mandatory quarterly briefing items are outlined in DAFMAN 13-204V1, *Management of Airfield Operations,* Attachment 3, and will be briefed at every AOB meeting.

8.2.2. Annual. **Table 8.1** outlines the AOB items that must be reviewed annually IAW DAFMAN 13-204V1, *Management of Airfield Operations*.

Table 8.1. AOB Annual Review Items.

TERPS	January
Status of Existing Waivers (emphasis on temporary waivers and associated correction plans)	January
LOP Review	April
Results of Annual Airfield Certification & Safety Inspection	July
Results of Annual Self-Inspection	July
AICUZ (optional)	July
Aircraft Parking Plan	October
Special Interest Items	October

8.3. Notice to Airmen (NOTAM) Procedures.

8.3.1. Airfield Management is the designated primary airfield NOTAM facility monitor for Wright-Patterson AFB. The AFM will coordinate with AMOPS to ensure appropriate NOTAMs are sent to provide advanced notification to aircrews of local airfield/airspace restrictions or deviations from published information.

8.3.2. AMOPS will process NOTAMs IAW AFI 11-208_IP.

8.4. FLIP Accounts, Procedures for Requesting Changes.

8.4.1. Non-Procedural and DoD FLIP changes will be coordinated and approved through AOF/CC.

8.4.2. Procedural changes to Instrument Approach Procedures (IAP) will be coordinated though the AOF/CC and approved by HQ AFMC/A3OO (TERPS).

8.5. Prior Permission Required (PPR) Procedures.

8.5.1. All transient aircraft must obtain a PPR number before arriving at Patterson Field.

8.5.2. AMOPS or designated representative will generate and monitor all PPR numbers issued to aircrew and will de-conflict any issues that may arise due to airfield restrictions/event(s) prior to issuance IAW OSAM OI 13-201.

8.6. Air Evacuation Notification and Response Procedures.

8.6.1. Tower will notify AMOPS at or before 10NM from the runway.

8.6.2. AMOPS will:

8.6.2.1. Notify TA of 10-mile-final approach.

8.6.2.2. In cases of advanced notice, upon issuance of a PPR notify WPAFB Medical Center Emergency Department (ED).

8.6.2.3. Notify the WPAFB Medical Center ED and FD dispatcher upon notification of an inbound AIREVAC aircraft.

8.6.2.4. Pass special medical requests and 10-mile final approach alert when provided by Tower to the Fire Department and Emergency Department. The AIREVAC Checklist will be completed and events recorded on the AF Form 3616. **NOTE:** Per AFI 10-001 and DAFMAN 13-204V2, civil aircraft transporting critically ill or injured individuals to or from WPAFB are not required to obtain a Civil Aircraft Landing Permit (CALP) but are required to obtain a PPR number for tracking and notification.

8.6.3. Care Flight/Life Guard operations off the airfield but on base will be the responsibility of the IC.

8.7. Unscheduled/Unauthorized Aircraft Arrivals.

8.7.1. In the event of an unscheduled military aircraft, AMOPS shall obtain and log required flight data from crews of military aircraft that arrive without prior notification.

8.7.2. Civil aircraft that land without prior authorization from AMOPS shall be handled IAW *WPAFB Preventing and Resisting Aircraft Piracy (Hijacking) Plan*.

8.8. Distinguished Visitor (DV) Notification Procedures.

8.8.1. AMOPS will:

8.8.1.1. Request a 10 NM notification on the arrival of a DV aircraft, utilizing the AFAS.

8.8.1.2. Complete all actions as required by local checklists/QRC's.

8.8.2. Tower will make a single landline notification via "DV" line to AMOPS and TA of DV aircraft at or before 10 NM from the runway. **NOTE:** Ramp Isolation/Quiet Hours Procedures may be required for military/civilian DV code 3 or above. Refer to **paragraph 1.27** for further details.

8.8.3. TA and AMOPS will coordinate daily for DV parking.

8.9. Dangerous/Hazardous Cargo.

8.9.1. Stub 8 Operations.

8.9.1.1. Safe Haven and Secure Hold for Department of Energy and DoD Drivers is located on Stub 8 A/B located on the east side of the airfield adjacent to the base golf range.

8.9.1.2. Stub 8 A is located outside the airfield fence while Stub 8 B is entirely on the airfield; both are accessible only from the airfield side.

8.9.1.3. Procedures will be followed IAW WPAFB Base Defense Plan.

8.9.2. The following guidelines apply to parking an aircraft loaded with explosive materials and armament in order of preference:

8.9.2.1. Hot Cargo Pads (HCP) 1 through 4: All Hazard Class/Division (HC/D). **NOTE:** Aircraft with a tail height higher than 49 ft will not be parked on HCP 2 whenever possible due to a 50:1 Approach/Departure Clearance Surface violation for RWY 05R/23L.

8.9.3. Hotel 1 through 4. Only explosive-loaded aircraft may park next to another explosive-loaded aircraft (no non-explosive loaded aircraft) Refer to **Table 8.2**.

8.9.3.1. India 1 and 2: Only used for HC/D 1.4 cargo; no parking restrictions (e.g. may park non-explosive loaded next to explosive loaded).

8.9.3.2. TWY Alpha south of TWY Charlie: Emergency only (All HC/D).

8.9.4. Alpha 1 through 14. Limited to HC/D 1.2.2 and below.

8.9.4.1. Park aircraft with exempt explosive devices at designated aircraft parking spots or hangar these aircraft IAW DAFMAN91-201, *Explosives Safety Standards,* and Technical Order (T.O) 11A-1-33, *Handling and Maintenance of Explosives Loaded Aircraft – (ATOS*). (See **Table 8.2** and **Figures 1.1**. & 1.2., Authorized Parking Areas for Aircraft Carrying Explosives.)

8.9.5. Clear zones.

8.9.5.1. 88 ABW/SEW (Weapons Safety) is responsible for defining necessary clear zones.

8.9.5.2. Peace Time Operations

8.9.5.2.1. Any HC/D 1.1 and 1.2.1 will have clear zones of 1250 and 1260 feet, respectively.

8.9.5.2.2. HC/D 1.4 will have a clear zone of 100 feet.

8.9.5.2.3. Any other HC/D clear zones will be determined by 88 ABW/SEW.

8.9.5.3. War/Contingency Operations

8.9.5.3.1. When activated Hot Cargo Pads 1 through 4 will assume HAZPAD 1 through 4 designations utilize the appropriate Explosive Site Plan limits and clear zones

8.9.5.3.1.1. Any HC/D 1.1 and 1.2.1. on HAZPAD 1 and 2 will have clear zones of 1,633 and 1,433 feet, respectively. No change to lower limits.

8.9.5.3.1.2. Any HC/D 1.1 and 1.2.1. on HAZPAD 3 and 4 will have clear zones of 1,887 and 1,433 feet, respectively. No change to lower limits.

8.9.5.3.1.3. Any other HC/D clear zones will be determined by 88 ABW/SEW.

8.9.5.4. Non-mission related personnel are not authorized access into defined clear zones (e.g., mowers, USDA, contractors, etc. are non-mission related personnel).

Table 8.2. Authorized Parking Areas for Aircraft Carrying Explosives.

	Explosive Hazard Class and Division	**Quantity in Pounds**
Hot Cargo Pads 1-4***	(12)1.1	Daily Tier: 30,000 NEW#
“	1.2.1>450 Max Credible Event	Daily Tier: 30,000 NEW
“	1.2.2	Daily Tier: 30,000 NEW
“	(12)1.2.3</=450 Max Credible Event	Daily Tier: 30,000 NEW
“	1.3	Daily Tier: 100,000 NEW
“	1.4	PC*
Stub 8A and Stub 8B	(12)1.1	30,000 NEW
	1.2.1>450 Max Credible Event	30,000 NEW
	1.2.2	30,000 NEW
	(12)1.2.3</=450 Max Credible Event	30,000 NEW
	1.3	100,000
	1.4	PC*
TWY A (Spots 1-11)**	(12)1.1	30,000 NEW
”	1.2.1>450 Max Credible Event	30,000 NEW
“	1.2.2	30,000 NEW
“	(12)1.2.3</=450 Max Credible Event	30,000 NEW
“	1.3	100,000 NEW
“	1.4	PC*
Parking Spots H-1	1.3	5,000 NEW
	1.4	PC*
Parking Spots H-2 thru H-4	1.2.2	5,000 NEW
	1.3	20,000 NEW
	1.4	PC*
Parking Spots I-1 & I-2	1.4	PC*
Parking Spots A-1 – A-9	1.2.2	50,000 NEW
Parking Spots A-10	1.2.2	29,000 NEW
Parking Spots A-11 – A-12	1.2.2	16,000 NEW
Parking Spots A-13	1.2.2	19,000 NEW

Parking Spots A-14	1.2.2	30,000 NEW
Parking Spots A-1 – A-14	1.3	65,000 NEW
(West Ramp)	1.4	MEQ*
	WARTIME CONDITIONS - HAZARDOUS CARGO PADS	
HAZPAD 1 and 2***	1.1	68,000 NEW
	1.2.1	100,000 NEW
	1.2.2	100,000 NEW
	1.2.3	100,000 NEW
	1.3	250,000 NEW
	1.4	PC*
HAZPAD 3 and 4***	1.1	105,000 NEW
	1.2.1	100,000 NEW
	1.2.2	100,000 NEW
	1.2.3	100,000 NEW
	1.3	250,000 NEW
	1.4	PC*

#NEW = Net Explosive Weight (in lbs). MEQ = Mission Essential Quantities
*PC = Physical Capacity
**TWY Alpha = - Static grounds required to be installed by CE prior to use.
***Hot Cargo Pads 1-4 transition to Hazardous Cargo Pads (HAZPADS) 1-4 in wartime conditions or if weight limits for HC/Ds 1.1 and/or 1.2.1 are exceeded

Figure 8.1. Hotel and India Row Explosives Safety Clear Zone.

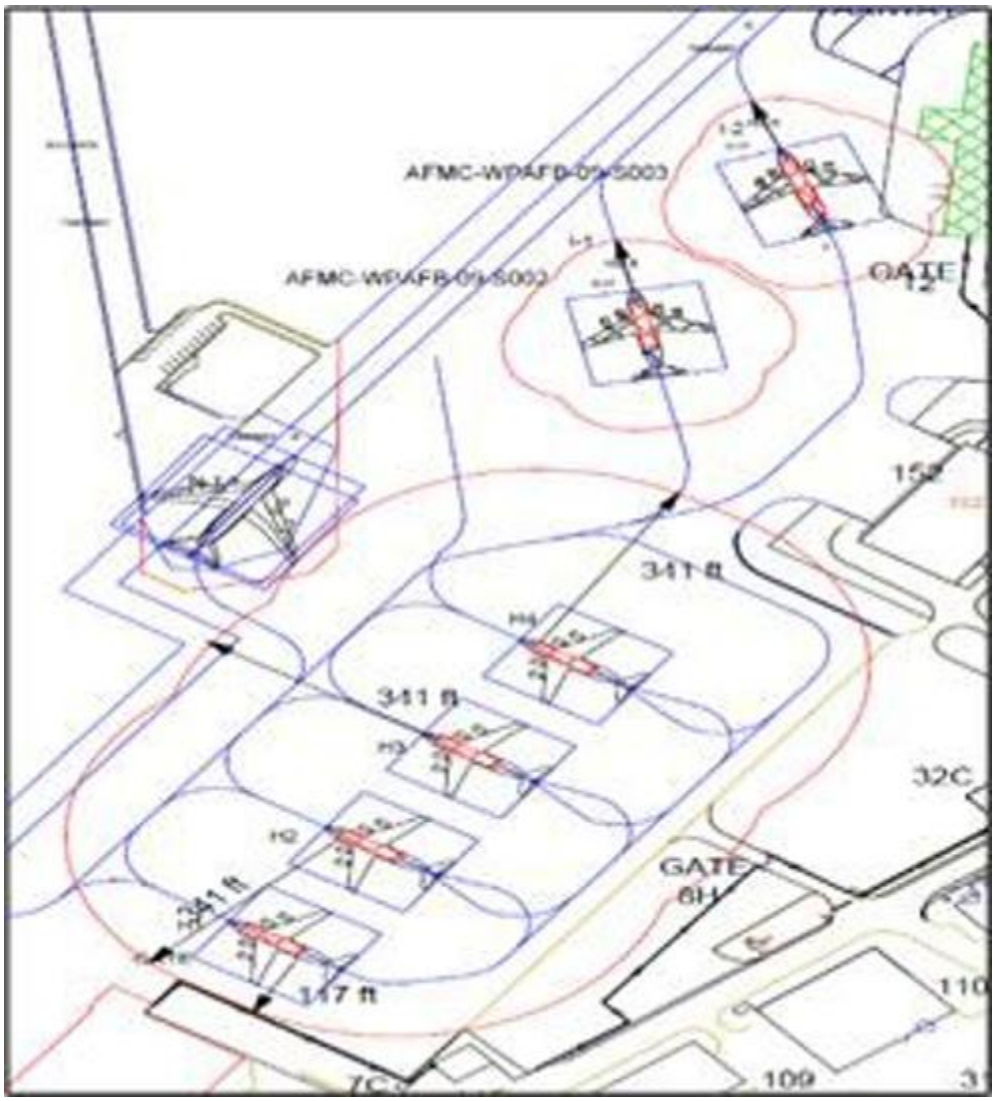


Figure 8.2. West Ramp Explosives Safety Clear Zone.



8.10. Night Vision Device (NVD) Operations.

8.10.1. Patterson Field AMOPS personnel are not equipped with NVDs.

8.10.2. NVD airfield operations are conducted at Patterson Field IAW *C-17A Portable Night Vision Device (NVD) Lighting Operations* LOA. NVD procedures are only authorized by units designated in a *C-17A Portable Night Vision Device (NVD) Lighting Operations* LOA.

8.10.3. Operating a vehicle or equipment with NVDs is not authorized on Patterson Field.

8.11. Local Aircraft Priorities: Aircraft priorities set by 14 CFR, *Aeronautics and Space,* Part 91, FAA JO 7110.65, *Air Traffic Control,* and this instruction are:

8.11.1. Emergency aircraft

8.11.2. Air Evac/MED EVAC

8.11.3. Search and Rescue

8.11.4. E-4B (NAOC). **Note:** Launch priority will change under National Emergency conditions. Reference WPAFB NAOC Installation Support Plan for aircraft priorities during a national emergency.

8.11.5. Flight Check

8.11.6. TACC-directed missions under “REACH” callsigns

8.11.7. Distinguished Visitors (DV)

8.11.8. Hurricane Evacuation (HUREVAC) aircraft

8.11.9. Scheduled IFR arrivals/departure

8.11.10. TAD Procedures/Training Missions

8.11.11. NVD Procedures

8.11.12. Jump operations. **NOTE:** These priorities are not absolute. ATC will adjust as necessary to affect minimum delay based on the actual traffic mix using good judgment.

8.12. Aircraft Lost Communications Instructions. No radio (NORDO) is treated as an emergency unless the PIC has signaled that radio failure is the only problem, using procedures in the FLIP Flight Information Handbook. Tower is able to give landing instruction on all appropriate frequencies and by light gun signals.

8.13. Standard "Climb-Out" Instructions.

8.13.1. Standard "Climb-out" for departures is issued IAW the procedures in the CMH KFFO Tower Interfacility Coordination LOA.

8.14. Opposite Direction Take-Offs and Landings.

8.14.1. Requests for opposite direction IFR arrivals or departures will be coordinated between Patterson Tower and CMH Approach Control IAW the procedures in the CMH Consolidated Opposite Direction Operations (ODO) LOA.

8.15. Breakout/Go Around/Missed Approach Procedures.

8.15.1. Breakout/Go Around instructions will be coordinated between Patterson Tower and CMH Approach Control IAW the procedures in the CMH KFFO Tower Interfacility Coordination LOA.

8.15.2. Missed Approach procedures shall be IAW published Instrument Approach Procedures located within each FLIP.

8.16. Civilian Aircraft Operations.

8.16.1. AFM or designated representative is the approving authority for WPAFB Civil Landing Permit.

8.16.2. Civil aircraft require prior permission from AMOPS and an approved Civil Landing Permit to land at Patterson Field, unless exempt per AFI 10-1001.

8.16.3. PICs must coordinate with AMOPS 24 hours prior to landing at Patterson Field, to confirm PPR.

8.16.4. AMOPS notifies Tower prior to the estimated time of arrival (ETA) of a civil aircraft authorized to land at Patterson Field.

8.16.5. If unable to determine approval status, Tower shall direct the aircraft to contact AMOPS on Pilot-To-Dispatch (PTD), see **Table 1.1**. AMOPS will determine if the aircraft is authorized/unauthorized and inform Tower accordingly.

8.16.6. If the aircraft insists on landing and no known emergency exists, Tower shall take the following actions:

8.16.7. State that they are unable to issue a landing clearance and request the PIC to restate intentions.

8.16.7.1. Immediately inform AMOPS.

8.16.7.2. Implement unauthorized landing procedures IAW *WPAFB Preventing and Resisting Aircraft Piracy (Hijacking) Plan*.

8.17. Commercial Gate 26A Cordon Operations. Gate 26A procedures will be conducted IAW the AMOPS 26A checklist, in the event SFS activates a cordon.

8.18. Weather Dissemination and Coordination Procedures.

8.18.1. Hazardous/Severe weather notification procedures to include lightning response shall be IAW DAFMAN 91-203 and *WPAFB Base Weather Support Plan.*

8.18.2. When Base Weather disseminates a warning for observed lightning within ten (10) nautical miles of the airfield, notify all personnel working on the airfield of the weather warning IAW **para. 8.18.4**.

8.18.3. When Base Weather disseminates a warning for observed lightning within five (5) nautical miles of the airfield, notify all personnel working on the airfield that all outdoor activity on the airfield will cease (i.e. construction personnel, LEX, Barrier MX, RAWS, etc.) and the following procedures apply:

8.18.4. All personnel, including military, civilian and contractors must seek shelter in a vehicle, aircraft or structure immediately after notification until the lightning warning has expired. The aircraft commander (AC) of an aircraft armed/loaded with hot/hazardous cargo may elect to disembark the crew/passengers if remaining on the aircraft creates a greater danger to personnel. Ground support will respond to transport the crew/passengers to shelter. Ground support will not vacate the transportation vehicle, and no other ground/maintenance support will be provided. All maintenance, aerial port and fuel truck operations on the airfield are suspended.

8.18.4.1. Patterson Tower will make a blanket broadcast on local control frequencies for all lightning weather warnings issued for Wright-Patterson AFB.

8.18.4.2. Patterson GC and Patterson AMOPS will make a blanket broadcast to inform all aircraft and personnel monitoring the ground frequencies and LMR nets of all lightning weather warnings issued for Wright- Patterson AFB.

8.18.4.3. Aircraft arrivals: Aircraft are authorized to land and taxi, via “follow me” guidance, to an approved staging area. Crews and passengers will remain onboard the aircraft until the lightning warning has expired. Crews should not expect any ground support during the warning period.

8.18.4.4. Aircraft departures: If the aircraft engines are running, all crew members will remain on the aircraft. Transient alert services will not be provided.

8.18.4.4.1. If aircraft engines are not running, all external preflight and loading operations will cease immediately. All crew members outside of the aircraft will either vacate the airfield to seek shelter or go inside the aircraft for cover. Once the lightning hold is lifted, the crew may resume preflight and load duties.

8.19. Variable Winds. Tower will issue variable winds to base assigned aircraft IAW DAFMAN 13-204V3, *Air Traffic Control.*

8.20. 445 AW Aircraft Ground Operations Concept Operations (CONOPS).

8.20.1. C-17 contingency ground operations are conducted at Patterson Field IAW C-17A Ground Operations LOA. Contingency ground operation procedures are only authorized by units designated in a C-17A Ground Operations LOA.

8.21. Explosive Ordnance Disposal (EOD) Range Procedures.

8.21.1. EOD (788 CES/CEXD) Explosive Operations

8.21.1.1. EOD will not detonate more than five pounds of demolition explosive at one time IAW DESR 6055.09_DAFMAN91-201, unless performing emergency destruction operations with 88 ABW/CC approval.

8.21.1.2. When EOD personnel are on the EOD Proficiency Training Range for non-explosive related activities, prior coordination and continuous communications is not required. EOD personnel will contact AMOPS when entering and exiting the airfield.

8.21.2. The "Clear Zone" is a 500-foot radius around the EOD Proficiency Training Range and extends onto the airfield. A fence has been constructed around the Clear Zone to exclude non-essential personnel with the exception of the portion of the 500' cordon that extends within the airfield fence; no vehicles or pedestrians are permitted in the grass area east of Taxiway (TWY) Bravo, from TWY Delta to Hot Cargo Pad 4 during EOD Range activation. It is incumbent upon EOD personnel to remain vigilant that this area is clear of unauthorized personnel and to report any unauthorized movement inside the designated "Clear Zone" to Airfield Management. **NOTE:** "Clear Zone" radius is for training operations only; emergency detonation clear zone radius will be on a case-by-case basis.

8.21.2.1. EOD must perform the following to use the EOD Proficiency Training Range for explosive operations:

8.21.2.1.1. Notify Airfield Management 24 hours in advance via email at **88OSS.BaseOPS@us.af.mil** to include: a POC with phone number at range during op, date of operation, number of planned detonations, start time, stop time, and Above Ground Level (AGL) affected.

8.21.2.1.2. Notify Airfield Management at least 1 hour prior to activating range. EOD will provide a specific start time, duration, AGL affected, and any changes compared to the email sent, if applicable.

8.21.2.1.3. During Emergency Destruction Operations, EOD will gain 88 ABW/CC approval and notify AMOPS of the location of emergency detonation, the cordon around the affected area and the AGL restriction.

8.21.2.1.4. EOD will raise range flag (orange in color) for all explosive operations.

8.21.2.1.5. EOD will establish radio communications and coordinate with "Patterson Ground" on the Tower Net before activating the range for explosive operations. EOD will maintain communication until the operation terminates. Upon termination, EOD will notify Airfield Management.

8.21.2.1.5.1. EOD shall advise "10 minutes from detonation" and "1 minute from detonation" to Patterson Ground.

8.21.2.1.5.2. EOD shall advise “detonation complete” to Patterson Ground.

8.21.2.1.5.3. When termination of EOD activity is directed by Airfield Management or the Control Tower, EOD will immediately cease activity unless it represents a safety hazard (e.g. burning time fuse) and report stoppage to the Control Tower. Termination may be required at any time during these procedures. All airfield operations will take priority over explosive operations at EOD Proficiency Training Range. **NOTE:** In the event of a failed detonation attempt (misfire), the range must remain active for a minimum of 30 or 60 minutes depending on explosive setup to safely handle hazard.

8.21.2.2. In the event of an accident or fire, RSO or most available person will notify the Control Tower via the “TWR Net.” Tower will activate the Primary Crash Alarm System (PCAS).

8.21.3. EOD will immediately notify the Control Tower and AMOPS of a misfire, the operations that the misfire affect and the estimated time that operations are required to be suspended.

8.21.4. After EOD misfire operations are complete, the Control Tower and AMOPS will be notified.

8.21.5. Tower will:

8.21.5.1. Upon request of range activation by EOD, the Control Tower shall:

8.21.5.2. Provide positive control instructions to assist arriving/transitioning/air-taxiing aircraft from overflying the range below 500’ AGL while the EOD range is active. If a higher altitude restriction is required, EOD will notify the control tower of the appropriate altitude restriction.

8.21.5.3. To the maximum extent possible, tower personnel will report to Airfield Management any observed suspected unauthorized movements in the area around EOD Proficiency Range. **NOTE: Normal** training detonations do not require suspension of TWY Bravo to aircraft taxi or tow operations.

8.21.5.4. Blanket broadcast on the TWR net “EOD operations in progress at the EOD range.”

8.21.5.5. Notify AMOPS of “10 minutes from detonation” and “1 minute from detonation” call.

8.21.6. Ten minutes prior to detonation is latest tower can call “knock-it-off”.

8.21.6.1. Notify AMOPS of “detonation complete” call.

8.21.7. Once “Range Inactive” call is received from EOD, Tower may resume normal operations.

8.21.8. Emergency Destruction Operations conducted at the EOD training range:

8.21.8.1. Terminate all taxi and tow operations on TWY Bravo south of TWY Delta. To the maximum extent possible, Tower personnel will remain vigilant and report to AMOPS any suspected unauthorized movement in the grassy area east of TWY Bravo from TWY Delta to Hot Cargo Pad 4 during these operations.

8.21.9. If EOD experiences an emergency, Tower will activate PCAS.

8.21.9.1. Patterson Ground will broadcast any observed or reported lightning within 5 NM. **NOTE:** Emergency Destruction Operations that are conducted outside of the EOD training range may require different restrictions and NOTAMS than what is outlined in this AFBI, as determined by the Incident Commander.

8.21.10. AMOPS will.

8.21.10.1. Upon notification of pending explosive range operation activation by EOD, Airfield Management shall send the following Notice to Airmen (NOTAM): DEMOLITION OF EXPLOSIVES WILL TAKE PLACE AT THE EOD TRAINING RANGE LOCATED APPROXIMATELY 1000 FT EAST OF HOT CARGO PAD 3. AFFECTED ALTITUDE IS FROM SURFACE TO (INSERT ALTITUDE) FT AGL. **NOTE:** Emergency Destruction Operations may require different restrictions/NOTAM.

8.21.10.2. Complete EOD Range Quick Reaction Checklist and make all appropriate notifications.

8.21.11. Complete an airfield check to access the area and notify all agencies whose ground operations may be impacted. AMOPS will use whatever means possible to ensure all agencies are clear of the affected area and are notified via any means possible. These organizations include, but are not limited to: mowers, snow removal, sweeper, aircraft tow operations, USDA, Fleet Service, Air Freight, Airfield Lighting, National Park Service, and all contractors working on the airfield.

8.21.11.1. Make a blanket broadcast on the AMOPS net “EOD explosive operations in progress at the EOD range.”

8.21.11.2. Ensure no EOD explosive operations are conducted when explosive-laden aircraft parking, loading/unloading of hazardous cargo, and/or refueling takes place on Hot Cargo Pads 1-4 as concurrent operations pose a safety hazard. **NOTE:** Parking of aircraft without hazardous cargo is permitted during EOD explosive operations.

8.21.11.3. Explosive Training Operations:

8.21.11.3.1. Advise all agencies affected when EOD explosive operations have terminated.

8.21.11.3.2. Emergency Destruction Operations conducted at EOD training range: Prior to approving operation, suspend operations on TWY Bravo South of TWY Delta. Complete a check of the area and notify agencies that could be impacted.

8.21.11.3.3. Advise all agencies affected when EOD explosive operations have terminated.

8.21.11.3.4. After emergency destruction range activity terminates and prior to opening TWY Bravo, complete a FOD check of TWY Bravo (south of TWY Delta) and Hot Cargo Pads 1-4. Notify Control Tower and all affected agencies when normal operations can be resumed.

8.21.11.4. AMOPS will log all actions on the AF Form 3616, Daily Record of Facility Operation.

8.22. Bird/Wildlife Control: Local Bird/Aircraft Strike Hazard (BASH) Program.

8.22.1. WPAFB Bird/Wildlife Aircraft Strike Hazard (BASH) Plan establishes a BASH program and is designed to minimize aircraft exposure to harmful effects of birds and wildlife.

8.22.2. RESPONSIBILITIES**.** All required actions and responsibilities are outlined in the WPAFB BASH Plan. All personnel who work on/around Patterson Field and Wright Field should be alert for bird/wildlife activity and report such activity directly to Tower on the LMR Tower talk group and/or AMOPS on PTD frequency (UHF 372.2, VHF 126.2), landline, or the Base Ops LMR talk group. The responsibility to declare a bird watch condition lies (primarily) with AM. Upon observation or report of bird activity from any credible source, AM personnel will use the definitions in section 8.23 as a guide in determining bird watch conditions. Under MODERATE or SEVERE bird watch conditions, disperse bird concentrations as required.

8.23. Bird Watch Conditions (BWC).

8.23.1. BWCs are provided to indicate the level of activity around WPAFB, estimate the hazard, and allow aircrews and flying units to implement their internal BASH procedures. BWCs are based on continuous bird activity lasting for more than one minute. Large birds are considered any bird that appears or is known to weigh more than three pounds or more each. Small birds are all other birds. Conditions are defined as follows:

8.23.1.1. BWC LOW. Unless specifically notified of moderate or severe conditions, all agencies should assume a low condition is in effect.

8.23.1.1.1. Definition. Wildlife activity on and around the airfield representing low potential for strikes.

8.23.1.1.2. Actions required. None.

8.23.1.2. BWC MODERATE. This condition requires increased vigilance by all agencies and supervisors and caution by aircrews.

8.23.1.2.1. Definition. Wildlife activity near the active runway or other specific location representing increased potential for strikes:

8.23.1.2.1.1. Actions required. All aircraft takeoff and landings allowed at the discretion of the aircraft commander. No transition training, simulated flameout, or formation landings/takeoffs allowed.

8.23.1.3. BWC SEVERE. Aircrews and supervisors must thoroughly evaluate mission needs before operating in areas under this condition. Aircraft operations will be suspended except for emergency or military operational necessity aircraft, which will be given priority.

8.23.1.3.1. Definition. Wildlife activity on or immediately above the active runway or other specific location representing high potential for strikes.

8.23.1.3.2. Actions required. Aircraft operations will be suspended except for emergencies. Non-emergency base assigned 445 AW aircraft operations must be approved by 445 AW/CC or designated representative no lower than 445 OG/CC. All other non-emergency aircraft operations must be approved by 88 ABW/CV.

8.23.1.4. Bird Watch Alert: Weather, time of day, and seasonal conditions that make an influx of birds onto the airfield likely.

8.24. Supervisor of Flying (SOF) Operating in the Tower.

8.24.1. The 445 AW and other flying units possess SOF programs that are only responsible for their own flying activity. SOF responsibilities and interface with other tenant units and the 88 Operations Support Squadron (88 OSS) are as follows:

8.24.1.1. Units administer their own SOF programs from vehicles or the Tower after receiving approval from the AOF/CC.

8.24.1.2. SOFs are responsible for the conduct of their unit's flying activities.

8.24.1.3. When advice is extremely technical, or when the SOF feels that relay of information by the Tower controller could cause an unacceptable delay, the SOF coordinates with the ATC facility WS or SC for permission to transmit directly to the affected aircraft. Limit instructions to preventing a mishap.

8.24.2. The SOF must not perform ATC functions or transmit ATC instructions or clearances to an aircraft. A person who commandeers an ATC frequency assumes responsibility for separation of aircraft.

8.24.2.1. SOFs or other unit representatives may provide assistance during transient aircraft emergencies upon request of AMOPS.

8.24.2.2. SOFs shall have no responsibilities to other flying units unless specifically requested to render assistance by AMOPS, or the commander/representative of another unit.

8.25. Airfield Photography. Personnel requesting to take photos of the airfield environment, aircraft or system must coordinate with the AFM as well as the aircraft/unit commander for the aircraft/system being photographed. Unofficial airfield photography should be coordinated 48-hours in advance with the above identified agencies and appropriate Public Affairs office (88 ABW/PA or 445 AW/PA). Further restrictions may be enforced IAW current wing guidance; contact 88 ABW/PA 937-255-2873 or 445 AW/PA 937-257-5784.

8.26. Wear of Hats/PPE.

8.26.1. Headgear will not be worn on the airfield.

8.26.2. Headgear/clothing authorized for extreme cold weather protection may be worn; however, every effort must be made to prevent such headgear from coming loose during duty performance. Special attention to the FOD potential and safety of personnel will be prime considerations when determining extreme cold weather clothing authorizations.

8.26.3. Personal protection equipment (PPE) is authorized during airfield construction activities. Every effort must be made to prevent such PPE from coming loose during duty performance. Special attention to the FOD potential and safety of personnel will be prime considerations when determining PPE authorizations.

8.27. Airfield Smoking Policy. Smoking on the airfield is not authorized. Exception: Commanders and Directors may designate smoking areas that are located only on non-aircraft movement area sides of hangars or other airfield support facilities. Prior coordination with and approval by the Fire Emergency Services Flight and Airfield Manager is required.

8.28. Military Assumes Responsibility for Separation of Aircraft (MARSA) Procedures. WPAFB conducts operations IAW FAA Order JO 7110.65 Air Traffic Control.

8.29. Customs, Agriculture, and Immigration.

8.29.1. Arrivals.

8.29.1.1. A customs, agriculture and immigration inspection is required for all aircraft, flight crew and cargo arriving from outside the Customs Territory of the United States (CTUS), which is defined as the 50 states, District of Columbia, and Puerto Rico. Space A passengers will not clear customs at Wright-Patterson AFB unless approved by Dayton U.S. Customs & Border Protection, Port Director.

8.29.1.2. Aircrew or mission scheduler(s) shall contact AMOPS at least 24 hours in advance of a scheduled arrival from a non-CTUS location and provide call sign, type of aircraft, country of origin, airport/country of departure prior to U.S., cargo/hazardous material status, number of crew and passengers, and estimated arrival and departure information.

8.29.1.3. Upon notification of an aircraft requiring customs, AMOPS shall coordinate requirements IAW local Customs/Agriculture/Immigration checklist.

8.29.1.4. U.S. Customs is subject to respond to all arrivals, however, may authorize designated Military Custom Officer Exempted (MCOe) assigned to 88 SFS to clear U.S. military aircraft arrivals from non-CTUS locations. If U.S. Customs responds, designated MCOe will assist with the agricultural portion of the inspection by removing and/or storing international trash.

8.29.1.5. Foreign aircraft arrivals from non-CTUS locations must be cleared by a U.S. Customs Officer. Designated MCOe will provide assistance, as required.

8.29.2. Departures.

8.29.2.1. Upon notification of an aircraft requiring a permit to proceed, AMOPS shall coordinate requirements with U.S. Customs.

8.29.2.2. Designated MCOs can issue a permit to proceed to foreign aircraft as long as the aircraft had arrived Patterson Field from another U.S. port of entry. All others must receive clearance from U.S. Customs

8.29.3. Diplomatic Clearance Procedures for Canadian Forces

8.29.3.1. Routine flights through USA airspace or landing at military airfields (including USA territories) do not require diplomatic clearance or landing authorization. Flights transporting DV or hazardous materials require diplomatic clearance and landing authorization. For clearance purposes DV is defined as Cabinet Minister or above, or Lieutenant General or above. For clearance purposes hazmat is defined as class 1.1, 1.2, 1.3, 1.4, and 6.1. Aeromedical evacuation flights require both diplomatic clearance as well as landing authorization.

8.30. Aircraft Hurricane Evacuation (HUREVAC).

8.30.1. WPAFB airfield is a safe haven for hurricane evacuation (HUREVAC) aircraft. In the event of a natural disaster, the 88 OSS Director of Special Operations will coordinate with AMOPS for the sheltering of applicable aircraft. AMOPS will complete the HUREVAC Checklist IAW the WPAFB HUREVAC Plan.

8.30.2. AFM and 88 OSS Director of Special Operations will coordinate with TA to set up a HUREVAC Operations Parking Plan.

8.30.2.1. Any deviation from the original parking plan must be coordinated with the AFM, DAFM, or Special Operations Director.

8.30.3. To ensure safe, expeditious handling of aircraft, close coordination and mutual understanding is vital between AMOPS and TA during HUREVAC. Ensure TA is notified of any situation concerning:

8.30.3.1. Aircraft movement and recovery.

8.30.3.2. Aircraft parking restrictions.

8.30.3.3. Aircraft with special handling such as AIREVAC and/or Hazardous Cargo.

8.30.3.4. Maximum On Ground (MOG) issues. MOG issues may cause overabundance of aircraft, limited aircraft parking, limited support agencies and/or limited resources (e.g., fuel, fuel trucks, AGE equipment, personnel, and ramp space).

8.30.4. Hangar 206 utilization must be coordinated with the AFM, Building Manager and/or 88 OSS Special Operations Director.

Chapter 9

CONTROLLED AREA

9.1. Airfield Controlled Area.

9.1.1. The airfield is a controlled area consisting of approximately 1,758 acres, delineated by 69,000 feet of marked chained link security fence, ranging from 8 to 10 feet tall. Forty-six entry points provide vehicle or personnel access to the airfield controlled area, excluding buildings.

9.1.2. Five main gates provide electronic airfield access: Gate 206N and 206S located on the north and south side of Building 206. Gate 4007 located on Vandenberg Road between Hangar 4015 and 4007. Gate 4016 located adjacent to Hangar 4016 and Gate 10 located by Building 152. All other gates are operated by tenant organizations on an as-needed basis and are secured when not in use.

9.1.3. Personnel requiring access to the airfield controlled area (AA) must submit an AF Form 2586, *Unescorted Entry Authorization* certificate, for Airfield Management approval prior to receiving a controlled area badge (AF Form 1199).

9.1.4. All visitors/contractors required to operate a vehicle on the airfield must obtain prior permission from Airfield Management before accessing the airfield. Individuals without a current AF Form 1199 will be escorted by individual(s) with proper credentials or must have an EAL signed by the 88 OSS/CC or designated representative and authenticated by SFS.

9.1.5. EALs will contain: name (last, first, middle initial), state driver's license number, rank, duty title, phone number, office symbol and clearance (if applicable)

9.1.6. All personnel utilizing a privately owned vehicle (POV) on the airfield must obtain a POV pass from AMOPS. Permanent base assigned contractor vehicles (i.e., Fuels, AGE, Transient Alert, etc.) do not require a POV pass when marked with an organizational/company decal or other type of designation marking IAW WPAFBI 13-213.

9.1.7. POV passes are issued in Bldg 206, Room 105. Individual must provide AMOPS with the following:

9.1.7.1. Name

9.1.7.2. Phone Number

9.1.7.3. Vehicle make, model, year, color and license plate.

9.1.7.4. Area of operation/location

9.1.8. POV passes are a controlled item and shall only be displayed while on the airfield. In the event a POV pass is lost or stolen, individuals will immediately notify AMOPS. AMOPS will contact the Base Defense Operations Center to report a lost/stolen POV pass with the associated number.

9.1.9. All temporary POV passes must be turned into AMOPS at the end of each duty day. Requests for exception to this requirement will be approved by the AFM or DAFM.

9.1.10. Permanent POV passes grant access to the airfield for base assigned personnel, however, each pass will expire on 31 Dec of the year issued and needs to be re-validated/renewed annually.

DUSTIN C. RICHARDS, Colonel, USAF
Commander

Attachment 1

GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION

References

445th AW and 88 ABW LOA, *C-17A Portable Night Vision Goggle (NVG) Lighting Concept of Operations (CONOPS)*

Air Force Research Laboratory and 88 ABW, *Small UAS (SUAS) Operations within Wright-Patterson AFB Class D Airspace*

Certificate of *Waiver or Authorization (COA)* 2011-CSA-4-MOA

88 ABW and 180th FW, *Toledo Air National Guard, Hydrazine Response Team* (HRT) Procedures

88 ABW sUAS *Concept of Employment (CONEMP) or WPAFB sUAS* Concept of Employment (CONEMP)

88 ABW and 445th AW LOA, *Tactical Arrival/Departure (TAD) Procedures*

88 ABW and NMUSAF LOA, *Wright Field Operations*

AFI 10-1001, *Civil Aircraft Landing Permits*

AFI 11-208, *Department of Defense Notice to Airman (NOTAM) System*

AFI 13-207-O, *Preventing and Resisting Aircraft Piracy (Hijacking)* (FOUO)

AFI 32-1040, *Civil Engineer Airfield Infrastructure Systems*

AFI 33-364, *Records Management and Information Governance Program,*

AFMAN 11-2C-17V3*, C-17 Operations Procedures*

AFMAN 11-202 V3, *Flight Operations*

AFMAN 11-213, *Military Flight Plan and Flight Movement Data Communications*

AFMAN 11-255V3, *Flight Manager Responsibilities and Procedures*

AFPAM 32-2004, *Aircraft Fire Protection for Exercises and Contingency Response Operations*

AFPD 13-2, *Air Traffic, Airfield, Airspace and Range Management*

DAFI 10-2501, *Emergency Management Program*

DAFMAN 13-213, *Airfield Driving*

DAFI 13-213 w/WPAFB Sup, *Airfield Driving*

DAFI 31-101, *Base Defense Operations*

DAFMAN 13-204 V1, *Management of Airfield Operations, Guidance Memorandum*

DAFMAN 13-204 V2 w/AFMC Sup, *Airfield Management*

DAFMAN 13-204V3*, Air Traffic Control*

DAFMAN 13-217, *Drop Zone, Landing Zone, and Helicopter Landing Zone Operations*

DAFMAN 91-202, *The Department of the Air Force (DAF) Mishap Prevention Program*

DAFMAN 91-212, *Bird/Wildlife Aircraft Strike Hazard (BASH) Management Program*

DESR 6055.09 DAFMAN 91-201, *Explosives Safety Standards*, Guidance Memorandum

FAA Advisory Circular 91-57C, *Exception for Limited Recreational Operations of Unmanned Aircraft*

FAA JO 7110.65, *Air Traffic Control*

OSAM OI 13-201, *Airfield Management*

UFC 3-260-01, *Airfield and Heliport Planning and Design*

UFC 3-260-04, *Airfield and Heliport Marking*

UFC 3-535-01, *Visual Air Navigation Facilities*

WPAFB *Aircraft Hurricane Evacuation (HUREVAC)* Support Plan

WPAFB *Base Weather Support Plan*

WPAFB *Bird/Wildlife Aircraft Strike Hazard (BASH) Plan*

WPAFB *Installation Emergency Management Plan (IEMP)* 10-2

WPAFB *NAOC Installation Support Plan*

WPAFB *Preventing and Resisting Aircraft Piracy (Hijacking) Plan*

WPAFB *Snow and Ice Control Plan*

WPAFB *sUAS Policy Letter*

Adopted Forms

AF Form 1199, *Air Force Entry Control*

AF Form 3616, *Daily Record of Facility Operation*

AF Form 847, *Recommendation for Change of Publication*

DD Form 1801, *DoD International Flight Plan*

Abbreviations and Acronyms

AAS—Aircraft Arresting System

ACCTLR—Assistant Chief Controller

ABS—Anti-Lock Braking System

ADI—Airfield Driving Instruction

ADPM—Airfield Driving Program Manager

AF—Air Force

AFCEC—Air Force Civil Engineering Center

AFFSA—Air Force Flight Standards Agency

AFH—Air Force Handbook

AFI—Air Force Instruction

AFJI—Air Force Joint Instruction

AFJMAN—Air Force Joint Manual

AFM—Airfield Manager

AFJQS—Air Force Job Qualification Standard

AFPAM—Air Force Pamphlet

AFPD—Air Force Policy Directive

AFRC—Air Force Reserve Command

AFREP—Air Force Representative

AFSC—Air Force Specialty Code

AGE—Aerospace Ground Equipment

AICUZ—Air Installation Compatible Use Zone

AIM—Aeronautical Information Manual

AIREVAC—Aeromedical Evacuation

AIS—Automatic Identification System

AFRIMS—Air Force Records Information Management System

AM—Airfield Management

AMA—Academy of Model Aeronautics

AMOC—Airfield Management Operations Coordinator

AMOM—Airfield Management Operations Manager (Civilian Only)

AMOPS—Airfield Management Operations

AMOS—Airfield Management Operations Supervisor

AMSL—Airfield Management Shift Lead

AMTM—Airfield Management Training Manager (Civilians Only)

ANG—Air National Guard

AMOPS—Airfield Operations

AOB—Airfield Operations Board

AOF—Airfield Operations Flight

AOF/CC—Airfield Operations Flight Commander

ARFF—Aircraft Rescue and Fire Fighting

ARTCC—Air Route Traffic Control Center

ASR—Airport Surveillance Radar

ASRR—Airfield Suitability and Restrictions Report

ATARS—Air Traffic Activity Reporting System

ATC—Air Traffic Control

ATCS—Air Traffic Control Specialist

ATCT—Air Traffic Control Tower

ATCTS—Air Traffic Control Training Series

ATIS—Automatic Terminal Information Service

ATSN—Assistant NCOIC, ATC Training and Standardization

BAS—Basic Allowance for Subsistence

BASH—Bird/Wildlife Aircraft Strike Hazard

BHWG—Bird Hazard Working Group

BLOS—Beyond Line of Sight

BWC—Bird Watch Condition

CAT—Category

CBMS—Capabilities-Based Manpower Standard

CBT—Computer Based Training

CBRNE—Chemical, Biological, Radiological, Nuclear and high-yield Explosives

CCTLR—Chief Controller

CD (-R)—Compact Disc (-Recordable)

CDR—Continuous Data Recording

CE—Civil Engineering

CEMP—Comprehensive Emergency Management Plan

CFETP—Career Field Education and Training Plan

CFM—Career Field Manager

CFR—Code of Federal Regulations

CMA—Controlled Movement Area

CMAV—Controlled Movement Area ViolationCMS—Case Management System

COA—Certificate of Authorization

COMSEC—Communications Security

CP—Command Post

CPD—Core Personnel Document

CPF—Civilian Personnel Flight

CRM—Crew Resource Management

CTO—Control Tower Operator

CTRD—Certified Tower Radar Display

CWW—Cooperative Weather Watch

DAAS—DoD Advanced Automation System (also known as STARS)

DAFM—Deputy Airfield Manager

DAFMAN—Department of the Air Force Manual

DALR—Digital Audio Legal Recorder

DAT—Digital Audio Tape

DBRITE—Digital Bright Radar Indicator Tower Equipment

DD Form—Department of Defense Form

DH—Decision Height

DLT—Digital Linear Tapes

DNIC—Duties Not to Include Controlling

DoD—Department of Defense

DoT—Department of Transportation

DSM—Diagnostic and Statistical Manual

DSN—Defense Switched Network

DTAS—Digital Terminal Automation Systems

DTM—Digital Terrain Maps

DV—Distinguished Visitor

DVA—Diverse Vector Area

DVD(-R)—Digital Video Disc (-Recordable)

DVRS—Digital Voice Recorder System

EDIT—Experiencing Difficulty In Training

EMI—Electromagnetic Interference

EOC—Emergency Operations Center

EOD—Explosive Ordnance Disposal

EO/IR—Electro-Optical Infrared

ERC—Emergency Response Capability

ETL—Engineering Technical Letter

ETVS—Enhanced Terminal Voice Switch

FAA—Federal Aviation Administration

FAAO—Federal Aviation Administration Order

FAF—Final Approach Fix

FCF—Functional Check Flight

FCG—Foreign Clearance Guide

FCT—Facility Continuation Training

FD—Fire Department

FDS—Flight Data System

FLIP—Flight Information Publication

FLT—Front Load Training

FOD—Foreign Object Damage

FOIA—Freedom of Information Act

FOUO—For Official Use Only

FSS—Flight Service Station

FWG—Facility Working Group

GC—Ground Control

GE—Ground Emergency

GPS—Global Positioning System

HATR—Hazardous Air Traffic Report

HIRL—High Intensity Runway Lights

HQ AFFSA—Headquarters Air Force Flight Standards Agency

IAW—In Accordance With

IC—Incident Commander

ICAO—International Civil Aviation Organization

IDS5—Information Display Systems

IFE—In-Flight Emergency

IFR—Instrument Flight Rules

IMC—Instrument Meteorological Conditions

ILS—Instrument Landing System

INST—Instrument or Instrument Hold Line

IR—Ice on Runway

JO—Joint Order

KSA—Knowledge, Skills and Abilities

LAAS—Low Altitude Alert System

LAN—Local Area Network

LDA—Localizer Directional Aid

LMR—Land Mobile Radio

LOA—Letter of Agreement

LOI—Local Operating Instruction

LOP—Local Operating Procedure

LOS—Line of Sight

LSR—Loose Snow on Runway

MAJCOM—Major Command

MARE—Major Accident Response Exercise

MCOe—Military Customs Officer Exempted

MDS—Mission Design Series

MGRS—Military Grid Reference System

MIA—Minimum IFR Altitude

MLS—Microwave Landing System

MM—Middle Marker

MOU—Memorandum of Understanding

MRI—Master Reference Index

MSAW—Minimum Safe Altitude Warning

MTI—Moving Target Indicator

MTL—Master Task Listing

MTP—Master Training Plan

MTTR—Master Task and Technical Reference

MVA—Minimum Vectoring Altitude

NAF—Numbered Air Force

NAMO—NCOIC, Airfield Management Operations

NAS—National Airspace System

NATCT—NCOIC, Air Traffic Control Training

NAVAID—Navigational Aid

NLT—No Later Than

NM—Nautical Mile

NORDO—No Radio

NOTAM—Notice to Airmen

NSE—NCOIC, ATC Standardization and Evaluation

OBO—Official Business Only

OCL—Operational Capability Level

ODO—Opposite Direction Operations

OI—Operating Instruction

OJT—On the-Job Training

OPLAN—Operations Plan

OPR—Office of Primary Responsibility

ORE—Operational Readiness Exercise

ORI—Operational Readiness Inspection

ORM—Operational Risk Management

OSS—Operations Support Squadron

PAPI—Precision Approach Path Indicator

PAR—Precision Approach Radar

PCA—Permanent Change of Assignment

PCAS—Primary Crash Alarm System

PCS—Permanent Change of Station

PCG—Position Certification Guide

PHA—Preventive Health Assessment

POFZ—Precision Obstacle Free Zone

POV—Privately Owned Vehicle

PM—Preventive Maintenance

PMI—Preventative Maintenance Inspection

PPR—Prior Permission Required

PSR—Packed Snow on Runway

PTD—Pilot to Dispatch

PWS—Performance Work Statement

QA—Quality Assurance

QRC—Quick Reaction Checklist

QTP—Qualification Training Package

RAC—Risk Assessment Code

RAPCON—Radar Approach Control

RAWS—Radar, Airfield & Weather Systems

RCR—Runway Condition Reading

RCS—Runway Control Structure

RDS—Records Disposition Schedule

RFC—Radar Final Control

RIF—Recent Information File

RMP—Radar Monitoring Position

RPI—Runway Point of Intercept

RRF—Ready Reference File

RSC—Runway Surface Condition

RSI—Remote Status Indicator

RSRS—Reduced Same Runway Separation

RVR—Runway Visual Range

RWY—Runway

SAR—Synthetic Aperture Radar

SATCOM—Satellite Communications

SAV—Staff Assistance Visit

SC—Senior Controller

SCN—Secondary Crash Net

SCPD—Standard Core Personnel Document

SDF—Simplified Directional Facility

SE—Safety

SEI—Specialty Experience Identifier

SF—Security Forces

SIGINT—Signals Intelligence

SIGNAL—Simulation and Integration of Ground, Network, and Air Links

SII—Special Interest Item

SLR—Slush on Runway

SM—Statute Mile

SMS—Safety Management System

SOF—Supervisor of Flying

STAR—Standard Arrival Route

STARS—Standard Terminal Automation Replacement System

STS—Specialty Training Standard

SUA—Special Use Airspace

sUAS—small Unmanned Aircraft System

SUI—Sensitive Unclassified Information

TACAN—Tactical Air Navigation

TCAS—Traffic Alert and Collision Avoidance System

TCW—Tower Controller Workstation

TDW—Tower Display Workstation

TDY—Temporary Duty

TERPS—Terminal Instrument Procedures

TO—Technical Order

TOI—Training Operating Instruction

TR—Technical Reference

TRB—Training Review Board

TSC—Training Status Codes

TSN—NCOIC, ATC Training and Standardization

TSS—Tower Simulation System

UA—Unmanned Aircraft

UAS—Unmanned Aircraft System

UGT—Upgrade Training

UHF—Ultra High Frequency

UMD—Unit Manning Document

UPS—Uninterruptible Power Supply

US—United States

USAF—United States Air Force

USAFR—United States Air Force Reserve

USNO—United States Naval Observatory

UTC—Unit Type Code

UTC—Universal Time Coordinated

UTG—Upgrade Training Guide

UTM—Unit Training Manager

VCO—Vehicle Control Officer

VCNCO—Vehicle Control Noncommissioned Officer

VFR—Visual Flight Rules

VMC—Visual Meteorological Conditions

VHF—Very High Frequency

WR—Wet Runway


WS—Watch Supervisor

XP—Plans & Programs Division

Attachment 2

WRIGHT FIELD AIRFIELD DIAGRAM


Figure A2.1. Wright Field Airfield Diagram.

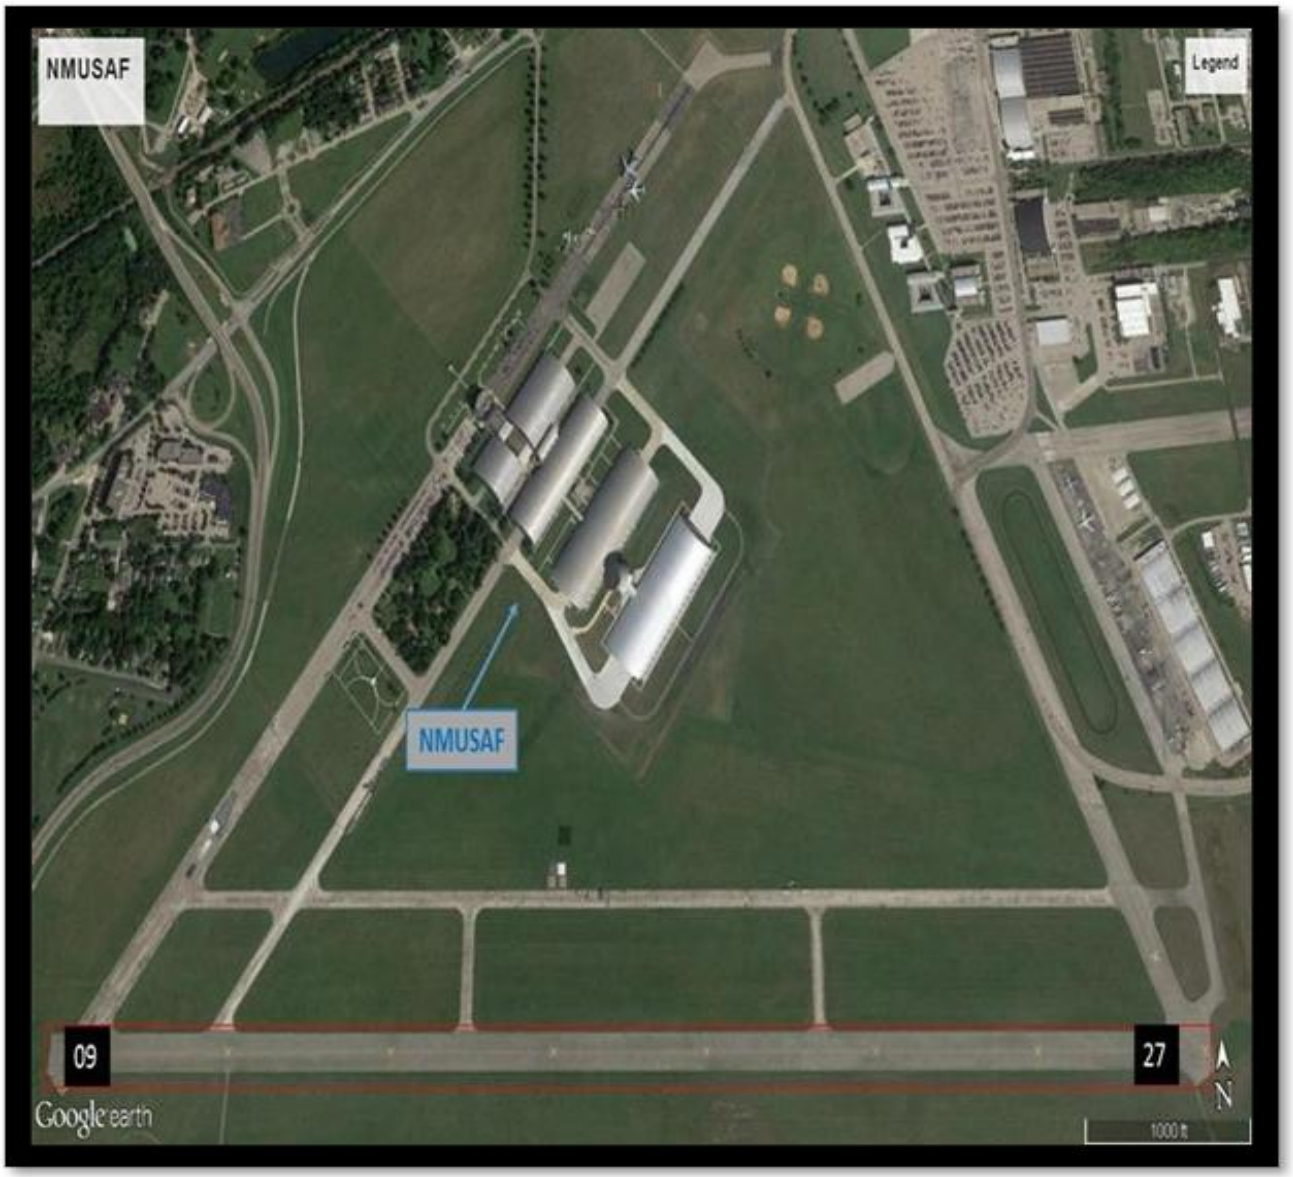

Attachment 3

PATTERSON FIELD AIRFIELD DIAGRAM INCLUDING CONTROLLED MOVEMENT AREAS (CMA), RESTRICTED AREAS, AND ATC BLIND SPOTS


Figure A3.1. Patterson Field Airfield Diagram.

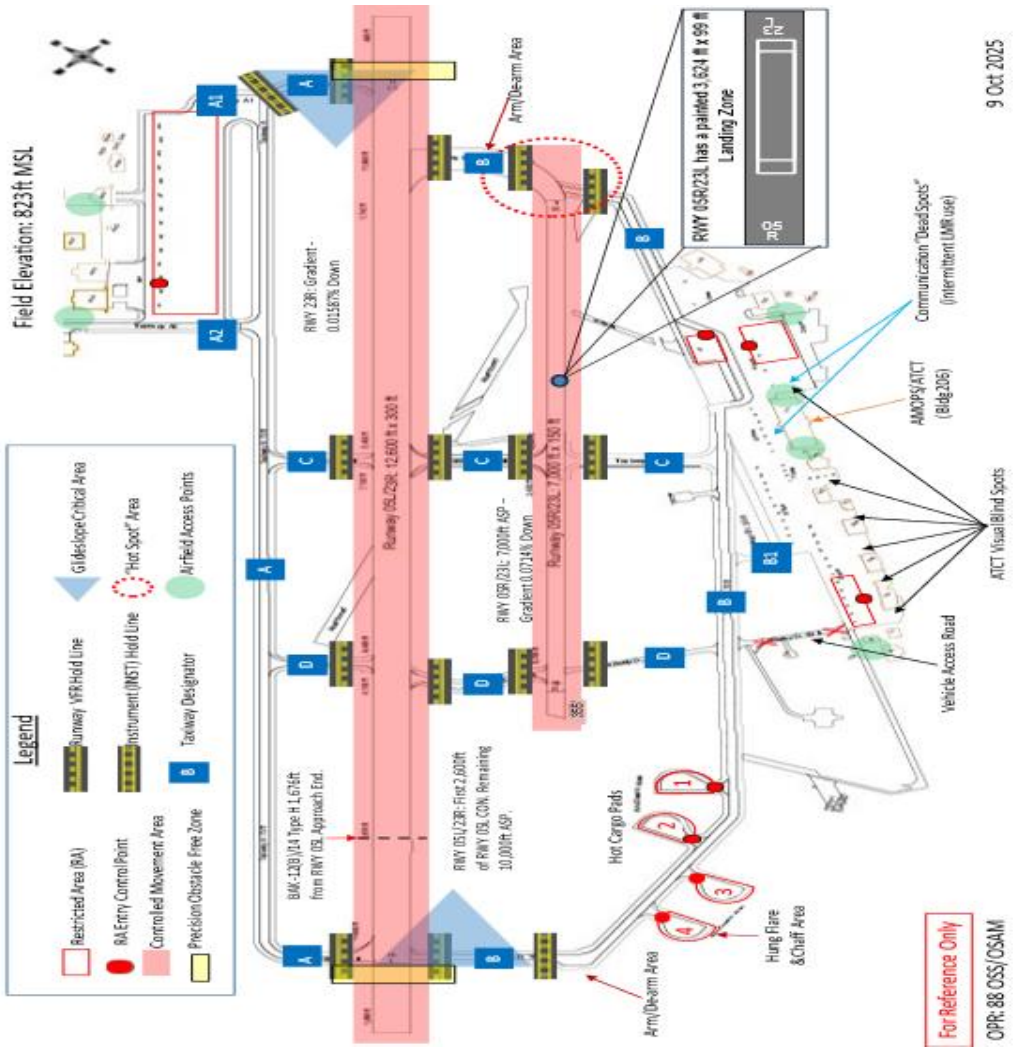

Attachment 4

PATTERSON FIELD EAST RAMP PARKING PLAN


Figure A4.1. East Ramp Parking Plan Diagram.

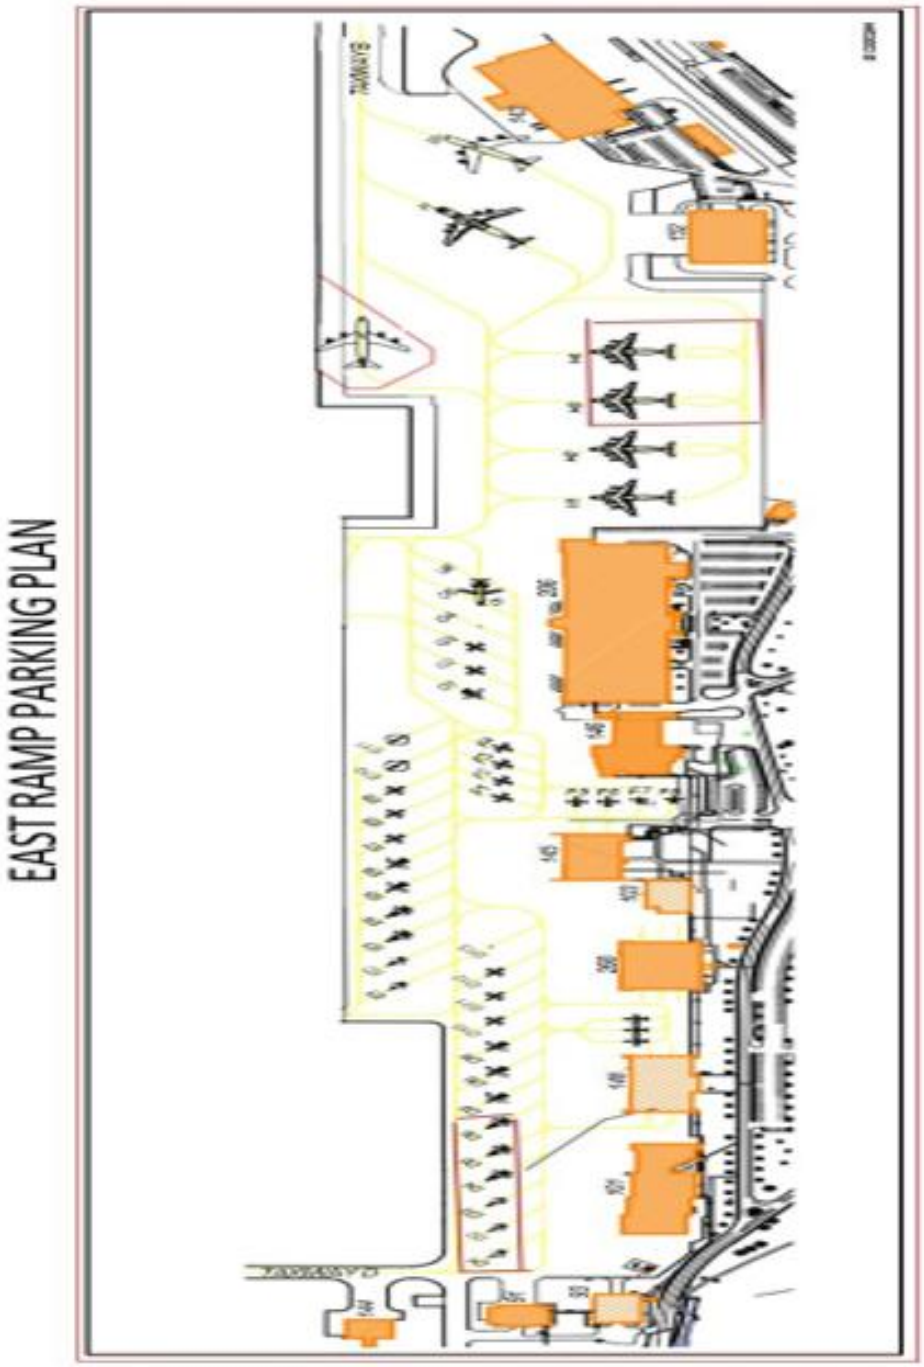

Attachment 5

PATTERSON FIELD WEST PARKING PLAN

Figure A5.1. West Ramp Parking Plan Diagram.

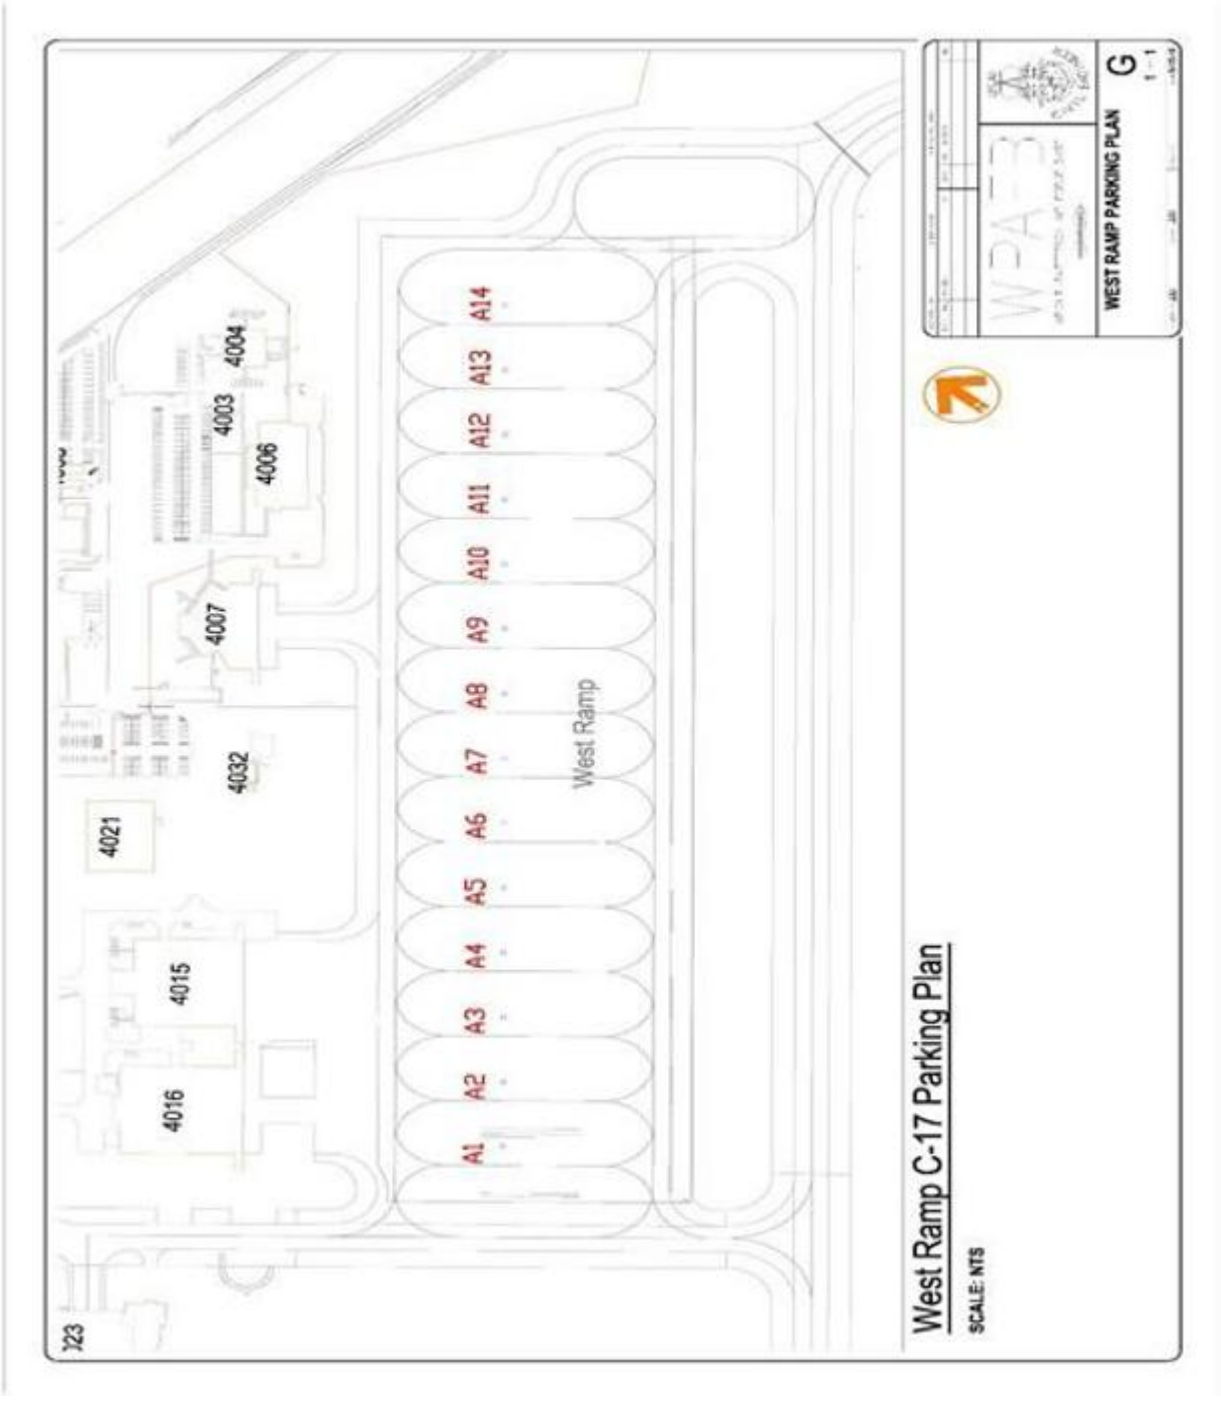

Attachment 6

PATTERSON FIELD RUNWAY 05L/23R PRECISION OBSTACLE FREE ZONE (POFZ) AND LOCALIZER CRITIAL AREA

Figure A6.1. POFZ RWY 23R Approach End.


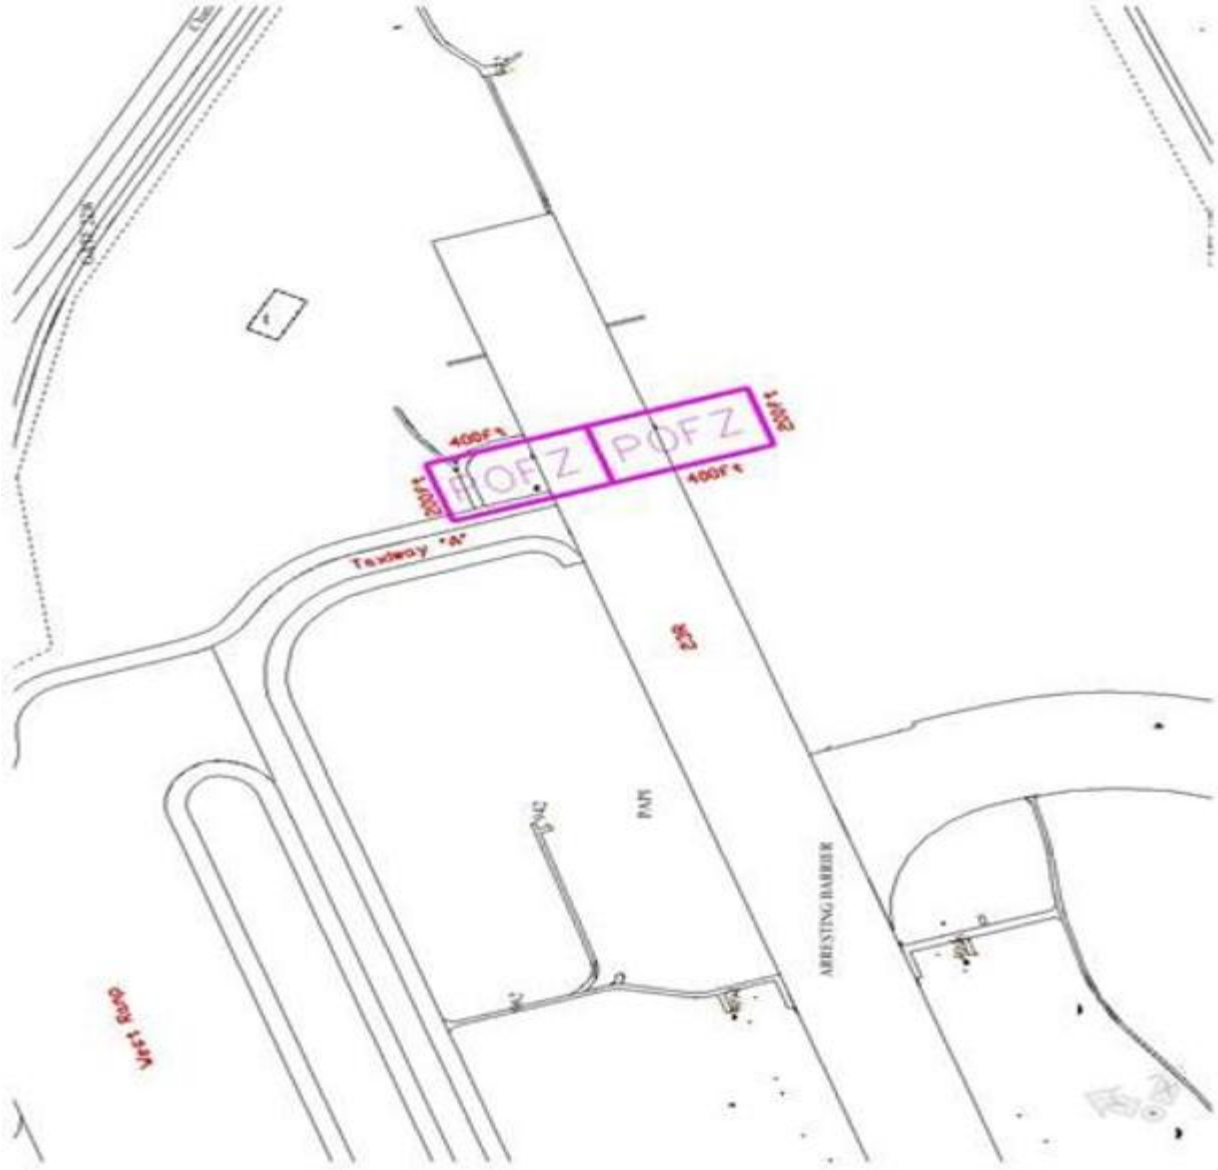



Figure A6.2. POFZ RWY 05L Approach End Diagram.

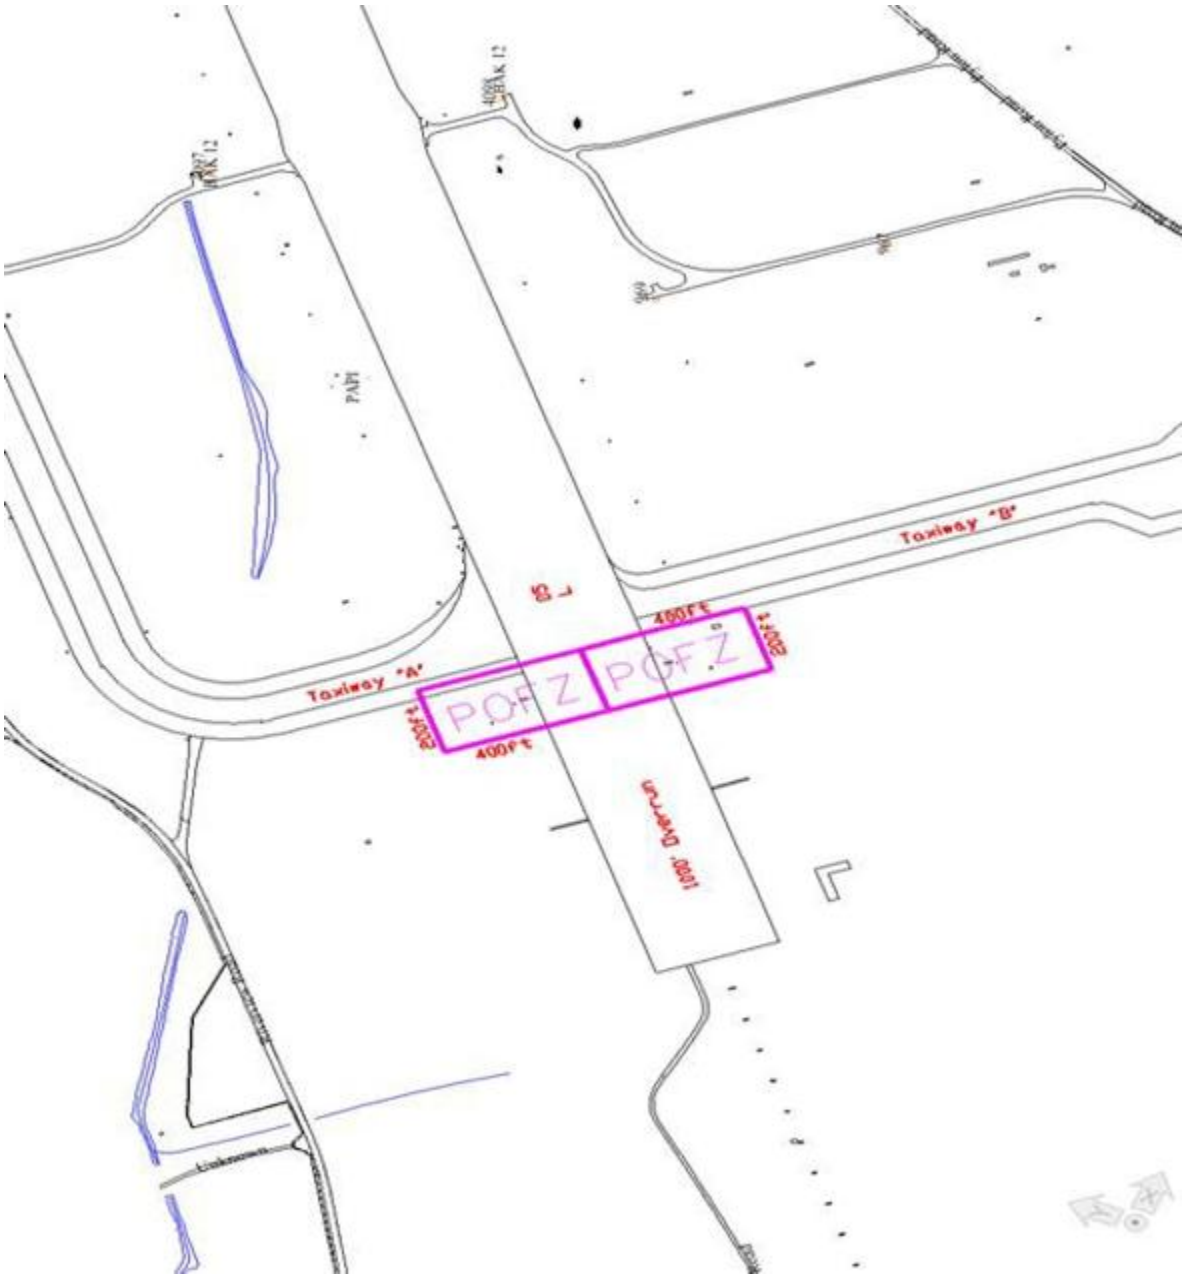

Attachment 7

PATTERSON FIELD AIRFIELD SPECIAL OPERATIONS AREAS/RAMPS


Figure A7.1. Airfield Special Operations Areas/Ramps Diagram.

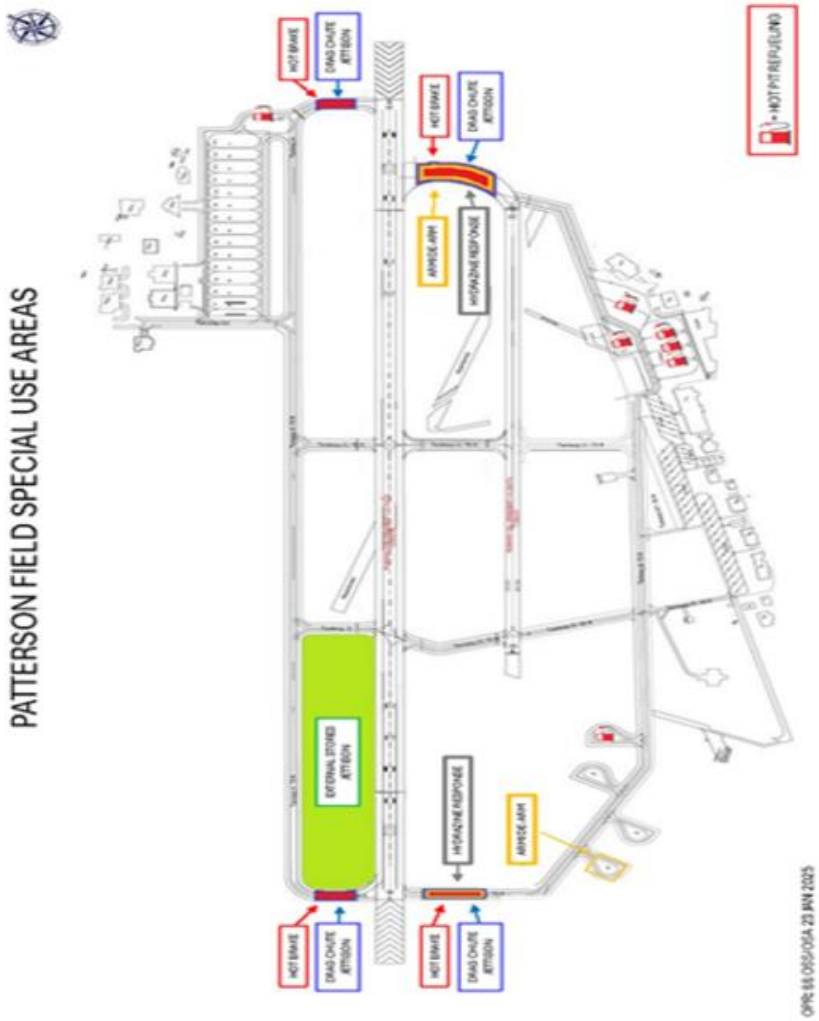

Attachment 8

FLYING AREAS


Figure A8.1. Flying Areas Airspace Diagram.

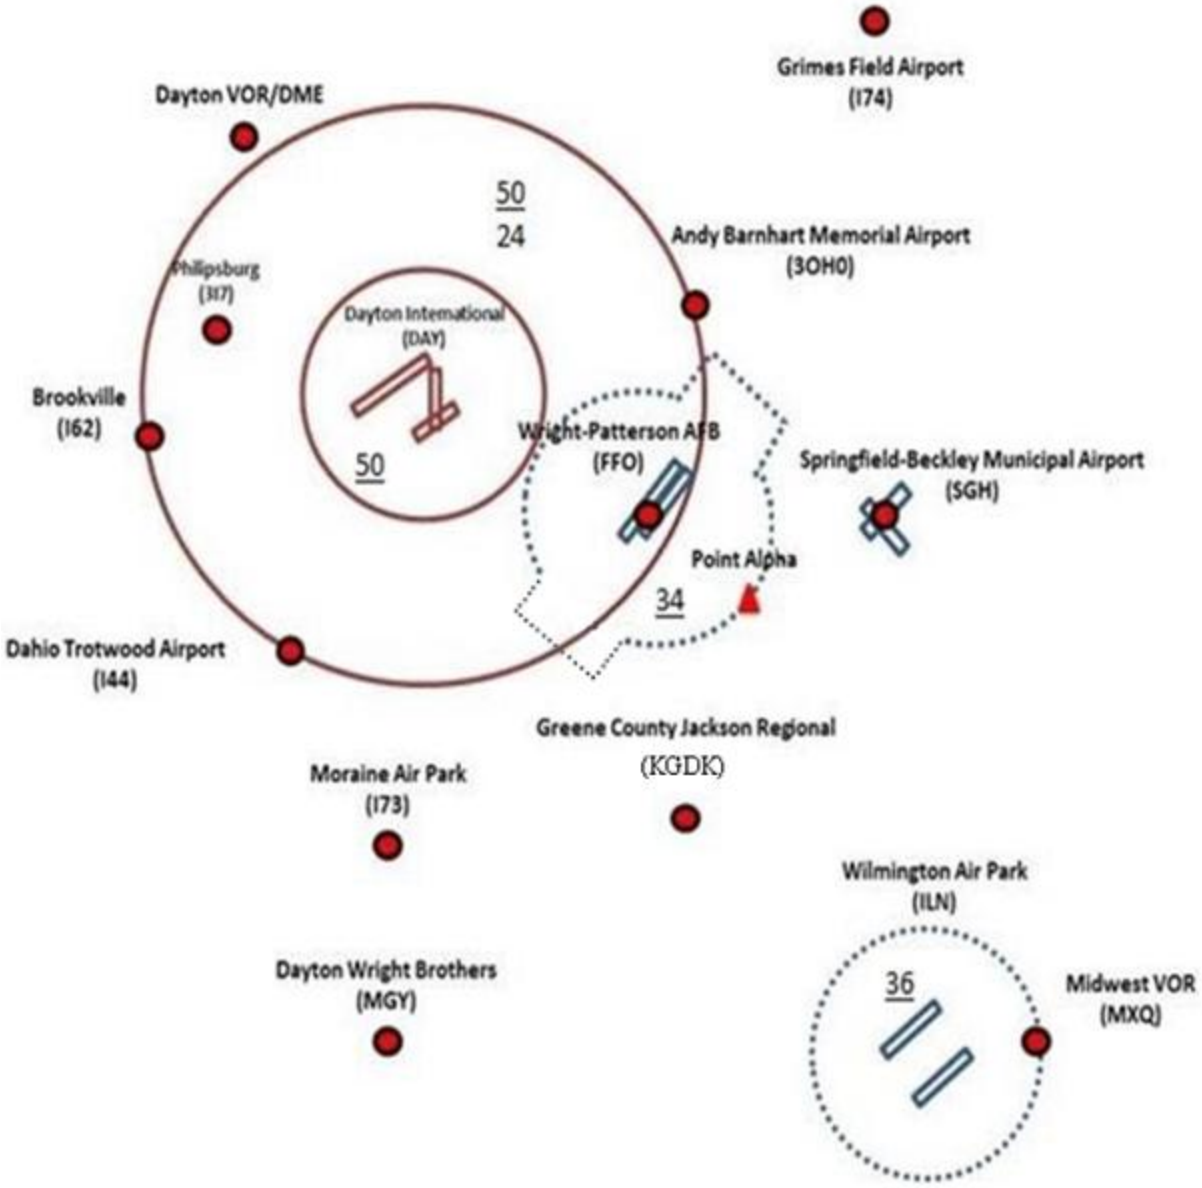

Attachment 9

VFR TRAFFIC PATTERNS


Figure A9.1. VFR Traffic Patterns Diagram.

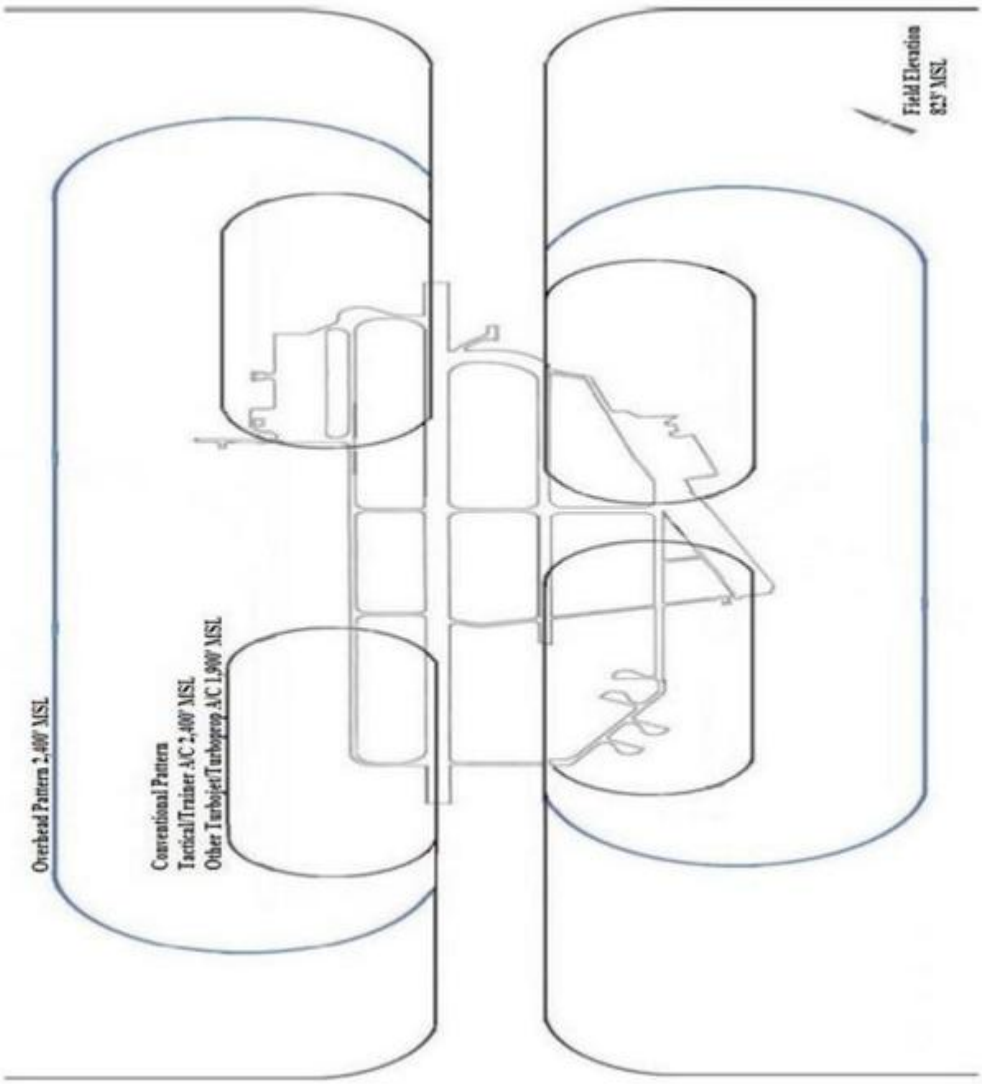

Attachment 10

STRAIGHT IN SIMULATED FLAME-OUT (SI-SFO)


Figure A10.1. SI-SFO.

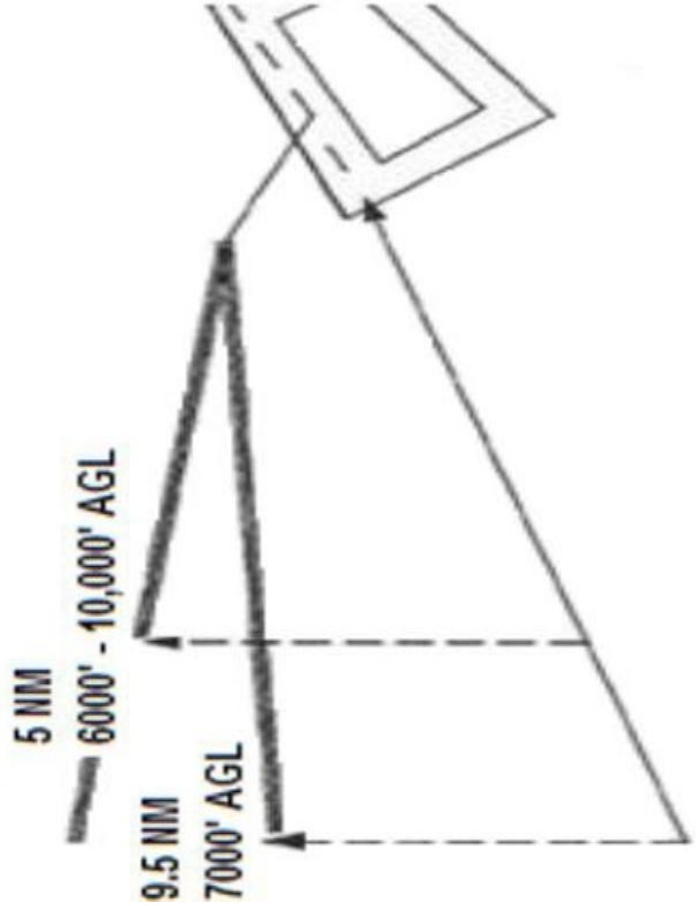

Attachment 11

OVERHEAD SIMULATED FLAME-OUT (SFO)


Figure A11.1. Overhead SFO.

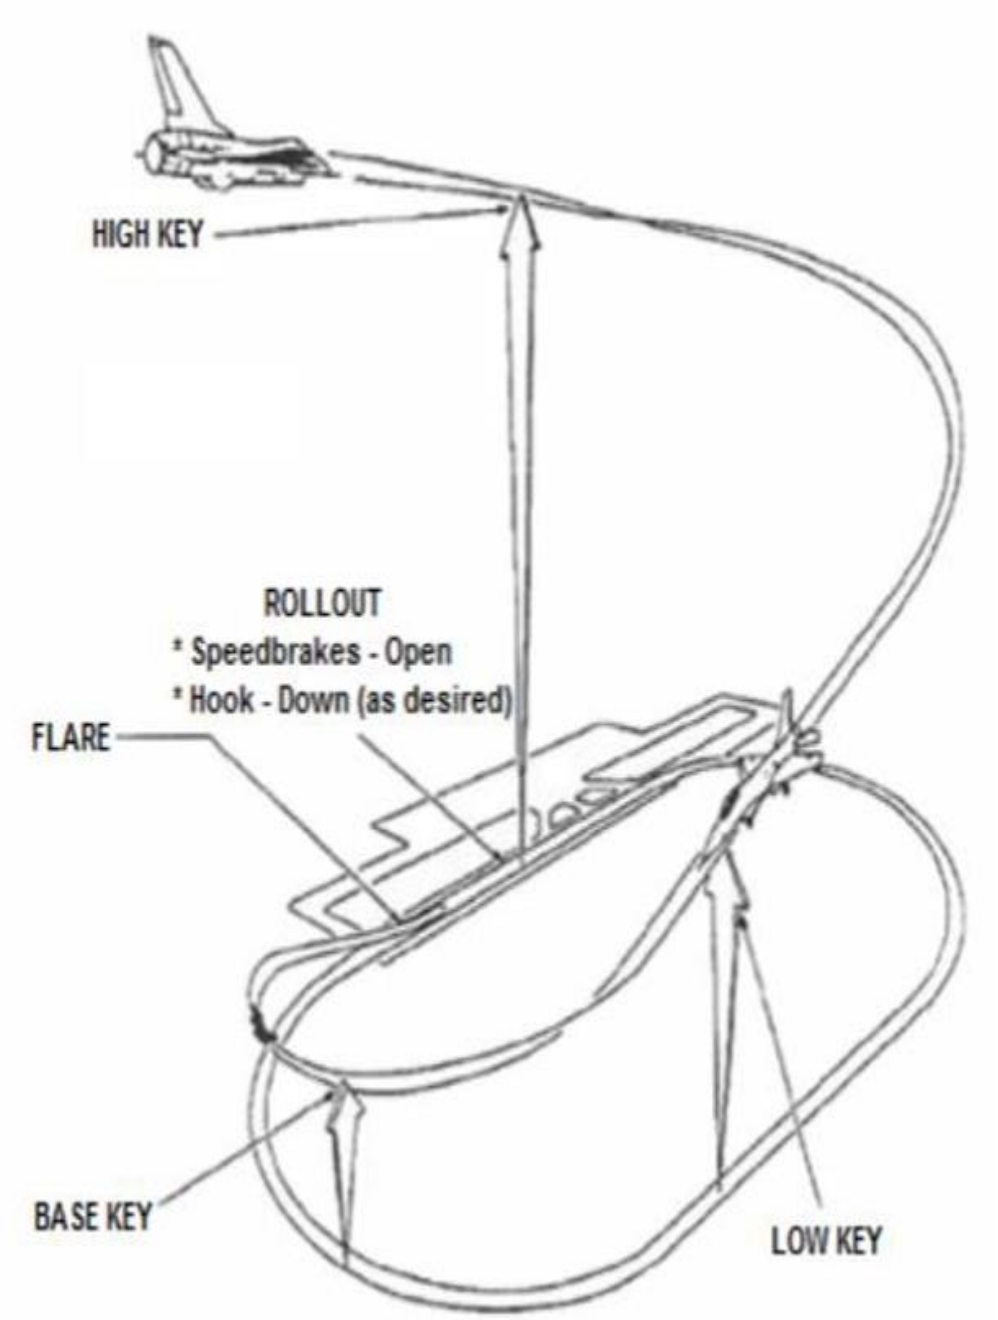

Attachment 12

445 AW GROUND OPERATIONS


Figure A12.1. 445AW Ground Operations Diagram.

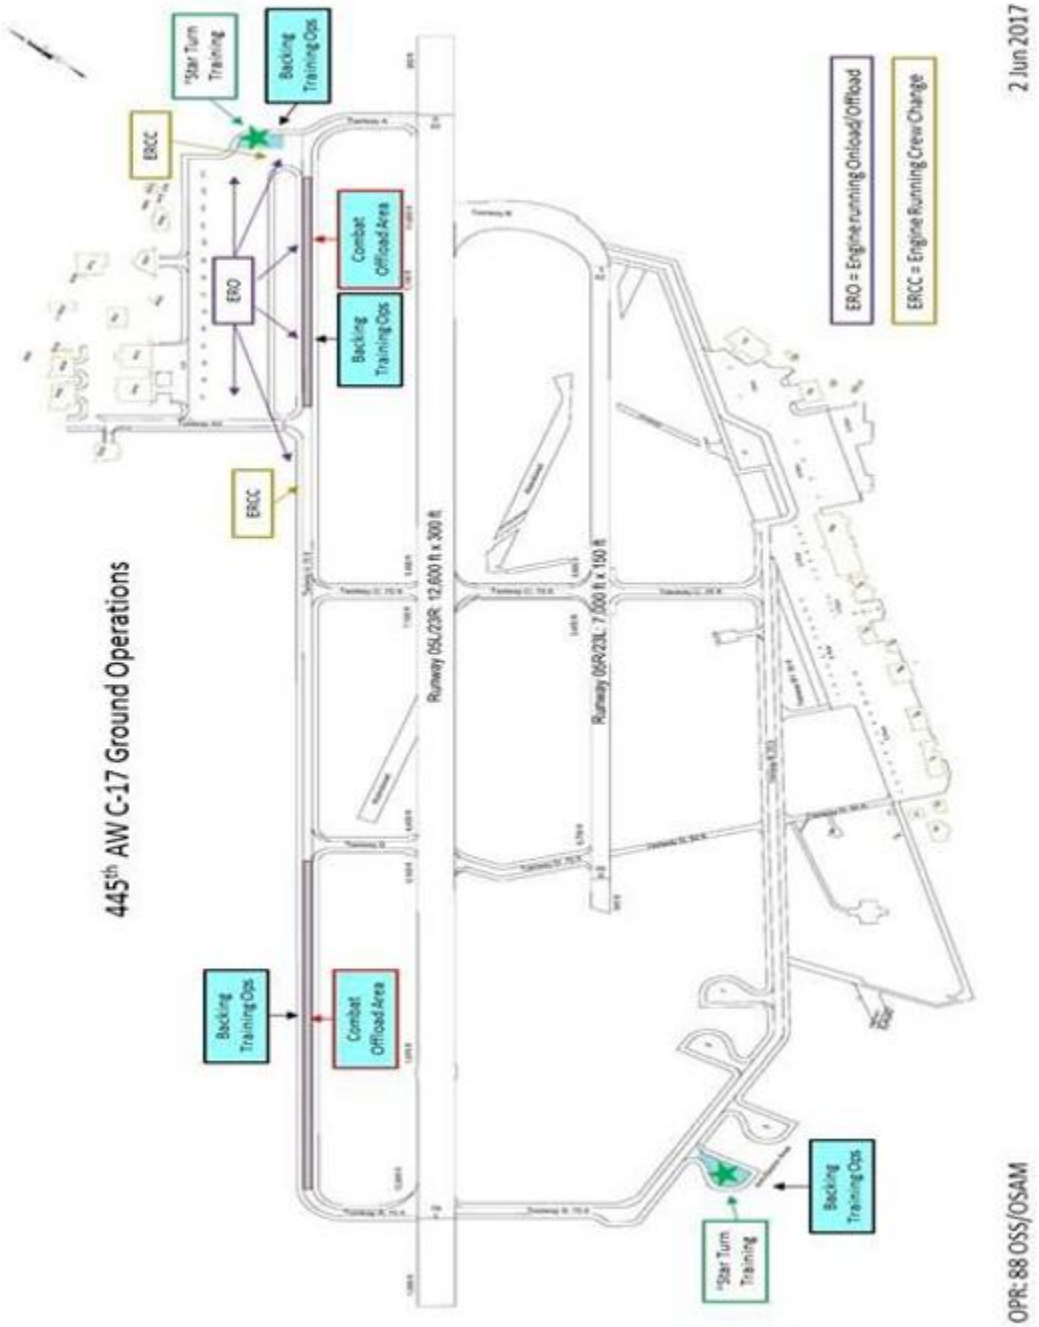

Attachment 13

PATTERSON DROP ZONE


Figure A13.1. Patterson Drop Zone.

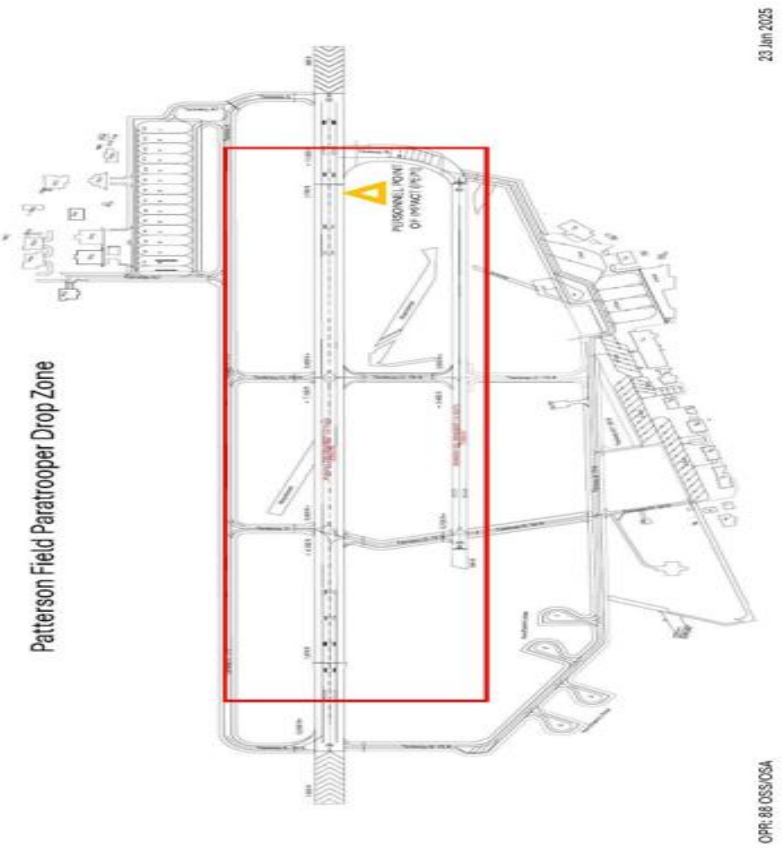

Attachment 14

AIRFIELD SWEEPING PLAN

Figure A14.1. Sweeping Diagram.

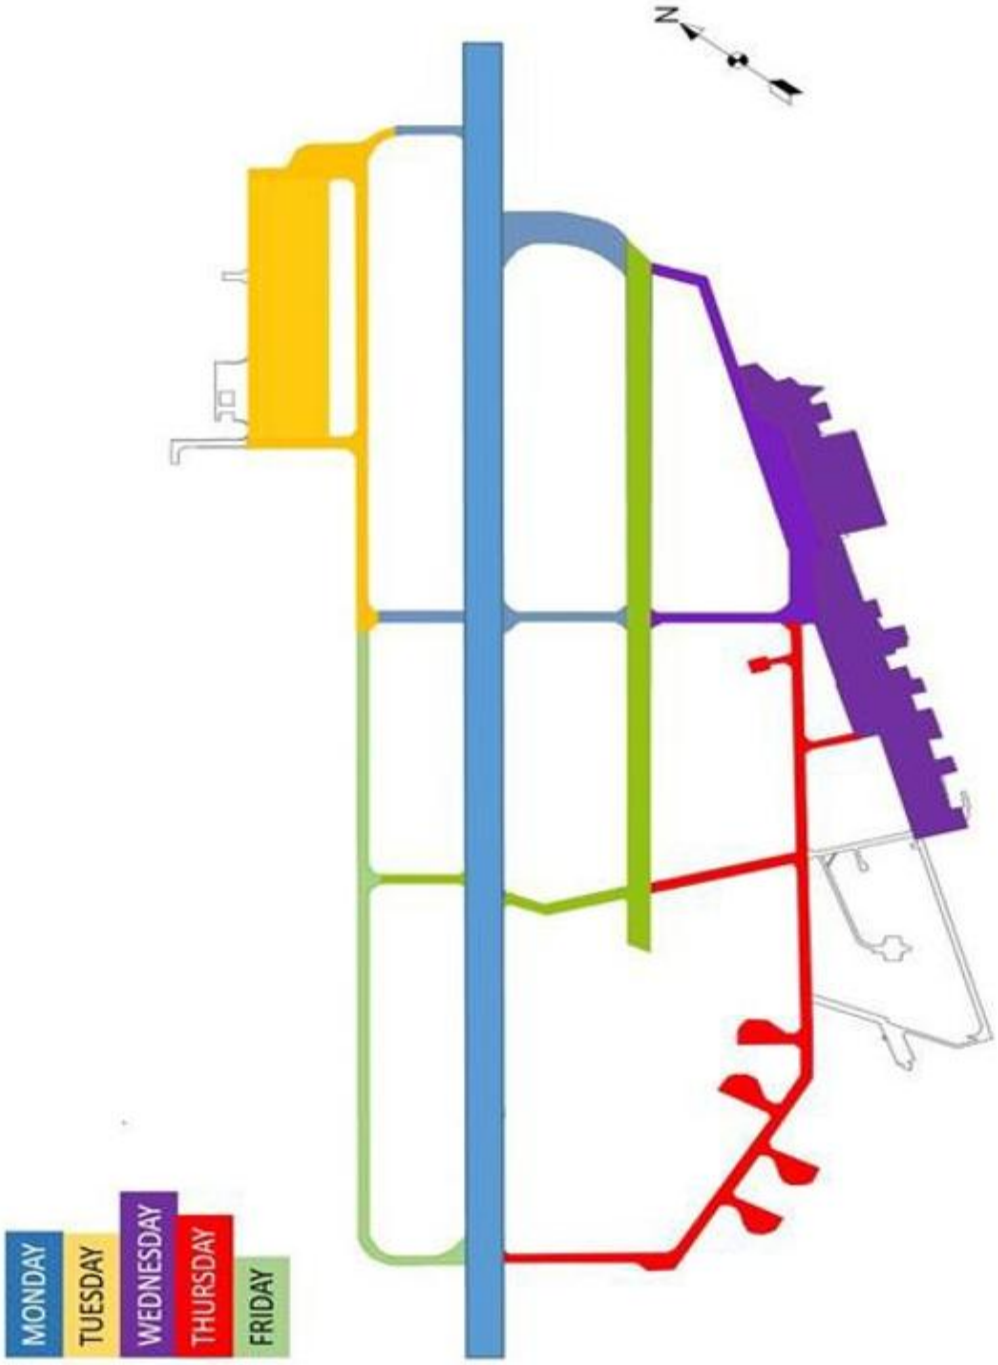

Attachment 15

RAMS CLUB FLYING – WRIGHT FIELD (AREA B)

Figure A15.1. Rams Club Flying Field – Wright Field (Area B).

