BY ORDER OF THE COMMANDER
57TH WING (ACC)

NELLIS AIR FORCE BASE
INSTRUCTION 11-250

9 JULY 2026

Flying Operations

AIRFIELD OPERATIONS AND LOCAL FLYING PROCEDURES

COMPLIANCE WITH THIS PUBLICATION IS MANDATORY

ACCESSIBILITY: This publication is available for downloading or ordering on the e-Publishing website at www.e-Publishing.af.mil.

RELEASABILITY: Access to this publication is unlimited; the publication will be available for downloading on the publicly accessible e-Publishing website.

OPR: 57 OSS/OSA

Certified by: 57 OG/CC
(Colonel Stephen S. Redmond)

Supersedes: NELLISAFBI11-250, 17 June 2022

Pages: 142

This instruction outlines Nellis AFB local procedures common to all aircraft and personnel under the operational control of the 53d Wing, 57th Wing, 99th Air Base Wing, and Nevada Test and Training Range (NTTR) Direct Reporting Unit. Failure to comply with mandatory provisions of this instruction are a violation of Article 92, Uniform Code of Military Justice (UCMJ); instruction is compliant with departmental and higher headquarters guidance. This instruction applies to all aircraft under the jurisdiction of the 57th Wing (57 WG) when operating from Nellis AFB or within the confines of the airspace delegated to the Nellis Air Traffic Control Facility (NATCF). This jurisdiction applies to all assigned and deployed units and personnel flying scheduled missions at Nellis AFB. Unit commanders must ensure aircrew under their operational control comply with this publication. Deviation or waiver requests to this instruction need to be approved by the 57th Operations Group Commander (57 OG/CC), or a designated representative, before flight operations begin. Submit requests for waivers through the chain of command to the 57 OG/CC or alternatively, to the publication OPR. NATCF delegated airspace contains Class A, B, E, G, and Special Use Airspace (SUA). Subsequently, all applicable AFIs, Federal Aviation Administration Joint Orders (FAA JO) and Federal Aviation Regulations (FAR) apply. Refer to Air Force 11-series instructions, major command (MAJCOM), or service specific directives for procedures unique to individual type aircraft. Recommendations for change should be referred to 57 OSS/OSA, 4450 Tyndall Ave, Nellis AFB NV, using the AF Form 847, Recommendation for Change of Publication. Changes to this instruction impacting safety are considered time critical. 57 OSS/OSA will coordinate time critical changes with 57 WG/WGV to generate a Flight Crew

Information File (FCIF) change; formal interim changes will be accomplished IAW DAFI 33-360. Ensure that all records created as a result of processes prescribed in this publication are maintained IAW *Air Force Manual (AFMAN) 33-363, Management of Records*, and disposed of IAW *Air Force Records Information Management System (AFRIMS) Records Disposition Schedule (RDS)*.

SUMMARY OF CHANGES

This publication is updated to reflect changes in Nellis AFB flying operations, has been substantially revised and must be completely reviewed. Some of the changes include updating graphics to higher resolution versions. Copies of these graphics are available at request from the OPR. The flow graphics for the End of Runways (EORs) have been updated, and the wingtip clearance requirements have been updated. Air Traffic Control (ATC) departure and arrival procedures have been updated. Mission Design (MDS) specific items have been removed from this regulation to reduce duplication. C-sUAS has been added to include new procedures for the reporting of C-sUAS, and updated sUAS operating procedures. Majority of Airfield Operations specific coordination was removed from this regulation and moved to a separate, Airfield Operations only publication.

Chapter 1—GENERAL **8**

1.1. Deviation and Waiver Authority. 8

1.2. Airfield Waivers. 8

1.3. TDY Operations. 8

1.4. Off-Station, Deployed Operations (Nellis Based 57 WG Units), and Use of Civilian Fields. 9

1.5. Command and Control. 9

1.6. Flight Following Procedures. 10

1.7. Recurring Preventative Maintenance Schedule. 10

1.8. ATC Facility and NAVAID Auxiliary Power. 10

1.9. Airfield and ATC Services. 11

1.10. Runway Closure. 11

1.11. Runway Suspension. 11

1.12. Runway Selection. 11

1.13. Notice to Airmen (NOTAM) Procedures. 11

1.14. Transient Aircraft. 11

1.15. Flight Information Publication (FLIP). 12

1.16. Flight line Smoking Policy. 12

1.17. The Wear of Hats on the Airfield. 12

1.18. Flight line and Restricted Area Photography. 12

1.19. 99 LRS Refueling Priorities. 12
1.20. RSC and RCR Procedures. 12
1.21. Airfield Maintenance and Construction. 12
1.22. Airfield Inspections and Checks. 12
Chapter 2—LOCAL FLYING AREA 14
2.1. General. 14
2.2. Nellis AFB Description. 14
Table 2.1. NAFB Aircraft Arresting Systems (AAS). 15
Figure 2.1. North EOR and Delta EOR. 16
Figure 2.2. Echo EOR East. 17
Figure 2.3. Alpha North EOR and Alpha South EOR. 18
Figure 2.4. Alpha East EOR. 19
Figure 2.5. Alpha Center EOR. 20
Table 2.2. EOR Wingtip Restrictions. 20
Figure 2.6. Nellis Airfield Diagram. 22
Figure 2.7. Nellis Airfield. 23
2.3. Las Vegas Class B Airspace. 25
2.4. Las Vegas Speedway. 25
2.5. Low Level Avoidance and Noise Sensitive Areas. 25
2.6. Mid-Air Collision Avoidance. 25
Figure 2.8. Tower Area of Responsibility. 26
Figure 2.9. NATCF Area of Responsibility NTTR and Local Area. 26
Figure 2.10. NATCF Area of Responsibility Local Area. 27
Figure 2.11. NATCF Area of Responsibility Alpha Areas. 27
Figure 2.12. North Las Vegas Training Area. 28
2.7. Primary Training Area. 28
2.8. Range Transition Corridors. 29
Figure 2.13. Local Area/VFR Low Altitude Tactical Navigation (LATN). 29
Table 2.3. LATN West. 30
Table 2.4. LATN East. 30
Table 2.5. LATN Central. 30
2.9. Lights Out Training Procedures. 31
2.10. Hot Refueling Pits. 31

Chapter 3—GROUND OPERATIONS **32**

3.1. General. 32
3.2. Operations within the Controlled Movement Area (CMA). 32
3.3. Aircraft Priorities. 32
3.4. Flight Plans. 33
3.5. Clearance Procedures. 33
3.6. Taxi Procedures. 33
Figure 3.1. Multiple Runway Crossing Locations. 36
3.7. Calling Ready for Departure. 36
3.8. Intersection Departures. 37
3.9. Rolling Takeoffs. 37
3.10. After Landing Procedures. 37
3.11. Engine Run Procedures. 37
3.12. Transient East Taxi Procedures. 38
Figure 3.2. Transient East Taxi. 38
Table 3.1. Transient East Coordinates/Elevation. 39
3.13. Aircraft Tow Procedures. 39
3.14. Flight Line Photography. 39

Chapter 4—FLIGHT OPERATIONS **40**

4.1. Primary Runway Designation. 40
4.2. Standard Frequencies. 40
4.3. Nonstandard Formations. 40
4.4. Dissimilar Formation Flights. 40
4.5. Hot Cargo Pad (HCP) Procedures 41
4.6. Departure Procedures. 41
Figure 4.1. RWY 03L/R FLEX Departure. 44
Figure 4.2. RWY 21L/R FLEX Departure. 45
Figure 4.3. Peaks Departures 46
4.7. Use of Military Assumes Responsibility for Separation (MARSA). 47
4.8. Airspace Entry. 48
4.9. Training Area Operations. 48
4.10. Altimeter Setting Procedures. 49
4.11. Airspace Recall Corridors. 49

Figure	4.4.	Airspace Recall Corridors.	50
	4.12.	Transit Corridors.	50
	4.13.	Recovery Procedures.	51
Figure	4.5.	JAYSN Recovery.	53
Figure	4.6.	STRYK Recovery.	54
Figure	4.7.	TORYE/ARCOE Recovery.	55
Figure	4.8.	MINTT Recovery.	56
Figure	4.9.	ALAMO Recovery.	57
	4.14.	VFR Traffic Pattern Procedures.	58
Figure	4.10.	Tactical Initial RWY 03.	61
Figure	4.11.	Nellis AFB Traffic Patterns.	62
	4.15.	Lost Communications Procedures.	62
	4.16.	Opposite Direction Procedures.	63
Figure	4.12.	Missed Approach/Local Climb Out.	64
	4.17.	Simultaneous Opposite Direction Operation (SODO) Procedures.	64
	4.18.	Reduced Same Runway Separation (RSRS).	65
Table	4.1.	RSRS for Similar Fighter Type Aircraft.	66
Table	4.2.	RSRS for Dissimilar Fighter Type Aircraft.	66
Table	4.3.	RSRS for C-130 vs. C-130.	67
Table	4.4.	RSRS for Heavy Class Aircraft vs Base Assigned Aircraft (Fighter/Attack, C-130, Heavies).	67
	4.19.	Simulated Flame-Out/Precautionary Flame-Out Operations.	68
Figure	4.13.	Nellis AFB SFO/PFO Patterns.	70
	4.20.	Nellis Assigned Aircraft Operations.	71
	4.21.	Fixed Wing Functional Check Flight (FCF) Procedures.	71
	4.22.	Systems Checks and Tactical Exercises.	71
	4.23.	Extreme Weather Operations.	71
	4.24.	Charted Visual Flight Procedure (CVFP) Approach.	73
	4.25.	Breakout Procedures.	74
	4.26.	Unmanned Aerial Systems (UAS).	74
Figure	4.14.	NAFB sUAS Perimeter Tripwire/Landing Zones.	77
	4.27.	Aircraft Flyover Requests.	77

4.28. Airport Surveillance Approaches (ASR)/Precision Approach Radar Approach (PAR) Approaches and Monitoring Services. 78

Chapter 5—ORDNANCE AND RANGE USE **79**

5.1. General. 79

5.2. Ordnance Departure Procedures. 79

5.3. Ordnance Employment Procedures. 80

5.4. Unexpended Ordnance Recovery. 80

5.5. Nellis Hung Ordnance Recovery. 80

Table 5.1. Nellis Unexpended and Hung Ordnance Procedures. 80

5.6. Jettison Procedures. 82

Table 5.2. Ordnance Departure Procedures. 83

Chapter 6—EMERGENCY PROCEDURES **84**

6.1. General. 84

6.2. Policy. 84

6.3. Notification and Coordination. 84

6.4. Response. 84

6.5. Responsibilities. 84

6.6. Hot Brake Procedures. 84

6.7. Emergency Single Frequency Approach Procedures. 84

6.8. No Radio/Radio Out (NORDO) Procedures. 85

6.9. Arresting System Engagement Procedures. 86

6.10. Dropped Object, Inadvertent Release and Unintentional Release Procedures. 87

6.11. Airborne Incident Reporting. 87

6.12. F-16 Hydrazine Procedures. 87

6.13. Controlled Bailout and Fuel Dump Procedures. 87

6.14. Downed Aircraft and Search and Rescue (SAR) Procedures. 88

6.15. Response to Emergency Locator Transmitter (ELT) Signals. 89

6.16. BASH. 89

6.17. Request for Explosive Ordnance Disposal (EOD) Assistance. 90

6.18. Aircraft Impoundment Items. 90

6.19. Evacuation of Air Traffic Control Facilities. 90

6.20. NATCF Non-Radar Airspace Recall Procedures. 91

6.21. Unauthorized Aircraft Landing or Unscheduled Aircraft. 91

6.22. Single-Runway Operations. 91
6.23. Aircraft Emergencies. 91
Chapter 7—DIVERT PROCEDURES AND EMERGENCY AIRFIELDS 93
7.1. Divert Procedures. 93
Figure 7.1. Divert Emergency Airfields. 93
7.2. Divert Airfields. 94
7.3. Emergency Airfields. 95
Attachment 1—GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION 96
Attachment 2—NELLIS AFB PARKING PLAN 104
Attachment 3—NAVIGATION POINTS 107
Attachment 4—CLASS B DEPARTURES 109
Attachment 5—HELICOPTER AND TILTROTOR OPERATIONS 110
Attachment 6—ALTERNATE MISSIONS 115
Attachment 7—A-10 SPECIFICS 116
Attachment 8—AVOIDANCE AREAS, NOISE SENSITIVE AREAS AND IFF OFF/LIGHTS OUT AIRSPACE 118
Attachment 9—SPILL OUT PROCEDURES 120
Attachment 10—BLACKED OUT LANDINGS 121
Attachment 11—NELLIS AFB BARRIER CERTIFICATION PROCEDURES 124
Attachment 12—PRIMARY CRASH ALARM SYSTEM (PCAS) AND SECONDARY CRASH NET PROCEDURES 126
Attachment 13—DISTINGUISHED VISITORS (DV) AND SPECIAL HANDLING PROCEDURES 128
Attachment 14—AIRFIELD OPERATIONS BOARD MEMBERSHIP AND ANNUAL AGENDA ITEMS 129
Attachment 15—FREQUENCIES 131
Attachment 16—PARACHUTE OPERATIONS 132
Attachment 17—IFF MODE 3/A BEACON CODE ALLOCATIONS 137
Attachment 18—CROSS-COUNTRY AND DIVERT PROCEDURES 139
Attachment 19—NELLIS AFB PRIOR PERMISSION REQUIRED (PPR) PROGRAM 141

Chapter 1

GENERAL

1.1. Deviation and Waiver Authority.

1.1.1. 99 ABW/CC has installation command authority over Nellis AFB and delegates flight line and flying operational control to the Senior Airfield Authority, designated as the 57th Wing Commander (57 WG/CC). Interim operational changes initiated by the 57 WG may be implemented with a 57 WG Flight Crew Information File (FCIF) and when necessary, coordinate operational changes with affected 99 ABW organizations prior to implementation. Local and TDY aircrew are responsible for reviewing FCIF changes impacting this directive before flying.

1.1.2. Deviation or waiver requests to this instruction need to be approved by the Senior Operations Commander (SOC), designated as the 57th Operations Group Commander (57 OG/CC), or a designated representative, before flight operations begin. Submit requests for waivers through the chain of command to the 57 OG/CC or alternatively, to the publication OPR.

1.1.3. Civil Aircraft Landing Permits (CALP) are reviewed, approved or delegated by HAF A3OJ, decision authority cannot be delegated below HQ USAF. For expeditious handling of short notice requests 99 ABW/CC has the authority to approve or disapprove civil aircraft landing permit applications (DD Forms 2400, Civil Aircraft Certificate of Insurance; 2401, Civil Aircraft Landing Permit; 2402, Civil Aircraft Hold Harmless Agreement) at Nellis airfield. This is only for one-time, official government business flights that are in the best interest of the U.S. Government and do not violate AFI 10-1001 provisions. The 99 ABW/CC has delegated authority to approve these permits and requests to the 57 OG/CC.

1.2. Airfield Waivers. The 99 ABW/CC is the approval authority for approving temporary waivers for violations of airfield and heliport planning and design criteria for construction activities, air shows, or temporary installation of an aircraft arresting system. 99 CES will process waiver requests. Coordinate and submit airfield waiver and clear zone and accident potential zone siting requests to the appropriate approving authority IAW *Unified Facilities Criteria (UFC) 3-260-01, UFC 3-535-01, AFI 10-1004, UFC 3-260-04 and AFH 32-7084* to include submitting a copy of wing-approved temporary waivers for construction activities, air shows, or temporary installation of an aircraft arresting system via the HQ ACC/A4CI SharePoint. An approved waiver and/or siting approval from the appropriate authority shall be secured before construction or alteration work is started.

1.2.1. Operational Waivers. The 57 WG/CC is the approval authority for operational waivers in accordance with *UFC 3-260-01, Para 1-7.*

1.2.2. Airspace Waivers and Agreements. Agencies wishing to nominate proposals for waivers to airspace criteria should contact the 57 OSS Airspace Manager. Airspace agreements are maintained by the 57 OSS Airspace Manager and reviewed annually.

1.3. TDY Operations. Units deployed to Nellis AFB for local flying must have a Nellis host unit sponsor. Aircrew attending formal flying training courses or flying in support of a host unit are considered local aircrew. Aircrew in a formal course will receive a phase briefing from the host unit before flying. Aircrew that are not part of a formal course will receive a local area briefing

from a local host unit covering Nellis AFB procedures prior to flying locally. Units inbound to Nellis AFB will receive the 57 WGV local area brief prior to operating at Nellis. Additional regulations must be followed for areas that are not covered under the NTTR. This is most important when the training event they wish to accomplish may extend the planned flying day length or if it takes place beyond the NTTR, R-2508 or the local Nellis traffic pattern (e.g. training events flown at outlying civilian airports or low-level structure beyond the Nellis local flying area. Nellis host unit will provide an Entry Access List (EAL) identifying all Foreign National participants in flight operations on the NTTR to NTTR/DO. Units desiring to use the NTTR without Nellis AFB support will contact NTTR/DOXP. United States Air Force Weapons School (USAFWS) geographically separated units (GSU) are considered host units.

1.3.1. TDY Units Utilizing R-2508. TDY units using R-2508 will coordinate with their host unit for use and coordination.

1.4. Off-Station, Deployed Operations (Nellis Based 57 WG Units), and Use of Civilian Fields. Reference **Attachment 18** for cross-country and divert procedures. Deployed operations are those which are off station for 72 hours or longer. Detachment commanders will forward their flight plan in the following distribution order: unit commander, group commander, and then return to 57th Wing Scheduling (57 OSS/OSOS). All deviations will be approved in advance by the applicable Group Commanders (GP/CC). All unplanned deviations will be briefed to the applicable GP/CC prior to departing on the next leg. Upon landing call 99 ABW/CP with aircraft status and a local telephone number. Contact operations and maintenance supervision for any aircraft problems. The United States Air Force Air Demonstration Squadron (USAFADS) will use their own cross-country procedures IAW *57 WGI 11-USAFADS Volume 3, Official Procedures - Thunderbirds*.

1.4.1. Off-station operations will be conducted IAW the Cross-Country and Divert Procedures, **Attachment 18**.

1.5. Command and Control. The 57 WG Supervisor of Flying (SOF) supervises flying activities from Tower for all aircraft under the jurisdiction of the 57 WG and is the Incident Commander (IC) for in-flight emergencies. Commanders must have a fully qualified squadron duty officer (SDO) available during unit flying. The SDO will be a highly experienced aircrew member selected by the squadron or detachment commander. The position of IC may be assumed by the 57 WG/CC or 57 OG/CC at any time. See *AFI 11-418, Operations Supervision, Nellis AFB Supplement*, for guidance on SOF/Tower personnel interaction and SOF/SDO responsibilities.

1.5.1. The SOF must coordinate with the Watch Supervisor (WS) prior to using an ATC frequency. A person who commandeers an ATC frequency assumes responsibility for separation of aircraft.

1.5.2. The Base Fire Chief or designated representative (99 CES/CEF) is the IC for ground emergencies and IFEs after landing at Nellis AFB.

1.5.3. The 99 ABW/CP, call sign GAMBLER 99, works with the 57 OG/CC or designated representative to give assistance to transient aircraft when local flying is not scheduled, and a SOF is not on duty.

1.5.4. The Nellis Air Traffic Control Facility (NATCF) provides air traffic services to aircraft operating within the NTTR and NATCF delegated airspace in accordance with appropriate Letters of Agreement (LOA) and Certificates of Authorization (COA). Airspace LOAs and

COAs can be found in the AOF publication library on the ACC SharePoint and are reviewed IAW *DAFMAN 13-204V1, and AFMAN 11-202 Volume 3, General Flight Rules, ACC Supplement*. 57 OSS/OSA Publication Index.

1.5.5. NTTR/DOOS (Director of Operations, Scheduling) is the office for scheduling special use airspace assigned under the jurisdiction of the USAF Warfare Center (USAFWC). BLACKJACK, a range monitoring office, provides real-time scheduling for NTTR airspace. NTTR Supplement to *AFMAN 13-212, Volume 1* (*AFMAN 13-212V1, ACC Sup, NTTR Addendum A*), Range Planning and Operations defines range authority and operations. NTTR/DO is assigned authority in LOAs as applicable.

1.6. Flight Following Procedures. The 99 ABW/CP will be responsible for tracking all transient and cross-country departures and arrivals that are posted in the Global Decision Support System (GDSS). 99 ABW/CP will notify Airfield Management Operations (AMOPS) if an aircraft (loaded in GDSS) is overdue. The SDO will be available immediately to assist the SOF via landline. The phone number for the SDO will be posted by unit schedulers in the 57 WG daily flying schedule inputs on the Patriot Excalibur (PEX) or verbally over the SOF landline.

1.6.1. Locally Assigned Aircraft Times. The appropriate squadron operations will record all locally assigned aircraft departure and arrival times into PEX. If a local aircraft is overdue, the squadron operations center must contact the 99 ABW/CP to run the required checklists.

1.6.2. Transient Aircraft Times. The Tower will record all arrival and departure times of transient *(DD Form 1801, DoD International Flight Plan*) aircraft and pass the times to AMOPS. AMOPS will contact 99 ABW/CP as soon as possible, but no later than 15 minutes from the time they are notified with arrival and departure times of transient aircraft. AMOPS will execute the overdue aircraft checklist if the aircraft is more than 30 minutes past their proposed arrival time.

1.7. Recurring Preventative Maintenance Schedule. No-NOTAM (Notice to Airmen) Preventative Maintenance Inspections (PMI) published in the IFR Supplement and FLIPs will be followed for the Nellis AFB Navigational Aids (NAVAID). This includes the TACAN, Instrument Landing System (ILS), Nellis Digital Approach Surveillance Radar (DASR), Tolicha Peak DASR. If downtime is required outside of the scheduled times, prior coordination with the users must be accomplished by Airfield Operations (57 OSS/OSA) with approval from the 57 OG/CC (Tier 3). During periods of daylight-saving time, effective hours will be one hour earlier than shown and will be indicated by a "++" symbol following the hours indicated.

1.8. ATC Facility and NAVAID Auxiliary Power. The following outlines the auxiliary power capabilities for specified facilities and equipment.

1.8.1. NATCF Equipment. The ETVS is supported by a UPS with a 20-minute capacity. The STARS and FDIO (enroute and terminal) do not have UPS capabilities.

1.8.2. Tower Equipment. The New Voice Recorder (NVR) and ETVS have UPS capability of 20-minutes. The FDIO does not have UPS.

1.8.3. Base Operations Equipment. The Base Operations NVR has a 5-minute UPS capacity when operating at full load.

1.8.4. NAVAIDS and ATCALS. The LSV and TLP DASR systems use a facility UPS with a 35-minute full-load capacity to maintain uninterrupted operations during a 15-second delay

required for the external, refuellable generator to engage and provide sustained power. The FMQ-19 has a 20-minute UPS capability. The Localizer and Glideslope systems are each supported by a UPS for up to 4 hours. The TACAN is equipped with 20-minute UPS.

1.9. Airfield and ATC Services. Nellis AFB airfield and ATC services are provided 24 hours a day, 7 days a week, unless closed by NOTAM.

1.9.1. Civil Use of Military NAVAIDS. Practice approaches are authorized for civil aircraft outside of the local flying window if accomplished with no delay to aircraft operating at Nellis AFB. Civil aircraft are not authorized to touch the runway without a Prior Permission Required (PPR) number and authorized Civil Aircraft Landing Permit (CALP) for Nellis AFB unless diverting or in an emergency.

1.9.2. Automatic Terminal Information Service (ATIS) shall be broadcast 24 hours a day unless the airfield is closed. Millibars will be included in the ATIS broadcast during large force exercises (LFE).

1.9.3. *IAW DAFMAN 13-204 Volume 3, Air Traffic Control*, the 57 OG/CC waives the requirement for air traffic controllers to issue variable winds to wing aircraft during periods of moderate to heavy traffic as determined by the appropriate on-duty ATC watch supervisor.

1.10. Runway Closure. AMOPS may close the RWYs and taxiways (TWYs) for unsafe conditions. NOTAMs will be sent for extended periods of closures, normally more than one hour. For planned closures, AMOPS will send applicable NOTAMs no earlier than 72 hours in advance and advise all agencies concerned. Tower Watch Supervisor (WS) will notify NATCF WS of the runway closure and estimated duration. AMOPS will cancel the applicable NOTAMs when the runways are opened. AMOPS will perform the required checks prior to reopening the runways.

1.10.1. Closing a runway for hazardous runway conditions. To avoid damage to aircraft, runway closures may be appropriate with the presence of certain types of FOD (i.e. large pieces of metal, large aggregate, large concrete spalling pieces, or any other materials likely to pose a high risk for operators). Tower will notify AMOPS immediately upon observing or being notified of FOD that poses a high risk for operators and will suspend operations to the runway if warranted. AMOPS will determine the necessity to close the runway for FOD removal if required for an extended period or if unsafe conditions exist on the runway.

1.11. Runway Suspension. Tower or AMOPS can temporarily suspend operations to a runway when unsafe conditions exist. After airfield suspension, AMOPS is the only agency that may resume runway operations.

1.12. Runway Selection. RWY21 is the calm wind runway. When prevailing headwind/tailwind component exceeds 10 knots, the runway most nearly aligned with the winds will be designated the active runway. Tower WS will work with the SOF for runway changes but retains operational authority for active runway determination**.**

1.13. Notice to Airmen (NOTAM) Procedures. The Airfield Manager is the only authority for publishing NOTAMs for Nellis AFB. Agencies with recommended NOTAMs should contact AMOPS. The Instrument Flight Procedures Specialist is the authority for publishing Class V NOTAMs.

1.14. Transient Aircraft. Nellis AFB requires a PPR number for all transient aircraft. Transient Alert (TA) is contracted therefore outside the hours of 0800-2000 will incur a cost on the transient

unit. Contact Airfield Management at DSN 682-4601 or submit a PPR request form to **Nellis.BaseOps@us.af.mil** seven days prior to arrival. TA services are IAW *Nellis AFB AP/1*. Please refer to the IFR Supplement or AP/1 for specific service availability.

1.15. Flight Information Publication (FLIP). AMOPS is the OPR for requesting non-procedural changes to the FLIPs. Aircrew will fly with the minimum EFB required per 57 WGV. AMOPS does not stock extra FLIPs.

1.16. Flight line Smoking Policy. Smoking is prohibited on the flight line. Flight line smoking policy is IAW *AFMAN 91-203, Air Force Occupational Safety, Fire and Health Standards*.

1.17. The Wear of Hats on the Airfield. Wear of hats on the airfield is IAW *AFI 21-101, Nellis Supplement 1, Aerospace Equipment Maintenance Management*. USAFADS is exempt.

1.18. Flight line and Restricted Area Photography. In general, photography and videography on the Nellis AFB flight line area is restricted. For up-to-date guidance on flight line photography, please reference the 57th WG Photo Policy Letter.

1.19. 99 LRS Refueling Priorities. Aircraft refueling priorities are outlined in the Nellis AFB Fuels Prioritization Letter coordinated through all flying units and signed by the 99 ABW/CC.

1.19.1. Where capacity cannot meet all requirements within a specific category, prioritization decisions will be made by or delegated from the 57 OG/CC through the weekly scheduling process. Installation priority will be communicated by MOC for all fuels requests. Adjustments to prioritization will be handled through the MOC and 99 LRS then elevated to 57 OG/CC if necessary.

1.20. RSC and RCR Procedures. Runway Surface Checks (RSC) will be performed based on changing weather conditions. When precipitation occurs, a visual inspection of the runway surface is required. If the runway is reported as "Wet," the following actions must be taken: Airfield Management will send the appropriate NOTAM, report the water depth to the nearest 1/10 of an inch, and complete all applicable checklists. Another check must be performed before the runway's condition can be returned to "Dry." Runway Condition Reading (RCR) checks are required when the runway is reported as "Wet" or having "Slush on Runway" and there is a possibility of freezing conditions (40°F or lower).

1.20.1. Airfield Snow Removal Operations**.** Due to the climate, Nellis AFB does not typically experience snow accumulation and does not have procedures for snow removal operations. Additionally, Airfield Management does not possess FAA-approved friction measuring equipment to conduct Runway Condition Reading (RCR) checks.

1.21. Airfield Maintenance and Construction. All airfield maintenance and construction projects that may impact airfield operations must be coordinated through the Airfield Manager (57 OSS/OSAA). Sweeper operations, grass mowing, etc., will be IAW operations letter between AMOPS and CE for specific operations.

1.21.1. Contractors working on the airfield. Airfield Management will notify the Tower and 99 SFS when contractors begin and complete work on the airfield, monitor their activities, and conduct a final airfield check after work has concluded for the day. All pertinent information will be recorded in the Daily Events Log.

1.22. Airfield Inspections and Checks. Airfield Management will conduct at least one daily inspection of the airfield in accordance with (IAW) *DAFMAN 13-204v2*. Airfield checks will be

conducted at intervals not to exceed three hours. During periods of heightened bird activity or rapidly changing weather conditions, these checks will be performed more frequently. Further guidance regarding airfield inspections and checks is provided in the *Nellis AMOI 13-204*.

Chapter 2

LOCAL FLYING AREA

2.1. General. The Nellis AFB local flying area includes southern Nevada, western Utah, western Arizona, and east-central California. The primary training areas are immediately north of Nellis AFB. Secondary training areas are in the range complexes assigned to Hill AFB, Edwards AFB, China Lake NAS, Fort Irwin, and Luke AFB.

2.2. Nellis AFB Description. Nellis AFB is located northeast of Las Vegas, Nevada; field elevation is 1,869 feet MSL. The airfield lies within Las Vegas Class B airspace. Two parallel RWYs are oriented 030°/210° with 1,000 feet between the centerlines.

2.2.1. The east RWY (21L/03R) is 10,051 feet by 150 feet and is concrete with asphalt overruns. Runway 21L is the primary instrument runway.

2.2.1.1. BAK-14 (Retractable Hook-Cable AAS) Normal Configuration. Both BAK-14(s) approach and departure end will be in lowered position and are available upon request for emergency use only. The SOF, in coordination with Tower WS, will consider raising the departure end BAK-14 during inclement weather when the Runway Surface Condition (RSC) is being reported as “wet runway”.

2.2.1.2. BAK-12 AAS Configuration. During normal configuration, both overrun BAK-12s are always connected and in a raised position. After 99 CE Barrier Maintenance has been notified of a barrier response request, they respond. Upon arrival at the specific AAS, 30 minutes is required for removal of any BAK-12 arresting system. In an emergency, the BAK-12 (overrun RWY 03R) can be removed with a 20-minute notification (see **paragraph 6.9**.).

2.2.2. The west RWY (21R/03L) is 10,120 feet by 200 feet and the first 1,320 feet of 21R and first 920 feet of 03L are grooved concrete, the mid 7,879 feet and center 80 feet are concrete, and the remaining is asphalt with asphalt overruns.

2.2.2.1. RWY 21R/03L BAK-12 AAS Configuration. During normal configuration, approach, departure end and overrun BAK-12s are always connected and in a raised position. 30-minute notification is required for removal of any arresting system.

2.2.2.2. RWY 21R/03L RC-135, B-2 and P-3 AAS BAK-12 procedures. RWY 21L/03R has retractable cables that can be raised and lowered remotely from the Tower. Nellis flying organizations hosting RC-135, B-2 or P-3 aircraft will contact AMOPS at 652-4601 with initial arrival/final departure dates and times as soon as they are known. If RWY 21L/03R is unavailable for departures or arrivals, aircrew will plan accordingly for a 21R/03L departure, and the following actions will be taken:

2.2.2.2.1. AMOPS or Tower will coordinate with the fire department and barrier maintenance for removal of the active South/North BAK-12 cables on runway 21R/03L NLT 30 minutes prior to the scheduled arrival/departure time. RC-135, B-2 and P-3 aircraft require removal of approach and departure barriers. BAK-12 AAS removal procedures may also requested for other type aircraft and is at the discretion of the Tower Watch Supervisor based on current operational necessity.

2.2.3. Primary helicopter landing pads are the Jolly and Transient Helipads, and both are concrete. Taxiways/Taxi lanes Alpha through Juliet are concrete except for Charlie and Kilo. Taxiway Charlie has a 25-foot concrete center, the remaining is asphalt. Tow-ways to the fuel barn, north trim pad and south trim pad are asphalt.

2.2.4. Aluminum Matting (AM-2) Parking Pad. A 120’ x 120’ pad situated between taxiway Hotel and taxilane Juliet, next to helicopter parking spots 15 – 17. It is designated for overflow and contingency parking for aircraft with wingspans of 132.7’ and smaller. The pad lacks apron lighting and is limited to daylight/VFR operations only. Moreover, due to the absence of markings, towing is only permitted on the pad. Utilization of the AM-2 pad must adhere to restrictions and receive approval from 57 OSS/OSAA.

2.2.5. The Nellis AFB Parking Plan is IAW **Attachment 2**, and the OPR is 57 OSS/OSAA. The Parking Plan is reviewed and changes monthly, contact 57 OSS/OSAA (AMOPS) at 652-4601 for most up to date version.

2.2.5.1. When arranging parking for transient aircraft, host units will plan for 25’ wingtip clearance when ramp space allows. As approved by the 57 WG/CC, 10’ wingtip clearance will only be used when operationally necessary due to limited ramp space.

2.2.6. Aircraft Arresting Systems (AAS). See **Table 2.1** and **Figure 2.6** for basic arresting system layout. BAK-12s are modified with an 8-point tie-down system (except in overruns). See **Attachment 11** for barrier certification procedures.

Table 2.1. NAFB Aircraft Arresting Systems (AAS).

RUNWAY LENGTHS	
RWY 21R/03L	10,120' x 200'
RWY 21L/03R	10,051' x 150'
BARRIERS	
RWY21R	BAK-12 1,451’ from approach end, BAK-12 41’ into overrun
RWY21L	BAK-14 1,200’ from approach end, BAK-12 46’ into overrun
RWY03L	BAK-12 1,211’ from approach end, BAK-12 41’ into overrun
RWY 03R	BAK-14 1,226’ from approach end, BAK-12 41’ into overrun

2.2.7. Aircrew will ensure scheduled takeoff and arrival times are provided to Nellis AMOPS NLT two hours prior. RC-135, B-2 and P-3 aircrew are responsible for informing AMOPS or Tower of any changes. Every effort will be made by scheduling agencies to ensure these airframes depart first and recover last during LFEs to deconflict with aircraft requiring cables.

2.2.7.1. Barrier maintenance is responsible for reporting barrier system status to Tower and AMOPS and will use the following phraseology. For operational barriers, use “UP AND OPERATIONAL.” For non-operational barriers, use “OUT OF SERVICE”. For disconnected barriers, use “REMOVED FROM SERVICE.”

2.2.8. End of Runway (EOR) Pads and Arming (**Figure 2.4**.)


2.2.8.1. The taxi guidance below specifies directional flow in the EORs for arming aircraft, considering weapon safe areas during arming procedures. Aircraft may taxi via alternate methods to hold after arming, or if no arming is required, however, the aircraft commander takes responsibility for wingtip clearance and aircraft obstacle avoidance. See the 57th WG/WGV Inflight Guide for more information.

2.2.8.2. The RWY 21L/R primary EOR Pad (North EOR – **Figure 2.1**) is located on Taxiway Echo between Taxiway Foxtrot and RWY 21R/03L. All aircraft must taxi beyond the white wingtip clearance line to ensure wingtip clearance is provided to aircraft on the taxiway.

2.2.8.2.1. An additional EOR Pad is located on Taxiway Delta between Taxiway Foxtrot and RWY 21R/03L. Delta EOR is marked for 5 aircraft with wingspan 45 ft and smaller but up to 6 aircraft with wingspan 45ft or smaller are authorized to arm on Taxiway Delta (10-foot wingtip clearance).

2.2.8.2.2. When arming in the North EOR and the Delta EOR, park in the first available slot to the west and fill to the east pointing away from Taxiway E. When complete with arming, move to the first spot from the East.

Figure 2.1. North EOR and Delta EOR.

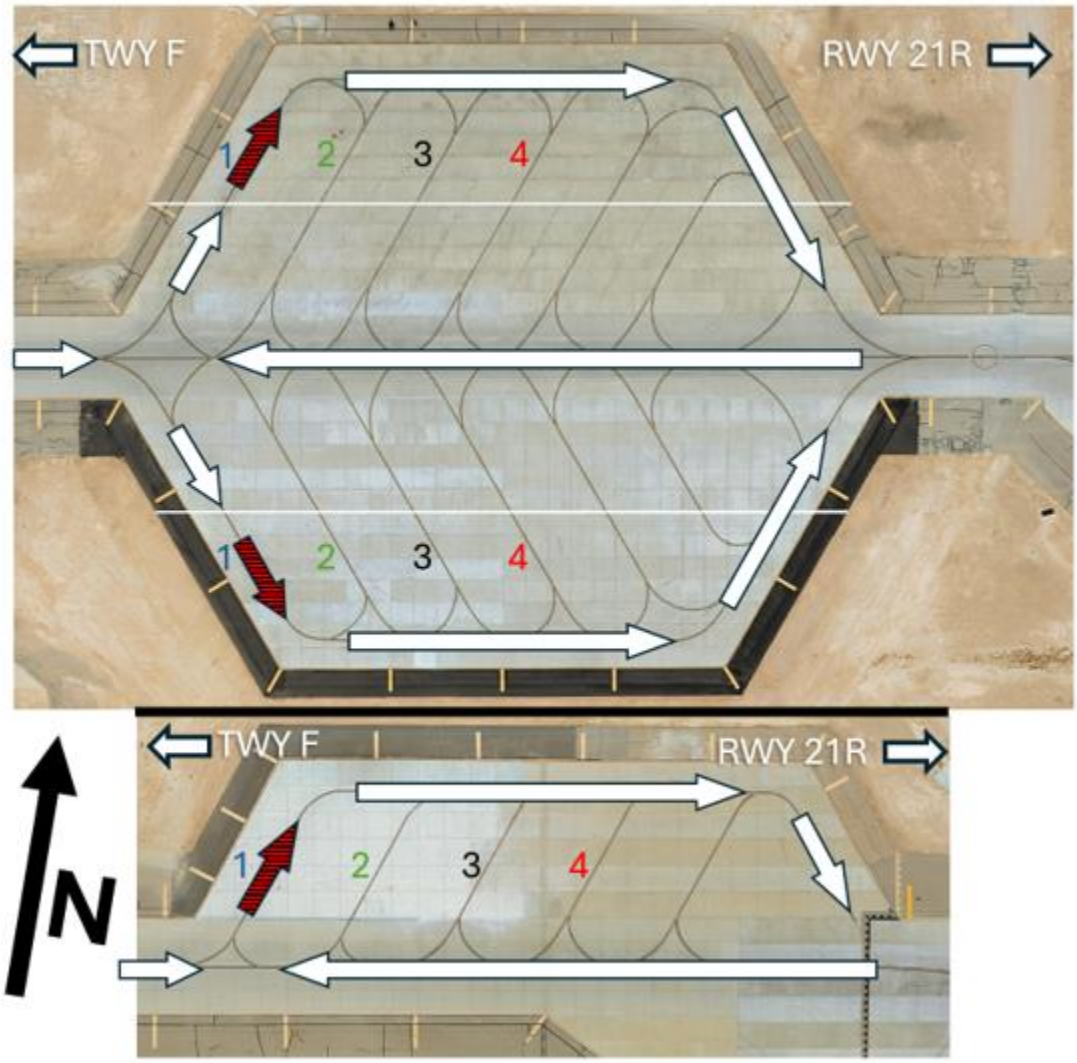


2.2.8.2.3. An additional EOR Pad is located on Taxiway Delta between Taxiway Foxtrot and RWY 21R/03L (**Figure 2.1.**). Delta EOR is marked for 5 aircraft with

wingspan 45 ft and smaller but up to 6 aircraft with wingspan 45ft or smaller are authorized to arm on Taxiway Delta (10-foot wingtip clearance).

2.2.8.3. Echo East is the arming pad east of the north end of the airfield, between RWY 21L and Taxiway G. Enter from the east end EOR (**Figure 2.2**), park pointing north in the first available spot from the west. All aircraft must taxi or hold beyond the white wingtip clearance line to ensure wingtip clearance is provided to aircraft on taxiway adjacent EOR apron.

Figure 2.2. Echo EOR East.

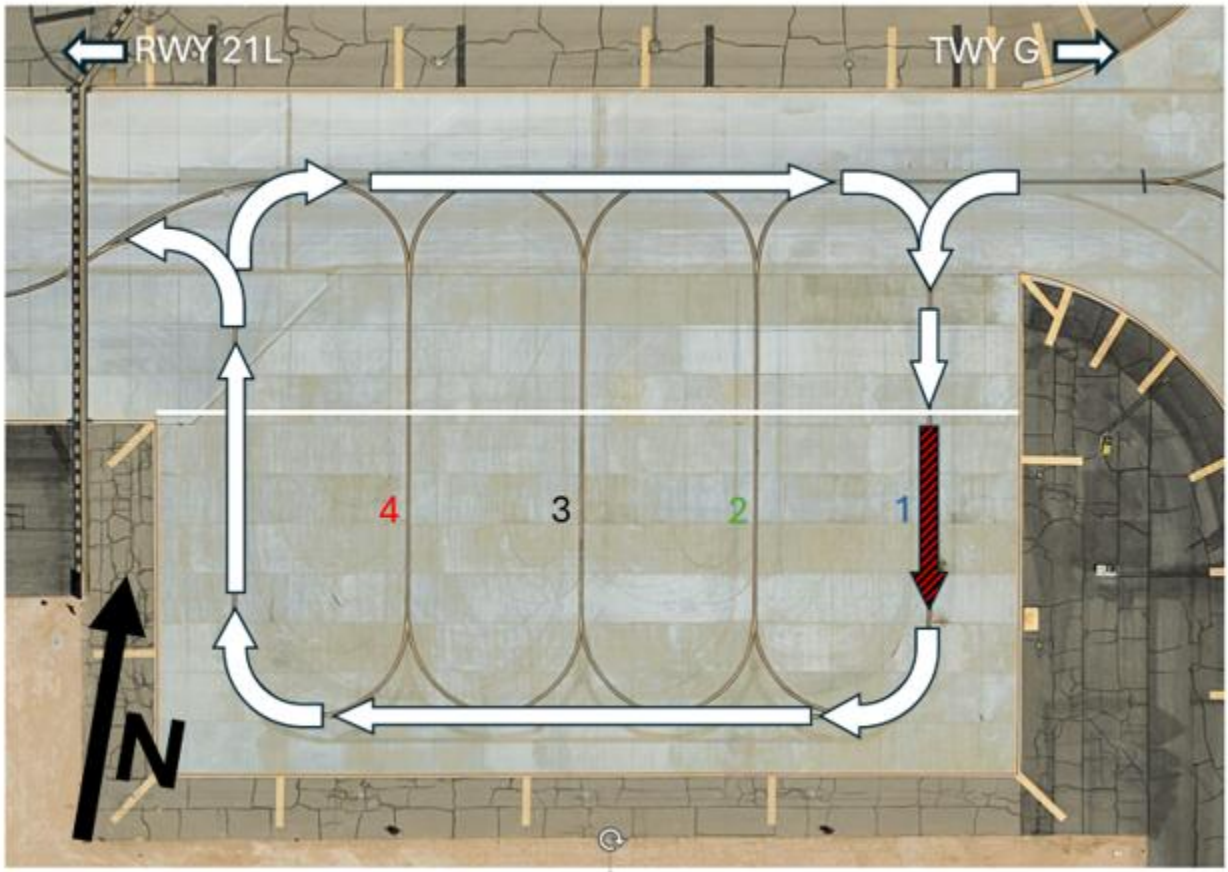


2.2.8.4. The RWY 03 primary EOR Pad (South EOR – **Figure 2.3**) splits Taxiway Alpha on Taxiway Foxtrot.

2.2.8.4.1. The EOR portion north of Taxiway Alpha (Alpha North EOR) will be primarily used by TDY units supporting Nellis-hosted exercises such as RED FLAG, GREEN FLAG, or Weapons School Integration (WSINT). Whether arming or de-arming, aircraft will utilize the northernmost arm/de-arm location first, parking perpendicular to Taxiway Foxtrot and fill-in to the south.


2.2.8.4.2. The EOR portion south of Taxiway Alpha (Alpha South EOR) will be primarily used by Nellis-assigned aircraft. Aircraft will utilize the southernmost arm/de-arm location first, parking perpendicular to Taxiway Foxtrot and fill to the north.

Figure 2.3. Alpha North EOR and Alpha South EOR.

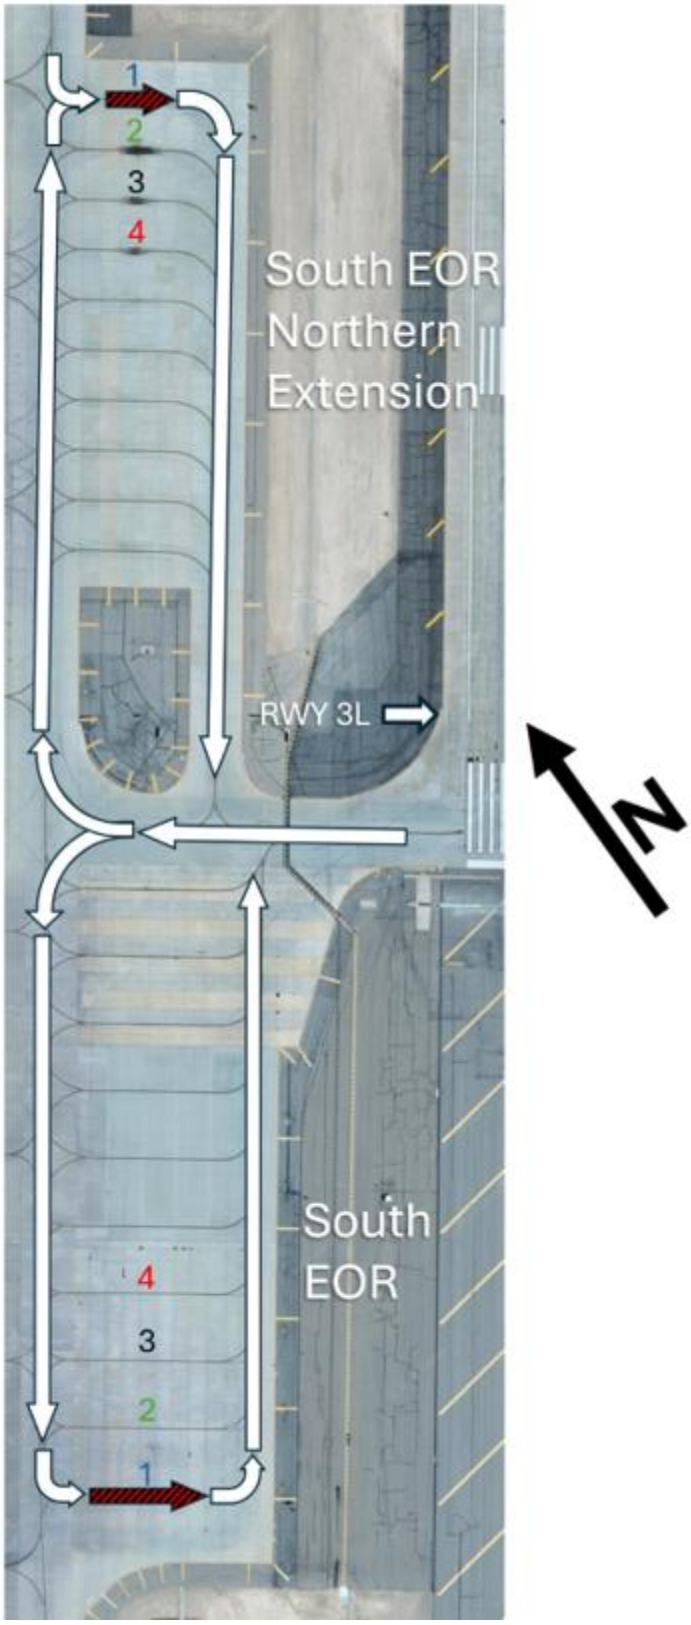


2.2.8.5. An additional RWY 03 EOR Pad is on Taxiway Alpha east of RWY 21L/03R (Alpha East EOR – **Figure 2.4)**. Aircraft will park in the first available spot to the west and fill to the east. All aircraft when taxiing into hold position pointed north must pull up to the white wing tip clearance line to ensure clearance is provided for aircraft taxiing behind in EOR. White wingtip clearance line is provided to ensure clearance to aircraft on taxiway adjacent EOR apron.

Figure 2.4. Alpha East EOR.

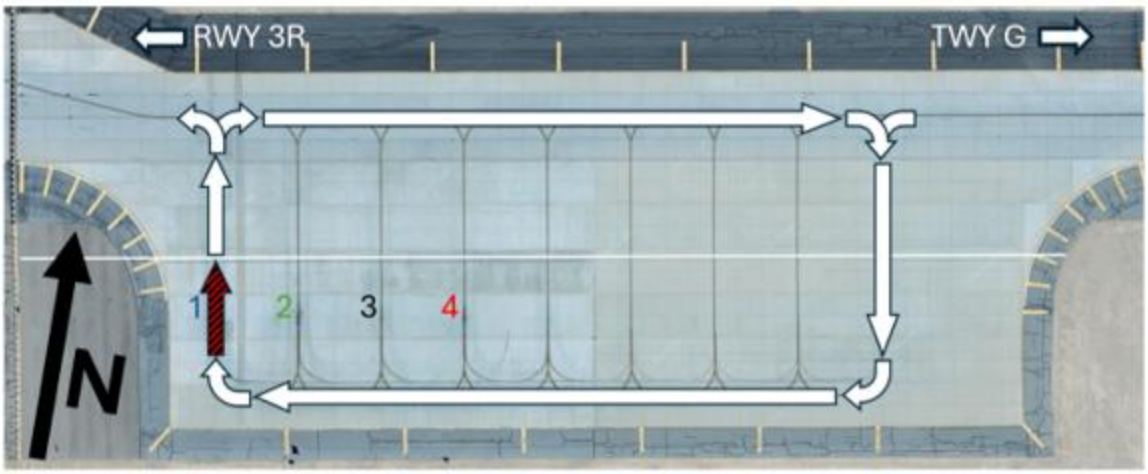

2.2.8.6. Alpha Center EOR (**Figure 2.5)** located between RWY 21L and RWY 21R, park in first available spot, fill west to east (to allow for clockwise directional flow). When taxiing into hold position pointed north, aircrew must pull up to the white wing tip clearance line to ensure clearance is provided for aircraft taxiing behind in EOR. White wingtip clearance line is provided to ensure clearance to aircraft on taxiway adjacent EOR apron.

Figure 2.5. Alpha Center EOR.

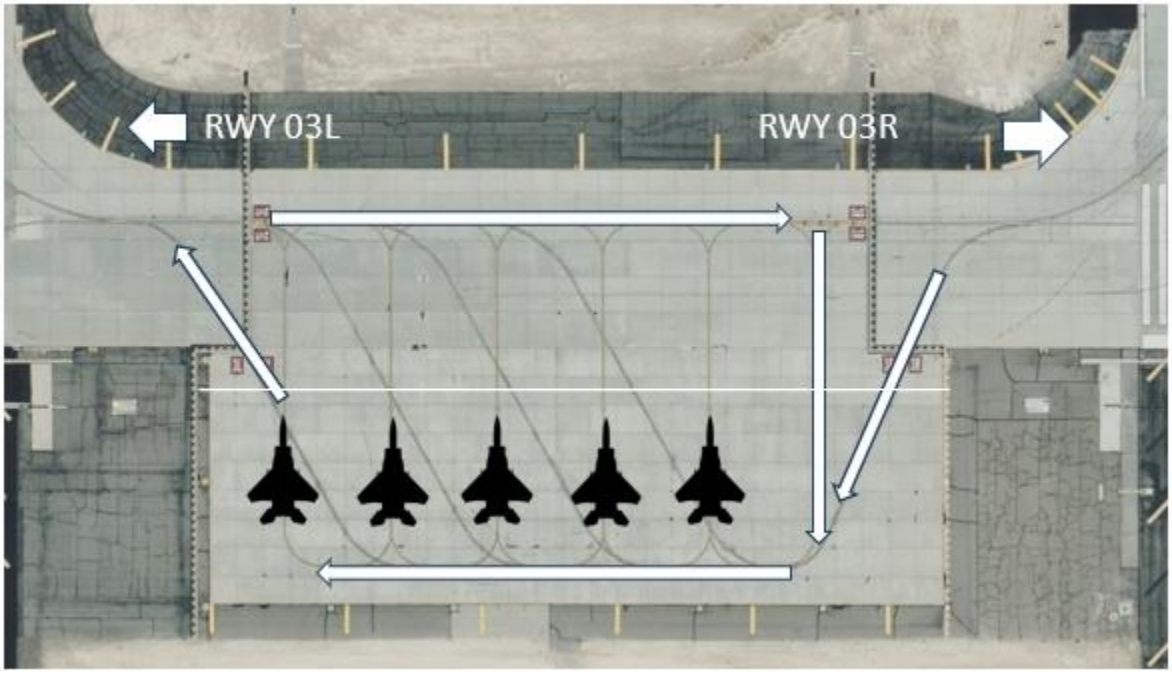

2.2.8.7. For aircraft using the Live Ordnance Loading Areas (LOLA) or revetments, use the eastern EOR Pads on Taxiway Alpha and Taxiway Echo. EOR pads are for fighter type aircraft only.

2.2.8.8. Aircraft Maintenance is responsible for ensuring all equipment is positioned to allow proper wingtip clearance. Equipment must be removed NLT three hours after flying and pre-positioned no earlier than three hours prior to the start of flying. Equipment is not to be stored in the EOR area.

2.2.8.9. Aircrew are responsible for ensuring proper wingtip clearance and must follow marshaller or wing walker instructions.

2.2.8.10. Aircraft with wingspans of 185 ft or greater must have wing walkers present when taxiing through EORs due to the close proximity of airfield signs to wingtips.

Table 2.2. EOR Wingtip Restrictions.

EOR	Aircraft Present?	Wingtip Restriction
Alpha South	Yes	No greater than 84 ft
	No	No greater than 132.7 ft
Alpha North	Yes	No greater than 84 ft
	No	No greater than 132.7 ft
Alpha Center	Yes	No greater than 136 ft
	No	No restriction
Alpha East	Yes	No greater than 136 ft
	No	No restriction
Delta	Yes	No greater than 44 ft

	No	No greater than 170 ft
Echo North	Yes	No greater than 170 ft
	No	No greater than 223 ft
Echo East	Yes	No greater than 132.7 ft
	No	No restriction

2.2.8.11. Fixed Wing Arming, De-arming and Pre-takeoff Inspection**.**

2.2.8.11.1. The revetments have three taxi lines painted in each shelter. The center line accommodates all fighter aircraft, while F-16s may use the other two lines to park two aircraft per shelter. F-16s parked two per shelter must have a crew chief marshal them when entering or exiting the revetments. Fighters using the center line may transit the shelters without marshaling.

2.2.8.11.2. Aircraft must taxi into revetments with the front of the aircraft facing the dirt berm. This is to prevent jet blast damage to the berm and ensure weapons do not point towards populated areas.

2.2.8.11.3. Arming and de-arming is not allowed in the revetments except for deviations approved by the 57 WG Weapons Safety Office. Maintenance will ensure all equipment is properly stored prior to aircraft entering or exiting the revetments to ensure proper wingtip clearance.

2.2.8.11.4. Individual flight members should clear the EOR after arming is complete. Flights anticipating a delay in takeoff after arming should request clearance from the Tower to hold between the runways; however, do not taxi in front of aircraft arming forward-firing ordnance (FFO).

2.2.8.11.5. Arming for visiting aircraft will be performed by visiting maintenance personnel. Visiting units will comply with required regulations to include *DAFI 21-101 ACC Sup, DAFI 21-101 57 MXG Sup.*

2.2.8.11.6. Aircraft will de-arm at the nearest EOR before taxiing to parking (if de-arm required per MDS regulations). If EOR crews are not available (ex: runway change in effect, weather) and a low fuel state exists, contact the SOF and shut down the engines in the appropriate EOR area if necessary.

2.2.8.11.7. Aircraft waiting to be armed will not block taxiways or revetments.

2.2.9. **Drag Chute Jettison.**

2.2.9.1. Aircraft with drag chutes must coordinate with sponsor or host unit prior to arrival. Host units will ensure drag chutes are retrieved.

2.2.9.2. Aircraft with drag chutes must turn off the runway so as not to drag rocks or snag taxiway lights with the drag chute. Carry drag chutes to parking. If unable to carry the drag chute to parking, use minimum power settings when releasing the chute in designated areas defined below. Align fuselage to runway heading to avoid blowing loose debris on the taxiways and runways. If chutes do not clear taxiways or the runway, notify Nellis Ground. At the south end, use Taxiway Alpha between RWY 21R/03L and Taxiway Foxtrot. At the north end, use Taxiways Echo or Delta between RWY 21R/03L and Taxiway Foxtrot. If

taxiing to the east side, jettison between RWY 21L/03R and Taxiway Golf on the south end and between RWY 21L/03R and DOE ramp on the north end.

2.2.9.3. In the event an aircraft jettisons a chute on the runway, tower will suspend runway operations. If a pilot requests to land on the suspended runway Tower will advise the aircraft, "CHUTE ON RUNWAY (POSITION OF CHUTE INCLUDING SIDE OF RUNWAY AND DISTANCE REMAINING)." UNABLE TO ISSUE LANDING CLEARANCE, LANDING WILL BE AT YOUR OWN RISK." Pilot will advise Tower of intentions.

Figure 2.6. Nellis Airfield Diagram.


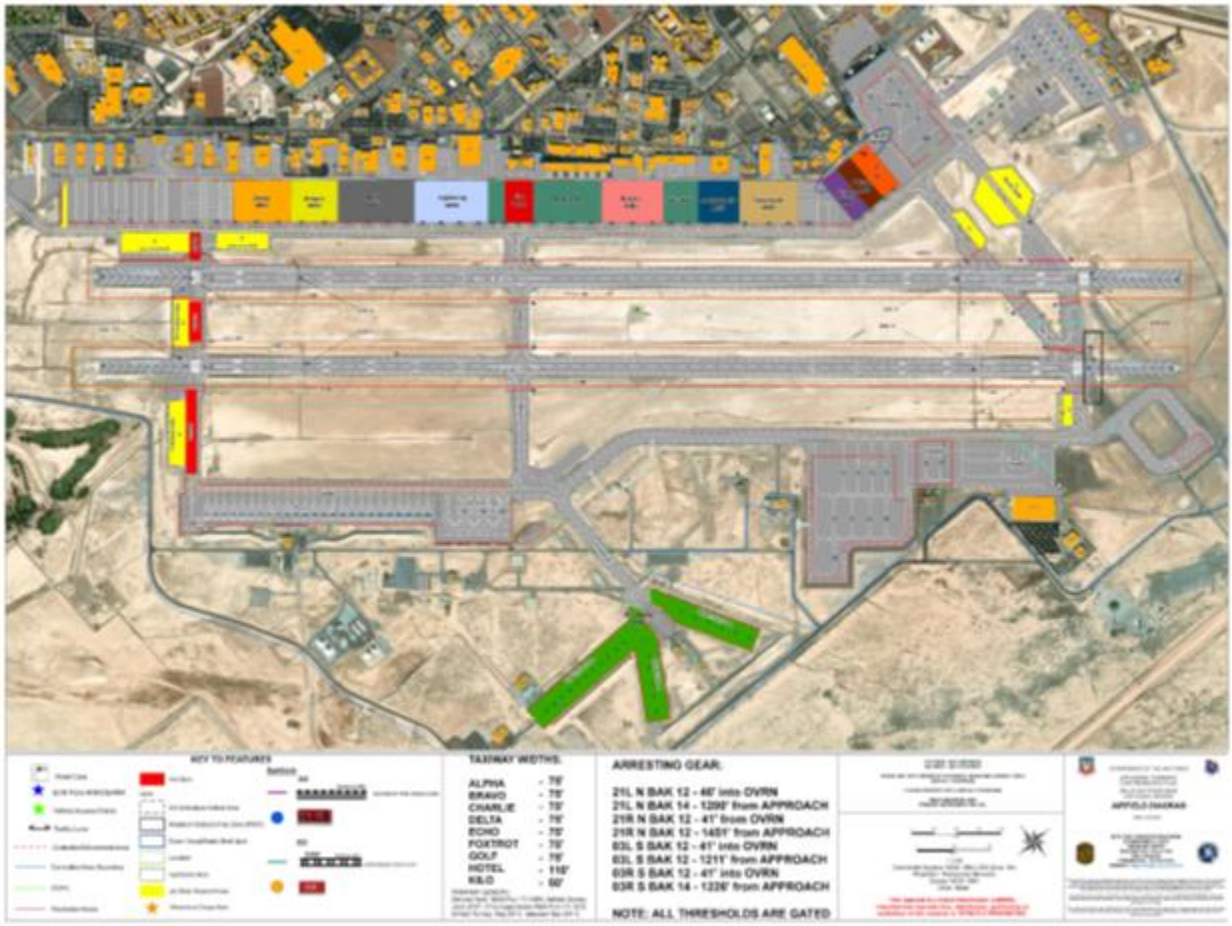


Figure 2.7. Nellis Airfield.

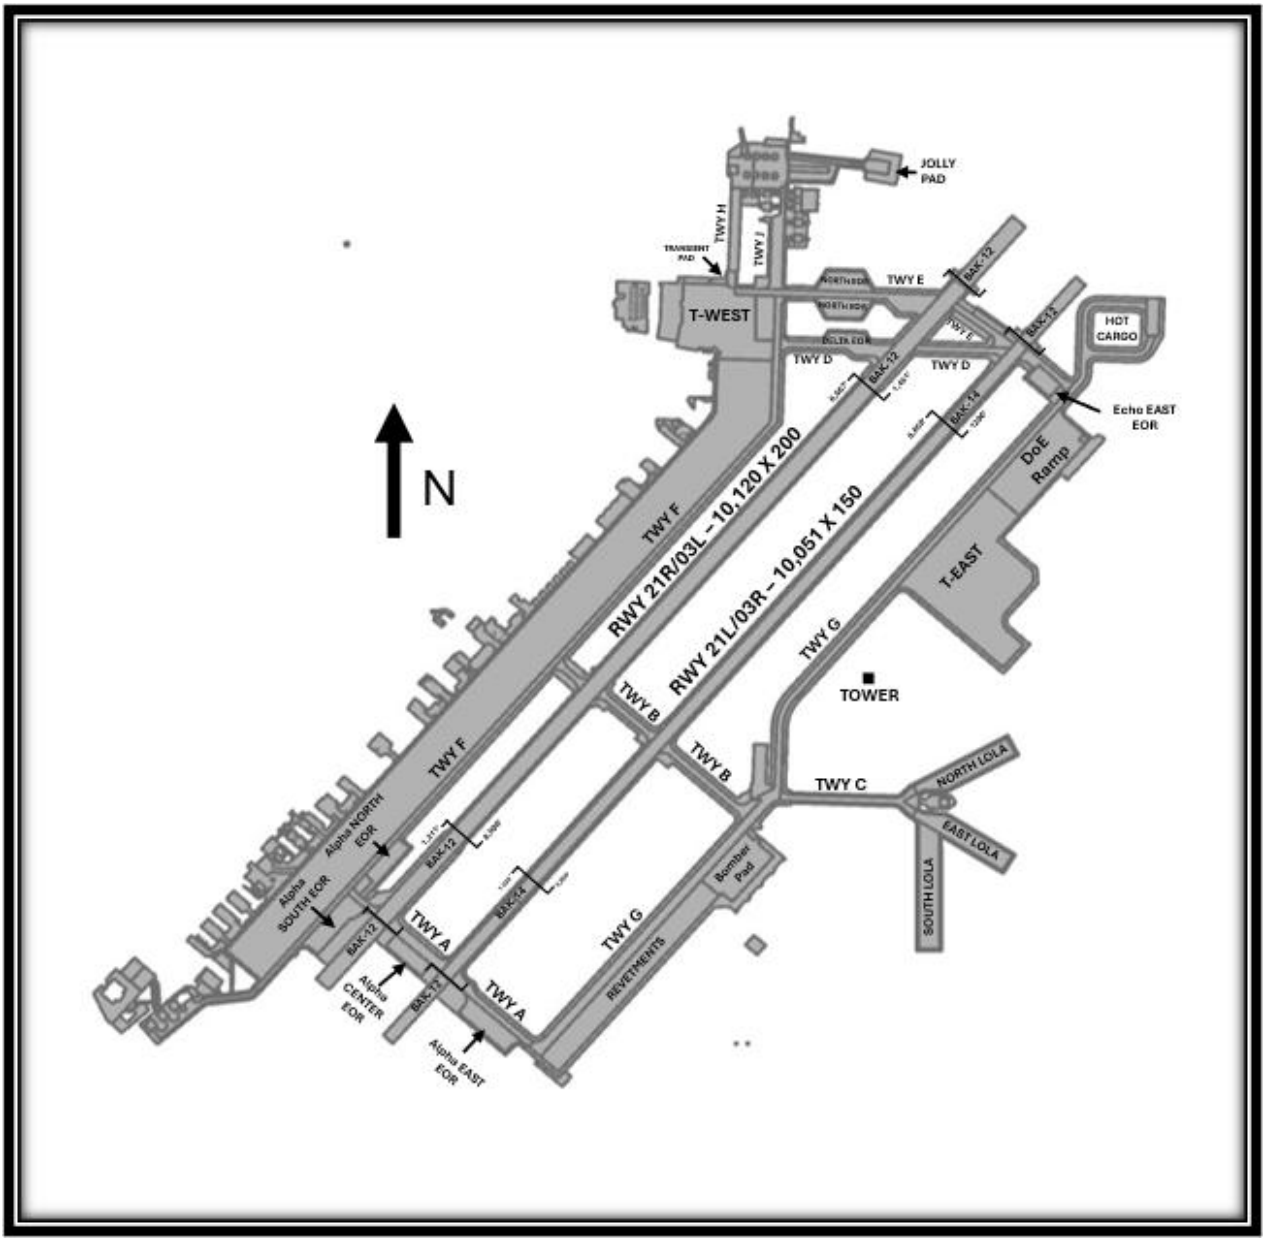

2.2.10. Live Ordnance Areas. Fixed wing live ordnance areas are the LOLA, Hot Cargo Pad, Bomber Pad, and Golf Revetments (**Figure 2.6**.). Contact 57 OSS/OSAA for coordination.

2.2.11. Hot Brake Areas. Hot brake areas are located on Taxiway Alpha and Echo between the runways (**Figure 2.6**.). The hot brake areas are not wide enough for B-52 aircraft. B-52 aircraft will clear the runway and hold on Taxiway Echo (east of RWY 21L/03R) or Alpha for hot brakes.

2.2.12. Decontamination Areas. The primary decontamination area for fighter type aircraft is located at the wash rack adjacent to Hangar 270 (Row 25). The secondary decontamination area is at the wash rack on the ramp side of the Thunderbird Hangar (Row 37 and 38). Holding points for either area is in the north EOR pads and hot brake areas.

2.2.13. Hydrazine Area. The hydrazine areas are between the runways on Alpha Center when RWY 21 is active and Echo Center when RWY 03 is active. Taxiway Alpha East EOR should be avoided due to its proximity to the Golf Course (**Figure 2.6**.).

2.2.14. Critical Protection Areas. The localizer critical area, glide slope critical area and Precision Obstacle Free Zone are depicted in **Figure 2.6**.

2.2.14.1. Instrument Hold Line Procedures (**Figure 2.6**.):

2.2.14.1.1. Tower will:

2.2.14.1.1.1. Restrict vehicle and aircraft movement to protect the critical areas *IAW DAFI 13-213* and *FAA JO 7110.65.*

2.2.14.1.1.2. Notify AMOPS, MOC, and Fire Department of activation or termination of instrument hold line procedures.

2.2.14.1.1.3. Include "INSTRUMENT HOLD LINE PROCEDURES IN EFFECT" on the ATIS and if necessary, advise aircrew on taxi clearance.

2.2.14.1.2. AMOPS will:

2.2.14.1.2.1. Broadcast and notify maintenance personnel via appropriate Ramp Net channels that "INSTRUMENT HOLD LINE PROCEDURES ARE IN EFFECT or TERMINATED."

2.2.14.1.3. When implemented, aircraft and vehicles shall not operate within the instrument hold line without permission from Tower.

2.2.15. Restricted Areas on the Airfield. There are nine restricted areas within Nellis Airfield, Transient East, Transient West, Bomber Pad Apron, Revetments, Main apron, North LOLA, East LOLA, South LOLA and the Hot Cargo Pad (HCP). All vehicles will use ECP points to enter and exit areas. Reference **Figure 2.6** for specific locations and entry points.

2.2.16. Permanently Closed and Unusable Portions of the Airfield. Pad in the vicinity of the intersection of Taxiway Bravo and Golf is closed (**Figure 2.6**.). The pad is remnants of an old cross runway (34S).

2.2.17. Control Tower Visual Blind Spots. A portion of the Transient West ramp is obscured by the AMOPS building (**Figure 2.6**.).

2.2.18. Radio Blind Spots. Rows 40-45 on the west parking apron are consistent radio blind spots for Ground Control (121.8/275.8). Taxiways Delta and Echo between the runways are consistent radio blind spots for Local Control (132.55/327.0) – see **Figure 2.6**.

2.2.19. Airfield Lighting. Both runways are equipped with illuminated distance remaining markers and arresting markers. The barriers on both runways are marked with illuminated signs; however, the barriers within the overruns are not marked with lighted markers. All taxiway lights are standard blue.

2.2.19.1. RWY 21L/03R is equipped with High Intensity Runway Lights (HIRL), Approach Lighting System with Sequenced Flashing Lights Category 1 (ALSF-1), and Precision Approach Path Indicator (PAPI) System.

2.2.19.2. RWY 21R/03L is equipped with HIRL and PAPI. All SFLs on RWY 21L are 1.5 feet to the right of the extended centerline. HIRL spacing exceeds 200 feet at two locations on 21R/03L and four locations on 21L/03R. All threshold lights are gated.

2.2.19.3. RWY 03L/R is equipped with LED PAPI systems. 21L/R is equipped with incandescent PAPI systems.

2.2.20. The Hot Cargo Pad (HCP) does not have taxiway lighting and is restricted to daylight/VFR use only.

2.2.21. Airfield Lighting Inspections. For details reference 57 OSS/OSAA and 99 CES/CEO LOA.

2.2.22. The paved areas leading to the trim pads and fuel barn area are tow ways. Aircraft must be towed to the position and are restricted to aircraft with wingspans 58 ft and smaller.

2.2.23. The taxiways adjacent to aprons are considered taxilanes for airfield criteria purposes. No taxilane edge stripe markings are present on the airfield.

2.2.24. Jet blast criteria may not be met on aprons. Maintenance must use caution and ensure adjacent rows/areas are aware of engine starts/runs.

2.3. Las Vegas Class B Airspace. Las Vegas Class B Airspace is an area of positive radar control, for all IFR and VFR aircraft, surrounding Harry Reid Airport that includes Nellis AFB. ATC clearance is required before entering or operating in Class B airspace.

2.4. Las Vegas Speedway. The Las Vegas Speedway is located two miles north of the runways at Nellis. The following procedures shall be in effect during scheduled events at the speedway from the time spectator gates open until at least one hour after the conclusion of the last event. All aircraft departing and arriving will avoid overflight of the speedway. An advisory shall be placed on the ATIS or in the NOTAM's during effective periods. VFR traffic pattern operations shall be flown east of the runways to the maximum extent possible. Aircrew can expect straight in approaches to RW21L and if recovering to the overhead a left break for either runway to a full-stop.

2.5. Low Level Avoidance and Noise Sensitive Areas. **Attachment 8** identifies noise sensitive and other restricted areas that must be avoided by established horizontal and vertical distances for flight safety, noise sensitivity, or environmental sensitivity. Temporary Flight Restrictions (TFR) are occasionally established within the NTTR. Aircrew must remain clear of these areas and use caution for VFR air support operations in the vicinity of TFR areas. TFR NOTAMs are displayed on the TFR NOTAM website (**https://www.notams.faa.gov/**).

2.6. Mid-Air Collision Avoidance.

2.6.1. Local traffic pattern potential conflict areas are:

2.6.1.1. Craig Ranch Park (LSV264/5.5). Craig Ranch Park is outside of the North Las Vegas (KVGT) Class D airspace (the fix falls inside the lateral boundaries of Tower airspace) and near KVGT Airport which accommodates numerous types of light aircraft (**Figure 2.8**.).

Figure 2.8. Tower Area of Responsibility.

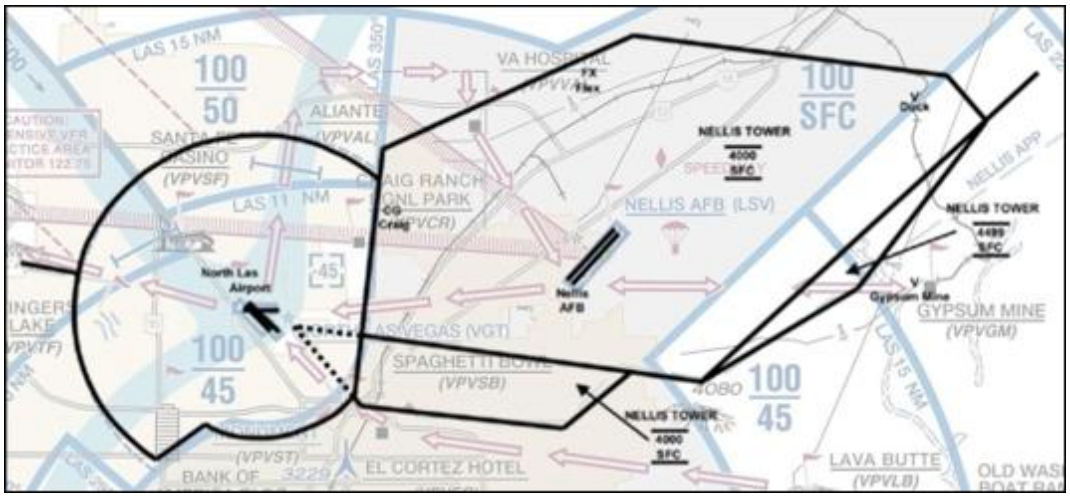


Figure 2.9. NATCF Area of Responsibility NTTR and Local Area.

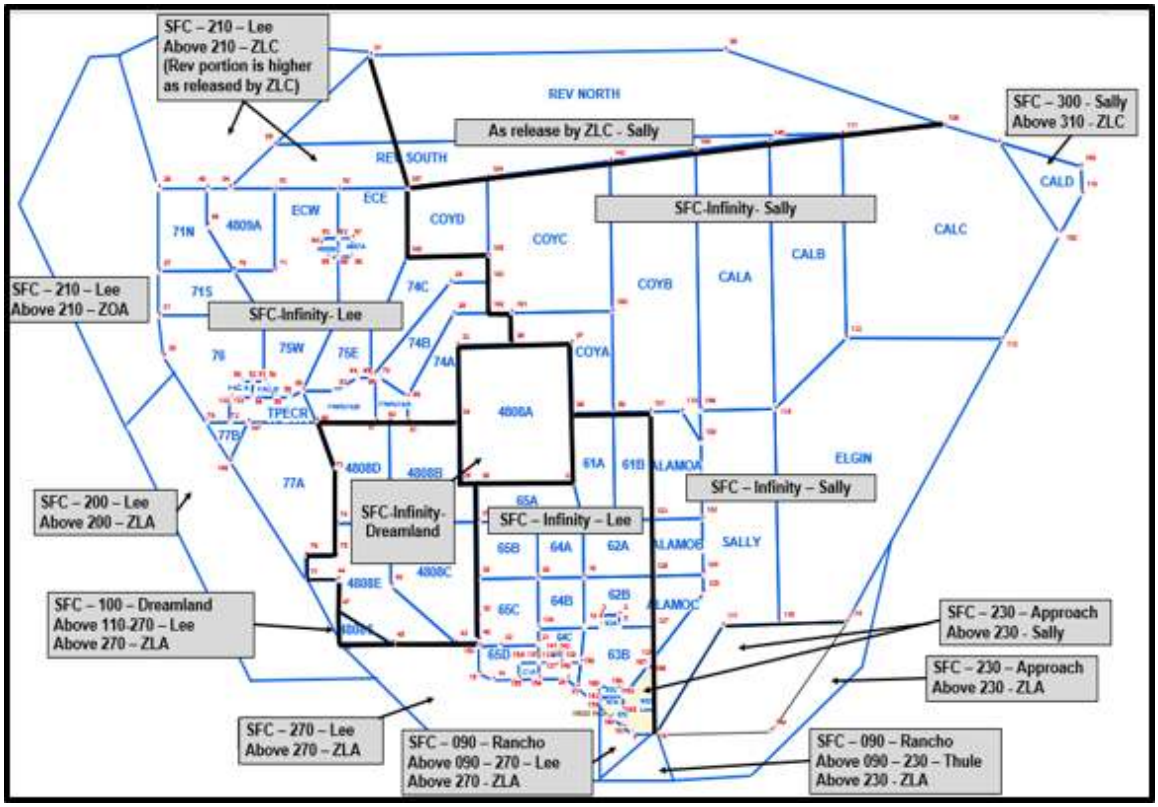


Figure 2.10. NATCF Area of Responsibility Local Area.


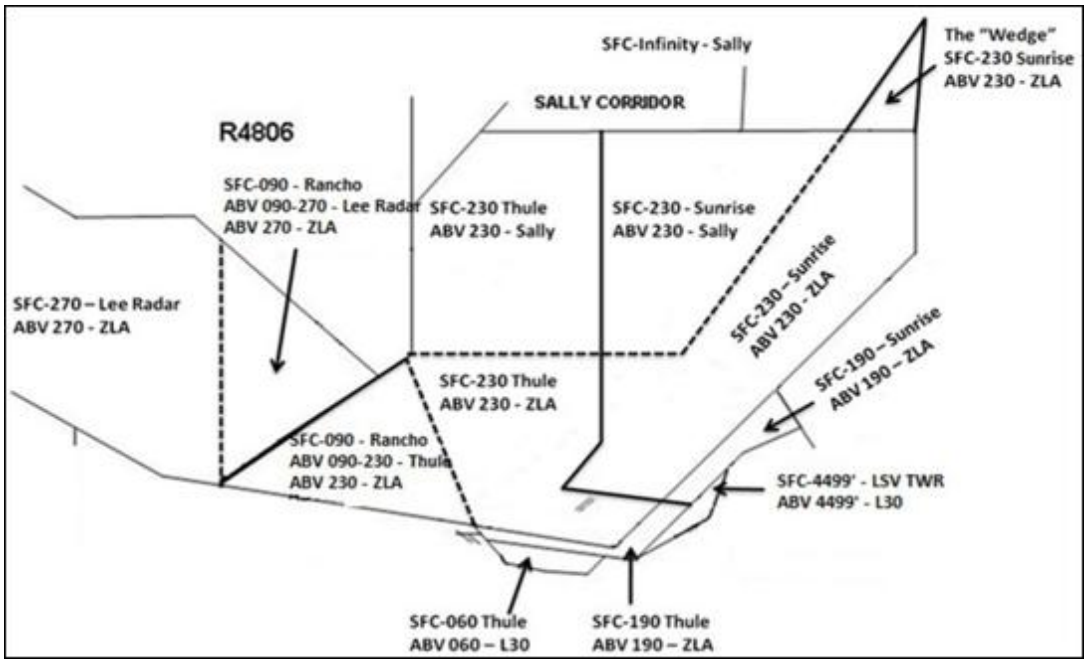


Figure 2.11. NATCF Area of Responsibility Alpha Areas.

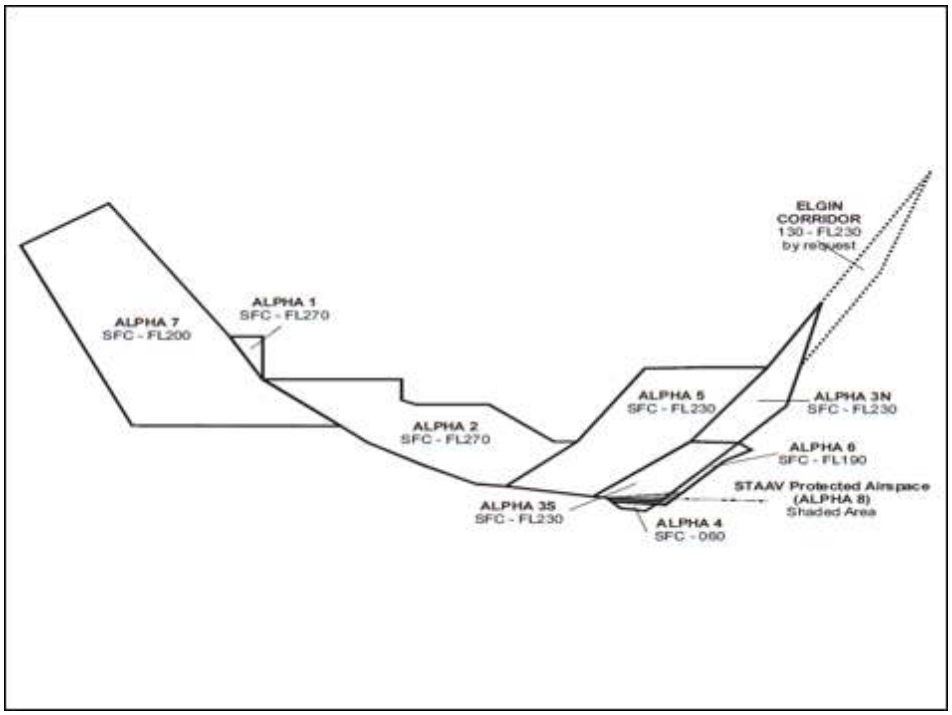

2.6.1.2. Environmental Conditions. Late afternoon and low sun conditions restrict Tower's visibility for control of the area from Craig Ranch Park to initial and from base leg to final for RWY 03. Late afternoon takeoffs from RWY 21 are also obscured to Tower controllers.


2.6.2. North Las Vegas Training Area. A high-density VFR civilian aircraft training area is located north of the Las Vegas (LAS) 260 radial, west of Highway 95, and from approximately

15 to 30 NM from LAS TACAN (**Figure 2.12**). The training area extends as far north as Lee Canyon and includes all VFR altitudes.

2.6.2.1. Runway 03 Arrivals. Limited airspace for RWY 03 arrivals creates a possible conflict between straight-in, initial, and base leg traffic. Additional conflicts may occur with high density VFR civilian aircraft operating in the vicinity of VGT.

2.6.2.2. Nellis Tower Airspace. The Nellis Tower Area of Responsibility (AOR) is depicted in **Figure 2.8**. With the exception of Alpha 6 East, the vertical limits are from surface up to and including 4,000 MSL. Alpha 6 East's vertical limits are from surface up to and including 4,499 MSL. The lateral boundaries of Nellis Tower AOR are as follows: 36˚19'35"N 115˚00'57"W to 36˚18'40"N 114˚51'46"W to 36˚17'34"N 114˚50'39"W to 36˚13'25"N 114˚54'25"W to 36˚11'09"N 114˚ 58'55"W to 36˚11'22"N 115˚00'56"W to 36˚10' 18'06"N 115˚02'27.46"W to 36˚10'30"N 115˚08'46"W to 36˚10'40"N 115˚08'56"W to 36˚16'48"N 115˚08'13"W thence to the point of the beginning.

Figure 2.12. North Las Vegas Training Area.

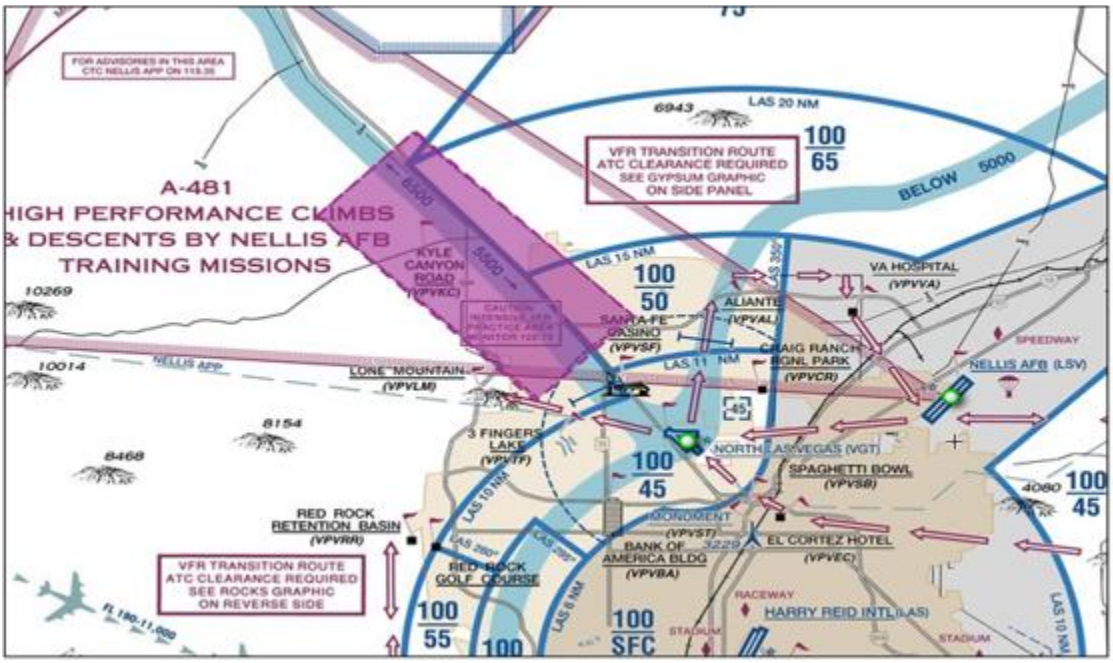

2.6.3. Desert Rock Airport (NV65). Aircraft in the Low Altitude Tactical Navigation (LATN) west area must use caution for DOE aircraft on approach to or departure from NV65.

2.6.4. Mesquite Airport. Aircraft in the LATN east area and within the confines of IR 126, IR 266 or VFR Military Training Route (VR) 209 must use caution for aircraft on the published instrument approach.

2.7. Primary Training Area. The primary training area (**Figure 2.13**) includes: Desert and Reveille Military Operations Areas (MOA), overlying Air Traffic Control Assigned Airspace (ATCAA), Altitude Reservation (ALTRV), LATN, the Silver MOA, and restricted areas 4806E, 4806W, 4807A, 4807B, and 4809. Restricted area 4808 and portions of 4809 are assigned to other agencies. See **Attachment 8** for avoidance areas, noise sensitive areas and IFF off and lights out airspace.

2.7.1. Boundary coordinates, procedures, and restrictions for the primary training area SUA subdivisions are in *DAFMAN 13-212V1, ACC Sup, NTTR Addendum A, Range Planning and Operations.*

2.7.2. LATN Areas (Figure 2.13.). The LATN areas are for use by aircraft to allow random selection of navigation points and low altitude tactical formation practice (**Table 2.3**, through **Table 2.5**.). Ground tracks must remain outside of Class B (adjacent to LATN Central), D airspace, airports and populated or noise sensitive areas. Altitudes will be in accordance with *CFR Part 91*, applicable FAA orders and appropriate AFI/AFMAN 11-series regulations. Airspeed will not exceed 250 knots. Helicopter crews flying in the Bitter Springs or White Basin area or in the Lake Mead, Grand Canyon, or Hoover Dam area are encouraged to monitor and communicate on 120.65.

2.8. Range Transition Corridors.

2.8.1. Sally Corridor. Sally Corridor is exclusively owned by NATCF to vector aircraft in and out of the north ranges and used for administrative and tactical purposes. NATCF has limited radar coverage below 10,000 ft and cannot provide deconfliction. Helicopters will monitor appropriate frequencies and contact Nellis Approach or Tower when appropriate.

Figure 2.13. Local Area/VFR Low Altitude Tactical Navigation (LATN).

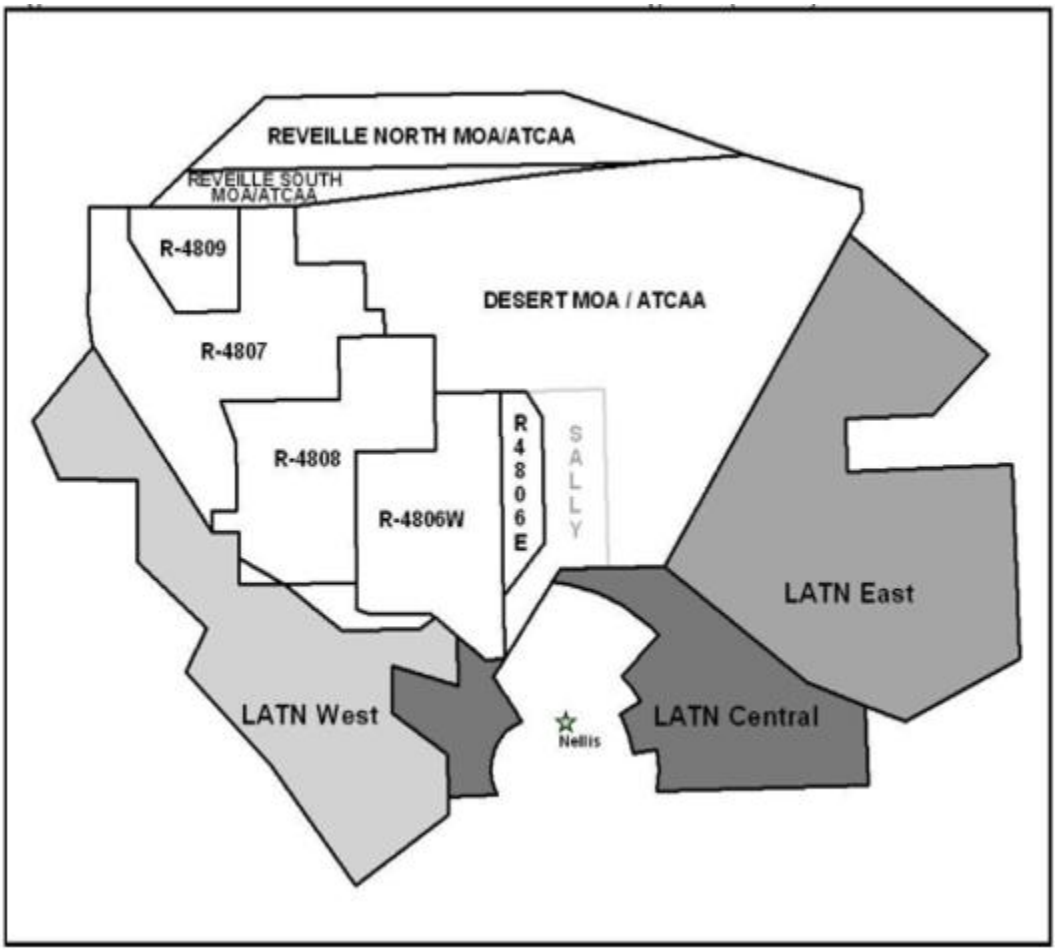


Table 2.3. LATN West.

50 -1,500 feet AGL	***(WGS-84 HH-MM-SS)***
37 26 30N, 117 04 30W	36 51 00N, 116 33 30W
36 51 00N, 116 26 30W	36 41 00N, 116 26 30W
36 41 00N, 116 14 45W	36 32 00N, 116 00 00W
36 32 00N, 115 39 50W	36 34 00N, 115 36 00W
36 30 00N, 115 30 00W	36 21 00N, 115 30 00W
36 25 00N, 115 47 00W	36 16 00N, 115 47 00W
36 08 00N, 115 33 00W	35 56 25N, 115 33 00W
35 43 20N, 115 56 50W	36 06 30N, 116 17 00W
36 25 00N, 116 40 00W	36 32 50N, 116 36 00W
36 32 50N, 116 36 00W	36 45 00N, 116 52 30W
37 01 30N, 116 52 30W	37 01 30N, 117 12 30W
37 11 55N, 117 20 20W	37 26 30N, 117 04 30W

Table 2.4. LATN East.

50 - 1,500 feet AGL	***(WGS-84 HH-MM-SS)***
37 45 00N, 113 45 20W	37 21 00N, 113 10 00W
37 10 00N, 113 25 00W	37 10 00N, 113 48 00W
37 00 00N, 113 48 00W	37 00 00N, 113 05 00W
36 23 00N, 113 05 00W	36 12 00N, 113 35 00W
36 20 00N, 114 00 00W	36 45 00N, 114 34 00W
37 45 00N, 113 45 20W	???

Table 2.5. LATN Central.

50 - 1,500 feet AGL	***(WGS-84 HH-MM-SS)***
36 26 00N, 115 24 00W	36 26 00N, 115 17 00W
36 44 00N, 115 03 50W	36 44 00N, 114 35 00W
36 45 00N, 114 34 00W	36 20 00N, 114 00 00W
36 15 00N, 113 45 00W	36 00 00N, 113 45 00W
36 00 00N, 115 47 00W	36 08 00N, 115 33 00W
36 16 00N, 115 47 00W	36 25 00N, 115 47 00W
36 21 00N, 115 30 00W	36 30 00N, 115 30 00W
36 26 00N, 115 24 00W	Excluding Las Vegas B Airspace

2.9. Lights Out Training Procedures.

2.9.1. Lights Out Training MOA Operations. Aircrew using lights out training procedures in the MOAs will add the phrase "Lights Out" to their initial check in with the Tactical Controlling Agency. Reference *DAFMAN 13-212V1 NTTR ADD A* **Attachment 17** for further guidance.

2.9.2. USAFADS will conduct daytime operations lights out.

2.10. Hot Refueling Pits.

2.10.1. Rotary Wing. There are two rotary wing hot refueling areas on Taxiway Hotel north of the Transient Helipad. Rotary hot pit refueling capabilities are for base rotary assigned aircraft or for rotary aircraft specifically supporting a base-assigned unit. Non-local aircraft supporting based assigned units must receive Hot Pit refueling training as part of their local area orientation briefing prior to utilizing the hot refueling pits. The supported or host rotary unit is responsible for notifying the 57 MXG during the weekly scheduling meetings if a non-locally assigned rotary aircraft will be conducting hot pit refueling and confirm they have received the appropriate training.

2.10.2. Fixed Wing. For hot refueling pit procedures, refer to the 57 WG Hot Pit Master Site Listing, found under tab 8 on the 57 MXG Quality Assurance webpage.

2.10.3. A Forward Arming and Refueling Point (FARP) Permanent Site is located at T-East. This site will be in support of 43d Electronic Control Squadron FARP operations IAW the 2022-0004 Permanent FARP Site at Nellis AFB. During mission planning, the home unit will ensure 57 MXG/CC coordination and 57 OG/CC approval through 57 OSS/OSAA (Airfield Management) prior to FARP operations.

Chapter 3

GROUND OPERATIONS

3.1. General. Unit operations sections and aircrew will file flight plans with AMOPS and confirm range space restrictions with NTTR Operations Center (Blackjack) in accordance with AFMAN 13-212V1, ACC Sup, NTTR Addendum A, Range Planning and Operations, NAFB Addendum A. All frequencies for Nellis AFB operations are contained in the 57 WG IFG and available for download at the 57 WG/WGV website.

3.1.1. Driving on the airfield will be IAW *NAFB Instruction 13-213, Airfield Drivin*g. contact 57 OSS/OSAA for wing airfield driving program manager (WADPM) training.

3.2. Operations within the Controlled Movement Area (CMA). The CMA is defined as areas within 100 feet of both runways, overruns, and helipads. All other surface areas are uncontrolled movement areas.

3.2.1. Operators requesting entry into the CMA must possess a valid airfield driver's license with CMA authorization unless otherwise authorized. Only vehicles in direct radio contact with Nellis Ground or escorted by a radio-equipped vehicle in direct radio contact with Nellis Ground will be authorized in the CMA.

3.2.2. Entry Procedures. Vehicle operators will contact Nellis Ground on the Ramp Net stating location and requested operation. Operators will acknowledge all ground control instructions to ensure receipt and understanding prior to compliance. The Ramp Net must be continuously monitored while within the CMA.

3.2.3. Exit Procedures. Refer to *AFI 13-213_NELLISAFBSUP* for procedures on the emergency exit of vehicles in the event of a radio failure.

3.2.4. Radio Failure. Tower will flash the runway edge lights on and off to alert vehicle operators or pedestrians to immediately exit the runway. Contact Tower and advise off the runway and include any pertinent information that might affect safe runway operations. If not able to communicate with Air Traffic Control Tower or Airfield Management via radio, use other means of communication such as a cellular phone. Report incident to Airfield Management.

3.3. Aircraft Priorities. Aircraft will be given priority for taxi, takeoff, and landing IAW *FAA JO 7110.65* and applicable supplemental publication. *FAA JO 7110.65* priorities will take precedence over local priorities, which are listed below:

3.3.1. ACA Taskings

3.3.2. DOE

3.3.3. DV/VIP (See 3.3.9.1. below)

3.3.4. LFEs

3.3.5. Active Runway Arrival (See 3.3.9.2. below)

3.3.6. Active Runway Departure (See 3.3.9.2. below)

3.3.7. Opposite Direction Departures

3.3.8. Opposite Direction Arrivals (See 3.3.9.2. below)

3.3.9. Practice Approaches.

3.3.9.1. Thunderbirds will have priority when they have a DV/VIP on board.

3.3.9.2. Check rides in the instrument, PFO, or SFO pattern. Inform the SOF or NATCF of check ride events if priority is forecasted.

3.3.9.3. The SOF, in coordination with ATC, may advise on priorities to meet mission needs.

3.4. Flight Plans. All aircraft departing Nellis AFB must have a flight plan filed with AMOPS, even if they are departing VFR.

3.4.1. Stereo routes. Used for local operations. TDY aircrew must be briefed by their host unit prior to using stereo flight plans. If stereo routes are not used, aircrew must file a DD Form 1801, Military Flight Plan.

3.4.2. For a comprehensive list of Nellis Stereo routes, reference the 57 OSS/OSOP SharePoint site, or in the 57th WG/WGV Inflight Guide, located on the 57th WG/WGV SharePoint site.

3.4.3. E-Mail *DD Form 1801* to AMOPS and maintain the original *DD Form 1801*. Amendments to the original *DD Form 1801* will be coordinated with AMOPS. After submission of flight plan, aircrew will verify with AMOPS receipt and accuracy.

3.4.4. Transient aircrew not participating in LFE or supporting Nellis-based flying operations must file a *DD Form 1801* via electronic means (Foreflight, email, fltplan.com, etc.).

3.4.5. Changes made to stereo routes requested in PEX within an hour of departure time, require a call to AMOPS for amendments to be submitted.

3.5. Clearance Procedures. Clearance will be obtained from Nellis Clearance Delivery.

3.5.1. Request a FLEX VFR departure, if desired, during initial contact via, "REQUEST FLEX “FIX” TRANSITION”. (see **para 4.6.12**.).

3.5.2. Aircrew expending ordnance on the NTTR, except for RED FLAG missions and WSINT exercises, will confirm type ordnance and specific target with Blackjack prior to departure. Blackjack will advise the pilot of any range restrictions.

3.5.3. If a wingman is delayed or a clearance is not available, a short-range clearance may be requested. Use the following procedures:

3.5.3.1. Request a short-range clearance from Clearance Delivery. Specify the requested departure procedure.

3.5.4. If two or more flights want to join-up and depart together, each flight must be on the same departure procedure and have their own clearance.

3.6. Taxi Procedures. All aircrew must obtain ATIS information prior to taxi. Include the following information when requesting taxi from Ground Control (GC): Call sign, number of aircraft, parking row location, ATIS letter designation, status of clearance.

3.6.1. Advise GC when:

3.6.1.1. The number in the flight changes from the flight plan (i.e. one aircraft ground aborts).

3.6.1.2. Planned takeoff spacing is more than 20 seconds between aircraft.

3.6.1.3. VFR Departures other than FLEX.

3.6.1.4. RWY 03 departure is required for live or inert ordnance configuration when RWY 21 is the active runway. See **Chapter 5** for specific ordnance definitions and restrictions.

3.6.1.5. Separate flights intend to depart together. Advise ground control which formation will lead.

3.6.1.6. Quick climbs. Request with highest altitude on departure. Quick climbs are subject to the following restrictions:

3.6.1.6.1. No transient or TDY aircraft departing to another base will perform an unrestricted AB climb out of Nellis without approval from the 57 OG/CC.

3.6.1.7. Requesting an opposite direction departure.

3.6.1.8. Non-standard arming area.

3.6.1.9. Any deviation from standard departure procedures is requested.

3.6.2. Aircraft Taxi Procedures.

3.6.2.1. Heavy Aircraft Taxi Procedures. To reduce FOD potential on taxiways, after landing, large or heavy aircraft must taxi with outboard engines at idle or off, unless for operational necessity. Consider any areas of airfield construction as high risk FOD areas and use caution to minimize FOD.

3.6.2.1.1. ATC should avoid holding heavy aircraft between the runways at the approach end or on any taxiway adjacent to runways where jet wash is directed at the landing zone. If unavoidable, ATC will issue a cautionary to aircraft landing to the affected runway.

3.6.3. Aircraft with wingspan greater than 132.7 feet. Taxiway Foxtrot between rows 1-22 and 29-46 requires wing-walkers. If wing-walkers are required, reference **paragraph 3.6.5**. If wing-walkers cannot be provided, the last outboard parking spot on rows 1-22 and 29-46 will be closed. The last outboard spots must remain clear of aircraft, AGE, or obstructions. Aircraft exiting at Taxiway Bravo may taxi to rows 23-26 without wing-walkers, provided no aircraft is parked on the spot closest to Taxiway Foxtrot.

3.6.4. Wing Walkers. Wing-walker and marshalling duties will be performed by either the 57 MXG or the owning AMU for locally assigned aircraft. Transient Alert (57 MXG/MXMTA) will perform these duties for transient aircraft, and the sponsoring LFE unit will provide wing-walkers/marshallers for their respective aircraft.

3.6.5. All aircraft must give way to emergency response vehicles. If taxiing near an Emergency Power Unit (EPU) activation or hydrazine spill, switch to 100% oxygen until clear of the area.

3.6.6. If radio failure occurs during taxi, turn on taxi lights and return to parking, remaining off the active runways.

3.6.7. Low wing aircraft (B-52's) with outboard engines are restricted to RWY 21R/03L only due to vicinity of Aircraft Arresting System enclosure on 21L/03R.

3.6.8. Runway and adjacent taxiway operations will be suspended after C-5 or B-747 arrivals or departures until a FOD check can be accomplished by AMOPS.

3.6.9. Simultaneous heavy aircraft departures are prohibited.

3.6.10. Taxiway Charlie restricted to 58 feet wingspan or smaller aircraft.

3.6.11. Multiple Runway Crossing (MRC) Procedures (**Figure 3.1**.). MRC procedures are authorized for all Nellis based aircraft, and transient aircrew that have been specifically briefed in a Nellis AFB Local Area Orientation (LAO) briefing. MRC operations are authorized via FAA JO 7110.65, Para 3-7-2-C, provided approval Air Force Flight Standards Agency. Multiple runway crossings may be issued with a single clearance at the following locations:


3.6.11.1. Runway 21R/03L and runway 21L/03R at taxiway Alpha.

3.6.11.2. Runway 21R/03L and runway 21L/03R at taxiway Bravo.

3.6.11.3. Runway 21R/03L and runway 21L/03R at taxiway Delta.

3.6.11.4. Runway 21R/03L and runway 21L/03R at taxiway Echo.

Figure 3.1. Multiple Runway Crossing Locations.

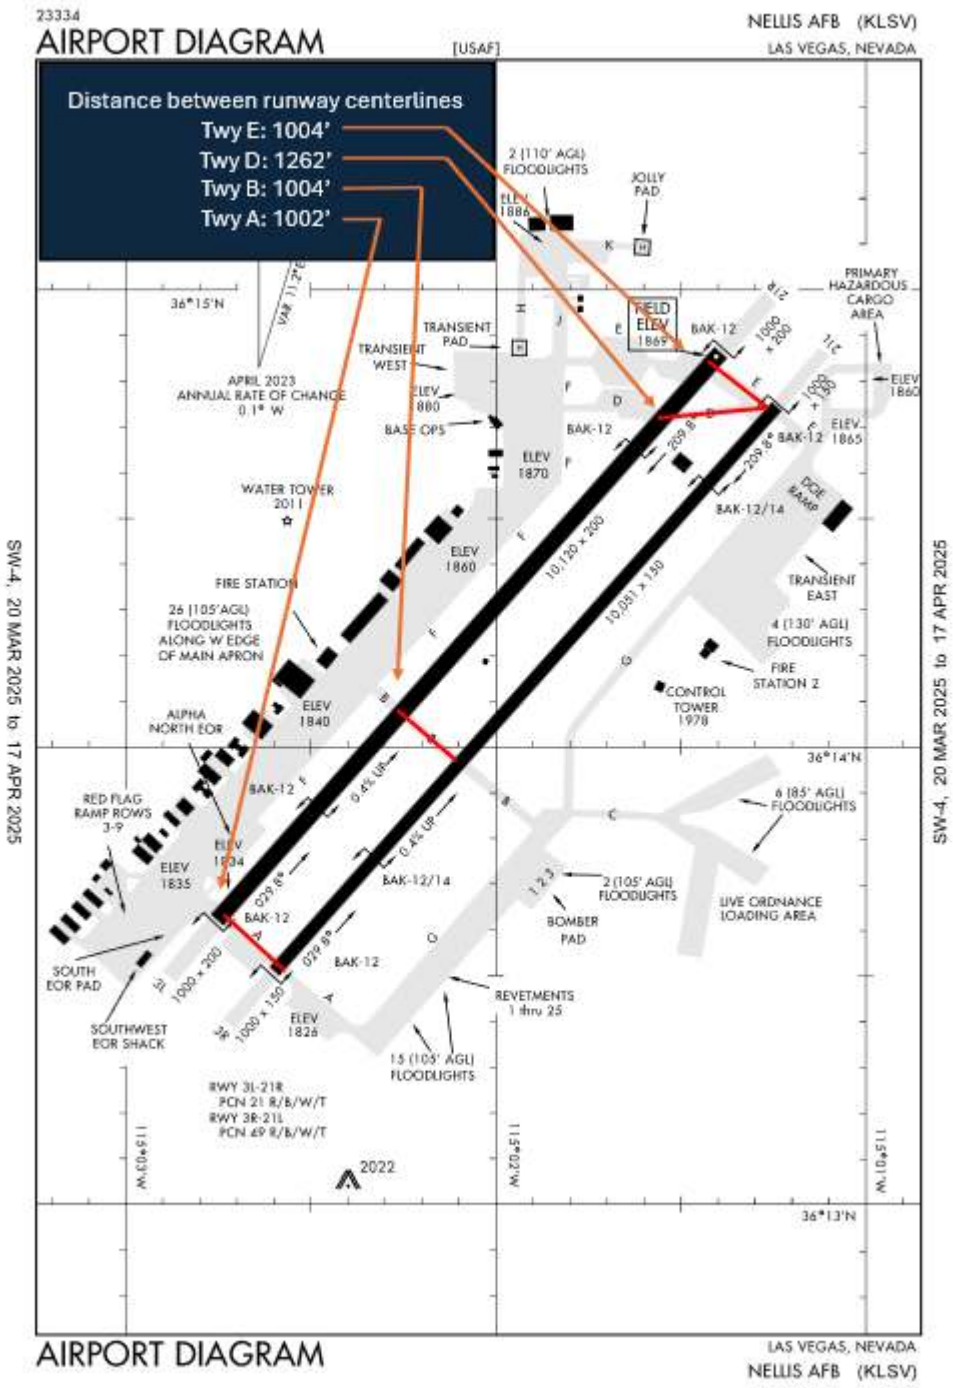

3.7. Calling Ready for Departure. After aircraft have performed pre-takeoff checks, call Tower for departure using the phraseology, "C/S, READY FOR DEPARTURE". Aircraft should be airborne within three minutes after takeoff clearance is received.

3.7.1. Formations will not call ready for departure until all flight members are ready for takeoff.

3.7.2. Unless instructed to "TAXI UP TO AND HOLD SHORT", do not block other aircraft from accessing the runway. A "HOLD SHORT" instruction is not authorization to block taxiways.

3.7.3. If the departure sequence desired is not in the order of first come first served, aircraft may request a sequence with Tower.

3.8. Intersection Departures. Intersection departures are authorized for RWY 21R/03L and:

3.8.1. RWY 21R at Taxiway Delta 8,900 feet available (**Figure 2.6**.).

3.8.2. RWY 03L/R at Taxiway Bravo 6,450 (RWY 03L)/6,300 (RWY 03R) feet available (**Figure 2.6**.).

3.8.3. As cleared by ATC, helicopters and tiltrotor aircraft are authorized to depart from any active runway, taxiway, or helipad. Runway feet available identified above are rounded down to the nearest 50' interval.

3.9. Rolling Takeoffs. Tower may request non-heavy aircraft rolling takeoffs to expedite traffic flow. The aircrew is the final authority to accept or reject the rolling takeoff option. Tower will use the following phraseology, "C/S, CAN YOU ACCEPT ROLLING?" If it is accepted, Tower expects a rolling takeoff when takeoff clearance is issued.

3.10. After Landing Procedures. To avoid congestion in the EOR areas, aircrew should taxi single ship to the chocks immediately following dearming unless other aircraft are dearming FFO or other factors present a hazard. If congestion is not a factor, flight integrity may be maintained.

3.11. Engine Run Procedures.

3.11.1. Engine runs will be conducted IAW MDS restrictions and with 57 OSS/OSAA approval.

3.11.1.1. During standard airfield operating hours, MOC shall advise Tower of proposed engine runs. Include the following information:

3.11.1.2. Aircraft type, tail number, and parking location.

3.11.1.3. Outside non-standard airfield operating hours. MOC shall advise Tower of proposed maintenance engine runs (this is an advisory only; Tower does not approve or deny maintenance engine runs). During airfield closures, MOC will notify Command Post and the Base Defense Operations Center (BDOC) for engine runs.

3.11.1.4. Due to jet blast issues on the apron, maintenance must ensure that personnel and equipment on adjacent rows are aware of engine runs.

3.11.2. C-130s and larger aircraft may conduct engine runs at the following locations:

3.11.2.1. Idle engine runs - at the standard parking spot.

3.11.2.2. Greater than idle runs – primary location is on the concrete portion of the runway. Alternate engine run locations may be approved by Airfield Management on a case-by-case basis if the below criteria are met:

3.11.2.2.1. Sufficient space for required engine run must be present behind the aircraft per the applicable aircraft MDS limitations. The area must be all concrete (no asphalt or shoulder pavement).

3.11.2.2.2. Maintenance crews must conduct a FOD walk in front of and behind the aircraft before the engine run and protect the jet blast/prop wash danger area as required.

3.12. Transient East Taxi Procedures. Figure 3.2 and Table 3.1., Spots 01-A through 10-A, 11-B and the taxilane into the ramp are marked for aircraft with wingspans no greater than 137 ft. Any aircraft with a wingspan larger than 137 ft must ensure they have wing walkers because wingtip clearance cannot be guaranteed. Aircraft must use the taxi lane between the parking areas to access spots 01-A through 04-A. Aerospace Ground Equipment (AGE) will be stored in the AGE area, not on the shoulders. Aircraft must follow marshaller directions. Aircraft and equipment must be kept inside the red lines and east of the white line to protect wingtip clearance for Golf taxi lane.

Figure 3.2. Transient East Taxi.



Table 3.1. Transient East Coordinates/Elevation.

LOCATION	TYPE A/C	COORDINATES	ELEV
TRANSIENT EAST			
01-A	B-1B	N3614.284/W11501.502	1848’
01-B	C-130	N3614.277/W11501.493	1848’
02-A	B-1B	N3614.304/W11501.480	1849’
02-B	C-130	N3614.297/W11501.471	1849’
03-A	B-1B	N3614.324/W11501.458	1849’
03-B	C-130	N3614.317/W11501.449	1850’
04-A	B-1B	N3614.344/W11501.436	1850’
04-B	C-130	N3614.337/W11501.427	1850’
05-A	B-1B	N3614.402/W11501.381	1852’
06-A	B-1B	N3614.423/W11501.359	1854’
07-A	B-1B	N3614.219/W11501.441	1847’
07-B	C-130	N3614.214/W11501.433	1847’
08-A	B-1B	N3614.243/W11501.415	1848’
08-B	C-130	N3614.238/W11501.407	1848’
09-A	B-1B	N3614.267/W11501.388	1849’
09-B	C-130	N3614.269/W11501.381	1848’
10-A	B-1B	N3614.292/W11501.362	1849’
10-B	C-130	N3614.286/W11501.355	1849’
11-A	C-17	N3614.165/W11501.364	1846’
11-B	B-1B	N3614.163/W11501.362	1846’
DOE RAMP			
South End	N/A	N3614.40/W11501.38	1814’
Middle	N/A	N3614.44/W11501.32	1814’
North End	N/A	N3614.53/W11501.20	1814’
BOMBER PAD			
Spot 1 (S End)	N/A	N3613.71/W11501.95	1814’
Spot 2 (Mid)	N/A	N3613.73/W11501.92	1814’
Spot 3 (End)	N/A	N3613.77/W11501.89	1814’

3.13. Aircraft Tow Procedures. MOC will coordinate all aircraft tows that may enter the CMA with Tower (see **Figure 2.6**.). Tow crews shall obtain Tower approval prior to entering the CMA using aircraft radios or the Ramp Net and shall monitor until exiting the CMA. Tow crews will monitor Ramp Net during all tow operations even if they are not entering a CMA.

3.14. Flight Line Photography. For up-to-date guidance on flight line photography, please reference the 57th WG Photo Policy Letter.

Chapter 4

FLIGHT OPERATIONS

4.1. Primary Runway Designation.

4.1.1. The Tower WS, after coordinating with the SOF and NATCF WS, determines the active runway, coordinates changes, and negotiates times. The SOF will ensure EOR crews are notified of the change and are positioned as required.

4.1.2. In the event of an unplanned runway closure or suspended operations to a runway, NATCF will broadcast the runway configuration on Guard frequencies (243.0/121.5) using all repeaters.

4.1.3. RWY 21 is the calm wind runway. When the prevailing wind exceeds 10 knots, the runway most nearly aligned with the winds will be designated the active runway. When conflicting wind information is received from different sensors, the sensor that shows the highest velocity or most consistent direction will be used in determining the active runway.

4.1.4. RWY 03 will be used daily from 2200L to 0800L for departures and RWY 21 for arrivals unless winds, air traffic volume or operational requirements dictate otherwise. For additional restrictions for RWY 03 due to live ordnance, reference **Chapter 5**.

4.1.4.1. If weather is forecasted below circling minima for RWY 21L, and winds require the use of RWY 03, 57 OG/CC approval is required for Nellis flight operations due to limited instrument approach availability to RWY 03.

4.1.5. During peak traffic periods, controllers are not required to give wind variances to wing aircraft due to frequency congestion unless requested by the aircraft.

4.1.6. When “Area Alpha 8 Ops” are in effect RWY 21 quick climb coordination (including Thunderbird departure procedures) will require a minimum of 10 minutes prior notification. NATCF will coordinate for quick climb as soon as possible after pilot request.

4.2. Standard Frequencies. All aircraft under the operational control of the 57 WG should use standardized ultra-high frequency (UHF) preset channels 2 through 13. UHF equipped aircraft will use UHF frequencies to the maximum extent possible. See **Attachment 15**.

4.3. Nonstandard Formations. Departing flights of three or more will automatically be considered a non-standard formation and the last aircraft will squawk 4000 until standard or cleared tactical (100 feet vertical, 1 mile horizontal from lead). Notify ATC when in a standard formation, if desired.

4.3.1. 57 OSS/OSA coordinates directly with the FAA Western Service Area (WSA) for permanent allocations of Mode 3/A beacon codes and will in turn assign IFF Mode 3/A codes to local requirements as specified in **Attachment 17** IAW FAA JO 7110.66 WSA Supplement.

4.4. Dissimilar Formation Flights. 57 WG and TDY aircrew assigned to Nellis AFB are authorized to fly in dissimilar formations during departure and recovery and during deployed operations. Dissimilar aircraft may fly close formation provided it is briefed, emphasizing proper position, responsibilities, airspeeds, signals, and aircraft-unique requirements. Mixed formation low approaches are not authorized.

4.5. Hot Cargo Pad (HCP) Procedures.

4.5.1. Restricted to VMC, daylight use only.

4.5.2. When an aircraft is parked on the HCP, operations to RWY 21L/03R will be limited to 21L departures only. This is referred to as "LIMITED OPERATIONS." AMOPS will send an applicable NOTAM.

4.5.3. To the maximum extent possible, aircraft will be moved (taxied or towed) from the HCP as soon as possible, thus restoring RWY 21L/03R to normal operations.

4.6. Departure Procedures.

4.6.1. Protection of the 360° Overhead Pattern. During daytime VMC, all departing aircraft will remain at or below 3,000 feet MSL prior to turning out of traffic at the departure end of the runway.

4.6.2. Rotary departure procedures are contained within **Attachment 5**.

4.6.3. Diverse departures are authorized, use published instrument departure procedure or request a radar vector departure for obstacle avoidance.

4.6.4. Aircrew unable to comply with departure procedure climb or radar vector departure climb gradient must file the appropriate departure procedure for their intended destination and notify Clearance Delivery they are unable to make climb gradient and depart VFR. Clearance Delivery will assign a VFR Class B Departure (**Attachment 4**).

4.6.5. Do not request straight ahead or left turn departure when utilizing Runway 21 for departure.

4.6.6. FYTTR Departure. The FYTTR Departure is a westbound IFR departure. This departure requires a climb in excess of maximum climb rates required in DOD obstruction criteria.

4.6.7. DREAM Departure. The DREAM Departure is a northbound IFR departure for high-C aircraft. This departure is for locally briefed units only.

4.6.8. Local Climb-out Procedures (**Figure 4.12**) can be directed by NATCF as an alternate missed approach procedure, or if aircraft require handoff to radar after a low approach or go-around. Reference detailed Local Climbout Procedures in **para 4.6.11**.

4.6.9. Nellis has radar traffic pattterns for RWY 21 however, they are not utilized due to congestion of local airspace.

4.6.10. RWY 21 VMC Departures

4.6.10.1. When the airfield meets minimum required VMC conditions (4,700' AGL and 3 SM), the initial segment of all RWY21 instrument departures, alternate missed approach or local climbout procedures shall be flown under Visual Flight Rules (VFR) to accommodate expedited departure releases.

4.6.10.1.1. Once established on a radial segment of the instrument departure (ie. FYTTR, HAYFORD PEAK, DREAM, MORMON PEAK) or when north of LSV R-264 when departing on a MORMON MESA, radar vector departure, obstacle departure procedure or alternate missed approach local climbout, aircraft will be considered

Instrument Flight Rules (IFR) and further instrument departure and alternate missed approach local climb restrictions are mandatory. To ensure obstacle and terrain separation, aircrews are required to climb at published climb gradient rates contained within the FLIP or as issued by ATC

4.6.10.1.2. Initiate climb to 2,500 through 3,000 feet MSL. At the departure end of the runway, and NLT the southern edge of the golf course, turn to a heading of 300° to remain within 4.0 DME of the LSV TACAN, so as to not penetrate the LAS VORTAC 7.5 DME ARC.

4.6.10.1.2.1. When departing on the FYTTR Departure, cross the LSV R-256 westbound between 5,000 feet and 6,000 feet MSL.

4.6.10.1.2.2. When departing on the DREAM Departure, intercept the LAS R-349 outbound between 5,000 feet to 6,000 feet MSL NLT 12 DME.

4.6.10.1.2.3. When departing on the MORMON MESA Departure, cross the LSV R-264 northbound between 5,000 and 6,000 feet MSL.

4.6.10.1.2.4. When departing on ATC issued radar vectors or obstacle departure procedure or executing missed approach local climb out, cross the LSV R-256 (military TACAN equipped) or LAS R-349 (civilian) westbound below 6,000 feet MSL.

4.6.11. Local Climbout Procedures

4.6.11.1. RWY 21L/R:

4.6.11.1.1. Cross the departure end at or below 3000’ MSL. Turn right heading 300° to remain within 4 DME of LSV TACAN. Do not penetrate the LAS VORTAC 7.5 DME ARC westbound. Cross LSV R-256 (military TACAN equipped) or LAS R-349 (civilian) westbound below 6000’ MSL. Intercept LSV R-268 outbound (not applicable to civilian) then expect additional radar vectors from ATC.

4.6.11.2. RWY 03L/R:

4.6.11.2.1. Cross departure end at or below 3000 feet MSL. Turn to a heading of 040°, expect radar vectors passing 5400 feet MSL.

4.6.12. VFR Departures:

4.6.12.1. Aircrew will request a VFR departure, if desired, during initial contact with Clearance Delivery via, “REQUEST FLEX “FIX” TRANSITION or REQUEST [SID] GROUND TRACK.” ATC will acknowledge the request.

4.6.12.1.1. Due to traffic or other conditions, NATCF WS may cancel FLEX departures or direct specific FLEX transitions to facilitate expeditious movement and safety of flight.

4.6.12.2. When aircrew are ready for departure, and a VFR departure has been requested, they may hear one of three options from Local Control with takeoff clearance:

4.6.12.2.1. “UNABLE VFR.” Aircrew will be directed back to clearance delivery for an IFR clearance.

4.6.12.2.2. “CLEARED OUT OF THE BRAVO VIA [SID] GROUND TRACK”. Aircrew will fly the same ground track as their clearance issued, but via VFR altitudes.

4.6.12.2.3. “CLEARED OUT OF THE BRAVO VIA FLEX “FIX” TRANSITION. Aircrew will fly the FLEX departures to their first fix on the FLEX departure: FYTTR, HAYFORD PEAK, DREAM, MORMON PEAK, or MMM VORTAC IAW Figures **4.1 or 4.2**.

4.6.13. Non-Local Area Departures. Aircraft that depart on a DD Form 1801 flight plan will use the departure procedure appropriate to the filed route of flight. Aircrew TDY to Nellis AFB or aircrew departing on a cross – country may file as follows:

4.6.13.1. North/Northeast bound departures (routed over MMM) should file MORMON MESA Departure, MMM then direct either BERYL, MLF, BCE or DVC (Per LOA 8 between NATCF/ZLA). If unable to execute the MORMON MESA Departure, expect radar vectors.


4.6.13.2. Northeast/East bound departures (routed over DVC or South of DVC) should file BLD then direct either DRK or TBC (Per LOA 8 between NATCF/ZLA). Pilots can expect radar vectors to BLD.

4.6.13.3. South/Southwest bound departures (routed over HEC/GFS) should file LAS, CRESO then direct either HEC/GFS. Pilots can expect radar vectors to LAS.

4.6.13.4. Northwest bound departures should be filed to BTY then J92 Northwest bound. Pilots should file the FYTTR Departure to FYTTR, then BTY. If unable, expect radar vectors to BTY.

4.6.14. Local Area Navigation Points. **Attachment 3** contains a list of local area navigation points with their associated radial and DME and coordinates.

Figure 4.1. RWY 03L/R FLEX Departure.

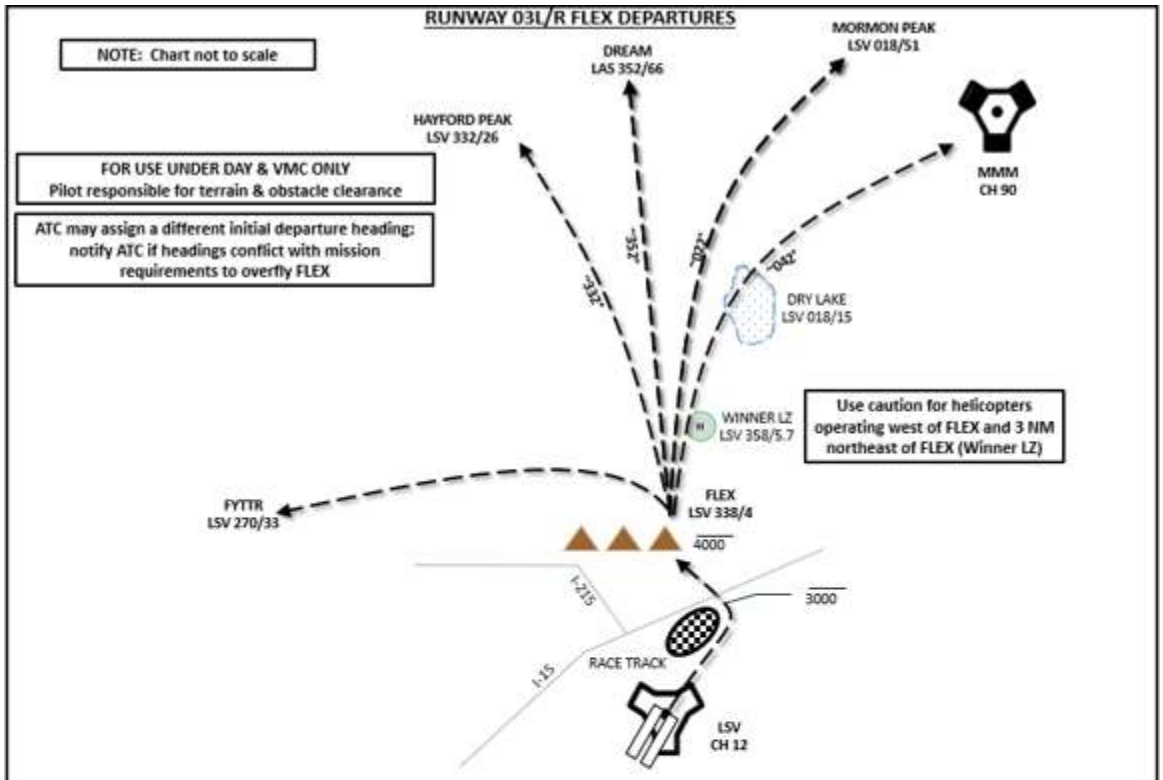


- Used by ATC or aircrew to expedite departure movement regardless of the active runway.
- Afterburner use prohibited over populated areas.
- ATC may initiate to expedite movement when filed on DREAM/FYTTR/HAYFORD PEAK/MORMON PEAK/MORMON MESA departures.
- Aircrew may request or ATC may initiate to expedite departures during periods of NAVAID outages in lieu of RWY 03 ODP.
- Aircrew acceptance cancels any previously issued IFR clearance.
- Notify NATCF after departure of requested altitude if an IFR pickup is required on initial contact; *"NELLIS DEPARTURE, MIGG01 LEAVING (altitude), REQUEST IFR PICK-UP (altitude)."* NATCF will confirm that the pilot is responsible for maintaining terrain & obstruction clearance until the minimum vectoring altitude and (time permitting) issue a short-range IFR clearance; use caution for rapidly rising terrain north and west of FLEX.

TAKEOFF RUNWAY 03L/R: Remain below 3000' MSL until north of Race Track. Proceed direct FLEX (eastern most triangle). Cross FLEX at or below 4000' MSL. Depart FLEX direct DREAM/FYTTR/HAYFORD PEAK/MORMON PEAK/MORMON MESA or as ATC assigned.

MORMON MESA NOTE (Only when entering ELG or CAL east of the NTTR and weather allows VMC until within NTTR): Expect VFR radar service cancellation leaving Class Bravo, squawk VFR (1200) and contact Nellis Control (Ch 7) north of MMM VORTAC and east of ELG or CAL for range entry. Do not expect radar identification; if needed, continue to hold VFR outside the NTTR and use caution for other holding aircraft. **When requesting on-time range entry with Nellis Control, provide location only and do not squawk range tactical Mode-3/A until within the confines of the NTTR.**

Figure 4.2. RWY 21L/R FLEX Departure.

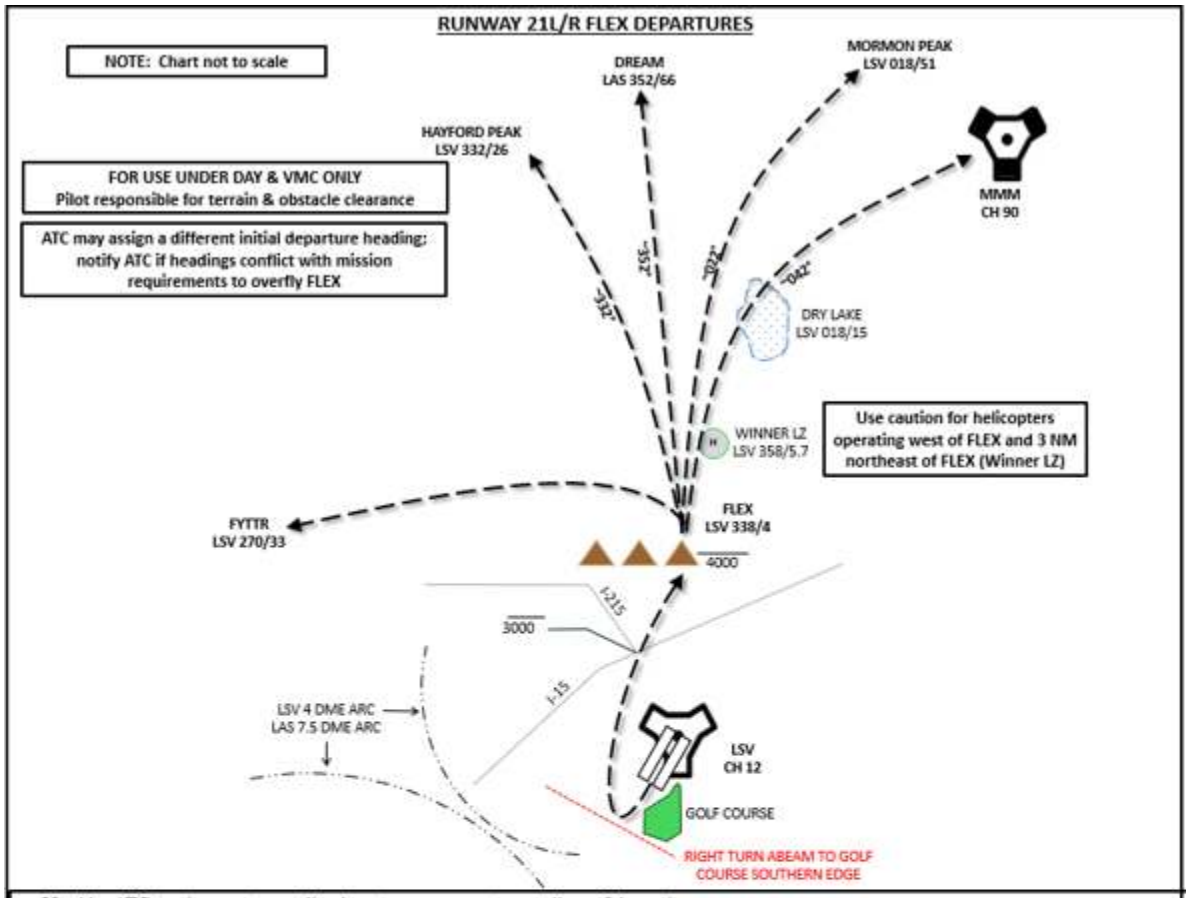


- Used by ATC or aircrew to expedite departure movement regardless of the active runway.
- Afterburner use prohibited over populated areas.
- ATC may initiate to expedite movement when filed on DREAM/FYTTR/HAYFORD PEAK/MORMON PEAK/MORMON MESA departures.
- Aircrew may request or ATC may initiate to expedite departures during periods of NAVAID outages in lieu of a RWY 21 radar vector departure.
- Aircrew acceptance cancels any previously issued IFR clearance.
- Notify NATCF after departure of requested altitude if an IFR pickup is required on initial contact; *"NELLIS DEPARTURE, MIGG01 LEAVING (altitude), REQUEST IFR PICK-UP (altitude)."* NATCF will confirm that the pilot is responsible for maintaining terrain & obstruction clearance until the minimum vectoring altitude and (time permitting) issue a short-range IFR clearance; use caution for rapidly rising terrain north and west of FLEX.

TAKEOFF RUNWAY 21L/R: Expedite climb to 2500'- 3000' MSL, then climbing right turn direct FLEX. Remain below 3000' MSL until North of I-15 and I-215. Proceed direct FLEX (eastern most triangle). Cross FLEX at or below 4000' MSL. Depart FLEX direct DREAM/FYTTR/HAYFORD PEAK/MORMON PEAK/MORMON MESA or as ATC assigned.

MORMON MESA NOTE (Only when entering ELG or CAL east of the NTTR and weather allows VMC until within NTTR): Expect VFR radar service cancellation leaving Class Bravo, squawk VFR (1200) and contact Nellis Control (Ch 7) north of MMM VORTAC and east of ELG or CAL for range entry. Do not expect radar identification; if needed, continue to hold VFR outside the NTTR and use caution for other holding aircraft. **When requesting on-time range entry with Nellis Control, provide location only and do not squawk range tactical Mode-3/A until within the confines of the NTTR.**

Figure 4.3. Peaks Departures.

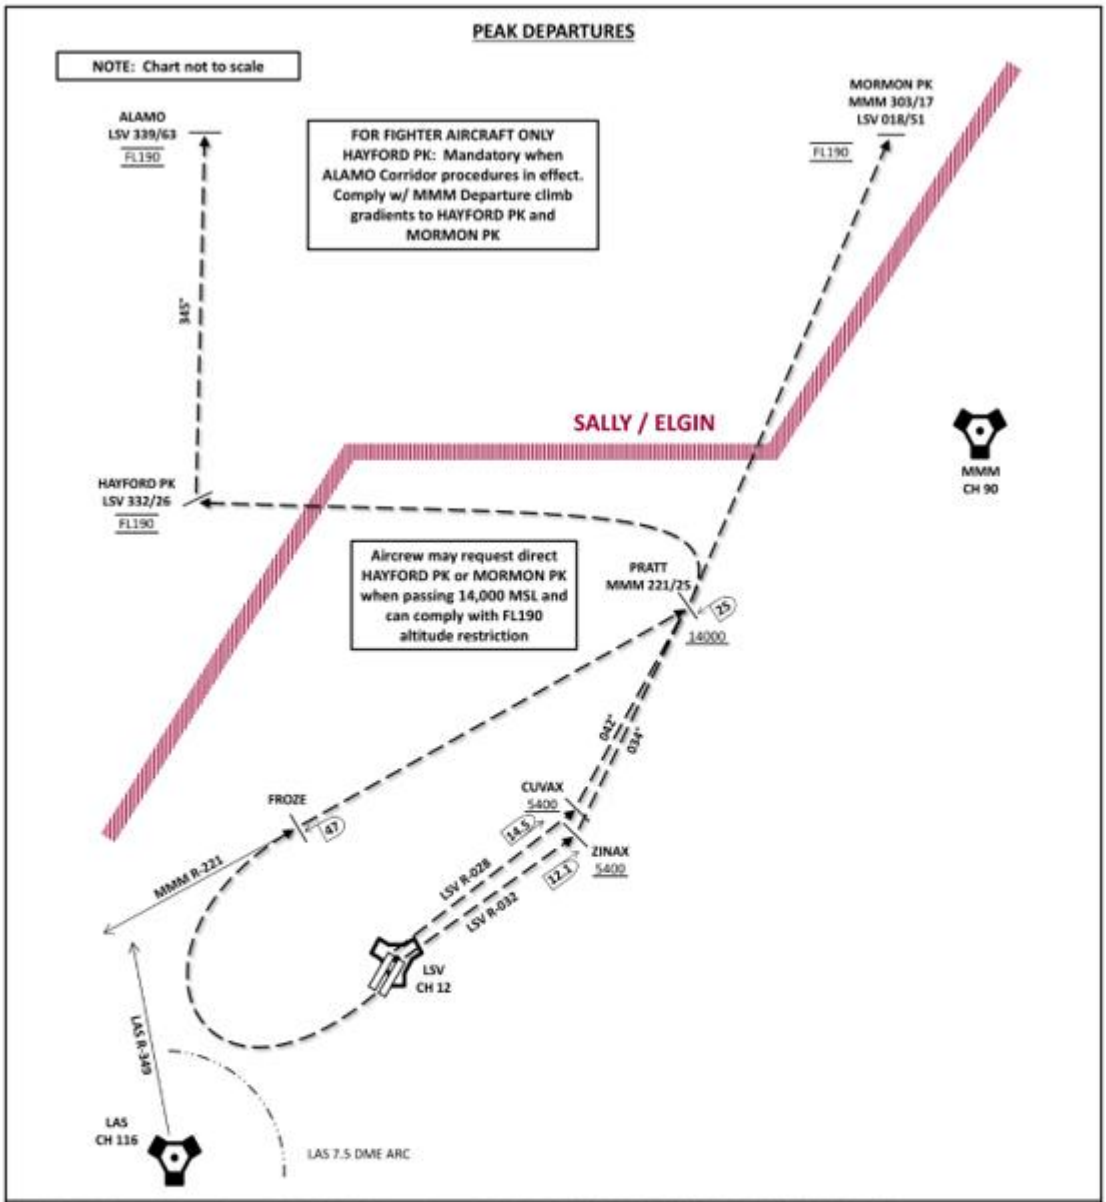

1. HAYFORD PK Stereo Route: File LSV135 Stereo Route (LSV..MMM221025..LSV332026..LSV339063/D0+15..)
2. MORMON PK Stereo Route: File LSV137 Stereo Route (LSV..MMM221025..LSV018051/D0+15..ARCOE..KLSV)
3. TAKEOFF RWY 21L/R: Turn right to intercept MMM VORTAC R-221 prior to MMM 47 DME, remain North of the LAS VORTAC 7.5 DME, remain East of the LAS VORTAC R-349, intercept MMM R-221 then direct PRATT, cross PRATT at or above 14,000. Thence….
4. TAKEOFF RWY 03L: Fly runway heading to intercept LSV TACAN R-028 to CUVAX, cross CUVAX at or above 5400, then direct PRATT, cross PRATT at or above 14,000. Thence….
5. TAKEOFF RWY 03R: Fly runway heading to intercept LSV TACAN R-032 to ZINAX, cross ZINAX at or above 5400, then direct PRATT, cross PRATT at or above 14,000. Thence....

…. HAYFORD PK DEPARTURES: Turn direct HAYFORD PK, cross HAYFORD PK at and maintain FL190, ALAMO, scheduled ranges.

…. MORMON PK DEPARTURES: Turn direct MORMON PK, cross MORMON PK at and maintain FL190, scheduled ranges.

4.7. Use of Military Assumes Responsibility for Separation (MARSA).

4.7.1. MARSA is authorized within the Nellis primary training area (**paragraph 2.1. & 2.7 and Attachment 8**) and as specified by ATC such as when refueling within scheduled ATCAA's or air refueling tracks.

4.7.2. ATC will not provide IFR services to aircraft operating under the provisions of MARSA in the NTTR.

4.7.3. MARSA operations outside the NTTR, for aircraft on an IFR flight plan are only authorized during flight join-ups or as specified in other LOAs or FAA documents (i.e. ATCAAs and ALTRVs). Aircraft operating VFR are not required to declare MARSA for join-ups.

4.7.4. MARSA Procedures. Aircrew planning to share airspace with another mission should communicate their deconfliction in the following order based on time available:

4.7.4.1. Update the GRR to reflect the deconfliction. The GRR should be updated to show geographic deconfliction for each mission.

4.7.4.1.1. For example, mission #1906 wants to use Elgin FL210 and above during mission #1616's airspace. Mission #1616 agrees to be established 20,000 feet and below in Elgin. The GRR should be updated to show #1906 owns Elgin above 21,000 feet and #1616 owns Elgin 20,000 feet and below. The GRR will not say "MARSA" as the scheduled mission airspace is deconflicted.

4.7.4.1.2. Establish deconfliction and add "MARSA" to the GRR. If the deconfliction cannot be easily annotated via GRR restrictions, communication that deconfliction exists between two missions of overlapping airspace will be annotated via "MARSA" on the GRR under restrictions. The GRR can be updated via "pencils" by the squadron scheduler. After "pencils" the GRR can be updated by contacting Blackjack scheduling.

4.7.4.1.3. Aircrew can contact Blackjack on the ground to see if early entry will be available. Blackjack will say "EXPECT EARLY ENTRY" or "EARLY ENTRY NOT AVAILABLE." "EXPECT EARLY ENTRY" from Blackjack does not approve the flight for early entry and is advisory only. Aircrew requesting early entry from Nellis Control can expect to hear "CLEARED EARLY ENTRY" or "CLEARED SCHEDULED." "CLEARED SCHEDULED" means to adhere to the GRR, early entry was denied. Expect Reveille MOA times and altitudes as scheduled. Reveille MOA is coordinated with Salt Lake Center 24 hours in advance.

4.7.5. On check in, inform Nellis Control of MARSA agreement between separate scheduled missions utilizing NTTR airspace. The flight entering the airspace is expected to communicate that they are MARSA (i.e. "NELLIS CONTROL, RAMBO01, FL190, MARSA PROCEDURES"). Aircrew can expect to hear "COPY MARSA, *appropriate frequency change instructions*" from Nellis Control. Blackjack and NATCF will not verify that the owning flight accepts MARSA. By communicating MARSA, the aircraft that communicated MARSA is responsible for deconfliction.

4.8. Airspace Entry.

4.8.1. ATC separation is provided until entering aircraft have crossed the boundary of SUA at ATC assigned routings and altitudes. Aircraft may not depart assigned altitude until within the confines of their scheduled airspace.

4.8.1.1. The Air Boss (or designated POC for an LFE) will check-in with Blackjack prior to range entry with their working frequency for any mission changes.

4.8.1.1.1. NATCF will transfer communications to Blackjack by voicing "CLEARED SCHEDULED, CONTACT BLACKJACK." Aircrew will comply with any routing instructions into the airspace provided by NATCF. Clearance direct to scheduled airspace is not clearance to enter non-owned airspace.

4.8.1.1.2. Upon entering the NTTR, all aircraft in the flight will squawk their assigned tactical Mode 3/C IAW *DAFMAN 13-212V1, ACC Sup, NTTR Addendum A.4.8*.

4.8.2. Early Airspace Entry. Reference 4.7 MARSA Procedures for methods of early airspace entry.

4.8.3. Range Exit.

4.8.3.1. Aircraft must contact Nellis Control 10 NM prior to desired exit point if IFR control is desired (above FL180, IMC, etc.) Aircraft exiting VFR will contact Nellis Control with altitude and routing. An instruction to proceed to a point outside the airspace constitutes approval and clearance. Aircrew should report if they cannot comply with an ATC heading or altitude and deconflict from unowned airspace or MARSA aircraft. Aircrew will not enter Class B airspace without NATCF clearance, even if VFR.

4.8.3.1.1. Aircrew will obtain ATIS no later than contact with Nellis Approach (local channel 5 or 6).

4.8.3.1.2. Flights will join up to a standard formation prior to exiting airspace and advise NATCF if unable or non-standard.

4.8.3.1.3. Aircraft unable to contact Nellis Control and unable to climb VMC above 10,000 feet will relay range exit plan through Blackjack or GCI. Aircraft will then maintain VFR exiting the range and obtain Nellis Approach (Channel 5 or 6) clearance prior to entering Class B airspace.

4.8.3.1.4. Aircraft may exit and re-enter the NTTR under VMC conditions after advising NATCF.

4.8.3.1.4.1. Aircraft executing these procedures must operate IAW VFR procedures when exiting the NTTR at or below 17,500 MSL. Aircraft returning to the NTTR will maintain their tactical squawk.

4.8.3.1.4.2. These procedures are designed primarily for aircraft operating along the western border of the NTTR.

4.8.4. For the most current Air Refueling Track information, please reference the Nellis Airspace Control Plan located on the 57 WGV SharePoint.

4.9. Training Area Operations. Aircrew must remain in their scheduled or assigned airspace. Nellis Control will transmit advisories on Guard when aircraft exceed the perimeter boundaries of

the NTTR. The operating agency will transmit advisories for aircraft approaching boundaries on the range frequency if possible, and on Guard if required. GCI and Blackjack will assist aircrew in remaining in assigned airspace. See **Attachment 9** for spill out procedures.

4.9.1. Low Level Hazard Reporting Procedures. In the event an uncharted or an unbriefed obstruction hazard is identified, the observing aircraft must notify 57 OSS/OSOS and provide the following: description (power line, tower, etc.), location (coordinates or geo-ref) and estimated height above surface. 57 OSS/OSOS will notify the appropriate Airspace Manager, Terminal Procedures Specialist (TERPS) and all Nellis AFB helicopter units.

4.10. Altimeter Setting Procedures.

4.10.1. Tactical aircraft entering and exiting the NTTR through the Sally corridor or Elgin use the Nellis AFB altimeter setting (also known as the ATC issued “range altimeter”) regardless of altitude to ensure deconfliction with other tactical aircraft entering and exiting the ranges.

4.10.2. In R-4808S and the Lee Corridor (Western departures), use the Nellis AFB altimeter up to but not including FL 180; at FL 180 and above use 29.92.

4.10.3. Within the confines of NTTR use the Nellis AFB altimeter at all altitudes.

4.10.4. Aircraft using AR-625 and other non-NTTR ATCAA’s or ALTRVs will use 29.92 (see LOA or Nellis ACP for specific direction).


4.10.5. When considering use of an emergency or minimum safe altitude (ESA/MSA), aircrew will use caution when tactically utilizing an ATC issued range altimeter (Nellis AFB source) while operating in NTTR areas significantly distant from Nellis AFB (i.e., R4809, R4807, REVEILLE, etc.); as needed, aircrew will request an altimeter setting closer to their location (i.e. Tonopah, etc.).

4.11. Airspace Recall Corridors.

4.11.1. When severe weather phenomena occur that necessitate routing non-participating aircraft through the Desert or XRAY, ATCAA sub-areas, the ARTCC may request the return of airspace as detailed within Control Procedures for the NTTR and Nevada National Security Site Letter of Agreement.

4.11.2. Aircrew will be alerted of the airspace recall of weather deviation area Coyote N, Caliente A B, Caliente C W, Caliente C, Elgin, XRAY, Sally South, or Reveille North or South. Some weather areas may be released to ARTCC at or above FL240 based on operational need.

Figure 4.4. Airspace Recall Corridors.

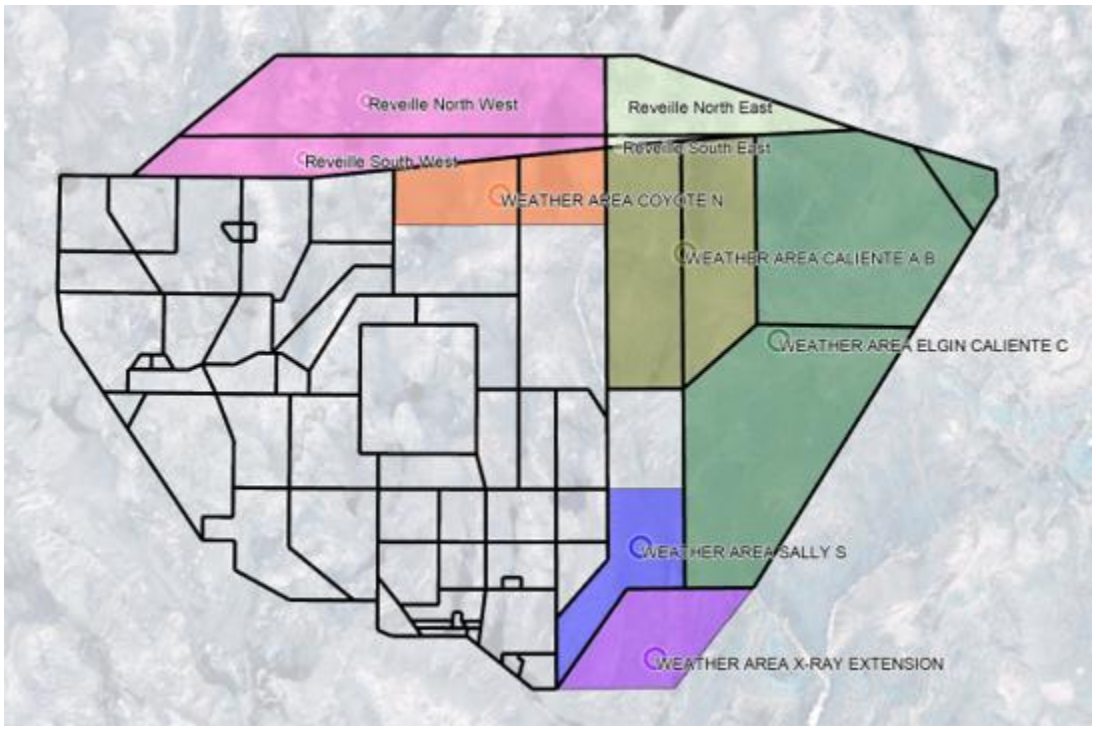

4.12. Transit Corridors.

4.12.1. When the Sally Corridor is utilized as tactical airspace, it is available all altitudes east of the W115 07 line and north of the N36 48 line to mission aircraft, the remaining airspace in Sally is known as the Yankee Extension. Aircraft going to other ranges in the NTTR will use the ALAMO corridor or execute MARSA procedures in **paragraph 4.7**. During Alamo Corridor procedures, NATCF will own the southern portion of Sally Corridor West of the W11503 line and south of the N3648 line for transiting aircraft to Alamo Corridor via MINTT.

4.12.1.1. NATCF can release the Sally corridor with or without the Yankee extension:

4.12.1.1.1. NATCF will use the following verbiage when releasing Sally with the Yankee extension: “SALLY RELEASED WITH YANKEE EXTENSION”

4.12.1.1.2. NATCF will use the following verbiage when releasing Sally without the Yankee extension: “SALLY RELEASED NORTH OF YANKEE EXTENSION”

4.12.2. LFE NORDO Departure Procedures w/ Sally Corridor Operative. LFE aircraft only– DO NOT FLY THE ENTIRE DREAM DEPARTURE. Once at FL190, turn right direct to ARCOE and climb to FL200 for holding. Do not enter the NTTR west of the W115 line (fight airspace). Hold inbound on the LSV R-358 (ARCOE) between DME 30-39, left hand turns. Reattempt communications for 15 minutes. If still NORDO after 15 minutes, commence recovery via the 57th WG IFG.

4.12.3. Sally Corridor Recall Procedures. During recovery phase there exists the possibility that NATCF may need to recall parts or all of Sally Corridor during heavy traffic flows. Expect that notification will take place no later than five minutes prior to the recall. NATCF will

coordinate with TAC C2 and the Air Boss to recall parts of Sally Corridor, the timeframe associated, and for relay to aircraft in the airspace.

4.12.3.1. Sally Recall A. If required, NATCF will recall Sally Corridor and Elgin South of the N 37 00 line, SFC-FL190. If higher altitudes are required due to weather, NATCF will coordinate with TAC C2 and the Air Boss.

4.12.3.2. Sally Recall B. If required, NATCF will recall all of Sally Corridor and Elgin South of the N 37 00 line, SFC-FL190. If higher altitudes are required due to weather, NATCF will coordinate with TAC C2 and the Air Boss.

4.12.4. Alamo Corridor. The Alamo Corridor can be used any time Sally (all altitudes) is utilized as fight airspace in order to transit aircraft to the Northern Ranges for missions. The corridor consists of the lateral confines of Alamo Alpha, Alamo Bravo, and Alamo Charlie, FL190 to FL600. If the GRR states that the corridor is FL190-600, THIS AIRSPACE WILL ONLY BE USED FOR TRANSIT AND NOT FOR ADDITIONAL FIGHT AIRSPACE. With prior coordination by a unit, the Alamos can be used for fight airspace above the corridor starting at FL240. This must be annotated in the GRR.

4.12.4.1. NTTR will schedule the Alamo Corridor on the GRR. This will provide sufficient notice to both Blackjack and NATCF, prior to execution. All aircraft assigned the Alamo/60s ranges for normal missions in the GRR will own the Alamo airspace below FL180.

4.12.4.2. Transit through the Alamo Corridor will be controlled by NATCF and IAW this ACP and **Figure 4.3** (Peaks Departures) and **Figure 4.9**(ALAMO Recovery). NATCF will own the southern portion of Sally Corridor West of the W 115 03 line and south of the N 36 48 line for transiting aircraft to Alamo Corridor via MINTT.

4.12.4.3. LFE NORDO Departure Procedures w/Alamo Corridor Active. LFE aircraft only–DO NOT FLY THE ENTIRE DREAM DEPARTURE. Squawk 7600 and continue climb to FL230. Once at MINTT, enter holding to the southeast of MINTT from 5 to 15 DME, right hand turns, outbound on the 090° heading, and maintain FL230. Continue holding until contact is established with NATCF. If contact is not established prior to recovery fuel, recover IAW 57 WG IFG.

4.13. Recovery Procedures.

4.13.1. Flights will contact Nellis Control 10 miles prior to exiting SUA with a location. Flights closer than 10 miles of exit can expect at least one turn in holding prior to clearance to exit SUA. Only an instruction to proceed to a point outside the airspace or clearance for a recovery constitutes approval to exit the range.

4.13.2. Standard Recovery Airspeed. Aircraft will recover at 300 KIAS. A faster or slower airspeed may be requested if traffic permits and is approved by NATCF.

4.13.3. Aircraft Spacing. Aircraft in non-standard trail formations will keep a maximum of 2 NM between formation members if in sensor or radar trail. If unable to maintain this maximum separation, notify NATCF of total formation spacing and do not expand further to aid in sequencing. Aircraft will attempt to self-space while exiting the airspace to be 10NM behind the aircraft preceding to aid in sequencing and deceleration.

4.13.3.1. Northern Ranges Recovery. When recovering through the Sally Corridor aircrew will report TEXAS LAKE (LSV 352/64), EMPRS, or CARPP. Contact Nellis Control on local Channel 7.

4.13.3.2. Elgin Recovery. When recovering from Elgin, the VFR pick-up point is TORYE. Contact Nellis Control on local Channel 7, 10 miles from TORYE.

4.13.3.3. Western. When recovering from the western ranges contact Nellis Control on local Channel 8 with position report.

4.13.3.4. R2508 Ranges Recovery. When recovering from R2508, aircraft will request an IFR clearance or contact Nellis Control, VFR, prior to reaching JAYSN with intentions.

4.13.4. Split-ups and Join-ups. Flight split-ups and join-ups are authorized to be conducted under MARSA. All aircraft within the flight will fly the same approach procedure, and once joined as a flight, the leading flight lead will be addressed. Emergencies may dictate exceptions.

4.13.5. VFR Recoveries. VFR recoveries will be used to expedite the flow of traffic into Nellis AFB. There are four VFR recoveries: STRYK, TORYE, ARCOE and MINTT (**Figures 4.6** through **4.8**). VFR Recoveries will be flown at 300 KIAS. If unable to maintain VMC on these recoveries, notify Nellis Approach.

4.13.5.1. STRYK Recovery. The STRYK recovery is used for aircraft recovering from the west of Nellis (**Figure 4.6**) and is a Day/VMC only procedure. Use caution in the area between STRYK and GASS PEAK due to high-volume of general aviation traffic.


4.13.5.2. TORYE or ARCOE Recovery. These are two separate recoveries. The TORYE or ARCOE recovery is used for aircraft recovering from the northern ranges when RWY 21 is the active runway (**Figure 4.7**) and is a Day/VMC only procedure.

4.13.5.3. MINTT Recovery. The MINTT recovery is used for aircraft recovering from the northern ranges when RWY 03 is the active runway (**Figure 4.8**) and is a Day/VMC only procedure.

4.13.5.4. ALAMO Recovery. The ALAMO recovery (**Figure 4.9)** is used for aircraft recovering when the ALAMO corridor is active.

4.13.5.5. Clearance for VFR recovery constitutes clearance into the Class B airspace and altitudes IAW VFR procedures. NATCF will clear the flight for a VFR recovery prior to STRYK, TORYE, ARCOE, or MINTT. When the pilot acknowledges receipt of the clearance, the IFR clearance is automatically canceled. While on a VFR recovery or if vectored off the VFR recovery, flights must maintain their own terrain clearance. All fighter aircraft will recover to the overhead unless otherwise requested and approved.

Figure 4.5. JAYSN Recovery.

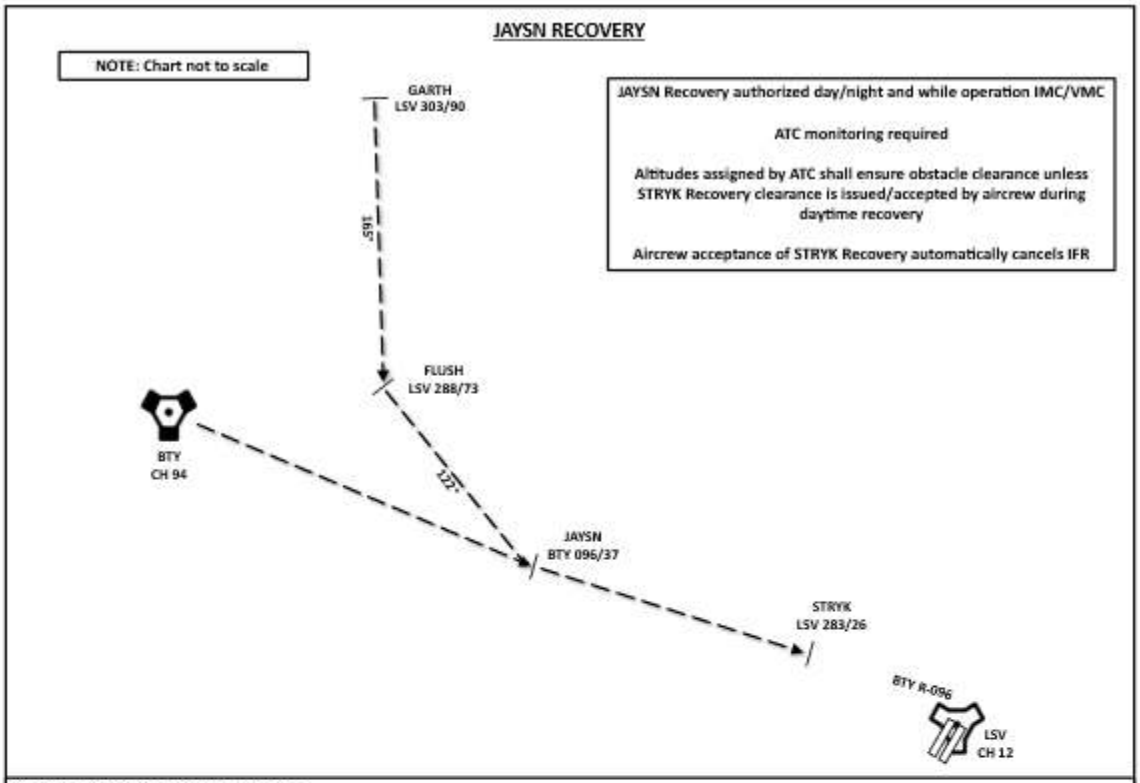


JAYSN RECOVERY VIA GARTH:

1. Contact Nellis Control on local Channel 8.
2. Aircrew shall not request/ATC shall not assign an altitude below 17,000' MSL until south of R4808.
3. Cross GARTH at the assigned ATC altitude heading 165° direct FLUSH.
4. Cross FLUSH and turn left heading 122° direct JAYSN.
5. Cross JAYSN and proceed outbound on the BTY R-096 to STRYK.
6. Expect clearance for STRYK Recovery during daytime/when VMC and traffic permits.
7. STRYK Recovery clearance authorizes descent to cross STRYK at or above 9,500' MSL.

JAYSN RECOVERY FROM BEATTY:

1. Contact Nellis Control on local Channel 8.
2. Cross BTY at the assigned ATC altitude; proceed outbound on the BTY R-096 direct JAYSN.
3. Cross JAYSN and continue outbound on the BTY R-096 to STRYK.
4. Expect clearance for STRYK Recovery during daytime/when VMC and traffic permits.
5. STRYK Recovery clearance authorizes descent to cross STRYK at or above 9,500' MSL

Figure 4.6. STRYK Recovery.

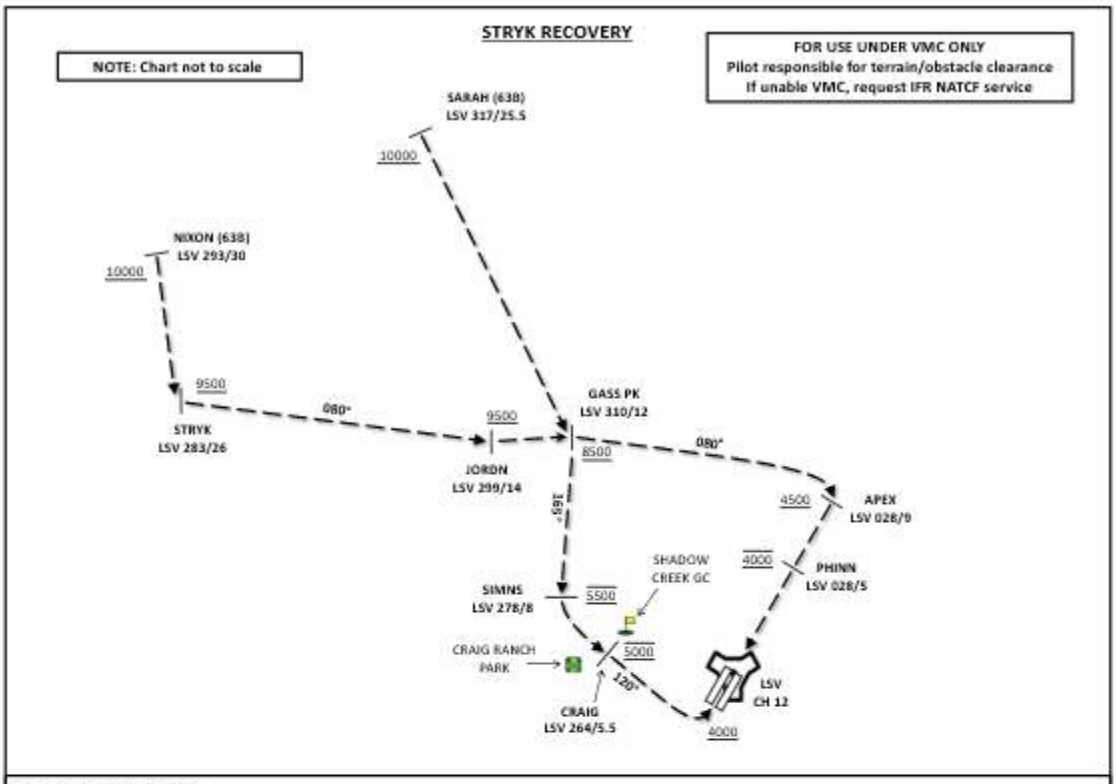

OVERHEAD RWY 03:
1. Cross STRYK at or above 9,500' MSL, proceed direct GASS PEAK.
2. Cross JORDN at or above 9,500' MSL.
3. Cross GASS PEAK at or above 8,500' MSL.
4. Proceed direct SIMNS and cross at 5,500' MSL.
5. Proceed direct CRAIG at 5,000' MSL.
6. Cross Las Vegas Blvd at or above 4,000' MSL then to 3,500' MSL for initial.
7. Remain within 4 DME of LSV on turn to final.

VFR STRAIGHT-IN RWY 03:
Depart CRAIG heading 140 and descend to be at 3,000' MSL by Las Vegas Blvd. Do not descend below 3,000' MSL until within 4.5 DME of LSV or 3.5 NM of the runway, remain within 4 DME of LSV on turn to final.


OVERHEAD RWY 21:
1. Cross STRYK at or above 9,500' MSL, proceed direct GASS PEAK.
2. Cross JORDN at or above 9,500' MSL.
3. Cross GASS PEAK at or above 8,500' MSL.
4. Cross APEX at or above 4,500' MSL then direct PHINN.
5. Descend to cross PHINN at 4,000' MSL.
6. Inside 5 DME, descend to 3,500' MSL for initial.

VFR STRAIGHT-IN RWY 21:
Cross APEX at 4,000' MSL. Descend to be at 3,000' MSL at PHINN.

RANGE 63B EXIT (MUST REQUEST ON INITIAL CONTACT & APPROVED BY NELLIS ATC):
SOUTH EXIT: Via NIXON at or above 10,000' MSL, then direct STRYK.
EAST EXIT: Via SARAH, then direct GASS PEAK, comply with remaining instructions.

NOTE: A-10 aircrews may request on initial contact to recover below published altitudes via NIXON when WX prevents compliance with higher restrictions. If approved by ATC, aircrew is responsible for NTTR airspace restrictions. Ground track is mandatory t o include CRAIG/APEX altitude crossing restrictions.

Figure 4.7. TORYE/ARCOE Recovery.

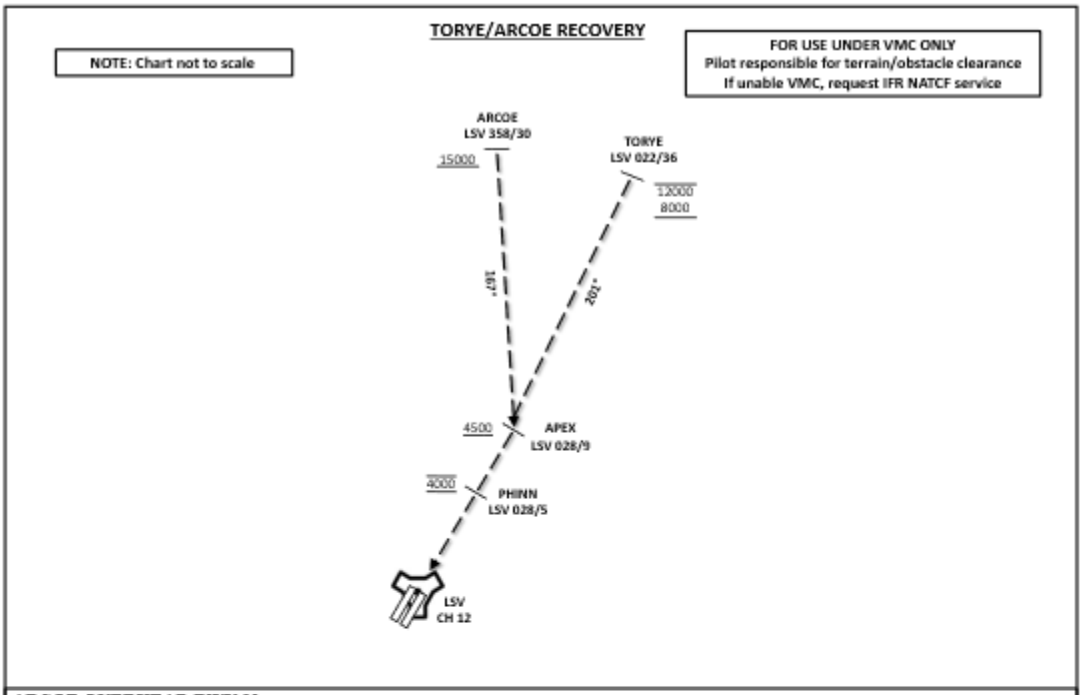


ARCOE OVERHEAD RWY 21:
1. Depart ARCOE at or above 15,000' MSL heading 167° direct APEX.
2. Cross APEX at or above 4,500' MSL then direct PHINN.
3. Descend to cross PHINN at 4,000' MSL.
4. Inside 5 DME, descend to 3,500' MSL for initial.

TORYE OVERHEAD RWY 21:
1. Depart TORYE between 8,000' MSL and 12,000' MSL heading 201° direct APEX.
2. Cross APEX at or above 4,500' MSL then direct PHINN.
3. Descend to cross PHINN at 4,000' MSL.
4. Inside 5 DME, descend to 3,500' MSL for initial.

TORYE/ARCOE VFR STRAIGHT-IN RWY 21:
Cross APEX at 4,000' MSL. Descend to be at 3,000' MSL at PHINN.

Figure 4.8. MINTT Recovery.

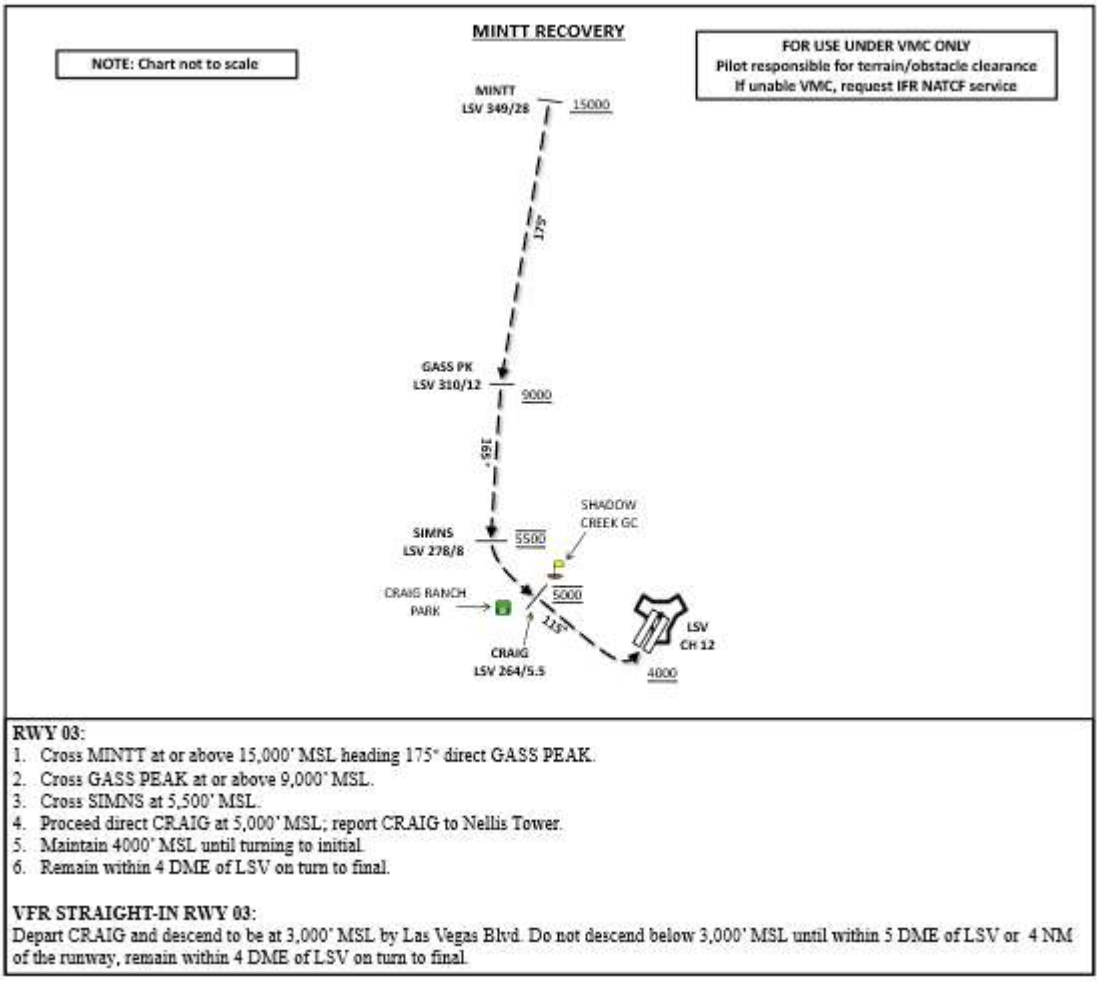


RWY 03:

1. Cross MINTT at or above 15,000' MSL heading 175° direct GASS PEAK.
2. Cross GASS PEAK at or above 9,000' MSL.
3. Cross SIMNS at 5,500' MSL.
4. Proceed direct CRAIG at 5,000' MSL; report CRAIG to Nellis Tower.
5. Maintain 4000' MSL until turning to initial.
6. Remain within 4 DME of LSV on turn to final.

VFR STRAIGHT-IN RWY 03:

Depart CRAIG and descend to be at 3,000' MSL by Las Vegas Blvd. Do not descend below 3,000' MSL until within 5 DME of LSV or 4 NM of the runway, remain within 4 DME of LSV on turn to final.

Figure 4.9. ALAMO Recovery.

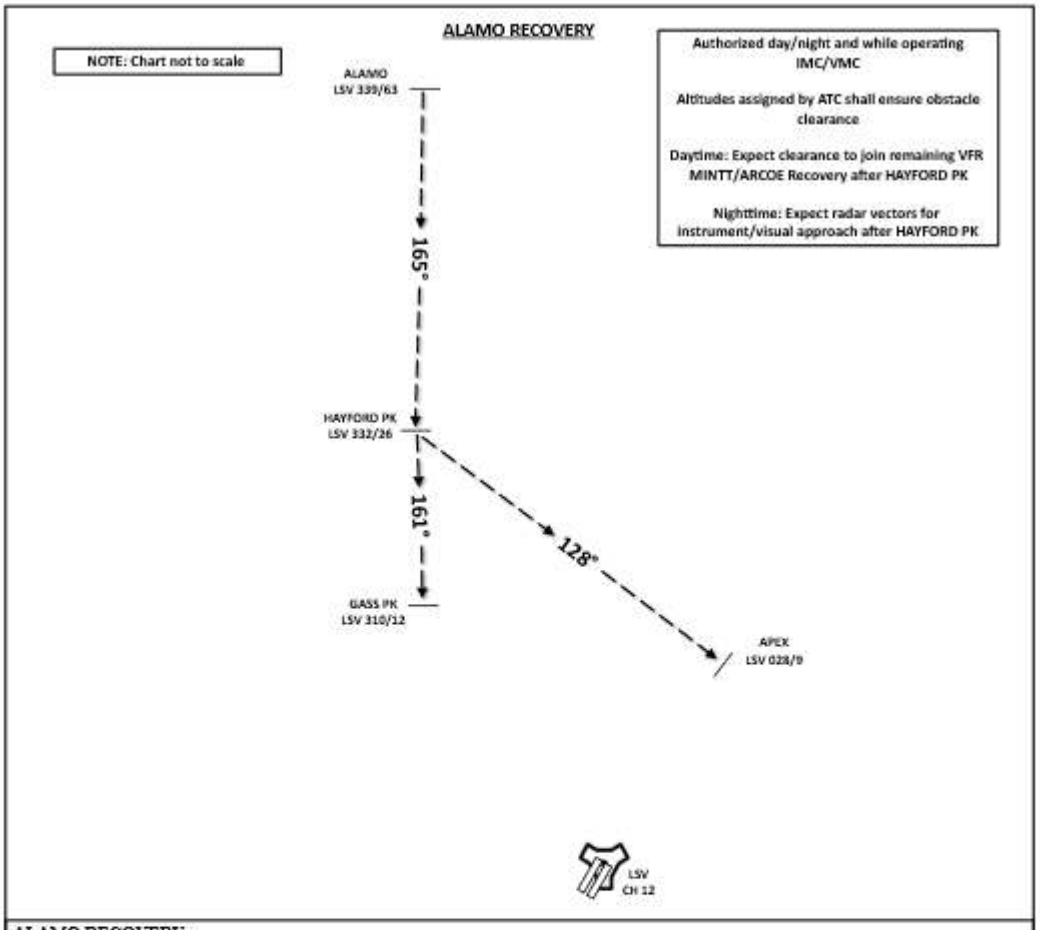

ALAMO RECOVERY:
1. Contact Nellis Control on local Channel 7.
2. Cross ALAMO at assigned ATC altitude (FL200 or FL 210) heading 165° direct HAYFORD PK.

DAYTIME:
1. Proceed direct GASS PK (RWY 03) or APEX (RWY21)
2. Expect descent as assigned by ATC and clearance to join MINTT or ARCOE Recovery.
3. Comply with remaining altitude restrictions for MINTT and ARCOE VFR recoveries.

NIGHTTIME: Expect radar vectors for instrument/visual approach after HAYFORD PK

NOTE: NATCF may assign below FL190 or above FL210 if airspace allows in ALAMO Corridor

4.13.6. Night and IFR Recoveries.

4.13.6.1. Expect vectors from Nellis Control for recovery to a charted approach. RWY 21 is the preferred landing runway at night unless winds dictate RWY 03.

4.13.6.2. Night Recovery RWY 21. Expect vectors for the ILS or TACAN approach in both VMC and Instrument Meteorological Conditions (IMC).

4.13.6.3. Night is defined as the time between the end of civil twilight and the beginning of civil twilight, as published in the American Air Almanac (converted to local time). Civil twilight times may be found on the USNO Astronomical Applications Department website at **http://aa.usno.navy.mil** under "Data Services." **NOTE**: ATC defines "nighttime" as the period between the end of nautical twilight and beginning nautical twilight. The estimated difference between nautical twilight and civil twilight is 30 minutes. When aircrew are following ATC procedures, they must adhere to ATC's definition IAW *DAFMAN 13-204v3 3.2.4.4.*

4.13.6.4. Night Recovery RWY 03. Aircraft will recover single ship, as formations of two or four-ship if in a sensor or radar trail formation. Aircraft should expect vectors for a visual approach to RWY 03 expecting the phraseology "CLEARED VISUAL APPROACH RWY 03, CROSS LSV R-256 BETWEEN 5,400 AND 6,000, TURN BASE LEG WITHIN 4 DME." Aircrew may request the charted visual approach (DoD FLIP Low Altitude United States Vol-3). Visual approaches require VMC, and IFR approaches to RWY 03 are extremely unlikely, due to proximity of Harry Reid airspace.

4.13.6.5. Night LFE Recoveries. Limited to 50 aircraft when RWY 03 is briefed as the expected recovery runway. This restriction may be waived by OG/CC, if mission commanders provide a plan to recover a maximum of four aircraft every five minutes. This restriction does not apply when RWY 21 is the expected arrival runway.

4.13.7. Split-to-Land Procedures. Weather must be at least 2,000 feet AGL ceiling and 3 miles visibility. Request a split-to-land recovery with Nellis Control on initial contact or as soon as practical after range exit. Example: "NELLIS CONTROL, C/S, FLIGHT OF TWO/FOUR REQUEST (TYPE APPROACH), SPLIT TO LAND." Nellis Control/Approach will respond with "C/S, SPLIT TO LAND APPROVED" or "C/S, UNABLE SPLIT TO LAND."

4.13.7.1. Once approved and not earlier than 3 NM from touchdown (approximately 2,800 feet MSL), each element of two will separate to land simultaneously on both the left and right runways. Flight leads will advise Tower on initial contact that they are split to land, and which element will land on which runway: "TOWER, MIG1, FLIGHT OF TWO/FOUR, SPLIT TO LAND, MIG1 and MIG3 on 21L, MIG2 and MIG4 on 21R". Split-to-land from an ILS approach is not authorized.

4.13.8. Side-Step Maneuver. Pilots desiring to execute a side-step maneuver will use the terms "side-step" and descend no lower than published side-step minimums without having the runway environment in sight.

4.14. VFR Traffic Pattern Procedures. VFR is defined as 1,500 feet AGL and 3 SM visibility. Minimum VFR traffic pattern weather is 500 feet above pattern altitude and 3 SM visibility. Expect frequency change to Tower approximately 15 NM from Nellis Tower. All aircraft are considered a full stop from initial unless otherwise requested on initial contact. Tower will not issue separate landing clearances to each aircraft that are part of a single flight. When Tower issues a landing clearance to the flight lead, it is clearance for all aircraft in the flight to land. Flight leads will acknowledge landing clearance for flight. Subsequent flight members will make a "gear and intended landing runway" call only and do not need to state intentions (i.e. "HOSS 2, GEAR"). Flight members who have different intentions than their lead, will make their request with Tower (i.e., "HOSS 3, GEAR DOWN, LOW APPROACH").

4.14.1. **Overhead patterns.** Initial will be flown to RWY 21R/03L, unless otherwise instructed, at 300 KIAS or less and 3,500 feet MSL within 3 NM of the field. Initial to the East (RWY 21L/03R) will be flown at 300 KIAS or less and 3,500 feet MSL within 2 NM of the field. See **Figure 4.11** for traffic patterns.

4.14.1.1. Radar Vectors to Initial. An aircraft executing an overhead maneuver is considered VFR and the IFR flight plan is cancelled when the aircraft reaches the "initial point" on the initial approach portion of the maneuver. After an aircraft reports the airport or runway in sight, they can expect a visual approach clearance to initial. Sin City Visual (DoD FLIP Low Altitude United States Vol 5) may be used in lieu of vectoring to initial.

4.14.1.2. Night overhead patterns are not authorized. Tower Watch Supervisor retains the authority to use good judgment in determining whether to keep the overhead pattern open based on real-time darkness.

4.14.1.3. **Overhead Break Procedures:** Standard break is to the west for aircraft arriving RWY 21R/03L and to the east for aircraft arriving RWY 21L/03R (**Figure 4.12**.). Tower will issue a direction of break and landing runway before aircraft reach 5-mile initial (RWY 21L/R) or 1 NM inside of Craig (RWY 03L/R). Aircraft will report initial and overfly the runway to which ATC has assigned. The break will be initiated over the approach end unless Tower directs otherwise for ATC separation requirements (i.e., "C/S BREAK MIDFIELD TO FOLLOW TRAFFIC."). Aircraft will fly a downwind ground track and adjust the final turn for the assigned landing runway. ATC may change the landing runway after the break based on real time traffic needs or at pilot's request.

4.14.1.4. After Tower issues direction of break and landing runway, aircrew acknowledge landing runway and direction example: "C/S1, RIGHT FOR THE RIGHT".

4.14.1.4.1. Changing the assigned runway: "C/S, CHANGE LANDING RUNWAY, RUNWAY 21 LEFT."

4.14.1.4.2. Changing the assigned break direction: "C/S, CHANGE DIRECTION OF BREAK, MAKE LEFT BREAK."

4.14.1.4.3. Changing both the assigned break and runway: "C/S, CHANGE DIRECTION OF BREAK AND LANDING RUNWAY, MAKE LEFT BREAK RUNWAY 21 LEFT"

4.14.1.5. Right base RWY 03R. For RWY 03R, complete the final turn within 4 DME. Do not widen the pattern or delay base turns. If separation becomes a problem after the break, request a climb to 4,000 feet MSL to turn back to initial or a climbing left turn to between 4,000 and 4,400 to proceed between the east gap and proceed to DUCK for re-entry into the pattern.

4.14.1.6. Rectangular Pattern. The rectangular pattern may be used by large or heavy aircraft when required for safety. Fly rectangular patterns to RWY 21R/03L unless directed otherwise. The standard pattern altitude is 3,000 feet MSL (**Figure 4.11**).

4.14.1.7. Non-Fighter Aircraft Overhead Pattern Procedures. The overhead pattern is primarily for fighter type aircraft. Non-fighter aircraft may be allowed in the overhead on a non-interference basis when specifically approved by the Tower. Non-transient heavy aircraft (exercise participants) may perform east breaks if able to remain within 2 NM of

the LSV TCN until north of Sunrise Mountain, due to mountainous terrain. Duck reentry is authorized provided PIC maintains 300' vertical obstacle clearance over Sunrise Mountain. Non-fighter aircrew should plan recovery via VFR straight-in, or instrument approach should overhead recovery be denied by ATC.

4.14.2. Straight-In Approaches. Make request upon initial contact with ATC. Straight-in altitude is 3,000 feet MSL. See **Figure 4.5** through **Figure 4.8** for straight-in procedures from VFR recoveries and **Figure 4.11** for procedures from reentry. VFR straight-ins to RWY 03 have short finals due to adjacent airspace south of Nellis. Early configuration and a descending turn will be required.

4.14.3. Closed Traffic. Closed patterns will be accomplished at the departure end of the runway. Present position closed maneuvers are authorized with Tower approval. Aircraft executing a closed pattern will perform a climbing turn to enter the respective downwind.

4.14.4. Re-entry Patterns. **Figure 4.11**.

4.14.4.1. Re-entry RWY 21. Expect ATC to issue a climbing right turn to 3000 feet MSL direct FLEX, when abeam the I-15 and I-215 intersection, climb to 4000 feet MSL.

4.14.4.2. Re-entry RWY 03. Expect ATC to issue a climbing left turn to 3000 feet MSL direct FLEX, when abeam the I-15 and I-215 intersection, climb to 4000 feet MSL

4.14.4.3. Duck Re-entry RWY 21. Aircrew will remain on Tower frequency and cross departure end at or below 3,000 MSL then perform a climbing left between 4,000 and 4,400 feet MSL, remain within 3.5 DME of the LSV TACAN. Point towards the gap (between Frenchman Mountain and Sunrise Mountain). Fly no further East than 3.5 DME of LSV TACAN to avoid conflict with Harry Reid Airport Class B airspace. Turn northbound to fly directly over the eastern part of the MSA then direct DUCK. Report DUCK. Proceed West from DUCK to reenter initial, descending to 3,500 feet MSL. For a straight-in, descend to 3,000 feet MSL prior to turning final. During runway closure or traffic saturation, Tower may direct holding at DUCK. Hold East of DUCK (remain 1.5 miles from DUCK) at 4,400 feet MSL.


4.14.5. High-Tactical Initial. Formations will request High-Tactical Initial with Nellis Control (Channels 7/8) on initial contact or as soon as practical.

4.14.5.1. High-Tactical Initial is only flown to RWY 21. Cross APEX at 5,500 feet MSL and maintain 5,500 feet MSL using the same ground-track, airspeed and spacing as Tactical Initial. When breaking towards inside, the downwind aircraft descends to establish a normal, configured perch point at 3,500 feet MSL.

4.14.6. Tactical Initial. Formations will request Tactical Initial with Tower as soon as practical. Tactical Initial to RWY 21 is flown at 400 KIAS (or IAW ATC instruction) and 3,500 feet MSL. Intra-elements spacing is 3,000 feet to 4,500 feet line-abreast with 1 NM spacing between elements. Wingman break simultaneously at the approach end of the landing runway.


4.14.6.1. Tactical Initial to RWY 03 is IAW **Figure 4.10**.

Figure 4.10. Tactical Initial RWY 03.

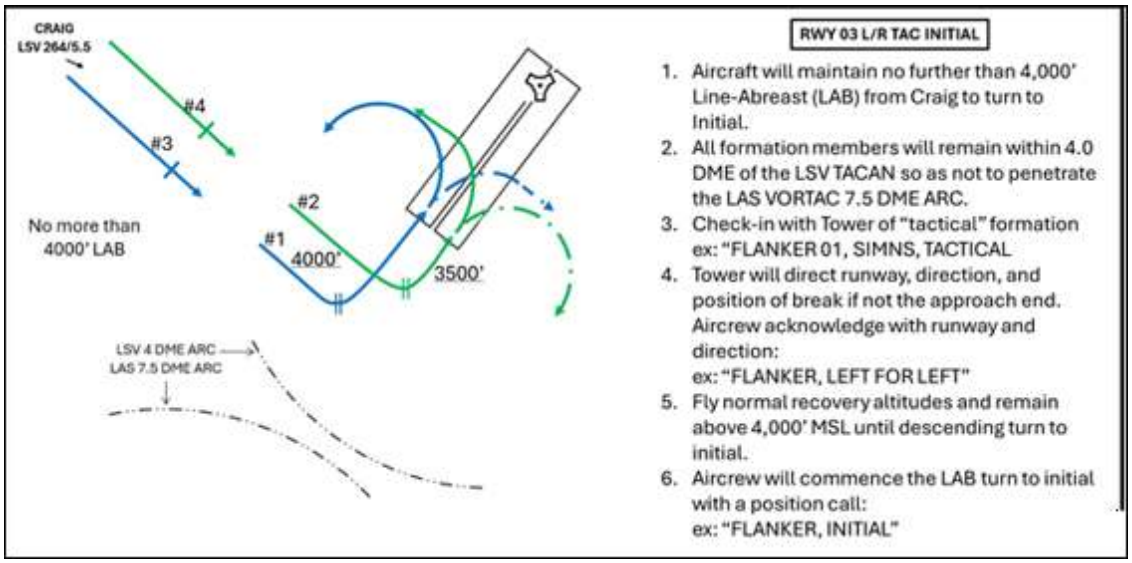

4.14.6.2. Aircraft breaking east must remain within 2 NM of the LSV TACAN to avoid mountainous terrain.

Figure 4.11. Nellis AFB Traffic Patterns.

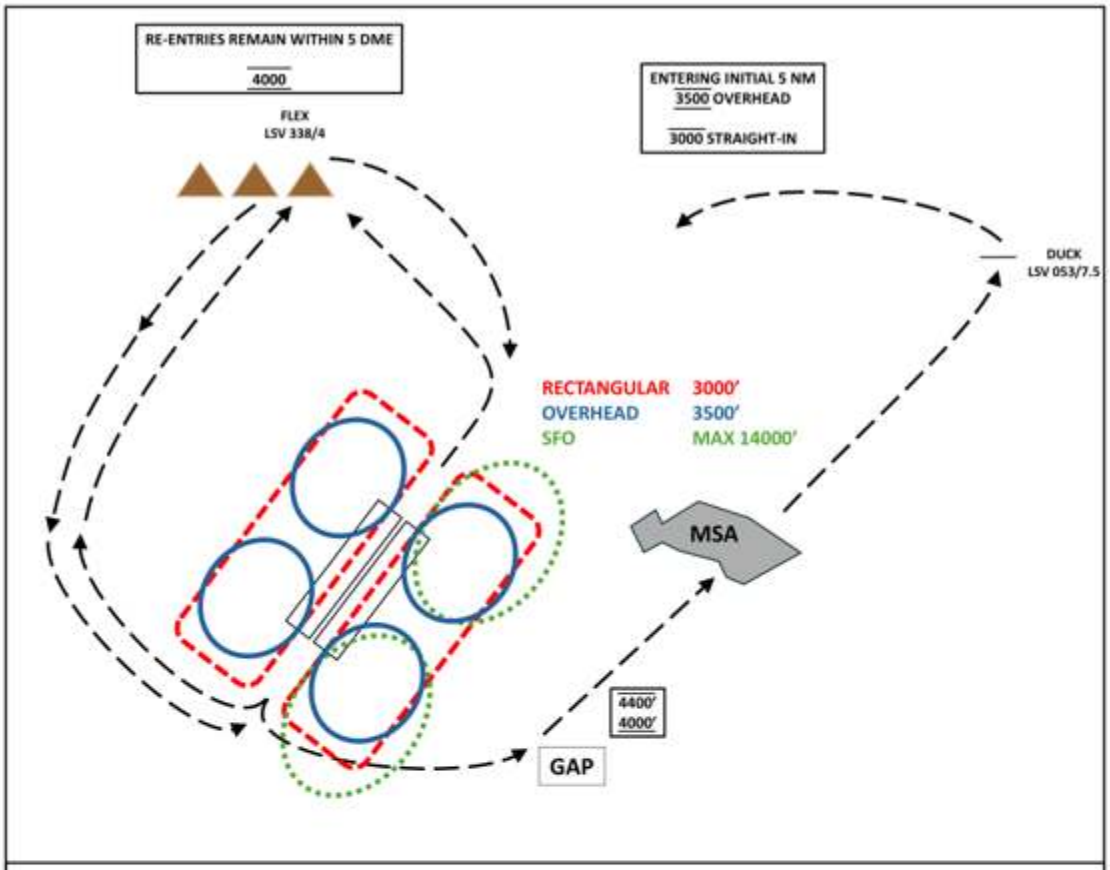

OVERHEAD:
1. RWY 03: Traffic entering from STRYK has priority over traffic entering from MINTT.
2. RWY 21: Traffic entering from APEX has priority over traffic entering from FLEX or GASS PEAK.
3. Fly initial to RWY 21R/03L.
4. Initial is 300 KIAS or less, 3500' MSL, 3-5 NM, break to the west. If given east break, fly initial to RWY 21L/03R.

VFR STRAIGHT-IN:
1. RWY 03: Depart CRAIG and descend to be at 3000' MSL by Las Vegas Blvd. Do not descend below 3000' MSL until within 5 DME of LSV or 4 NM of the runway, remain within 4 DME of LSV on turn to final.
2. RWY 21: Depart APEX and descend to be at 3000' MSL by LSV 028/5 or 5 NM final. If departing FLEX, descend to be at 3000' MSL by I-15 and intercept 5 NM final.

FLEX RE-ENTRY:
1. Remain at or below 3000' MSL until turned out of traffic.
2. RWY 03: Perform a climbing left turn direct FLEX at 4000' MSL. At FLEX, turn southwest to fly parallel with the runways. Passing Shadow Creek Golf Course, turn left to re-enter initial. Remain east of Craig Ranch to deconflict with VGT Airport traffic. Maintain 4000' MSL until Las Vegas Blvd. For a straight-in approach, do not descend below 3000' MSL until 4 NM (5 DME of LSV) of the runway.
3. RWY 21: Expedite climb to 2500'-3000' MSL then climbing right turn direct FLEX at 4000' (eastern-most triangle [LSV 338/4]). Turn to re-enter initial and descend to 3500' MSL. For a straight-in, descend to be at 3000' by I-15.

DUCK RE-ENTRY:
1. Perform a climbing left turn to between 4000'-4400' MSL remaining north of Lake Mead Blvd.
2. Point toward the gap between Frenchman Mountain and Sunrise Mountain.
3. Fly no further east the 3.5 DME of LSV TACAN to avoid conflict with Harry Reid Class B airspace.
4. Turn northbound to fly directly over the eastern part of the MSA then direct DUCK. Proceed west of DUCK to re-enter initial, descending to 3500' MSL. For a straight-in, descend to 3000' MSL prior to turning final.

NOTE: Portions of DUCK re-entry leave/exit Class B airspace; aircraft authorized to re-enter on published DUCK re-entry.

4.15. Lost Communications Procedures.

4.15.1. NORDO aircraft will squawk 7600.

4.15.2. If IMC and communications are lost, aircrew will climb and maintain 15,000 feet MSL and execute the HI-TACAN Z RWY 21L approach.

4.15.3. If IMC and communication is lost during radar trail recoveries and positive radar contact (range, altitude, airspeed and closure) can be maintained, continue with the flight to landing. If radar contact cannot be maintained or the situation dictates leaving the formation, proceed direct to the IAF for the HI-ILS or LOC/DME Z RWY 21L or HI-TACAN Z RWY 21L approach. Make one turn in holding and then execute the published approach.

4.15.4. If VMC, execute the ARCOE Recovery (from the north) or the STRYK Recovery (from the west).

4.15.5. Comply with light gun procedures from Tower.

4.16. Opposite Direction Procedures. Operations are IAW DAFMAN 13-204v3. Approval is at controller discretion and dependent on current traffic situation. When approved, aircrew may experience delays due to 10-mile ATC separation requirements.

4.16.1. Opposite Direction Departures. Request an opposite direction takeoff with Nellis Ground on initial contact.


4.16.2. Opposite Direction Arrivals. Request an opposite direction arrival on initial contact with NATCF (Control or Approach).

4.16.3. Opposite Direction Arrival versus Arrival. Opposite direction arrivals shall not proceed closer than 10 miles on final until the aircraft approaching the runway in use has touched down (full stop) or has completed a low approach or touch and go and turned to avoid conflict.

4.16.4. Opposite Direction Departure versus Arrival. Opposite direction departure must be airborne, turned to avoid conflict and established on a course diverging by at least 45° from the reciprocal of the final approach course before the arriving aircraft has reached a point 10 miles on final.

4.16.5. Opposite Direction Arrival versus Departure. Opposite direction arrival shall not proceed closer than 10 miles on final until the departing aircraft has turned to avoid conflict and is established on a course diverging by at least 45° from the reciprocal of the final approach course. Once an opposite direction arrival has reached 10 miles on final, the aircraft will be allowed to continue the approach, and all departures will be held.

Figure 4.12. Missed Approach/Local Climb Out.

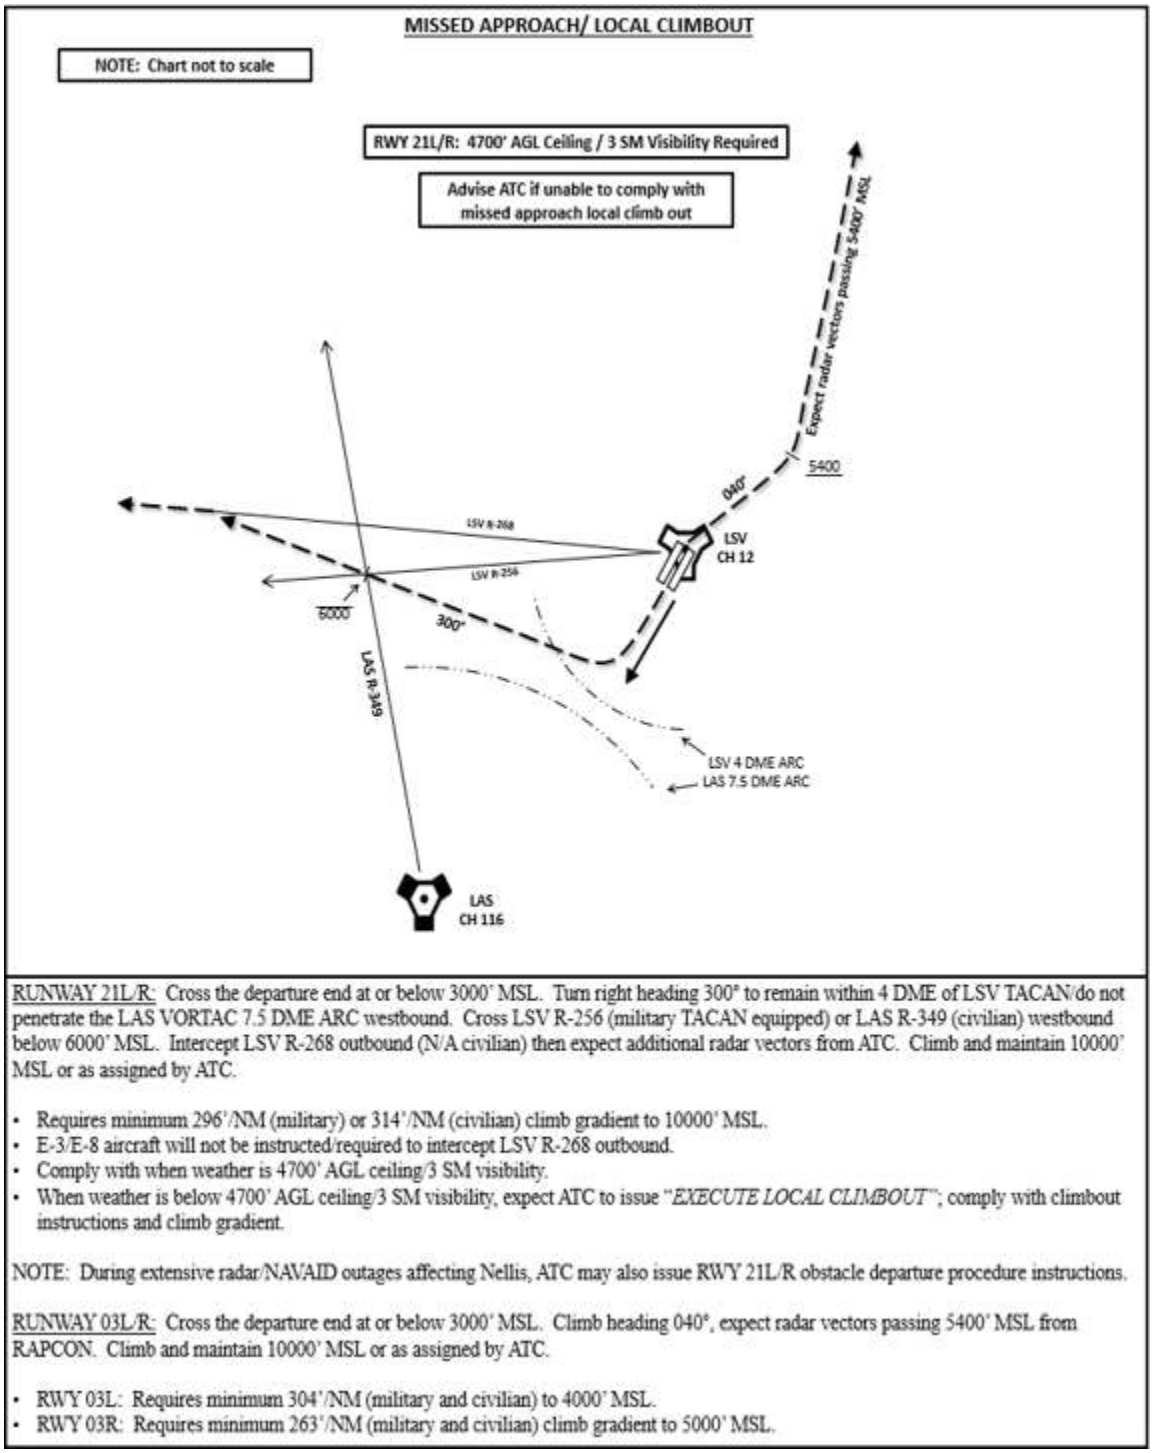

RUNWAY 21L/R: Cross the departure end at or below 3000' MSL. Turn right heading 300° to remain within 4 DME of LSV TACAN/do not penetrate the LAS VORTAC 7.5 DME ARC westbound. Cross LSV R-256 (military TACAN equipped) or LAS R-349 (civilian) westbound below 6000' MSL. Intercept LSV R-268 outbound (N/A civilian) then expect additional radar vectors from ATC. Climb and maintain 10000' MSL or as assigned by ATC.

- Requires minimum 296'/NM (military) or 314'/NM (civilian) climb gradient to 10000' MSL.
- E-3/E-8 aircraft will not be instructed/required to intercept LSV R-268 outbound.
- Comply with when weather is 4700' AGL ceiling/3 SM visibility.
- When weather is below 4700' AGL ceiling/3 SM visibility, expect ATC to issue "*EXECUTE LOCAL CLIMBOUT*"; comply with climbout instructions and climb gradient.

NOTE: During extensive radar/NAVAID outages affecting Nellis, ATC may also issue RWY 21L/R obstacle departure procedure instructions.

RUNWAY 03L/R: Cross the departure end at or below 3000' MSL. Climb heading 040°, expect radar vectors passing 5400' MSL from RAPCON. Climb and maintain 10000' MSL or as assigned by ATC.

- RWY 03L: Requires minimum 304'/NM (military and civilian) to 4000' MSL.
- RWY 03R: Requires minimum 263'/NM (military and civilian) climb gradient to 5000' MSL.

4.17. Simultaneous Opposite Direction Operation (SODO) Procedures. Applicable only to participating Coalition, locally assigned or deployed fighter-type aircraft that have been briefed on SODO procedures IAW *AFFSA/MAJCOM SODO Waiver* in a Local Area Orientation (LAO) briefing. SODO approval is at Watch Supervisor discretion and dependent on current traffic situations. SODO is conducted IAW the waiver and the following stipulations:

4.17.1. When RWY 21L is the active runway, aircrew desiring to use SODO procedures will request taxi to TWY 3L.

4.17.2. Only used between sunrise and sunset.

4.17.3. A minimum ceiling of 2,500 feet and 10 miles of visibility exists. Weather conditions in the vicinity of Nellis may preclude the use of SODO.

4.17.4. During single runway operations, use of SODO is prohibited. Standard opposite direction operations will apply IAW **paragraph 4.16** of this document.

4.17.5. Traffic advisories are issued to participating aircraft.

4.17.6. All separation and SODO requirements will adhere to FAA JO 7110.65.

4.17.7. The departing aircraft will be issued a FLEX departure. ATC may change the departure procedure to expedite take-off due to existing traffic conditions in or around the airspace. If aircrew are unable to accept a FLEX departure, procedures in **paragraph 4.16** of this document will apply.

4.17.8. Departing aircraft will remain at or below 3,000 feet MSL until crossing I-15 north of the Racetrack and turned west/north bound from FLEX.

4.17.9. Participating pilots shall not cross the extended centerline of runway of intended landing or departure.

4.17.10. Arriving aircraft shall be under Tower control conducting a published VFR straight-in approach (TORYE/ARCOE), or in the overhead or closed traffic pattern with a crosswind turn or east break issued NLT 5 NM initial.

4.17.11. Helicopters operating from Golf Taxiway are authorized opposite direction traffic using East rectangular patterns with prior approval from Tower.

4.18. Reduced Same Runway Separation (RSRS). See **Table 4.1** through **Table 4.4** for authorized RSRS.

4.18.1. C-130s are authorized the following RSRS when operating with base-assigned aircraft:

4.18.1.1. C-130 full stop or low approach behind base-assigned aircraft (excluding other C-130) is 8,000 feet.

4.18.1.2. Base-assigned aircraft (excluding other C-130) full stop or low approach behind a C-130 full stop is 8,000 feet.

4.18.1.3. 509 WPS assigned KC-135 full stop or low approach behind base-assigned aircraft is 8,000 feet.

4.18.2. The minimum day or night RSRS when either aircraft is a RC-135/E-3/E-8 or heavy class aircraft (locally briefed or exercise participating) is 8,000 feet and dry runway conditions. Formation landings by heavy class aircraft are not authorized. RSRS is not authorized for a touch-and-go behind a full stop or low approach behind a touch-and-go when either aircraft is a heavy class aircraft. RSRS is not authorized for heavy aircraft when the runway surface condition has been declared wet. If aircrew of any locally briefed or participating heavy aircraft cannot accept RSRS, it is the pilot's responsibility to notify ATC as soon as possible.

4.18.3. All aircraft must maintain at least 500 feet lateral or vertical separation when over flying aircraft on the runway. Responsibility for separation rests with the pilot.

4.18.4. RSRS does not relieve the pilot of responsibility for wake turbulence separation.

4.18.5. Runway separation within the flight (similar or dissimilar) rests with the individual elements. This requirement does not preclude ATC from acting in an unsafe condition.

4.18.6. RSRS will not be applied to emergency aircraft or when either aircraft involved has been cleared for the option or when braking action reports of less than "medium" are reported.

4.18.7. Short takeoff and vertical land (STOVL) aircraft shall rollout to the end of the runway, maintaining rollout speed, unless authorized otherwise by Tower for early turnoffs. During normal operations, vertical takeoffs and landings are authorized under emergency conditions only; however, when crosswinds are out of limits for STOVL aircraft to perform normal takeoffs and landings, the SOF has the authority to approve vertical takeoffs and landings if Tower is able to sequence them into the traffic pattern. STOVL operations are authorized IAW MDS limitations for the runway surface material.

4.18.8. Aircraft may request an early turn off at Taxiway Bravo with Tower if safing is not required and flight size is not more than two aircraft (this flight size restriction does not apply to AV-8s or the Thunderbirds). This request should be made to Tower as soon as possible for planning purposes. Early turns at Taxiway Bravo are authorized for fighter aircraft dearming on the opposite end of the departure end of the landing runway.

4.18.9. During wet runway conditions, minimum spacing between all fighters will be no less than 6,000 feet with no intentional touch-and-goes authorized.

Table 4.1. RSRS for Similar Fighter Type Aircraft.

Day/Night, Dry Runway Only				
		LEAD AIRCRAFT		
		FULL STOP	TOUCH-AND-GO	LOW APPROACH
TRAIL AIRCRAFT	FULL STOP	3,000 or 6,000 feet for formation landings	3,000 feet	3,000 feet
	TOUCH-AND-GO	6,000 feet if Day, VFR, Dry	3,000 feet	3,000 feet
	LOW APPROACH	3,000 feet	6,000 feet	3,000 feet
NIGHT: 6,000 feet is the minimum spacing for all similar night operations if ATC can safely determine distances; otherwise, standard *FAAO 7110.65* separation standards will apply. *6,000 feet is the minimum spacing for a single aircraft or a formation of aircraft, landing behind a formation landing. RSRS is measured between the trailing aircraft in the lead flight and the lead aircraft in the trailing flight. Note: Aircraft conducting a low approach or touch-and-go behind a full stop will not overfly aircraft on the runway. Responsibility for ensuring compliance rests solely with the pilot.				

Table 4.2. RSRS for Dissimilar Fighter Type Aircraft.

Day/Night, Dry Runway Only	
	LEAD AIRCRAFT

		FULL STOP	TOUCH-AND-GO	LOW APPROACH
TRAIL AIRCRAFT	FULL STOP	6,000 or 8,000 feet for formation landings*	6,000 feet	6,000 feet
	TOUCH-AND-GO	6,000 feet	6,000 feet	6,000 feet
	LOW APPROACH	6,000 feet	6,000 feet	6,000 feet
NIGHT: 8,000 feet is the minimum spacing for all dissimilar night operations if ATC can safely determine distances; otherwise, standard *FAAO 7110.65* separation standards will apply. *8,000 feet is the minimum spacing for a single aircraft or a formation, landing behind a formation full stop. RSRS is measured between the trailing aircraft in the lead flight and the lead aircraft in the trailing flight. Note: Aircraft conducting a low approach or touch-and-go behind a full stop will not overfly aircraft on the runway. Responsibility for ensuring compliance rests solely with the pilot.				

Table 4.3. RSRS for C-130 vs. C-130.

Day/Night, Dry Runway Only				
		LEAD AIRCRAFT		
		FULL STOP	TOUCH-AND-GO	LOW APPROACH
TRAIL AIRCRAFT	FULL STOP	5,000 or 8,000 feet for formation landings*	5,000 feet	5,000 feet
	TOUCH-AND-GO	Not Authorized	5,000 feet	5,000 feet
	LOW APPROACH	5,000 feet	Not Authorized	5,000 feet
8,000 feet is the minimum spacing for a single aircraft landing behind a formation full stop. RSRS is measured between the trailing aircraft in the lead flight and the lead aircraft in the trailing flight. Note: Aircraft conducting a low approach or touch-and-go behind a full stop will not overfly aircraft on the runway. Responsibility for ensuring compliance rests solely with the pilot.				

Table 4.4. RSRS for Heavy Class Aircraft vs Base Assigned Aircraft (Fighter/Attack, C-130, Heavies).

Day/Night, Dry Runway Only				
		LEAD AIRCRAFT		
		FULL STOP	TOUCH-AND-GO	LOW APPROACH
TRAIL AIRCRAFT	FULL STOP	8,000 feet	8,000 feet	8,000 feet
	TOUCH-AND-GO	Not Authorized	8,000 feet	8,000 feet
	LOW APPROACH	8,000 feet	Not Authorized	8,000 feet

RSRS 8,000 feet is the minimum spacing for a single aircraft behind a single aircraft. Note 1: Aircraft conducting a low approach behind a full stop will not overfly aircraft on the runway. Responsibility for ensuring compliance rests solely with the pilot. Note 2: Table also applies to other heavy aircraft that have received the familiarization briefing that are TDY or base assigned.

4.19. Simulated Flame-Out/Precautionary Flame-Out Operations. Simulated Flame-Out (SFO) and Practice Precautionary Flame-Out (PFO) will be conducted IAW the following procedures by F-16 and F-35 aircraft, respectively (see **Figure 4.13**.). The F-35 PFO procedure may be used during an emergency; therefore, the aircraft will declare an emergency first and land out of the procedure. The guidance below is for aircraft performing practice PFO procedures, referred to as a "PFO" for simplicity.

4.19.1. An SFO or PFO will only be conducted between official sunrise and sunset. The ceiling must be 1,000 feet AGL above the highest altitude to be flown and visibility must be better than 5 SM. An SFO or PFO will terminate in a low approach. The Tower WS is the approval authority for authorizing SFO and PFO approaches. Tower may disapprove or instruct pilots to discontinue an SFO or PFO at any time.

4.19.2. High Key. Pilots will request an SFO or PFO with desired high key altitude (MSL) with NATCF on first contact or Tower. Aircraft will squawk normally with altitude while conducting an SFO or PFO. Nellis Approach will transfer SFO and PFO aircraft to Tower no later than CRAIG (RWY 03) or APEX (RWY 21). All SFO and PFO procedures will commence at high key. Alternate Entry SFO or PFO operations are not authorized. ATC will make the airspace available as soon as possible, if approved.

4.19.2.1. Pilot phraseology: "NELLIS [APPROACH/TOWER], C/S, REQUEST HIGH KEY [ALTITUDE]". Controller phraseology, if approved: "C/S, [RIGHT/LEFT] [TURNOUT] APPROVED, REPORT HIGH KEY, NO HIGHER THAN [ALTITUDE]." Pilots will report high key, low key, and base key. Tower will issue clearance and other instructions when the pilot calls low key. A gear call is still required prior to crossing the threshold.

4.19.3. SFOs or PFOs may be conducted to all runways. Tower may approve SFOs or PFOs to a closed runway. All SFOs or PFOs to a closed runway shall terminate in a restricted low approach at or above 500 feet AGL (or as directed by ATC). Aircraft must remain within 3.5 NM of the TACAN.

4.19.4. There shall be no more than two IFR and eight VFR aircraft under Tower control during SFO or PFO operations. No more than three aircraft may perform SFO or PFO procedures simultaneously (chase aircraft do not count toward the three aircraft limit).

4.19.5. The ATC deconfliction cutoff point for an SFO or PFO to high key is 10 miles. Arriving aircraft on final (i.e., VFR straight-in, instrument final, etc.) to the same runway as an SFO or PFO shall proceed no closer than 10 NM to the runway until the SFO or PFO aircraft reports low key.

4.19.6. Traffic information will be issued by tower between aircraft enroute to initial or on final and aircraft at high key. If the aircraft at high key does not have the traffic in sight prior to initial, Tower may provide visual separation between the aircraft. If tower is unable to provide visual separation and no other aircraft are conducting an SFO or PFO, the pilot may

climb to low or high key or break out. If there is a second aircraft in the SFO or PFO pattern, the aircraft must break out.

4.19.6.1. If aircrew are visual with traffic, report traffic in sight and maintain visual separation (i.e., "TRAFFIC IN SIGHT, WILL MAINTAIN VISUAL").

4.19.7. Break out instructions: In the event that Tower terminates the SFO or PFO or issues a break-out of the SFO or PFO, pilots may be instructed to climb back to High-Key, descent to 4,000 ft MSL and proceed direct FLEX, or proceed to DUCK between 4,000 and 4,400 and await further instructions. A pilot may request to break out after reporting low key.

4.19.7.1. Controller phraseology: "SNAKE 1 BREAK OUT [REASON IF ABLE] RE-ENTER VIA FLEX"

4.19.8. Straight-in SFO (SI-SFO) and Straight-in PFO (SI-PFO). Flown to Runway 21 only. Pilots will request SI-SFO or SI-PFO approaches from Nellis Approach on initial contact. If holding is required, hold VFR over DRY LAKE, left turns and at an altitude as directed by NATCF or Tower.

4.19.8.1. Pilot phraseology: "NELLIS APPROACH, C/S, REQUEST STRAIGHT-IN [SFO/PFO], 12,000" Controller phraseology, if approved: "C/S, STRAIGHT-IN [SFO/PFO] APPROVED, PROCEED DIRECT [DRY LAKE/OTHER ROUTING]" If disapproved: "SNAKE 1, UNABLE [SFO/PFO], SAY INTENTIONS." If holding is required: "SNAKE 1, HOLD AT DRY LAKE AT [ALTITUDE], MAINTAIN VFR."

4.19.8.2. NATCF will push aircraft to Tower NLT 15 NM. Pilots will report position and altitude to Tower on initial contact.

4.19.8.3. Pilot phraseology: "TOWER, C/S, [ALTITUDE], [DME], STRAIGHT-IN [SFO/PFO]." Controller phraseology: "C/S, TOWER, REPORT 10 MILES FINAL."

4.19.8.4. At 10 DME final. Pilot phraseology: "C/S, 10 MILES, STRAIGHT-IN [SFO/PFO]" Controller phraseology: "C/S 1, REPORT 5 MILE FINAL"

4.19.8.5. At 5 DME final. Pilot phraseology: "C/S, 5 MILE FINAL, GEAR DOWN, LOW APPROACH." Controller phraseology: "SNAKE 1, RUNWAY 21[L/R], WIND (DIRECTION/ SPEED, IF APPLICABLE), CLEARED LOW APPROACH."

4.19.8.6. During single runway operations, traffic permitting, Tower may approve SI-SFO/SI-PFO either to the sole operating runway or the closed runway. Aircraft shall be aligned within five degrees of runway centerline no later than 5 DME final. There shall be no more than two IFR and six VFR aircraft under Tower's control during the SI-SFO or SI-PFO procedure. No more than two aircraft may perform SI-SFO/SI-PFO procedures simultaneously (chase aircraft do not count toward the two aircraft limit). The second aircraft will not be cleared inbound from DRY LAKE until the preceding aircraft reports five miles.


4.19.8.7. Breakout Procedures: Breakout as directed by NATCF or Tower. Before 10 NM, ATC may direct to return to Dry Lake, a FLEX re-entry or to proceed to DUCK.

4.19.8.8. The ATC deconfliction cutoff point for the SI-SFO or SI-PFO is 10-mile final. When the pilot reports 10 miles there shall be no preceding aircraft established on final or flying to initial for either runway. Aircraft enroute to final or initial from FLEX shall be

sequenced to follow the SI-SFO or SI-PFO, aircraft on downwind will either extend to turn base behind the SI-SFO or SI-PFO aircraft or be directed to reenter via FLEX.

4.19.8.9. Departures off the same runway must be airborne prior to the SI-SFO or SI-PFO aircraft reaching 5 DME.

Figure 4.13. Nellis AFB SFO/PFO Patterns.

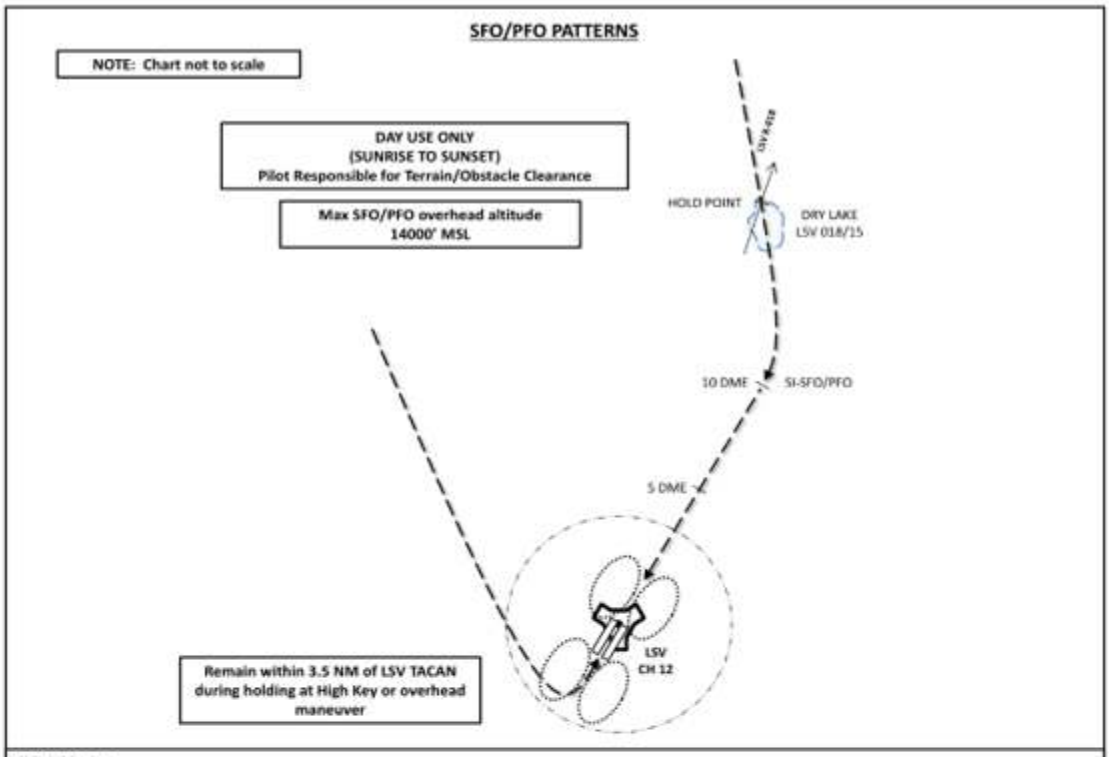

GENERAL:
1. Day use only (Sunrise to Sunset)
2. Weather Requirements: Ceiling 1000' above highest altitude to be flown/5 SM visibility
3. Request SFO/PFO with desired altitude (maximum 14000' MSL) with NATCF or Tower
4. Holding: Hold VFR at Dry Lake, left turns, at altitude directed by NATCF/Tower
5. Breakout Instructions:
   a. Overhead: Descend to 4000' MSL, proceed direct FLEX and comply w/FLEX reentry
   b. SI-SFO/PFO: As instructed by NATCF/Tower

OVERHEAD SFO/PFO: Report *"HIGH KEY"*, *"LOW KEY"*, and *"BASE, GEAR DOWN, LOW APPROACH"*

STRAIGHT-IN SFO/PFO (RWY 21L/R ONLY):
1. If cleared by NATCF, proceed to 10 DME final
2. Report position and altitude to Tower on initial contact
3. Report *"(Aircraft identification), 10 mile Straight-In SFO/PFO."*
4. Report *"(Aircraft identification), 5 mile final, gear down, low approach."*

4.20. Nellis Assigned Aircraft Operations.

4.20.1. MDS-Specific Guidance. Nellis assigned aircraft will abide by the guidance provided in the specific MDS regulations, or MDS attachment if included.

4.20.2. Survival Equipment. 57 WG aircrew flying in fighter aircraft equipped with survival kits are not required to wear survival vests during sorties in the local area. Use of survival vests for training or on cross-country sorties will be at the discretion of the unit commander. The decision of whether or not to wear the survival vest should include ORM considerations.

4.21. Fixed Wing Functional Check Flight (FCF) Procedures. The primary FCF areas are the ATCAA/MOA (utilizing the X-Ray extension). Aircrew are encouraged to pre-brief Nellis Control on the profile to be flown. Remain on Nellis Control frequency as long as possible for additional coordination.

4.21.1. Aircrew will file the DREAM Departure stereo route to and from the proposed work area and include FCF profile in the PEX remarks section (F-16 clearance should specify F-16 FCF).

4.22. Systems Checks and Tactical Exercises. Flights are authorized to conduct systems checks and tactical exercises (ranging, weapons system checks, roll slides, etc.) on departure, recovery or in the working area when above 5,000 feet AGL, traffic permitting. Flights must clear their flight paths visually and with radar (if applicable) due to the heavy VFR traffic density in/around Nellis and its departure/arrival corridors.

4.23. Extreme Weather Operations. Nellis AFB location and the surrounding desert environment often cause aircrew to operate under extreme weather conditions to include heat, high winds and lightning.

4.23.1. Weather Recall. Weather recalls are initiated by Bullseye SOF in coordination with the 57 OG/CC. Nellis Control will broadcast a weather recall on Guard, using all repeaters. Aircrew will terminate the mission and contact the SOF for instructions.

4.23.2. Hot Weather Operations. The Weather Flight (57 OSS/OSW) is responsible for determining and reporting the Fighter Index of Thermal Stress (FITS). The FITS level is posted on the 57 OSS Weather page and on ATIS. Based on *AFI 11-202V3/ACC Supplement,* guidance and flight surgeon advice, the 57 OG/CC will make the decision to fly or to cancel sorties. General guidance for FITS zones is as follows.

4.23.2.1. FITS Caution.

4.23.2.1.1. Be aware of possible impairment due to heat stress.

4.23.2.1.2. Limit ground period (preflight and ground standby) to 90 minutes or less.

4.23.2.1.3. Minimum of 30 consecutive minutes of inactivity in an air-conditioned environment between flights.

4.23.2.2. FITS Danger.

4.23.2.2.1. Cancel low-level flights (below 3,000 feet AGL) if air-conditioning is inadequate.

4.23.2.2.2. Limit ground period to a maximum of 45 minutes.

4.23.2.2.3. Minimum of 30 consecutive minutes of inactivity in an air-conditioned environment between flights.

4.23.2.3. Cancellation Zone.

4.23.2.3.1. When FITS value is greater than 115, cancel all nonessential flights.

4.23.2.3.2. Cancel all chemical defense training flights.

4.23.2.4. FITS Zones.

4.23.2.4.1. Ground period time starts when aircrew leave the air-conditioned facility and ends with canopy down and environmental systems functioning correctly. In the aircraft with the environmental system functioning correctly is considered an air-conditioned facility.

4.23.2.4.2. If environmental system is functioning correctly, restrictions to low-level flights and recovery time between flights do not apply to fighter aircrew.

4.23.3. High Wind Operations. Nellis often experiences high winds. When operating under high winds, use the following guidance.

4.23.3.1. Take-offs for ejection seat aircraft will be suspended when the observed wind, including gusts, at Nellis AFB exceeds 35 knots. Airborne aircraft can continue their mission and land at Nellis AFB if crosswind is within MDS specific limits.

4.23.3.2. When range wind is forecast to exceed 35 knots (steady state), a decision to suspend or continue training operations for ejection seat aircraft will be made by the 57 OG/CC or representative.

4.23.3.3. If range surface wind exceeds 35 knots (steady state) flight leads of ejection seat aircraft will terminate missions on that range. Range wind can be determined by using aircraft systems or Tonopah Test Range Airfield (TNX) surface winds or other range sensors available to weather and operations personnel.

4.23.3.4. When 57 WG units (ejection seat aircraft only) are deployed and training operations will take place over water, operations will be suspended if winds exceed 25 knots (steady state) or wave heights are ten feet or greater. When these conditions are forecast, by not yet actual conditions, a decision to suspend or continue training operations will be made by the unit commander.

4.23.4. Thunderstorms within 10 NM Operations. When Nellis Weather declares “thunderstorms within 10 NM,” the 57 OG/CC or designated representative may authorize approaches or departures. Thunderstorms must not be producing hazardous conditions at either the airport or in the departure/arrival corridors being used. Thunderstorms must not be forecast or observed to be moving in directions that threaten either the airport or departure/arrival corridors.

4.23.5. Lightning Within 5 NM Operations. When Nellis Weather declares “LIGHTNING WITHIN 5 NM,” take the following action.

4.23.5.1. Aircraft in the Chocks. Aircraft at their parking space will be expeditiously shut down, after which ground personnel will take shelter. The decision to remain in the aircraft or seek shelter rests with the pilot in command.

4.23.5.2. Aircraft in the Air. Tower will make the following radio call on Tower frequencies: “NELLIS AFB IS LIGHTNING WITHIN 5 NM. ALL NELLIS-BASED AIRCREW CONTACT BULLSEYE SOF.” NATCF will make this broadcast on up range guard radios. If time and conditions permit, the SOF and OSS/OSW will inform the 57 OG/CC of weather cell location, direction of movement, forecast conditions and discuss with the 57 OG the decision to divert or recover aircraft to Nellis. If time and conditions do not permit consulting with the 57 OG/CC, the SOF will make a determination on whether to recover aircraft at Nellis or divert them and inform the 57 OG/CC once time permits. Reference *AFMAN 11-202V3 (and ACC supplement)* for further guidance.

4.23.5.2.1. No SOF or No SOF in the Tower. In lieu of a SOF in the Tower or no SOF (i.e. reduced flying or weekend cross-country arrivals), the pilot in command is responsible for compliance with *AFMAN 11-202V3_ACCSUP* as well as amplifying instructions in **paragraph 4.23.5.2**.

4.23.5.3. Aircraft on the Ground. Aircraft on the ground, prior to arming or post de-arm, taxi back to the chocks. Armed aircraft on the ground will hold in the appropriate arm/de-arm area. Contact the SOF to determine the anticipated length of delay and fuel load of appropriate aircraft. Only the minimum personnel required to safely recover/ground aircraft will be used. Any other actions not accomplished during this recovery will be performed after lightning is no longer within 5 NM. The intent is to minimize exposure to ground personnel while minimizing possible damage to aircraft in the event they run out of fuel.

4.23.5.3.1. When aircraft reach emergency fuel, the SOF will coordinate with the MOC for de-arming (in the de-arm area) and shutdown (at the aircraft’s assigned parking area) utilizing minimum personnel. Tail hook equipped aircraft will lower the hook before personnel will de-arm the aircraft (ground the aircraft in case of lightning strike). After de-arm, aircraft will taxi to parking. Flights of aircraft in the same parking area will be shut down together to minimize personnel exposure.

4.24. Charted Visual Flight Procedure (CVFP) Approach. Sin City Visual RWY 03L/R approach (DoD FLIP Low Altitude United States Vol-3) is authorized for day and nighttime operations. Approach is conducted while operating on an IFR flight plan which authorizes an aircraft to proceed visually remaining clear of clouds and terrain to Nellis AFB RWY 03L/R via visual landmarks as depicted on the CVFP FLIP plan view. Sin City Visual approach includes prominent landmarks, inbound course (LSV R-277) and mandatory crossing altitudes.

4.24.1. Approach is authorized for local/non-locally assigned aircraft.

4.24.2. Approach published within HIGH/LOW Altitude DoD FLIP products.

4.24.3. Clark County Shooting Range (CCSR) visible at night only during operating hours.

4.24.4. Approach has ceiling/visibility weather requirements (4100’/6).

4.24.5. Antennas (3144’ MSL) located North of HWY 95/Paiute Golf Course visible at night.

4.24.6. 250 knots recommended at HASIL.

4.24.7. ATC clearance may be issued to intercept LSV R-277 inside of HASIL for sequencing; comply with remaining altitude restriction.

4.24.8. Although described on plan view of FLIP as supplementary, inbound course radial (LSV R-277) protects from North Las Vegas Class Delta airspace; remain on radial until 6 DME (ONDAE)

4.24.9. ONDAE altitude restriction (5000' MSL) protects from routine North Las Vegas VFR northbound departures.

4.24.10. The 4 DME ARC from LSV TACAN used to protect from VFR overhead/base turn to final traffic landing RWY 03L/R.

4.24.11. Industrial Park on base to final approach not discernable at night.

4.24.12. Nellis Control Tower and Nellis TACAN must be operational.

4.24.13. Aircrew will use the following phraseology to make request: "[NELLIS CONTROL or NELLIS APPROACH], MIG1 REQUEST SIN CITY VISUAL." To expedite approach clearance, aircrew may specify ground reference is in sight: "[NELLIS CONTROL or NELLIS APPROACH], MIG1 HAS NORTHWEST CITY OUTLINE IN SIGHT, REQUEST SIN CITY VISUAL."

4.24.14. Nellis ATC will issue the following clearance once aircrew reports initial approach ground reference is in sight: "MIG1, CLEARED SIN CITY APPROACH."

4.24.15. Nellis ATC may also issue a CVFP approach clearance when an aircraft reports a preceding aircraft landing RWY 03 in sight and has subsequently been cleared for a CVFP: "MIG1, MAINTAIN VISUAL SEPARATION, CLEARED SIN CITY APPROACH."

4.24.16. Aircrew may request or ATC may initiate use of the approach for initial pattern entry. Aircrew shall comply with inbound radial, altitudes and ground track until at initial or pattern altitude.

4.24.17. Aircrew should advise ATC if at any point they are unable to continue an approach or lose sight of a preceding aircraft.

4.24.18. CVFP approaches are not instrument approaches or have published missed approach segments. Missed approaches are handled as a go around. Aircrew are responsible for preplanning climb-out options based on aircraft performance and terrain features.

4.25. Breakout Procedures. ATC will issue breakout instructions to protect from high terrain IAW local guidance contained within Airfield Operations Flight Coordination Letter.

4.26. Unmanned Aerial Systems (UAS).

4.26.1. Small Unmanned Aerial System (sUAS) Operations (sUAS Category – Groups 1-3). The Nellis sUAS Program office (57 OSS/OSAS) is the Point of Contact (POC) for sUAS operations and counter-small Unmanned Aerial System (c-sUAS) operations. 57 OSS/OSAS will work with the Air Traffic Control Tower (57 OSS/OSAT) and Airspace Management (57 OSS/OSOP) for approval of operations on or near Nellis AFB. Additionally, requesting units will coordinate with Airspace Management (57 OSS/OSOP) for operations on Nevada Test & Training Range (NTTR) assigned airspace. Entities that desire to operate any sUAS on or near Nellis AFB must contact 57 OSS/OSAS, via email, **57OSS.OSA.NellisCSUAS@us.af.mil** or phone, 702-652-3309 NLT three (3) duty days prior to the proposed operation.

4.26.1.1. General. Requests for sUAS operations shall include site-specific procedures/supporting data, emergency procedures to terminate sUAS mission/recall airspace, landing location and altitude caps/limitations. All sUAS operations must have an approved training plan, signed ATC LOA, and unit operation approved by the 57 WG/CC and 99 ABW/CC. In general, provide the following minimum information:

4.26.1.1.1. Schedule of flight (date, time and duration).

4.26.1.1.2. Location where flight will occur (map with coordinates and radius) to include sUAS start area (start area may be designated by OSAS to minimize impact to flying operations).

4.26.1.1.3. Requested altitude.

4.26.1.1.4. Communication details (e.g. cell phone contact number).

4.26.1.1.5. In the event of a lost link and/or fly away, the sUAS operator will immediately notify Tower at 702-62-3275/3278 and state the following:

4.26.1.1.5.1. Unmanned Aircraft (UA) altitude

4.26.1.1.5.2. UA last known location

4.26.1.1.5.3. Direction/Heading of flight

4.26.1.1.5.4. Fuel on board/battery time

4.26.1.1.5.5. Operator's intentions

4.26.1.1.5.6. Termination of flight/emergency condition

4.26.1.2. Approval for sUAS flights is completely dependent upon mission impact.

4.26.1.3. 57 OSS/OSAS will coordinate approved sUAS operations.

4.26.1.4. 57 OSS/OSOP will coordinate RPA missions with 57 OSS/OSA as required to ensure timely ATC training/familiarization. Note: DoD UAS/RPA Categories are defined in *AFMAN 11-502.*

4.26.1.5. A sub-working sUAS group will be held following each quarterly AOB. The sUAS working group will review sUAS policies and processes for the installation and will be comprised of 57 OSS, 99 SFS and all personnel mentioned in *Nellis Plan 8* (for information reach out to 57 OSS/OSAS).

4.26.2. RPA Operations. ATC provides air traffic services as needed to RPA operations within the NTTR & NATCF delegated airspace IAW appropriate UAS DoD/DoT guidance and specific Letters of Agreement (LOA), Certificates of Authorizations (COA) and Airspace Access Authorizations (AAA). NOTAM requirements are as directed by each COA. RPA LOA/COAs can be found in the 57 OSS/OSA publication library; documents are reviewed for currency *IAW DAFMAN 13-204*.

4.26.2.1. RPA Emergency Divert Operations. Nellis will approve/disapprove RPA divert operations on a case-by-case basis. Divert operations will be approved by the SAA, (57 OG/CC), contact the 57 OSS Airfield Operations Flight Commander for the most up-to-date MOU and Lost Link Procedures.

4.26.3. Counter-Small Unmanned Aerial Systems (C-sUAS) Operations

4.26.3.1. Operational Area. While C-sUAS operators may use systems to build SA on the common operating picture (COP) of sUAS outside the base boundary (BB), C-sUAS defeat is only authorized for use within the BB. Activities within the Base Security Zone (BSZ) will be coordinated with local authorities to provide response to threats *IAW Base Defense Plan (BDP) 31-101*. Refer to **Figure 4.13** for a depiction of the BB and Base Defense *Plan 31-101* for the BSZ. See the C-sUAS checklist for detailed visual depictions of each sUAS Landing Zone.


4.26.3.1.1. As future capabilities are fielded at NAFB, they may be utilized at the direction of the C-sUAS PM with approval from 57 WG/CC & 99 ABW/CC and USAFWC JA in order to rapidly utilize all capabilities. Refer to *Nellis Plan 8* (contact 57 OSS/OSAS) or individual unit checklist for the most up to date capabilities and operating instructions. Additional information about specific procedures may be found in the *Base Defense Plan 31-101*.

4.26.3.2. C-sUAS PM works closely with USAFWC/JA in order to ensure the C-sUAS plan abides by legal requirements, *10 USC 130i*, etc.

4.26.4. sUAS Reporting Actions.

4.26.4.1. All personnel assigned to NAFB must immediately report any sightings of non-U.S. military or unknown sUAS within the "perimeter tripwire" **(Figure 4.14)** to the BDOC at DSN: 652-2311, Option 1. Signs around NAFB include the phone number to call and information to report. Personnel should provide the location, number and type of sUAS, direction of travel, and any other information as asked by the BDOC. BDOC will utilize this information IAW the C-sUAS checklist to initiate other checklist actions.

Figure 4.14. NAFB sUAS Perimeter Tripwire/Landing Zones.

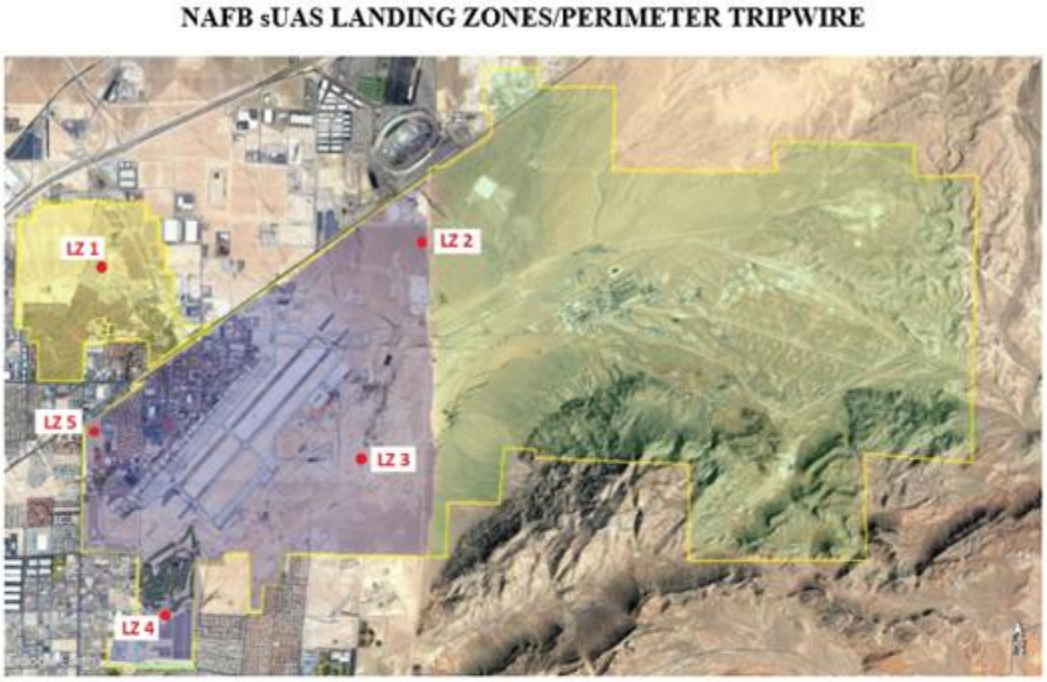

- LZ 1 – 11SPA 74535 14074 (Hospital Side by Obstacle Course)
- LZ 2 – 11SPA 78961 14693 (Area II)
- LZ 3 – 11SPA 78377 11337 (End of Canal by LOLA)
- LZ 4 – 11SPA 75486 09045 (Golf Course)
- LZ 5 – 11SPA 74325 11684 (Old Coral Academy)

4.27. Aircraft Flyover Requests. 57 OSS/OSOP (Airspace Management) is the Nellis AFB Point of Contact for coordinating all aircraft flyover requests involving Nellis AFB assigned aircraft. Units tasked to perform aircraft flyovers should contact 57 OSS/OSOP as early as possible but NLT one week prior to the event at **57OSS.OSOP.OSOP@us.af.mil** or 652-6490/7891. Flyover coordination includes:

4.27.1. Processing flyover approval with appropriate DOD officials (e.g. *DD Form 2535*)

4.27.2. Obtaining Class Bravo airspace flyover altitude and airspeed waivers from FAA Las Vegas Flight Standards District Office (FSDO).

4.27.3. Coordinating flyover requests with surrounding Nellis AFB & FAA Las Vegas ATC facilities.

4.27.4. Provide the following minimum information:

4.27.4.1. Flight specifics (i.e. date, departure time, call-sign, number of aircraft).

4.27.4.2. Departure intentions.

4.27.4.3. Requested holding location and altitude.

4.27.4.4. Run-in profile route [i.e. heading ramp down altitudes, Time-over-Target (TOT), etc.]

4.27.4.5. Follow-on intentions and any unique requests (i.e. missing man formation; direction of turn-out, etc.).

4.27.4.6. Communication requirements (e.g. need for discrete frequencies).

4.27.4.7. Unit POC phone number and e-mail.

4.27.5. 57 OSS/OSOP will coordinate with the AOF/CC, brief the fly-over lead on approval, mitigations, amendments and CFRs governing the operation. 57 OSS/OSOP will also coordinate the activity with FAA and FSDO.

4.28. Airport Surveillance Approaches (ASR)/Precision Approach Radar Approach (PAR) Approaches and Monitoring Services. ASR/PAR approaches and associated radar monitoring are not available at Nellis AFB.

Chapter 5

ORDNANCE AND RANGE USE

5.1. General.

5.1.1. Range procedures are outlined in *AFMAN 13-212V1, ACC Sup, NTTR Addendum A.* Consult CSE for current target information.

5.1.2. **Table 5.2** provides a decision matrix aid for Nellis departures but is not inclusive of all guidance contained below.

5.2. Ordnance Departure Procedures. There are no departure restrictions for training munitions, hot guns, or internally carried inert or live ordnance when the bomb bay doors are closed for multi-engine aircraft or for captive-carry training munitions. Aircraft carrying heavyweight inert or live ordnance externally (or internally for single engine aircraft) or FFO must depart RWY 03.

5.2.1. Aircraft will use caution when taking off with a tailwind component, reference MDS restrictions.

5.2.2. If aircraft are unable to depart RWY 03 as directed in **Para. 5.2**, they must request approval from the 57 OG/CC.

5.2.2.1. Nellis AFB assigned A-10 aircraft configured with live rockets (white phosphorus/Illum only, no HE) or Nellis based F-15E, PW-229 power aircraft carrying inert ordnance (no live munitions) do not require 57 OG/CC approval for RWY 21 departures.

5.2.2.2. Externally carried live munitions and live forward-firing ordnance (with the exception of 2.75-inch rockets) are not allowed to depart on RWY 21 under any conditions.

5.2.3. The following considerations and restrictions regarding RWY 21 departures with externally carried heavyweight inert ordnance and will be used by all aircrew, flying unit leadership, SOFs and 57 OG designated representatives ("OG brick-holders") to mitigate risk when requesting and granting RWY 21 heavyweight inert departures:

5.2.3.1. Only Nellis-based aircraft can be approved for RWY 21 heavyweight inert departures (no RED FLAG, GREEN FLAG-West or Weapons School support TDY units).

5.2.3.2. Single-engine aircraft with heavyweight inert internally or externally carried ordnance are not allowed to depart on RWY 21 under any conditions.

5.2.3.3. For multi-engine aircraft, the following conditions apply:

5.2.3.3.1. Can the heavyweight inert mission be delayed later in the day or another day when conditions are favorable or cancelled altogether? If yes, then slip the mission instead of requesting a waiver.

5.2.3.3.2. If the mission is critical or cannot be rescheduled or cancelled, can risk be reduced by adjusting gross weight to make a RWY 03 departure possible? If so, gross weight will be reduced instead of requesting a waiver.

5.2.3.3.3. Reduced bomb loads will still be considered even when a RWY 21 departure is required regardless of a weight reduction to reduce overall risk consistent with acceptable mission accomplishment.

5.2.3.3.4. 57 OG waiver requests for high gross weight F-15Es and A-10Cs will not be allowed if loss of an engine on takeoff would require the pilot to jettison heavyweight ordnance to achieve safe climb capability.

5.2.3.3.5. If a 57 OG waiver has been granted for a heavyweight inert departure on RWY 21, aircrew will continue to accomplish due diligence to reduce risk. If conditions allow, or are close to allowing a RWY 03 departure, arm at the south end of the airfield and evaluate the feasibility of a RWY 03 departure real-time. If not possible, taxi to and takeoff RWY 21.

5.3. Ordnance Employment Procedures. IAW MDS guidance, *DAFMAN 11-214*, and NTTR Operations Procedures.

5.4. Unexpended Ordnance Recovery. There are no restrictions for aircraft with unexpended training munitions, inert FFO, self-protection flares, captive missiles or internally carried munitions when bomb bay doors are closed. An east break or straight-in will be requested with NATCF on recovery.

5.4.1. Aircraft configured with external heavyweight inert ordnance will fly a straight-in approach to the active runway.

5.4.2. Aircraft configured with external live ordnance will fly a straight-in approach to RWY 21. If RWY 21 is not available, request direct downwind to RWY 03 (03R preferred) or fly a straight-in approach to RWY 03, avoiding populated areas.

5.5. Nellis Hung Ordnance Recovery. The following procedures apply to all recoveries with hung secure or hung unsecure ordnance:

5.5.1. Fly a straight-in approach to RWY 21, with chase if available, avoiding populated areas to the maximum extent possible. If RWY 21 is not available, reference **Table 5.1** for recoveries to Creech AFB.

5.5.2. Refer to Hung Ordnance Procedures, **Table 5.1**, for IFE, recovery base, runway and other information.

5.5.3. Contact Bullseye SOF as soon as possible; declare IFE if required.

5.5.4. Aircrew will confirm proper release of any ordnance that was attempted to be released. If aircrew cannot positively confirm weapons expenditures, aircrew will perform a straight-in to RWY 21, avoiding overflight of populated areas. If ordnance release was not attempted in flight, the ordnance will be considered unexpended.

Table 5.1. Nellis Unexpended and Hung Ordnance Procedures.

AIRCRAFT WITH EXTERNAL WEAPONS				
ORDNANCE	**IFE**	**LAND**	**TAXI TO**	**NOTES**
UNEXPENDED				
Training/FFO	No	Active	De-arm Pad	East Break
Inert	No	Active	De-arm Pad	**1**

Live	No	RWY 21	De-arm Pad	**2**
UNCONFIRMED EXPENDITURE				
Training/Inert/Live	No	RWY 21	De-arm Pad	**2**
HUNG SECURE				
Training	No	RWY 21	De-arm Pad	**2, 4**
Inert	No	RWY 21	De-arm Pad	**2, 4**
2.75” Rockets	No	RWY 21	Revet 1 or 2	**2, 4, 7**
Other FFO	Yes	RWY 21	Revet 1 or 2	**2, 4, 7**
Live	Yes	RWY 21	Revet 1 or 2	**3, 4, 7**
AGM-130	Yes	RWY 21	Revet 1 or 2	**2, 4, 7, 12**
EGBU-15	No	RWY 21	De-arm Pad	**12**
HUNG UNSECURE				
Training	Yes	Creech AFB	De-arm Pad	**5**
Heavy Weight Inert	Yes	Creech AFB	De-arm Pad	**6**
2.75” Rockets and Other FFO	Yes	Creech AFB	De-arm Pad	**6**
Live	Yes	Creech AFB	De-arm Pad	**6**
UNSAFE GUN	Yes	RWY 21	Revet 1 or 2	**2, 7, 11**
HUNG SELF-PROTECT FLARES	Yes	RWY 21	Revet 1 or 2	**2, 10**
HUNG LUU FLARES	Yes	RWY 21	Revet 1 or 2	**2, 8, 10**
AIRCRAFT WITH INTERNAL WEAPONS				
ORDNANCE	**IFE**	**LAND**	**TAXI TO**	**NOTES**
UNEXPENDED WEAPONS	No	Active	De-arm Pad	No restrictions, **9**
HUNG WEAPONS	Yes	Active	De-arm Pad	**1, 9**
HUNG/MISFIRED FLARES	Yes	RWY 21	Revet 1 or 2	**2, 8, 10**

Notes:

1. Straight-in to the active runway. Avoid overflight of populated areas to the maximum extent possible.

2. Straight-in to RWY 21 (RWY 21L is the preferred landing runway). If RWY 21 is not available, fly direct to RWY 03R base or a straight -in to RWY 03, avoiding populated areas.

3. Straight-in to RWY 21 (RWY 21L is the preferred landing runway). If RWY 21 is not available, divert to Creech AFB. If Creech AFB is not available, attempt to jettison ordnance or suspension equipment if applicable. Fly direct to RWY 03R base or a straight-in to RWY 03, avoiding populated areas.

4. Secure ordnance is defined as: ordnance parallel to the station or suspension equipment and clearly positioned against the sway braces. Rockets are considered secure if no portion of the rocket extends from the pod. Ordnance will be assumed unsecure anytime a battle damage check cannot be performed.

5. Jettison ordnance. If unable, declare IFE and recover to Creech AFB. Avoid populated areas.

6. Jettison ordnance. If unable, jettison suspension equipment if applicable. If unable, declare IFE and recover to Creech AFB. If able to jettison ordnance with/without suspension equipment, normal recovery applies.

7. Avoid pointing nose at populated areas. If munitions can be properly made safe or FFO safed or chamber cleared, aircraft can taxi to normal parking area. Otherwise shut the aircraft down in the revetments.

8. An attempt to expend a flare from a SUU-25 not resulting in an ignited flare is a hung flare, unless the pilot sees the flare depart the SUU. If flare remains and no indication of flare expenditure is noted by EOR, taxi back after the SUU is safe. If hung flare confirmed, shut down in revetment 1 or 2.

9. Assumes internally loaded and bomb-bay doors closed. If externally loaded or bomb-bay doors open, refer to "Aircraft with External Weapons" matrix.

10. EOD will meet aircraft at revetments and attempt to safe the flare after engine shutdown. Fire Chief will determine if further actions are necessary.

11. AC-130/HH-60/CV-22. Terminate live fire and safe all guns. Request straight-in to RWY 21L (HH-60s may request a straight-in to Taxiway Golf and land abeam revetment #1) and exit at Taxiway Bravo. Make a left turn at Taxiway Bravo and then make a right turn onto Taxiway Golf. Continue to revetment #1 and stop with the gun pointing between the revetment walls towards the berm (east). Shutdown engines (except HH-60) and EOD will secure the hot gun. AC-130 will point hung guns at gun berm through revetment 1, aircraft facing south.

12. A hung inert EGBU-15, although not an IFE, will be a ground emergency. Coordinate with SOF to ensure a ground emergency is declared. If cockpit indications show the control section battery of an AGM-130 or EGBU-15 may have been activated (i.e. PCO), a ground emergency must be declared. Toxic dust and intense heat may endanger ground personnel.

5.6. Jettison Procedures. Inert or live ordnance hung unsecure must be jettisoned. (Secure ordnance is defined in **Table 5.1**., Note 4). If ordnance cannot be jettisoned, attempt to jettison rack, if applicable. If unable to jettison ordnance (training, inert or live), 2.75" rockets or other FFO hung unsecure, recover to Creech AFB. See *DAFMAN 13-212V1, ACC Sup, NTTR Addendum A* for NTTR specific guidance.

5.6.1. Inert ordnance, training ordnance and non-ordnance stores may be jettisoned at the pilot's discretion on any approved range or target provided clearance from Blackjack has been received.

5.6.2. Live ordnance will be jettisoned live on scheduled targets if possible. Minimum altitude will be 2,000 AGL or the minimum frag clearance altitude, or MDS mins. If jettison cannot be made on scheduled targets, contact Blackjack for a target.

5.6.3. Night or IFR Jettison. At night or IMC conditions aircrew will use all available means to ensure ordnance or store impacts the desired area. If weather precludes jettison of ordnance, NATCF will provide radar vectors to Range 62 Alpha, target 62-2 (airfield). Target 62-2 is located N36-55.015, W115-25.887 with elevation 3,463 feet MSL. The minimum vectoring

altitude (MVA) for Range 62 Alpha is 10,400 feet MSL. The controlling agency will inform the aircrew when 1 NM short of designated impact point. Heading and altitude restrictions will be followed to the maximum extent possible. In all cases the aircrew is ultimately responsible for proper impact location of jettisoned ordnance or stores.

Table 5.2. Ordnance Departure Procedures.

<table>
<tr><th>Depart RWY 03L/R</th><th>Allowed to Request 21</th><th colspan="3">Aircrew Decision Tree to Request 21</th></tr>
<tr><td rowspan="6">Aircraft must depart RWY 03L/R if meeting any of the below criteria:
• External live/inert heavyweight ordnance (not including TGBU-15s / TAGM-130s / TGM-65s / TGM-88s)
• Internal inert/live ordnance when the bomb bay doors are not closed
• Forward firing ordnance</td><td rowspan="6">Aircraft must meet all of the below to request a 21 departure:
• Nellis homebased multiengine aircraft (not TDY to Nellis)
• External munitions are inert or are 2.75” white phosphorous / illum rockets
• Cannot depart 03 due to winds or other special circumstances
• Has the capability to retain ordnance and continue the departure with a safe climb gradient with the loss of an engine.

*White phosphorous / illum rockets do not require OG approval to depart 21</td><td colspan="3">Can heavyweight mission be delayed when conditions are more favorable?</td></tr>
<tr><td>Yes</td><td colspan="2">Slip mission</td></tr>
<tr><td>No</td><td colspan="2">Can risk be reduced by adjusting gross weight/allow RWY 03L/R dep w/ non-CAT I/II TOLD (through the use of reduced fuel loads or reduced bomb loads)?</td></tr>
<tr><td></td><td>Yes</td><td>Reduce weight and do not request a waiver</td></tr>
<tr><td></td><td>No</td><td>Consider reducing bomb loads regardless of weight reduction in order to reduce overall risk consistent w/ acceptable mission accomplishment – request a waiver</td></tr>
<tr><td colspan="3">If OG/CC waiver approval is granted, continue to accomplish due diligence to reduce risk and if conditions are close to allow a RWY 03L/R departure, arm at the south end/evaluate the feasibility of a RWY 03L/R departure real-time; if not possible, taxi to/takeoff RWY 21L/R</td></tr>
</table>

Chapter 6

EMERGENCY PROCEDURES

6.1. General. The following procedures ensure the recovery of emergency aircraft is safe and effective. No directive can address all possible circumstances; therefore, situations not covered must be handled IAW flight manual procedures, SOF assistance and common sense. Aircraft emergencies can occur either in flight or on the ground. On and off base emergency response procedures will be IAW *Nellis AFB Plan 10-2, Installation Emergency Management Plan*.

6.2. Policy. Situations affecting safety of flight, air worthiness or necessitate other than normal handling require declaration of an emergency and termination of the mission. Emergencies may be declared by the aircrew, air traffic controllers, SOF or officials responsible for the operation of the aircraft.

6.3. Notification and Coordination. See **Attachment 12** for PCAS and SCN procedures.

6.4. Response. The Incident Commander (IC) will coordinate with Tower to determine the location of emergency response vehicles.

6.5. Responsibilities.

6.5.1. The Nellis Fire Chief, 99 CES/CEF is the IC for all aircraft emergencies. In the event of an emergency where the Crisis Action Team (CAT) or Emergency Operations Center (EOC) are activated, e.g., aircraft crash, unit leadership or their designated representative assumes their position in the CAT or EOC. IAW *AFIMS Standards & Procedures*, the IC is the authority who can declare an emergency scene safe and terminates an emergency.

6.5.2. Tower will release the appropriate UHF frequency to the IC when communications between ATC and the aircrew are no longer required.

6.5.3. AMOPS will respond to all in flight emergencies unless the SOF has waived the FOD sweep. AMOPS will respond to ground emergencies at the discretion of the Airfield Manager.

6.5.4. Runway suspension operations are when runway conditions are unsafe, as determined by AMOPS, SOF, and Tower.

6.5.4.1. Under special circumstances, the SOF may direct immediate opening of the runway for subsequent emergency recoveries. Examples include gate runners, sUAS over the airfield, etc. If the SOF directs opening of the runway, they assume responsibility for the safety of the runway until AMOPS completes the required FOD check.

6.6. Hot Brake Procedures. Tower will direct the aircraft to a designated hot brake area **(Figure 2.6),** and the aircrew should turn the aircraft into the wind to the maximum extent possible. The IC will direct aircraft be shut down if hot brakes exist.

6.7. Emergency Single Frequency Approach Procedures. The primary discrete emergency frequency for Nellis AFB is 343.725 (Channel 10). NATCF and Tower actively monitor unless NOTAM'd out-of-service.

6.7.1. NATCF will assign 343.725 (Channel 10) or a UHF/VHF discrete frequency to radio equipped emergency aircraft as soon as practical unless otherwise requested by aircrew.

6.7.2. NATCF will provide emergency information to the tower, as soon as practical.

6.7.3. Tower will relinquish control of Channel 10 or UHF/VHF discrete frequency, to the senior fire officer IAW **paragraph 6.5.2**. If cable engagement occurs, tower will relinquish control of Channel 10 or UHF/VHF discrete frequency to senior fire officer or designated representative once IFE aircraft engages the barrier and comes to a complete stop. If an aircraft does not engage the cable and intends to shut down on the runway, tower will relinquish control of Channel 10 or discrete frequency to the IC once IFE aircraft comes to a complete stop

6.7.4. When an aircraft declares a ground emergency or emergency aborts on takeoff and the Incident Commander (IC) or designated representative requests use of Channel 10 or UHF/VHF discrete frequency, tower will coordinate with NATCF, then relinquish Channel 10 as soon as possible. If the emergency ground aborts on takeoff and remains on the runway, tower will coordinate with NATCF then relinquish control of Channel 10 or UHF/VHF discrete frequency to the IC.

6.7.5. Once the IFE aircraft establishes contact with GC, GC will ask pilot intentions. GC will ensure aircraft comes to a complete stop prior to relinquishing control of Channel 10 or UHF/VHF discrete frequency to the IC. Once the aircraft comes to a complete stop use the phraseology below:

6.7.5.1. Aircraft will relay intentions to the tower when able. GC will push aircraft to Channel 10 with the phraseology: “CHIEF 2/BATT 20 NELLIS GROUND, CHANNEL 10 IS YOUR CONTROL, ADVISE TERMINATION.”

6.7.5.2. Once the emergency is terminated, the IC shall relinquish control of Channel 10 or UHF/VHF discrete frequency back to Tower on Channel 10 “NELLIS GROUND, CHIEF 2/BATT 20 TERMINATE EMERGENCY ON (AIRCRAFT CALLSIGN), CHANNEL 10 IS YOUR CONTROL.” The Tower Watch Supervisor will be responsible for ensuring the frequency is released to NATCF upon emergency termination.

6.7.6. ATC may take control of Channel 10 from the IC in the event another aircraft declares an IFE on the emergency frequency. IC will revert back to relaying through the GC on the Crash Net. Once the additional IFE aircraft lands, GC shall give the IC control of Channel 10 and follow the guidelines written above.

6.8. No Radio/Radio Out (NORDO) Procedures.

6.8.1. If radio failure occurs during taxi on taxiway foxtrot, turn on taxi lights and taxi to parking. If radio failure occurs while talking to GC or immediately upon landing, expect light gun signals from Tower.

6.8.2. Single-Ship.

6.8.2.1. Departure. Complete the departure procedure as published, squawk 7600, climb above MSA, and transition to IFR or VFR recovery IAW the following paragraphs.

6.8.2.2. VFR Recovery. Squawk 7600 and fly the STRYK, ARCOE, TORYE or MINTT recovery. If no other problems exist, execute the recovery to a visual entry point (APEX or CRAIG) to enter the overhead pattern for 21R/03L. Rock wings on initial, break at midfield and expect light gun signal from Tower.

6.8.2.3. IFR Recovery. Fly to the appropriate IAF and execute an instrument approach to 21L/03R. If at any point prior to initial the recovery can be flown in VMC, proceed to the overhead pattern as in **paragraph 6.8.2.2**.

6.8.3. Formation flights.

6.8.3.1. VFR Recovery. Fly normal procedures and inform tower of the NORDO aircraft. Expect light gun signal from Tower.

6.8.3.2. IFR Recovery. NORDO aircraft will be given the lead and be expected to fly to the appropriate IAF and execute an approach to RWY 21L with non-NORDO chase. Expect light gun signal from Tower.

6.8.4. NORDO with Additional Emergencies. Aircraft with or without unexpended inert training ordnance will squawk 7700 and fly the VFR or IFR recovery as appropriate to a straight in landing on 21L/03R. Tower will raise the BAK-14 on RWY 21L/03R for fighter type aircraft.

6.8.5. NORDO with Live and Heavyweight Ordnance. Aircraft with unexpended ordnance will recover to RWY 21 IAW **Chapter 5**.

6.8.5.1. NORDO with Hung or Unsecure Ordnance. Aircraft will squawk 7700 and must fly a straight-in to RWY 21, if unable, recover to RWY 08, Creech AFB, IAW Chapter 5.

6.8.6. Local helicopter NORDO procedures shall be IAW **Attachment 7** (A7.15).

6.9. Arresting System Engagement Procedures. If time is critical for the emergency aircraft (less than 20 minutes to engagement) Tower or SOF will issue a warning to the emergency aircraft stating that the underrun is raised. The SOF will inform airborne flights of the current cable configuration.

6.9.1. Post Barrier Engagement Procedures. After an arresting system engagement:

6.9.1.1. Do not taxi until directed by the IC.

6.9.1.2. If a cable disengagement cannot be accomplished or the aircraft is unable to taxi clear of the runway safely, the aircraft will be shut down on a signal from the IC.

6.9.1.3. The pilot will provide estimated aircraft gross weight and speed at time of cable engagement to the SOF and IC.

6.9.1.4. Successive cable engagements can be accomplished approximately 30 minutes after disengagement of the preceding aircraft.

6.9.2. Day-to-Day Coordination Procedures for Arresting Systems. AMOPS and barrier maintenance will check aircraft arresting system and ensure cables are tied down appropriately, tension is not loose, no damage to the cables/donuts and BAK-14 support blocks are not missing/misaligned during a runway inspection. Report any outages or abnormal indications to Tower and barrier maintenance. Pilots will taxi 25 knots or slower over raised departure end cables. Reference *DAFMAN 13-204v2, T.O. 35E8-2-5-1T.O. 35E8-2-8-1,* for further guidance.

6.9.2.1. Barrier Maintenance will provide AMOPS the status and results of daily arresting system inspections and maintenance. Provide the Airfield Manager with a copy of the annual certification and actual engagement report. When notified by CE that the effective pendant height has fallen to less than 60 millimeters (2 inches), AMOPS will issue a NOTAM to inform pilots of the reduced arresting system reliability.

6.10. Dropped Object, Inadvertent Release and Unintentional Release Procedures. Follow *DAFMAN 13-212V1, ACC Sup, NTTR Addendum A*. In all situations, the 99 ABW/CP will pass all information to 57 WG/SEF.

6.11. Airborne Incident Reporting.

6.11.1. Give airborne reports to the controlling ATC facility or Blackjack, as appropriate. Airborne incidents include:

6.11.1.1. Any known inadvertent release or loss of stores, suspension equipment, panels or drag chute in flight.

6.11.1.2. Any near mid-air collision.

6.11.1.3. Any incident or near accident when immediate dissemination of details would contribute to increased safety and efficiency.

6.11.2. After landing, aircrew must immediately provide details of the incident to their squadron commander, operations officer and squadron flying safety officer.

6.11.2.1. 57th Wing units will accomplish reporting via the 57th Wing Aircraft Incident Worksheet. This worksheet lists reportable events per *DAFI 91-223*. For all events, the applicable maintenance or operations unit is responsible for completing the worksheet and sending it to 57th Wing Flight Safety as soon as able, but no later than end of the flying day. Worksheets will be emailed to **57wg.sew@us.af.mil** or hand delivered to the flight safety office. Incident Worksheets are located on the 57 WG Safety SharePoint site.

6.11.2.2. Exception (414 CTS): Units deployed for RED FLAG will accomplish safety reporting for incidents or mishaps via their Core Wing Flight Safety Officer (FSO) who will in turn notify the 414 CTS FSO. In addition, for Class B mishaps or higher (and potential Class B or higher), the RED FLAG Mission Director will notify 57th Wing Flight Safety via the Flight Safety on call cell phone. For Class A/B Mishaps, 57th Flight Safety will convene an Interim Safety Board (ISB) per the Nellis AFB Aircraft Mishap Response Plan. For Class C/D/E and Hazards, the visiting unit will accomplish investigation actions and Air Force Safety Automated System reporting via their home unit flight safety office.

6.12. F-16 Hydrazine Procedures. For any ground or in-flight EPU activation or suspected hydrazine leak, the pilot will accomplish MDS checklists and follow procedures in the 57 WG IFG and F-16 Supplement. Tower shall instruct all aircraft in the vicinity of the EPU aircraft to utilize 100% oxygen.

6.13. Controlled Bailout and Fuel Dump Procedures.

6.13.1. Controlled Bailout. The primary controlled bailout area is over Range 63 Bravo (LSV 315/28). Should it become necessary to use this area, proceed to N36 38 W115 20 (LSV 315/28) in Range 63 Bravo, turn to a heading of 360° and eject or bailout no lower than MDS controlled or uncontrolled minimums. If IMC proceed from LSV to the bailout area no lower than 11,500 MSL and eject or bailout; request vectors from NATCF if required.

6.13.2. Fuel Dump Procedures. Fuel dump location and altitude is at the discretion of the aircrew with prior coordination with the appropriate ATC facility to provide required separation.

6.13.2.1. Federal and State regulations require reporting of releases of fuel (any quantity greater than 25 gallons or 200 pounds to soil or other surfaces of land) to the appropriate regulatory agency.

6.13.2.2. These criteria will be used to determine when a fuel dump from an airborne aircraft must be reported. Additionally, any quantity released to water must be reported.

6.13.2.3. The appropriate organization will provide relevant fuel dump information to the Command Post. Relevant information will, at a minimum, include, but not be limited to, the cause of the release, date, time, specific point(s)-of-contact, specific organization(s) responsible for the release, type and quantity of fuel released, a description of any remedial action taken.

6.13.2.4. The Command Post will contact the 99 CES/CEIE (Environmental) spill reporting phone by calling (702) 277-1977.

6.13.2.5. 99 CES/CEIE may provide a form to be used to document release information, or may take information verbally, depending upon circumstances.

6.13.2.6. 99 CES/CEIE will submit spill information to the Nevada Division of Environmental Protection (NDEP).

6.13.2.7. 99 CES/CEIE may request additional details about the release.

6.13.2.8. 99 CES/CEIE will report the release to the NDEP no later than the end of the first duty day after the release. If new information becomes available after reporting to the NDEP, the organization with the information will provide the information to the Command Post, and the Command Post will notify 99 CES/CEIE, who will provide a revised report to NDEP.

6.14. Downed Aircraft and Search and Rescue (SAR) Procedures. Use the following procedures when providing Rescue Combat Air Patrol (RESCAP) for a downed aircrew:

6.14.1. Broadcast an emergency distress call on Guard. Then, provide the following information to Nellis Control, Blackjack, 99 ABW/CP or the SOF:

6.14.1.1. Location of the crash site (TACAN Radial/DME, INS coordinates, Military Grid Reference System (MGRS) coordinates (if available), geographic references).

6.14.1.2. Call sign of downed aircraft.

6.14.1.3. Other pertinent information.

6.14.2. Blackjack will become the Rescue Coordination Center for all SAR inside NTTR for DoD assets. Nellis Control will provide all air traffic control services.

6.14.3. The On-Scene Commander (OSC) will remain in charge of the situation until relieved by another aircraft or reaching Bingo fuel. Have all nonessential aircraft RTB. A high combat air patrol may be used to provide a radio relay.

6.14.4. Contact the downed aircrew on Guard and then coordinate a frequency change to 282.8.

6.14.5. Non-DoD downed aircraft outside the NTTR and under the control of the NATCF.

6.14.5.1. ATC will use all available resources (i.e., SAR, airborne aircraft, civil air patrol, etc.) to assist with the emergency response assets plot and locate the downed aircraft.

6.14.5.2. To the maximum extent possible, use georeferenced coordinates (i.e., LAT/LON) or positional reference to fixed locations (i.e., airports, NAVAIDs, etc.) when relaying plotting information to first responders.

6.15. Response to Emergency Locator Transmitter (ELT) Signals.

6.15.1. Aircrew will inform appropriate air traffic control agencies upon detection of an emergency signal and assist in locating the source if possible.

6.15.2. Tower will:

6.15.2.1. Upon detection or notification of a signal, contact NATCF to determine if a possible emergency exists and if assistance is required.

6.15.2.2. Advise 99 ABW/CP of the time a signal was detected and the frequency.

6.15.2.3. Contact 99 ABW/CP and NATCF upon termination of the signal.

6.15.3. NATCF will:

6.15.3.1. Upon detection or notification of a signal, inform the appropriate ARTCC and Tower.

6.15.3.2. Report termination to appropriate ARTCC.

6.15.3.3. Inform tower of termination of ELT.

6.15.4. 99 ABW/CP upon detection or notification will notify 57th WG MOC.

6.15.5. 57 OSS/OSTL shall establish procedures for providing standby personnel and the appropriate equipment and means necessary to detect and locate emergency signals.

6.16. BASH. Local Bird/Aircraft Strike Hazard (BASH) Program Guidelines are IAW (Nellis and NTTR) *PLAN 17, Bird Aircraft Strike Hazard Plan*.

6.16.1. When bird activity is observed or reported to be an immediate or potential hazard to aircraft operations, expect USDA representative or the SOF to direct appropriate actions.

6.16.1.1. Within +/- 1 hour of sunrise or sunset the SOF has the authority to cancel or suspend based off observed birds/PIREPs.

6.16.2. Procedures for the coded bird watch conditions are as follows:

6.16.2.1. Bird watch condition SEVERE.

6.16.2.1.1. Cancel FLEX Departures.

6.16.2.1.2. Traffic Pattern. Only permit full stop landings. Formation takeoffs and landings are prohibited. The SOF may consider changing the runways, delaying takeoffs and landings, diverting aircraft, changing pattern altitude, etc.

6.16.2.1.3. Ranges and Training Areas. Identify a specific area and altitude. All flights must avoid using the range or area.

6.16.2.1.4. Low-Level Routes. Note and avoid specific routes or segments and altitudes.

6.16.2.2. Bird watch condition MODERATE.

6.16.2.2.1. Delete altitude restriction at FLEX. Coordination for release is accomplished between Tower and NATCF based on traffic and current operations.

6.16.2.2.2. Traffic Pattern. Limit touch and go landings and low approaches to the minimum number required for training. Takeoffs and landings permitted only when departure and arrival routes avoid identified bird activities. Pilots will be particularly cognizant of bird activity when on final approach.

6.16.2.2.3. Ranges and Training Areas. Make changes in flight profile or altitudes to avoid bird hazards.

6.16.2.2.4. Low-Level Routes. Make amendments to flight altitude to minimize bird hazards. Limit formation flying to a minimum for mission and training requirements.

6.16.2.3. Bird watch condition LOW. Continue with normal operating procedures.

6.16.2.4. Bird Watch Alert. In addition to the above bird watch conditions, the appropriate agency can declare a Bird Watch Alert. All aircrews should be aware of the increased likelihood of bird hazards to flight safety.

6.17. Request for Explosive Ordnance Disposal (EOD) Assistance. Any request for EOD support to aircraft loaded with munitions or aircraft weapon systems will require the aircraft be shut down prior to EOD personnel approaching the aircraft.

6.18. Aircraft Impoundment Items. Aircraft impoundment will be in accordance with DAFI 21-101.

6.19. Evacuation of Air Traffic Control Facilities. ATC facilities may be evacuated because of high wind, fire, bomb threat, total power outage or other situations that could endanger personnel. Tower will be evacuated when wind speed or gusts reach 70 knots. Whenever ATC facilities are evacuated, use the following procedures.

6.19.1. Tower Evacuation. Tower will release all airspace to NATCF and instruct all vehicles to exit the controlled movement area (CMA). Tower will relay intent to evacuate over the PCAS if there is time.

6.19.2. Contingency Recovery Procedures during Tower Evacuation. In the event tower evacuation is required and wing aircraft are airborne, one Watch Supervisor, one 5-Level controller, and the SOF will relocate to the most advantageous point on the airfield with portable radios to recover aircraft. A vehicle for relocation can be obtained by AMOPS. The following limitations will apply when tower ATC services are provided from anywhere other than the air traffic control tower:

6.19.2.1. Vehicle access to the CMAs will be limited to emergency response and airfield management requirements.

6.19.2.2. Departures and practice approaches are not authorized.

6.19.2.3. All arrivals will arrive via straight-in to a full stop with standard radar separation between aircraft and flights.

6.19.2.4. Wind and weather information will not be available from tower controllers but can be obtained from NATCF.

6.19.2.5. Reduced same runway separation will not be applied; all aircraft must report off of runway.

6.19.2.6. Transient arrivals are not authorized.

6.19.2.7. Once all wing aircraft have been recovered, the controllers will relocate to AMOPS, and the airfield will be closed until the control tower is returned to a safe state.

6.19.3. NATCF Evacuation. In the event of NATCF evacuation, all controllers will relocate to AMOPS (Bldg 805). Aircrews shall recover VFR via the appropriate VFR recovery. If IMC, aircrews will contact Los Angeles ARTCC.

6.20. NATCF Non-Radar Airspace Recall Procedures. In the event that all radar capability is lost, NATCF may recall the non-radar airspace in order to provide safe and expeditious recovery of aircraft. Non-radar airspace is defined as Elgin, Sally Corridor and the Alamos south of the N 37 17 below FL 200. NATCF will notify Blackjack, GCI and Tower they are recalling the non-radar airspace. NATCF will also broadcast non-radar airspace recall on Guard, using all repeaters.

6.21. Unauthorized Aircraft Landing or Unscheduled Aircraft. Procedures are in AMOPS OI and Nellis AFB Plan 5, Unauthorized Aircraft Movement, Theft or Hijack "STOP ALERT" and AFI 10-1801, Foreign Governmental Aircraft landings at United States Air Force Installations.

6.22. Single-Runway Operations. Nellis AFB is considered under single-runway operations anytime there is a planned or unexpected closure of one runway that is anticipated to last more than 30 minutes.

6.22.1. Single-runway operations will be announced on ATIS and placed in the NOTAMs, if applicable. If unexpected runway closures occur, the 57 WG SOF will ensure that notification of the closure is broadcast on guard and that the notification is passed to NATCF and Blackjack.

6.22.2. When single-runway operations are in effect, the SOF will declare a "divert airfield" for all fighter aircraft operating at Nellis. The SOF will coordinate with the divert airfield to ensure the airfield is available to accept divert aircraft. Under normal, day-VFR conditions, Creech AFB will be the divert airfield. If Creech is unavailable, the divert airfield will be the nearest suitable military airfield unless a civilian field is authorized by the 57 OG/CC. The divert airfield will be announced on ATIS.

6.22.3. During single-runway operations, all pilots will set their bingo fuels to arrive at initial or the FAF at Nellis with enough fuel to divert to the SOF-declared divert airfield and arrive at initial or the FAF with no lower than minimum fuel. Aircrew will consider the weather conditions at Nellis and at the divert airfield when setting bingo and divert fuels.

6.23. Aircraft Emergencies.

6.23.1. Tower shall inform NATCF of all airborne aircraft emergencies that may affect NATCF airspace. Tower will provide AMOPS a minimum of 15 NM call on all arriving Air Evacuation aircraft.

6.23.2. NATCF shall inform Tower of all aircraft emergencies that plan to arrive at Nellis, or that originally departed from Nellis. In addition to the information required in the *FAAO 7110.65*, pass the following information as soon as possible:

6.23.2.1. Estimated time of arrival.

6.23.3. Ordnance on board.

6.23.4. If there is an active/anticipated EPU activation.

6.23.5. If barrier engagement is expected.

6.23.6. SFA frequency to be used, if other than local Channel 10.


Chapter 7

DIVERT PROCEDURES AND EMERGENCY AIRFIELDS

7.1. Divert Procedures. Airborne diverts from Nellis AFB may be directed for dual runway closure or weather. In the case of dual runway closure, flight leads should be prepared to divert their flights to an alternate airfield, using Creech AFB, Edwards AFB and Luke AFB in that order unless the situation dictates otherwise. Harry Reid Airport may be used if emergency fuel prevents divert to a base previously listed. See **Figure 7.1** for a divert airfield quick look diagram for military diverts near Nellis AFB. Nellis Control will announce on Guard frequency any runway closures. Aircraft working in the NTTR or enroute to Nellis AFB will be notified of runway closures or weather diverts by NATCF or Blackjack on Guard frequency. After notification, contact the SOF for clarification or instructions. Upon arrival at the divert airfield, contact Nellis 99 ABW/CP and Bullseye SOF with aircraft status and intentions.

7.1.1. B-52 aircraft will divert if RWY 21R/03L becomes unusable (Edwards AFB is a suitable alternative).

Figure 7.1. Divert Emergency Airfields.

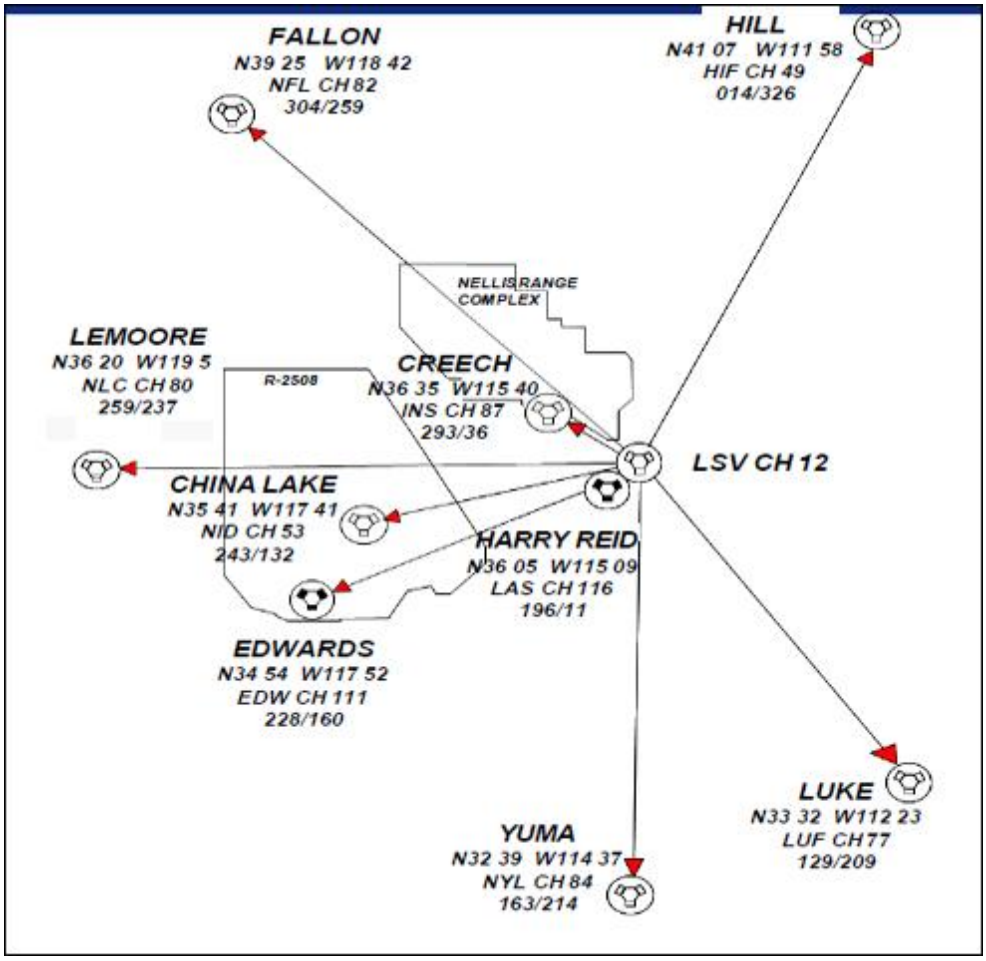

7.2. Divert Airfields.

7.2.1. Creech AFB. Creech AFB (CAFB) is the primary VFR divert airfield for Nellis aircraft and is located 36 NM to the northwest of Nellis AFB. CAFB has two runways. RWY 08/26 is the primary runway with 9,002 x 150 feet of usable runway. There are E-5 and BAK-12 arresting systems installed at both ends of the runway. The BAK-12 for RWY 08 is 1,400 feet from the approach end; the E-5 is 135 feet into the departure end overrun. The BAK-12 for RWY 26 is 1,200 feet from the approach end and includes a BAK-14 cable retraction system; the E-5 is 24 feet into the departure end overrun. The departure end and overrun cables for the active runway will be raised and connected. RWY 13/31 (Day/VFR Use Only) is 5,002 feet x 100 feet with no cables. Creech Tower, AMOPS, TA and Fire Department are open and operational during Nellis' flying window and can normally support up to 25 divert fighter aircraft at a time. To activate the Pilot Controlled Lighting when Creech Tower is closed, key the mike on the Tower VHF frequency three times for Low Intensity, five times for Medium Intensity and seven times for High Intensity. For information regarding CAFB, see *CAFBI 11-250.*

7.2.2. Edwards AFB. Edwards AFB is located 160 NM to the southwest of Nellis AFB. Edwards has two parallel runways, 04/22 (11,998 feet x 200 feet and 15,024 feet x 300 feet), with BAK-12s available on both ends of 04R and only one BAK-12 at the approach end of 04L.

7.2.3. Luke AFB. Luke AFB is located 209 NM to the southeast of Nellis AFB. Luke has two parallel runways, 03/21 (10,012 feet x 150 feet and 9,904 feet x 150 feet), with BAK-9s and BAK-12s on both runways (BAK-9s in the overruns).

7.2.4. Harry Reid International Airport. Harry Reid International Airport is located 11 NM southwest of Nellis AFB. There are two sets of parallel intersecting runways, 08/26 (14,512 feet x 150 feet) / (10,525 feet x 150 feet) and 01/19 (8,985 feet x 150 feet) / (9,775 feet x 150 feet). There are no arresting systems.

7.2.4.1. The earliest possible notification of intent to divert to Harry Reid Airport will assist in divert sequencing. Upon arrival, aircrew can expect a flight lead directed split up for VFR straight-in approaches to the active runway or ILS approaches to RWY 26 if IMC. Expect progressive taxi for parking.

7.2.4.2. Hazardous Situations. Aircraft with hazardous or a potentially hazardous situation (known or suspected) will park at the location determined by the airport operations coordinator. Hazardous conditions include hot brakes, EPU activation, hung training or inert ordnance, hung or unexpended live ordnance, or any other condition that aircrew, aircraft rescue and firefighting (ARFF) personnel, or the airport operations coordinator feels may pose a hazard. Aircrew will make every effort to make sure that any FFO is pointed in the least hazardous direction. In the event of EPU activation, only ARFF personnel with self-contained breathing apparatus and protective clothing will approach the aircraft. Harry Reid Airport is the last option divert for hazardous situations.

7.2.5. China Lake. China Lake is located 132 NM to the southwest of Nellis AFB. China Lake has three runways, 03/21 (9,991 feet x 200 feet), 14/32 (9,011 feet x 200 feet) and 08/26 (7,701 feet x 200 feet) with a single E-28 cable on each of the three runways. Normal operating hours are 0630L-2230L.

7.3. Emergency Airfields.

7.3.1. Tonopah Test Range (TNX) Airfield. TNX Airfield, located in R4809A (N 37 48 W 116 47), is available for emergency landings. The 12,000 x 150 feet runway is oriented 14/32 with a bi-directional BAK-12 located 1,599 feet from the approach end of RWY 32 and a bi-directional BAK-14 located 1,500 feet from the approach end of RWY 14. The field elevation is 5,547 feet. Taxiway Bravo is closed to all aircraft. Taxiways Alpha and Echo are designated "Arm/De-arm, Hot Brake and Hazardous Cargo" areas. Airfield hours of operation are 0500 to 1900L on weekdays with fire protection availably 24 hours/7 days a week. AM32A-60A and AMA32A-86 power carts and JP-8 fuel are available during normal operating hours. Airfield lighting will remain on during the Nellis AFB fly window. Diverting aircraft should announce their intention to land at TNX on the Nellis Control or Silverbow Tower frequencies.

7.3.2. Mercury (Desert Rock) Airfield. Mercury Airfield, located approximately 17 NM west of Creech AFB, can be used as a last-ditch emergency airfield. Mercury Airfield's runway is a 7,515 feet asphalt runway with no overruns. RWY 02/20 has a 2.5-degree upslope on RWY 02. There are no aircraft arresting systems or ATC facilities. Airport traffic advisories are available from 0800-1620 local on VHF UNICOM 122.8 (Mercury Radio), UHF 261.1/255.8 and VHF 126.15 (Dreamland Approach frequencies).

7.3.3. Cedar City Regional Airfield. Cedar City Regional, located approximately 20 NM east of Cal C, can be used as a last-ditch emergency airfield. Cedar City's runway is 8,600 feet (asphalt with no overruns). There are no aircraft arresting systems or ATC facilities. Airport traffic advisories are available on VHF UNICOM 123.0. Due to crown in RWY 02/20 departing aircraft are unable to observe aircraft departing in opposite direction. Cedar City is in the vicinity of high terrain, which may cause turbulence. RWY 20 is the calm wind runway.

7.3.4. St. George Municipal Airfield (SGU): St. George Municipal, located approximately 40 NM east of ELGIN can be used as a last-ditch emergency airfield. St. George's runway is 9,300 feet (asphalt with no overruns). There is no aircraft arresting systems or ATC facilities. Airport traffic advisories are available on VHF 123.075.

SCOTT C. MILLS, Colonel, USAF
Commander

Attachment 1

GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION

References

FAA JO 7110.65BB, *Air Traffic Control,* 17 August 2025

FAA JO 7350.9GG, *Location Identifiers*, 25 June 2024

AFI 10-1801, *Foreign Governmental Aircraft Landings at United States Air Force Installations,* 24 September 2018

AFI 10-201, *Force Readiness Reporting*, 4 June 2024

AFI 10-701, *Operations Security*, 23 July 2019

AFI 10-2501, *Emergency Management Program*, 15 Oct 2023

ACCI-11-USAFDSV3, *Operational Procedures – Thunderbirds*, 3 January 2018

AFMAN 11-2A-10CV3, *A-10C Operations Procedures*, 21 January 2020

AFMAN 11-2F-15V1, *F-15 – Aircrew Training,* 19 August 2024

AFMAN 11-2F-16V3, *F-16 – Operations Procedures,* 3 February 2020

AFMAN 11-2F-35AV3, *F-25A – Operations Procedures,* 16 May 2022

AFI 11-202 Volume 3, *General Flight Rules,* 9 January 2022

AFMAN 11-217, *Flight Operations,* 10 June 2019

AFMAN 11-218, *Aircraft Operation and Movement on the Ground,* 4 April 2019

Creech AFB Instruction 11-250, *Airfield Operations and Base Flying Procedures,* 15 April 2019

AFI 11-418, *Operations Supervision,* 21 December 2021

DAFMAN 13-201, *Airspace Management,* 9 December 2020

DAFMAN 13-204 V1, *Management of Airfield Operations,* 21 July 2020

DAFMAN 13-204 V2, *Airfield Management,* 19 September 2024

DAFMAN 13-204 V3, *Air Traffic Control*, 25 April 2024

DAFMAN 13-204 V4, *Radar, Airfield and Weather Systems,* 12 May 2024

AFI 13-207-O, *Preventing and Resisting Aircraft Piracy (Hijacking)*, 4 February 2019

AFMAN 13-212V1, ACC Sup, NTTR Addend A, *Range Planning & Operations,* 23 July 2020

AFMAN 13-213, NELLISAFBSUP, *Airfield Driving,* 17 November 2021

DAFMAN 17-1302-O, *Communications Security (COMSEC) Operations,* 12 Dec 2024

DAFI 21-101, *Aircraft and Equipment Maintenance Management,* 1 October 2021

DAFI 90-160, *Publications and Forms Management,* 13 April 2022

AFI 33-322, *Records Management and Information Governance,* 22 March 2020

DAFMAN 91-203, *Air Force Occupational Safety, Fire, and Health Standards,* 24 March 2022

NAFB Plan 31-101, *Base Defense Plan (BDP),* 2 September 2025

Adopted Forms

AF IMT 483, *Certificate of Competency*.

AF Form 847, *Recommendation for Change of Publication*

DD Form 1801, *DoD International Flight Plan*

Abbreviations and Acronyms

AAS—Aircraft Arresting Systems

AB—Afterburner

ACP—Airspace Control Plan

AFE—Aircrew Flight Equipment

AGE—Aerospace Ground Equipment

AGL—Above Ground Level

AMOPS—Airfield Management Operations

AOB—Airfield Operations Board

AR—Air Refueling

ARFF—Aircraft Rescue and Firefighting

ARTCC—Air Route Traffic Control Center

ASR—Approach Surveillance Radar

ATC—Air Traffic Control

ATCAA—Air Traffic Control Assigned Airspace

ATIS—Automatic Terminal Information Service

ATREP—Air Traffic Representative

BAK—Barrier Arresting Kit

BASH—Bird Aircraft Strike Hazard

BDOC—Base Defense Operations Center

BLD—Boulder City TACAN Identifier

BTY—Beatty TACAN Identifier

CAFB—Creech Air Force Base

CAT—Crisis Action Team

CCF—Central Control Facility

CE—Civil Engineering

CMA—Controlled Movement Area

COA—Certificate of Authorization

CP—Command Post

CVFP—Charted Visual Flight Procedure

DME—Distance Measuring Equipment

DOD—Department of Defense

DOE—Department of Energy

DP—Departure Procedure

DV—Distinguished Visitor

DZ—Drop Zone

DZC—Drop Zone Controller

ELT—Emergency Locator Transmitter

EOC—Emergency Operations Center

EOD—Explosive Ordnance Disposal

EOR—End of Runway

EPU—Emergency Power Unit

ETA—Estimated Time of Arrival

FAA—Federal Aviation Administration

FAF—Final Approach Fix

FCF—Functional Check Flight

FCIF—Flight Crew Information File

FFO—Forward Firing Ordnance

FITS—Fighter Index of Thermal Stress

FL—Flight Level

FLIP—Flight Information Publications

FM—Frequency Modulation

FOD—Foreign Object Damage/Debris

GC—Ground Controller

GCI—Ground Control Intercept

GDSS—Global Decision Support System

GRR—Graphical Range Restriction

HCP—Hot Cargo Pad

HIRL—High Intensity Runway Lights

IC—Incident Commander

IAF—Initial Approach Fix

IFE—In Flight Emergency

IFG—In Flight Guide

IFR—Instrument Flight Rules

ILS—Instrument Landing System

IMC—Instrument Meteorological Conditions

INS—Inertial Navigation System

INS—Creech AFB TACAN Identifier

IR—IFR Military Training Route

KIO—knock It Off

KTAS—Knots True Airspeed

LAS—Las Vegas TACAN Identifier

LATN—Low Altitude Tactical Navigation Area

LFE—Large Force Exercise

LL—Low Level

LLA—Low Level Avoidance

LOA—Letter of Agreement

LOLA—Live Ordnance Loading Area

LSV—Nellis TACAN Identifier

LZ—Landing Zone

MAJCOM—Major Command

MARSA—Military Authority Assumes Responsibility for Separation of Aircraft

MC—Mission Coordinator

MDS—Mission Design Series

MFF—Military Freefall

MMM—Mormon Mesa TACAN Identifier

MOA—Military Operations Area

MOC—Maintenance Operations Center

MSL—Mean Sea Level

NATCF—Nellis Air Traffic Control Facility

NACTS—Nellis Aircraft Tracking System

NAVAID—Navigational Aid

NM—Nautical Miles

NORDO—No Radio

NOTAM—Notice to Airmen

NS—Noise Sensitive

NTTR—Nevada Test and Training Range

NVG—Night Vision Goggles

OI—Operating Instruction

OPLAN—Operational Plan

OPR—Office of Primary Responsibility

ORM—Operational Risk Management

OTF—Over the Field

PAPI—Precision Approach Path Indicators

PCAS—Primary Crash Alarm System

PEX—Patriot Express

PFO—Precautionary Flameout

PFPS—Portable Flight Planning Software

PPR—Prior Permission Required

RAWS—Radar, Airfield, Weather Systems

RPA—Remotely Piloted Aircraft

RCR—Runway Condition Reading

RSC—Runway Surface Condition

RSRS—Reduced Same Runway Separation

RTB—Return to Base

RTO—Range Training Officer

RWY—Runway

SAR—Search and Rescue

SAA—Senior Airport Authority

SOC—Senior Operations Commander

SCN—Secondary Crash Net

SDO—Squadron Duty Officer

SFA—Single Frequency Approach

SFO—Simulated Flameout

SI—Straight-in

SM—Statute Miles

SODO—Simultaneous Opposite Direction Operations

SOF—Supervisor of Flying

SUA—Special Use Airspace

TA—Transient Alert

TAC—Tactical

TACAN—Tactical Air Navigation

TDY—Temporary Duty

TFR—Temporary Flight Restriction

TO—Technical Order

TOT—Time Over Target

TRACON—Terminal Radar Approach Control

UHF—Ultra High Frequency

UNICOM—Uniform Communication

UPS—Uninterrupted Power Supply

USAFWC—USAF Warfare Center

USAFWS—USAF Weapons School

VFR—Visual Flight Rules

VGT—North Las Vegas Airport

VHF—Very High Frequency

VMC—Visual Meteorological Conditions

VORTAC—VHF Omnidirectional Range Tactical Air Navigation

VR—VFR Military Training Route

VTR—Video Tape Recorder

WS—Watch Supervisor

WX—Weather

WSINT—Weapons School Integration

Terms

Airfield—The area of the base on which fixed wing aircraft and helicopters are operated, including the runways, taxiways, helipads, parking ramps, hangars, and all open areas surrounding the runways, taxiways, and parking ramps.

Controlled Movement Area—Both runways, overruns, helipads, and the area within 100' of the runways, overruns and helipads.

Emergency Response Vehicles—For the purpose of this instruction, the term "Emergency Response Vehicle" applies only when these vehicles are responding to an actual emergency or an approved exercise. These vehicles will follow normal flight line vehicle or airfield service routes and air traffic control regulations at all times.

Flight line—For the purpose of this instruction, the term "flight line" includes runways, infields, taxiways, helipads, aircraft parking ramps, hangars and associated maintenance/servicing areas where aircraft may be encountered.

Foreign Object Damage/Debris (FOD) checks—Inspection of vehicles prior to entering the flight line to ensure they are free of loose debris that may fall out of the vehicle and present a FOD hazard. This includes the tire tread, nuts, bolts, straps, packing materials, rocks, cups, cans, paper, etc.

Forward Firing Ordnance (FFO)—Weapon systems or munitions (guns, rockets, and missiles) that pose an additional hazard because of their directional response and potential long range if inadvertently activated on the ground.

General Purpose Vehicles—Those vehicles of commercial design and manufacture such as pickup trucks and sedans.

Heavyweight Ordnance—Ordnance that is 500 lbs or greater.

Hung Ordnance—Munitions items that fail to deploy when a release pulse is initiated from the cockpit.

Inadvertent Release—Ordnance fired or dropped without command from the aircrew. (system induced).

Inert Ordnance—Munitions items or components whose explosives material has been replaced by an inert material.

Limited Flight line Driving Privileges—Flight line driving privileges that restrict an individual to a specific area on the flight line. Limited privileges may be granted by the Airfield Manager on a case-by-case basis, in order to satisfy mission requirements. The specific area where they are authorized to operate vehicles will be annotated on the individual's AF IMT 483, Certificate of Competency.

Live Ordnance—All munitions items or components filled with or containing explosives or incendiary materials.

Operational Waiver—Waivers which supported aircraft are required to have to continue to operate, such as land/takeoff on a shorter runway, operate on a taxiway that is not wide enough, or operate with reduced wingtip clearances for interior hangars or sunshades. These are not waivers for design criteria for facilities or construction.

Practice Ordnance—Live or inert ammunition, live or inert bombs and inert warhead missiles possessing live missile motors used to give aircrew target practice over live-fire ranges.

Senior Airfield Authority—The SAA is an individual appointed by the component responsible for airfield operations at the direction of the joint force commander. The SAA is responsible for the control, operation, and maintenance of the airfield, to include deployable air traffic control and landing systems, the runways, associated taxiways, and parking ramps, as well as air, land, safety surfaces, and facilities of which proximity affects airfield operations.

Senior Operations Commander—The senior group commander (or equivalent) responsible for Airfield Operations.

Special Purpose Vehicles—Vehicles designed and used for a specific purpose in the course of aircraft servicing and maintenance such as forklifts, tugs, golf carts, tractors, multi-purpose servicing units, bomb lifts, etc.

Training Ordnance—Empty or inert munitions items or components used solely for classroom or weapons load training or training demonstrations.

Unexpended Ordnance—Ordnance retained onboard with no attempted release.

Unintentional Release—Ordnance fired or dropped through aircrew error (aircrew induced)

Weapon—Any instrument used to dispense or deploy a munitions item or component whether inert or live.

Attachment 2

NELLIS AFB PARKING PLAN

A2.1. Purpose. To establish local procedures for aircraft parking, and to formalize parking rows and apron use in support of the daily flying mission and maintenance operations.

A2.2. Responsibilities. The 57 OG/CC is responsible and maintains final authority for all ramps and parking rows. Specific rows and ramps are assigned to local organizations. The primary users of parking rows and ramps are listed below. Use of parking locations designated to 57 MXG should be coordinated through the 57 MXG Gatekeepers.

A2.2.1. Rows 1-9: Deployed aircraft. (Not marked) Note: Rows 3, 6 and 9 are taxilanes.

A2.2.2. Rows 10-11: Base Assigned (57 OG and 414CTS) (F-16/10 spots per row).

A2.2.3. Rows 12-14: Strike AMU (F-15E/7 spots per row).

A2.2.4. Rows 15-16: Dragon AMU (F-35/Row 15 has 7 spots, Row 16 has 6 spots).

A2.2.5. Rows 17-20: Bolt AMU (F-35/6 spots per row)

A2.2.6. Rows 21-24: Lightning AMU (F-35/6 spots per row).

A2.2.7. Rows 25-26: Deployed Aircraft (11 spots per row).

A2.2.8. Row 27: Fire Lane (emergency vehicle access lane).

A2.2.9. Rows 28-31: Deployed aircraft (unmarked).

A2.2.10. Rows 32-34: Raptor AMU (F-22A/rows 32-33 have 7 spots per row/row 34 has 6).

A2.2.11. Rows 35-36: Deployed aircraft. (Unmarked) (Row 37 partial taxilane when large aircraft on row 36)

A2.2.12. Rows 37-38: USAFADS (Thunderbirds). (10 spots each row. Row 38 unmarked).

A2.2.13. Rows 39-41: Tomahawk AMU (F-16C/9 spots per row).

A2.2.14. Rows 42-43: Viper AMU (F-16C/12 spots per row).

A2.2.15. Rows 44: Falcon AMU

A2.2.16. Rows 45, 46: Transient aircraft.

A2.2.17. Transient West: Transient and Deployed aircraft. (7 spots).

A2.2.18. Transient East: Transient and Deployed aircraft (11 spots).

A2.2.19. Revetments 1-25: As required for live weapons loading. Note: Revetments 1 & 2 are reserved for hot gun and hung ordnance. Revetments 12 and 13 not authorized for Forward Firing Ordnance (FFO) due to fuel tank proximity. Revetment 25 not authorized for FFO due to Line D/Flare build-up facility open storage pad proximity.

A2.2.19.1. Revetment Overflow Priorities. During overflow movement, the following priorities apply:

A2.2.19.1.1. Aerospace Control Alert (ACA) taskings (does not include practice operations).

A2.2.19.1.2. Overseas units (US & Coalition) expending live ordnance ISO RF/GF.

A2.2.19.1.3. Weapons School syllabi (live vs. swapping to inert).

A2.2.19.1.4. All other requirements.

A2.2.20. LOLAs:

A2.2.20.1. North and East LOLAs: Thunder Flight (A-10/6 spots per leg). A-10s will retain priority.

A2.2.20.2. South LOLA: Various fighter aircraft use (22 spots for 35 feet or smaller, or 11 spots for 60 feet or smaller). South LOLA is to be utilized by all locally assigned units prior to being offered to RF or GF TDY units. During overflow movement, the following priorities apply:

A2.2.20.2.1. 57th WG assigned units.

A2.2.20.2.2. 53rd TEG assigned units.

A2.2.20.2.3. USAF TDY units ISO RF/GF.

A2.2.20.2.4. Coalition Forces.

A2.2.20.2.5. All other requirements.

A2.2.21. Bomber pad spots 1, 2 and 3. TDY aircraft 180 feet or smaller. FFO not authorized on bomber pad.

A2.2.22. Helicopter aprons: Helicopter main aprons have 14 HH-60 spots. Taxilane Juliet has 5 HH-60 spots.

A2.3. Parking Plan and Ramp Parking Scheduling. The 57 OSS/OSAA is responsible for managing the ramp parking schedule. All parking plan requests will be coordinated and approved by Airfield Management. Users are required to submit requests to the Airfield Management organization box, **Nellis.baseops@us.af.mil**. Parking Plan meetings, chaired by the Airfield Manager, are held Monthly. Representatives from the following organizations should attend: AMOPS, 57 OSS Scheduling, USAFWS, 422 TES, Deployment Liaison, Nellis Support Center, 414 CTS, 549 CTS, 57 MXG TA, 57 WG/SEF/SEG, and any local unit requiring revetments or parking outside of their assigned rows. Please contact 57 OSS/OSAA at (702)-652-4601 for any parking plan/ramp scheduling inquiries.

A2.3.1. When arranging parking for transient aircraft, host units will plan for 25’ wingtip clearance when ramp space allows. As approved by the 57 WG/CC, 10’ wingtip clearance will only be used when operationally necessary due to limited ramp space. Reducing wingtip clearance to 10ft will be routed by Airfield Management when requested.

A2.4. LOLA and Revetment Overflow Priorities. During LOLA or revetment overflow movement, the following priorities will apply:

A2.4.1. ACA taskings (real-world)

A2.4.2. Overseas units expending live ordnance and supporting RED FLAG or GREEN FLAG

A2.4.3. Weapons School syllabi (live vs. swapping to inert)

A2.4.4. All other requirements.

Attachment 3

NAVIGATION POINTS

A3.1. Navigation Points. Table A3.1 lists Nellis local area navigation points and fixes. Asterisks are published fixes that are included with aircraft DAFIF and FAAO 7350.9 updates; non-asterisk points or fixes are local.

A3.2. Nellis TACAN Service Volume Limitation. Nellis TACAN is a category L NAVAID/usable to 40 NM IAW FAA service volume limitations; use caution when using navigational points that extend beyond 40 NM of Nellis TACAN.

Table A3.1. Local Navigation Points.

ATC POINT			
ALAMO	LSV 339/63	N 3716.98	W 11513.85
APEX	LSV 028/9	N 3621.58	W 11454.34
*ARCOE	LSV 358/30	N 3644.26	W 11455.02
BIGHORN	LSV 348/97	N 3752.00	W 11502.00
*CESAR	LSV 291/85	N 3700.49	W 11630.51
CARPP	LSV 356/63	N 3717.00	W 11450.72
Dry Lake	LSV 018/15	N 3627.68	W 11452.21
CRAIG	LSV 264/5.5	N 3615.25	W 11508.27
*DREAM	LAS 352/66	N 3710.34	W 11459.53
DUCK	LSV 053/7.5	N 3617.84	W 11453.09
ELKXX	LSV 002/100	N 3752.00	W 11430.00
EMPRS	LSV 344/62	N 3717.00	W 11507.05
FLEX	LSV 338/04	N 3618.62	W 11502.36
*FLUSH	LSV 288/73	N 3650.80	W 11620.27
FROZE	MMM 221/47	N 3620.35	W 11505.44
*FYTTR	LSV 270/33	N 3621.44	W 11541.47
GARTH	LSV 303/90	N 3717.96	W 11621.26
GASS PEAK	LSV 310/12	N 3624.14	W 11510.66
Gunfighter DZ	LSV 077/1.5	N 3614.70	W 11459.70
*HASIL	LSV 277/12	N 3618.58	W 11515.54
HAYFORD PEAK	LSV 332/26	N 3639.70	W 11510.41
*JAYSN	BTY 096/37	N 3634.42	W 11602.44
JENID	BTY 175/27	N 3621.50	W 11651.05
JORDN	LSV 299/14	N 3623.87	W 11514.59
*JUNNO	BLD 344/44	N 3643.80	W 11452.77
*KRYSS	LSV 030/21	N 3630.37	W 11444.17.
Leach Lake	DAG 338/40	N 3537.51	W 11640.67
*LIDAT	BTY 310/46	N 3725.81	W 11716.68
*MINTT	LAS 349/38	N 3642.74	W 11506.29
MOOSE	LSV 017/94	N 3736.77	W 11404.42
MOPAR	BTY 344/29	N 3717.00	W 11645.00
NIXON	LSV 293/30	N 3632.01	W 11532.25
*NUGGE	BLD 344/68	N 3707.83	W 11453.30
*ONDAE	LSV 277/6	N 3616.63	W 11508.52
PHINN	LSV 028/5	N 3618.51	W 11457.53
*PIUTE	INS 243/21	N 3630.68	W 11605.69
PRATT	MMM 219/25	N 3632.48	W 11442.68
RAMMM	LSV 025/38	N 3645.00	W 11433.33

ROX	LSV 013/50	N 3700.00	W 11430.00
SARAH	LSV 317/25.5	N 3636.45	W 11518.03
SIMNS	LSV 278/8	N 3617.34	W 11510.75
*STRIP	INS 112/24	N 3620.60	W 11516.48
*STRYK	LSV 283/26	N 3625.62	W 11530.70
STUCKEY'S PEAK	LSV 004/51	N 3704.10	W 11444.30
Texas Lake	LSV 351/64	N 3719.00	W 11457.50
TIMBR	LSV 012/33	N 3645.00	W 11444.58
*TORYE	LSV 022/36	N 3644.52	W 11436.46
*TUCKY	BTY 209/18	N 3635.23	W 11700.62
*VETTT	LSV 031/31	N 3637.33	W 11435.24
Winner LZ	358/5.7	N 3620.33	W 11500.25
*** FLIP IFR Points**			

Attachment 4

CLASS B DEPARTURES

A4.1. Authorization. Class B airspace VFR departures are available for aircraft authorized and desiring to depart VFR. Military fixed wing aircraft are not authorized to use Class B departures to transition to and from the NTTR, except those aircraft unable to meet published DP climb gradients.

A4.2. Class B West Departure.

A4.2.1. RWY 03: CROSS DEPARTURE END AT OR BELOW 3,000, TURN LEFT HEADING 300°. EXPECT RADAR VECTORS ON COURSE AFTER CROSSING I-15, MAINTAIN VFR. REMAIN CLEAR OF NORTH LAS VEGAS CLASS D AIRSPACE.

A4.2.2. RWY 21: CROSS DEPARTURE END AT OR BELOW 3,000, TURN RIGHT HEADING 300°. EXPECT RADAR VECTORS ON COURSE AFTER CROSSING I-15, MAINTAIN VFR. REMAIN CLEAR OF NORTH LAS VEGAS CLASS D AIRSPACE.

A4.3. Class B Northeast Departure.

A4.3.1. RWY 03: CROSS DEPARTURE END AT OR BELOW 3,000, FLY RUNWAY HEADING, MAINTAIN VFR, EXPECT RADAR VECTORS.

A4.3.2. RWY 21: CROSS DEPARTURE END AT OR BELOW 3,000, TURN RIGHT HEADING 340°. AFTER CROSSING I-15 TURN RIGHT HEADING 030°, MAINTAIN VFR, REMAIN CLEAR OF NORTH LAS VEGAS CLASS D AIRSPACE, EXPECT RADAR VECTORS.

Attachment 5

HELICOPTER AND TILTROTOR OPERATIONS

A5.1. Introduction. This attachment provides procedural guidance, training restrictions and general information pertinent to helicopter and tiltrotor operations at Nellis AFB. Throughout this attachment, the term helicopter also refers to tiltrotor aircraft. This attachment is not a single source document and must be used in conjunction with unit standard operating procedures (SOP) and policy directives. If a perceived conflict exists between this chapter and other applicable publication, the most restrictive guidance applies. Flight procedures changes of an immediate nature are in the FCIF, Operations Read File and the Aircrew Information File.

A5.2. General Policy. Unless otherwise specified below, this attachment applies to all helicopter aircrew assigned, attached or deployed to Nellis AFB. 57 WG/WGV is responsible for developing and administering the contents of this attachment. Proposed changes should be processed through 57 WG/WGV.

A5.3. Mission Planning/Preparation. In accordance with unit SOP.

A5.3.1. Portable Flight Planning Software (PFPS) Support. For administrative PFPS support, contact the System Support Representatives or 57 WG/WGV.

A5.4. Clearance and Taxi Procedures. Locally based helicopters will normally park in the Jolly Ramp area in front of 88th Test and Evaluation Squadron (88 TES) or the Ramp in front of the hush houses adjacent to Juliet Taxilane. Helipads are controlled movement areas requiring aircraft to receive clearance from Nellis ATC prior to entry and exit. Aircraft will contact Nellis Ground with: call sign, ATIS information, pad (Jolly or Transient), departure, squawk and flight-following intentions prior to taxi. Aircraft will contact Tower short of the pad to receive clearance to taxi onto the pad. Aircraft will monitor Tower once established on the helipad. Following hover checks, contact Tower for takeoff clearance.

A5.4.1. Arriving aircraft will be directed to an open helipad if traffic is located on the requested landing pad. After landing at Jolly or Transient Helipad, aircraft will clear off the pad with Tower then taxi direct to parking while monitoring Nellis Ground.

A5.4.2. Tower will direct all transient helicopter traffic to the Transient Helipad. AMOPS or TA normally assigns specific parking. Helicopters parked on the DOE ramp should depart the airfield from Taxiway Golf, paralleling the active runway to the northeast until cleared by Tower controllers to cross the runway's extended centerline.

A5.4.3. V-22 aircraft will not takeoff, land or conduct hover operations on the Jolly Pad.

A5.5. Operations within Class B Airspace. Upon departing Class B airspace, aircraft shall not re-enter without ATC approval. ATC clearance for any of the Class B departures/arrivals constitutes clearance to operate within Class B airspace.

A5.6. Helicopter VFR Departure/Arrival Routes. Departure routes are detailed below. For arrivals, fly the reverse of the departure routing. If other routings are desired, coordinate with Tower. Clearance will be obtained from Tower prior to crossing the extended runway within 5 NM. Avoid North Las Vegas Class D airspace during west arrivals and departures. Use caution for five antennas located at LSV R-312 1.7 DME (2,248 feet MSL). All procedures are not for use in IMC. Comply with MDS VFR weather minimums for all procedures. Aircrew are responsible

for terrain/obstacle avoidance. During periods of inclement weather when the reported ceiling or visibility is less than VFR minimums, helicopter pilots may request a Special VFR clearance to depart/arrive Nellis AFB. Class Bravo clearances will be issued in accordance with direction of flight requested.

A5.6.1. Teardrop Modification. A modification to a published departure to initially takeoff southerly or arrival procedure to land northerly for adverse winds. Example of clearance: "REQUEST TEARDROP GASS PEAK DEPARTURE." Takeoff south-bound avoiding over flight of aircraft on the taxiway when below 200 feet AGL. Remain west of the inside runway. Remain below 500 feet AGL and proceed with requested departure.

A5.6.2. GASS PEAK Departure/Arrival. Depart helipad north direct Las Vegas International Speedway marquee/I-15 (LAT/LON N 36 16.89 W115 01.46). Once reaching marquee/I-15, turn west direct I-215 and Pecos Rd intersection (just north of the VA hospital) and then on course. Remain at or below 500' AGL until clear of Class B airspace. Use caution for power lines in the vicinity (**Figure A7.1**.).

A5.6.3. Dry Lake Departure/Arrival. Depart north/northeast to cross the North Gap (LAT/LON N36 20.41 W114 58.79. Remain at or below 500 feet AGL until clear of Class B airspace. Use caution for aircraft operating at Winner LZ.

A5.6.4. Red Horse Departure/Arrival. Depart helipad north until intersecting I-15. Turn right to parallel I-15 until abeam the sand dunes (N 36 16.87 W 114 56.05). Proceed direct to the sand dunes and remain at or below 500 feet AGL until clear of Class B airspace.

A5.6.5. Sunrise Departure/Arrival. Depart the helipad direct to the South Gap (Lake Mead Blvd between Sunrise and Frenchman Mountain). Remain at or below 500 feet AGL until clear of Class B airspace.

A5.6.6. RED FLAG Departure/Arrival. Helicopters contact Tower and request the desired departure from current position. Tower Continue departure and maintain at or below 500 feet AGL until clear of Class B airspace and proceed to "Dry Lake" (N3627.68 W11452.21). Arriving helicopters should request desired arrival with Tower and request landing direct to Taxiway Golf abeam DOE Ramp. During arrivals or departures, monitor local helicopter common frequency (UHF-AM 259.0) for advisory of helicopter traffic using call signs "Jolly, Mongoose or Sting." (POC is RED FLAG Chief of Rotary Wing Operations).

A5.6.7. During periods of inclement weather when the reported ceiling and/or visibility is less than VFR minima, local helicopter pilots may request a Special VFR clearance to depart/arrive LSV. Class Bravo clearances will be issued IAW direction of flight requested.

A5.7. VFR Traffic Pattern.

A5.7.1. At Nellis. RWY 03/21 pattern altitude 2,500 feet MSL, with downwind east of the field. Base and crosswind limits are the Golf Course to the south and within 300 meters of Perimeter Road fire pit to the north. On a workload permitting basis, locally assigned helicopters will be authorized to fly practice approaches to Taxiway Golf with prior approval from Tower. Helicopters will not fly below 200 feet AGL over any parked or taxiing aircraft or vehicle, except in an emergency or when mission requirements dictate flight below this altitude. Do not overfly aircraft on the DOE ramp. Practice instrument approaches for helicopters are normally flown to RWY 21L. Standard climb out for subsequent VFR

approaches will be: “CROSS DEPARTURE END AT OR BELOW 3,000, TURN RIGHT HEADING 350, MAINTAIN VFR AND CONTACT APPROACH.”

A5.8. Helicopter Air Refueling (AR) Anchors/Hot Gas Operations.

A5.8.1. AR-230V: Helicopter refueling track located in the east LATN area, LAS VORTAC 025/46 to 025/81. Los Angeles is the assigned ARTCC. The scheduling agency is the 57 OSS/OSOS.

A5.8.2. AR-231V: Helicopter refueling track located in the west LATN area, BTY VORTAC 124/42 to 124/05. Los Angeles is the assigned ARTCC. The scheduling agency is the 57 OSS/OSOS.

A5.8.3. There are two rotary wing hot refueling areas on Taxiway Hotel north of the Transient Helipad.

A5.9. Water Operations. Water operations are conducted at Lake Mead in the vicinity of Black Island (N36 06.00 W114 46.20). Only locally assigned units may conduct water operations at Lake Mead. Transient units require prior coordination with the National Park Service before conducting operations. Training activities will be conducted near the center of the water area and must not interfere with the normal activities of the public. Use caution for air tour operators (VHF 120.650 is Lake Mead traffic common frequency) and boaters. If expendables are used (to include chem lights), pass their coordinates to the boat party so they can retrieve them from the water. Sea dye or smokes are not authorized in Lake Mead. Other areas in Lake Mead may be used if coordinated with Park officials and approval is obtained prior to operations. Additional activities requiring coordination/approval with park officials are any training on weekends and holidays and parachute operations at any time.

A5.10. Local Gunnery and Range Procedures/Restrictions. Prior to takeoff, the aircraft commander/flight lead will confirm the range schedule and live-fire targets with Blackjack. After takeoff and prior to range entry, contact range control and request “tactical.” Once “cleared as scheduled, cleared tactical” is received, aircraft are cleared for scheduled ranges/times and cleared to fire on coordinated target. Prior to departing the range, contact range control with status. Aircraft commanders will ensure specific range procedures are briefed to ensure fields of fire procedures are thoroughly understood. All other gunnery and range procedures will be IAW *NAFBI 11-250, AFI 11-2MDSV3, AFMAN 13-212V1, ACC Sup, NTTR Addendum A*, MDS gunnery procedures and unit SOP.

A5.10.1. Hot Gun Procedures. Terminate live fire, safe all switches and return to Nellis. Contact Blackjack and Nellis Approach, inform them you have an unsafe gun and declare an emergency. Contact Tower, relay intentions and advise the aircraft is configured with side firing guns. Return to Nellis and request an approach to Golf taxiway revetments 1-2 (see **Attachment 2**). Land with the gun pointed between the revetment walls towards the berm. Wait for maintenance to secure the gun. Aircraft engine shutdown is not necessary.

A5.11. FCF Procedures. FCF procedures requiring a runway will be conducted at Nellis AFB. FCFs will normally be flown in the airspace as described below:

A5.11.1. West FCF Area. Northern Boundary: An east-west line running through GASS (N36 23.7). Southern Boundary: An east-west line running through N36 17.0. Eastern Boundary:

Power lines running north and south on the east side of Apex peak (Elevation 4,108 feet MSL). Western Boundary: US 95. Floor is 500 feet AGL and the ceiling is as directed by ATC.

A5.11.2. East FCF Area. Area boundary references are Sunrise Mountain (N36 14.0 W114 59.0), Gypsum Mine (N36 13.0 W114 53.0), Piute Point (N36 27.0 W114 40.0) and the Road Bend (N36 28.0 W114 44.0). The floor is 500 feet AGL and the ceiling is as directed by ATC.

A5.12. Instrument Procedures. IAW *AFMAN 11-202V3 and AFMAN 11-2HH60V3*.

A5.12.1. Practice instrument approaches for helicopters are normally flown to RWY 21L. Standard IFR climb out for subsequent approaches will be IAW **paragraph 4.15**.

A5.12.2. Search and Rescue (SAR) IFR "Active/Training" Departure Procedures.

A5.12.2.1. SAR IFR "Active" Departure. Designed to assist 66 RQS respond to SAR missions routed southeast of Nellis and when an expedited VFR east/southeast departure/Special VFR clearance cannot be executed due to IMC conditions.

A5.12.2.2. SAR IFR "Training" Departure. Designed to assist local rotary units (Local Helicopter units/88 TES/34 WPS) to conduct instrument departure training from Nellis AFB. To the maximum extent possible, SAR IFR "Training" departures will be scheduled so as to limit impact to fixed wing flying operations.

A5.12.2.3. SAR IFR "Live/Training" aircrew shall file DD Form 1801 (LSV..LAS..BLD..southeast mission routing at 9,000 MSL) and include "Request radar vectors to LAS/Live "or" Training SAR mission" in the remarks section of the flight plan.


A5.12.2.4. NATCF shall assign a radar vector (RWY 21L/R) or obstacle departure procedure (RWY 03L/R) and initially assign 7,000; expect 9,000 10 minutes after departure.

A5.13. Air Operations Security. IAW *AFI 13-207-O, Preventing and Resisting Aircraft Piracy (Hijacking) (FOUO) and NAFB Plan 5*.

A5.14. OPSEC/COMSEC Procedures. IAW *AFI 10-701, Operations Security (OPSEC), AFMAN 17-1302 Communications Security (COMSEC) Operations.*

A5.15. Lost Communication Procedures. If lost communications are experienced while VMC, squawk 7600, turn on landing/strobe lights and proceed with GASS PEAK for western arrivals or RED HORSE for eastern arrivals. Follow Tower light gun signals to Jolly helipad. If lost communications are experienced while IMC, comply with the Flight Information Handbook.

Figure A5.1. GASS PEAK Departure/Arrival.

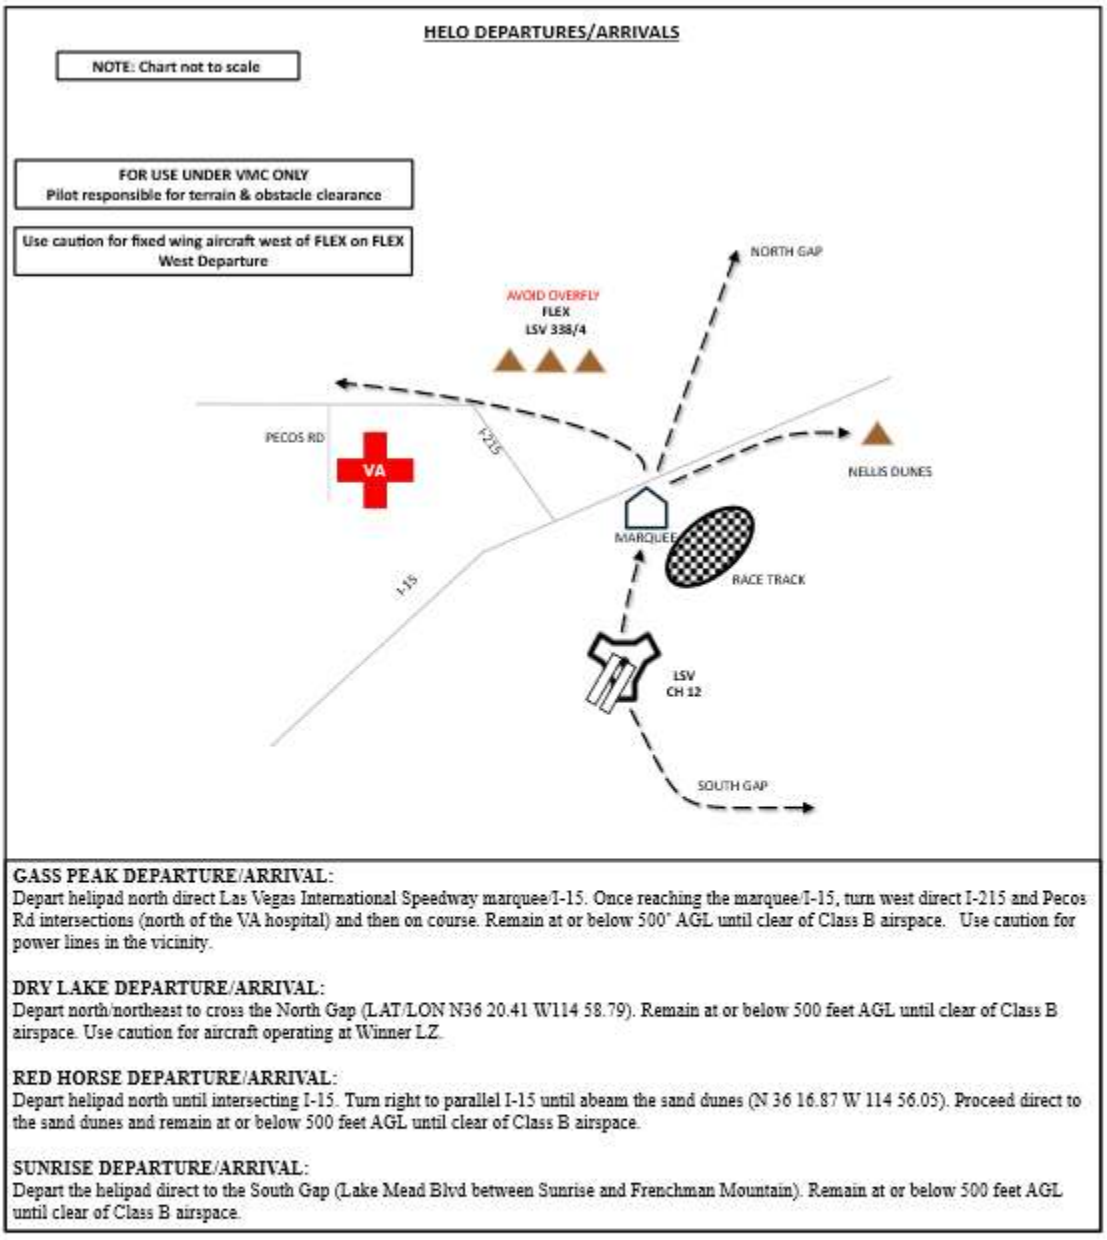

GASS PEAK DEPARTURE/ARRIVAL:
Depart helipad north direct Las Vegas International Speedway marquee/I-15. Once reaching the marquee/I-15, turn west direct I-215 and Pecos Rd intersections (north of the VA hospital) and then on course. Remain at or below 500' AGL until clear of Class B airspace. Use caution for power lines in the vicinity.

DRY LAKE DEPARTURE/ARRIVAL:
Depart north/northeast to cross the North Gap (LAT/LON N36 20.41 W114 58.79). Remain at or below 500 feet AGL until clear of Class B airspace. Use caution for aircraft operating at Winner LZ.

RED HORSE DEPARTURE/ARRIVAL:
Depart helipad north until intersecting I-15. Turn right to parallel I-15 until abeam the sand dunes (N 36 16.87 W 114 56.05). Proceed direct to the sand dunes and remain at or below 500 feet AGL until clear of Class B airspace.

SUNRISE DEPARTURE/ARRIVAL:
Depart the helipad direct to the South Gap (Lake Mead Blvd between Sunrise and Frenchman Mountain). Remain at or below 500 feet AGL until clear of Class B airspace.

Attachment 6

ALTERNATE MISSIONS

A6.1. Instruments and advance handling missions are approved alternate missions for fighter aircraft in the 57th and 53rd Wings. For any MDS, any mission in the USAFWS syllabus is an approved alternate mission provided it is less complex than the primary mission. Additional alternate missions are listed below.

A6.2. A-10. LATN missions are an approved alternate mission.

A6.3. USAFADS will specify approved alternate missions in unit operating procedures or standards.

Attachment 7

A-10 SPECIFICS

A7.1. High Tactical Recovery Procedure (High-TRP) (Figure A8.1). The High-TRP is a VFR overhead procedure that will only be conducted between official sunrise and sunset and flown to any runway by A-10 aircraft only. The reported ceiling must be 1,000 feet AGL above the highest altitude to be flown and flight/ground visibility must be at least 5 SM. It is flown at an altitude coordinated with Nellis Air Traffic Control Facility (NATCF) at an altitude between 10,500' MSL and 14,000' MSL. Due to traffic patterns and terminal area terrain, High-TRP descent will only be conducted to the East of Nellis AFB.

A7.1.1. Aircraft shall request the High-TRP during initial contact with NATCF (i.e., *"NELLIS CONTROL, BOAR01 REQUEST RTB VIA [VFR RECOVERY], HI-TRP AT [PATTERN ALTITUDE]"*). Range airspace restriction and weather permitting, aircrew shall be at or above the requested High-TRP pattern altitude upon check-in with Nellis Control. Nellis Approach or Tower may direct lower entry/holding altitudes for the High-TRP arrival.

A7.1.2. High-TRP from VFR Recoveries (i.e., STRYK/MINTT/ARCOE/TORYE). Pilots will maintain the coordinated altitude, following the assigned recovery ground track depicted in Figures **4.7** - **4.11** until CRAIG or APEX, then proceed direct over the field at the coordinated altitude. Upon pilot request, ATC may "approve" direct to the field earlier based on traffic conditions.

A7.1.3. High-TRP from any other VFR flight. Pilots will cancel IFR if required and request *"HIGH-TRP AT [PATTERN ALTITUDE]"* on initial check-in. NATCF will issue routing instructions and Class Bravo clearance as required.

A7.1.4. Upon communications transfer to Tower, pilots will report, *"THREE MILES FROM THE FIELD, HIGH-TRP [ALTITUDE]."* Tower will advise aircrew to either *"HOLD OVER THE FIELD"* or *"REPORT DECENT"* followed by an assigned landing runway (i.e., *"BOAR01, HOLD OVER THE FIELD"* or *"REPORT DESCENT, RUNWAY 03 RIGHT"*). During holding, High-TRP arrivals shall remain within 3.5 DME of LSV TACAN.

A7.1.5. Once directed to *"REPORT DESCENT,"* High-TRP aircraft begin a descending turn not to exceed 360 degrees East of the field regardless of runway assignment, to arrive on downwind at 3,500' MSL, between midfield and the perch. During descent, High-TRP aircraft shall remain within 3.5 DME of LSV TACAN.


A7.1.6. Changing traffic or airfield conditions may necessitate Tower to "BREAKOUT" an arriving High-TRP after commencing descent.

A7.1.6.1. Breakout Runway 21. If told to *"BREAKOUT"* after beginning the descent, pilots will terminate the High-TRP and comply with NAFBI 11-250 para. 4.14.4.2. DUCK Reentry (RWY 21).

A7.1.6.2. Breakout Runway 03. If told to *"BREAKOUT"* after beginning the descent, pilots will terminate the High-TRP and comply with instructions from Tower, based on traffic. To deconflict arrivals from CRAIG, arrivals instructed to *"BREAKOUT"* may be restricted above standard pattern altitudes.

A7.1.7. When Simulated Flame-Out/Precautionary Flame-Out Operations (SFO/PFO) are active, the HIGH-TRP approval will be dependent on traffic workload. Aircrew should not expect approval for High-TRP during Large Force Exercises.

Figure A7.1. A-10 HI-Tactical Recovery Procedure (HI-TRP).

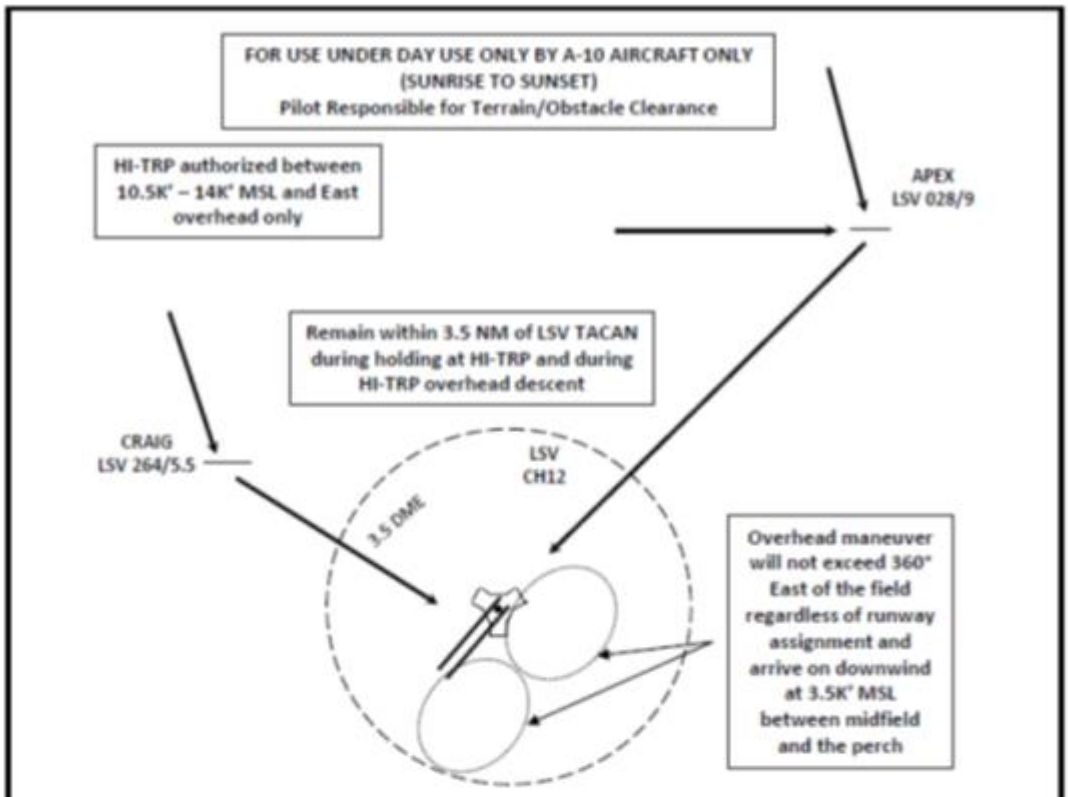

1. Weather requirements: Ceiling 1,000' above highest altitude to be flown/5 SM visibility
2. ATC may direct/approve lower HI-TRP altitude based on traffic conditions
3. Request HI-TRP with Nellis Control on initial contact at/above the requested altitude (i.e., *"NELLIS CONTROL, BOAR01 REQUEST RTB VIA STRYK RECOVERY, HI-TRP AT 14,000"*); flight track will follow VFR recovery procedure (i.e., STRYK/ARCOE Recoveries, etc.) at the approved HI-TRP altitude until CRAIG/APEX then direct Nellis
4. If applicable, pilot will cancel IFR and may request direct Nellis whether IFR/VFR; if approved, ATC will issue clearance/routing as traffic conditions allow
5. ATC when applicable, will advise to hold or report descent (i.e., *"BOAR01, HOLD OVER THE FIELD"* **or** *"REPORT DESCENT, RUNWAY ##L/R"*)
6. Holding: Hold VFR over airfield at the approved HI-TRP altitude or as directed by ATC
7. Breakout instructions (after commencing descent):
   a. RWY21L/R: Terminate HI-TRP/comply w/ NAFBI 11-250 DUCK Reentry procedures
   b. RWY 03L/R: Terminate HI-TRP/comply with Tower instructions
8. Aircrews should not expect HI-TRP approval during large force exercises

REPORT: *"ACID, 3 miles from field, HI-TRP [altitude]"* **and thereafter** *"ACID descending Runway ##L/R"*

Attachment 8

AVOIDANCE AREAS, NOISE SENSITIVE AREAS AND IFF OFF/LIGHTS OUT AIRSPACE

A8.1. Low Level Avoidance/Noise Sensitive Areas. The following are low level avoidance and noise sensitive areas for Nellis AFB's local operations area. Altitudes are AGL unless otherwise indicated in WGS 84 (HH-MM-SS).

A8.1.1. NELLIS TACTICAL RANGES INDICATED BY RESPECTIVE IDENTIFIER.

Table A8.1. Low Level (LL) Avoidance and Noise Sensitive Areas (NS).

Location Name	Coordinates	LL	NS	NM	ALT	Area	Remarks
Device Assembly Facility	36 53'54"N 116 02'53"	X	X	1.25	14,000' MSL	08	
Corn Creek Station	36 26'00"N 115 22'00"W	X	X	2	8,000'	63	
Range 63C	As depicted on the Nellis range map					63	No overflight below 4,500' MSL when Range 63C is cold. No overflight below 18,000' MSL when Range 63C is hot
City of Indian Springs, NV	36 34'50"N 115 40'30"W	X	X	1	500'	64	
Goldfield, NV	37 42'30"N 117 14'00"W	X	X	3	1,000'	71N	
Tonopah, NV	38 04'20"N 117 14'00"W	X	X	1	1,000'	71N	Not extended into R-4807
Caliente, NV	37 36'50"N 114 31'20"W	X	X	5	10,000' MSL	CAL-C	
Lincoln County Airport	37 47'15"N 114 25'18"W	X	X	3	1,500'	CAL-C	
Pioche, NV	37 56'00"N 114 27'10"W	X	X	1	1,000'	CAL-C	
Alamo, NV	37 22'00"N 115 10'00"W	X	X	1.5	1,500'	COY-B	
Key Pitman Wildlife Management Area	37 32'00"N 115 14'00"W 37 36'00"N 115 13'00"W	X	X		2,000'		1 NM either side of line between coordinates
Pahranagat Wildlife Area	37 12'00"N 115 03'00"W 37 19'00"N 115 08'00"W	X	X		2,000'		1 NM either side of line between coordinates
RWMC (Desert Nat'l Wildlife Refuge Area)	36 51'32"N 115 57'17"W	X	X	1	2,500'		
RF emitter EC West	37 41'06"N 116 25'10"W	X		0.5	2,000'	ECW	
Mesquite, NV Airport	A 6NM arc between the points 36 51'10"N, 114 09'55"W and 36 45'45"N, 114 07'40"W Extend lines eastward from 36 51'10"N, 114 09'55"W and 36 45'45"N, 114 07'40"W to the outer perimeter of the Mesquite Airport (36 49'59"N, 114 03'18"W	X	X	1	1,500'	LE	Avoid the approach corridor by 3,000' AGL
Moapa, NV	36 40'30"N 114 37'30"W	X	X	1	1,000'	LE	
Overton, NV	36 32'30"N 114 27'00"W	X		1	1,000'	LE	
Amargosa Valley (Death Valley)	36 18'20"N 116 25'00"W	X	X	3	1,500'	LW	
Beatty Ranches (Boundary Limits)	36 52'00"N 116 45'30"W 37 01'00"N 116 46'30"W	X	X		2,000'	LW	
Beatty, NV Airport	36 52'00"N 116 48'00"W	X		3	3,000'	LW	
Bell Residence, NV	36 52'20"N 116 48'00"W	X		3	1,000'	LW	
Calvada Meadows	36 16'00"N 116 00'00"W	X		1.5	1,500'	LW	

Airport							
Springdale, NV	37 01’23”N 116 43’42”W	X	X	5	1,500’	LW	

Table A8.2. Area Abbreviations (for LL/NS airspace table) NELLIS TACTICAL RANGES INDICATED BY RESPECTIVE IDENTIFIER.

AREA NAME	ABBREVIATION
ALAMO ALPHA	AL-A
ALAMO BRAVO	AL-B
ALAMO CHARLIE	AL-C
CALIENTE EAST	CAL-E
CALIENTE WEST	CAL-W
CALIENTE ALPHA	CAL-A
CALIENTE BRAVO	CAL-B
CALIENTE CHARLIE	CAL-C
COYOTE BRAVO	CY-B
COYOTE CHARLIE	CY-C
ELGIN	ELG
LATN CENTRAL	LC
LATN EAST	LE
LATN WEST	LW
REVEILLE MOA	REV
SALLY CORRIDOR	SAL

A8.2. IFF Off/Lights Out Airspace. IFF off/lights out operations will be conducted IAW *DAFMAN 13-212V1, ACC Sup, NTTR Addendum A*.

Attachment 9

SPILL OUT PROCEDURES

A9.1. Definition. A spill out is an unauthorized exit from the NTTR into an adjacent ATC facility's airspace. Spill outs are documented in IAW *DAFMAN 13-201*.

A9.2. Procedures. The following procedures apply when a spill out is observed by Blackjack, Nellis Control or other control agency. All facts such as date, time, location, call sign and unit are recorded by Blackjack and Nellis Control.

A9.2.1. Blackjack and Nellis Control spill out information is verified and processed through the 57 OSS/OSOP. 57 OSS/OSOP will forward preliminary information to the unit responsible for the spill out, 57 OSS/DO, 57 OG/CC, and the FAA ATREP. The 57 OSS/DO will forward official reports to the affected unit's squadron commander.

A9.2.2. The responsible unit will investigate the circumstances surrounding the spill out and forward a copy of their findings and corrective actions to the 57 OSS/OSOP who will, as appropriate, forward them to the FAA ATREP. The unit will retain the original copy of their findings and corrective actions for a minimum of 18 months as it may be required by the FAA for the adjudication of a formal airspace violation. Reference DAFMAN 13-201 for documentation procedures.

A9.2.3. 57 OSS/OSOP will maintain a log of all reported spill outs, retain statistical data to determine trends and apply appropriate management emphasis.

A9.2.4. Immediate remedial actions will be taken following deviations of Range 4808 airspace. For any deviation of Range 4808B/D/E airspace, a minimum 24 hour grounding will occur. Deviations of Range 4808A or 4808C airspace will result in debrief and return to home unit.

Attachment 10

BLACKED OUT LANDINGS

A10.1. General. Fixed wing Blacked Out landings at Nellis airfield will be authorized on a non-interference basis only. Helicopters may conduct blacked out landings, upon approval from tower and in compliance with AFI 11-MDSV3 illumination requirements for landing areas and aircraft lighting. Blacked out operations will be on a case-by-case basis and will not use the normal scheduling procedures or have NOTAMs/ATIS information published. They will be approved real-time based on tower traffic.

A10.2. Pilot Responsibilities.

A10.2.1. Ensure the requested procedure is IAW all higher headquarters (AFIs, MAJCOM supplements, etc.) guidance specifically relating to the aircraft's performance of Blacked Out landings including weather limitations. If the MDS is approved for IMC operations, that must be explicitly expressed to the tower controllers.

A10.2.2. Coordinate and clarify intentions with the SOF and Tower WS prior to departure.

A10.3. ATC Procedures.

A10.3.1. Approval by the Tower will be based on existing traffic and controller workload. The WS is the safety observer and as such, can terminate operations at any time for emergencies, existing traffic, controller workload, etc.

A10.3.2. Unless otherwise directed by Tower personnel, when the pilot requests the airfield lights off, the Tower will turn off the approach lights, HIRLs, runway edge lights and taxiway lights. Taxiway lights will remain on if ground operations are in progress. Tower cab lights will remain at standard night lighting levels.

A10.3.3. Aircraft will not be cleared for an NVG procedure; however, Tower will approve requests for NVG operations and issue a "CHECK WHEELS DOWN" and remind pilots that they are to "PROCEED AT THEIR OWN RISK." Note: Pilots can make their gear down call on final (with overt landing light on). Tower will respond "GOOD LANDING LIGHT" when visually confirmed. Pilots will then turn off the overt landing light and proceed with covert taxi light.

A10.3.4. Controllers are not authorized to wear any night vision devices.

A10.4. Box and One Procedures.

A10.4.1. Box and One configuration:

A10.4.1.1. The Box and One is for runway identification only, and the box length will be 500 feet. See **Figure A12.1** and **Figure A12.2** below.

Figure A10.1. Airfield Marking Pattern- 3 (Day) Amp-3 Cerise Panels To Be 500 Feet.


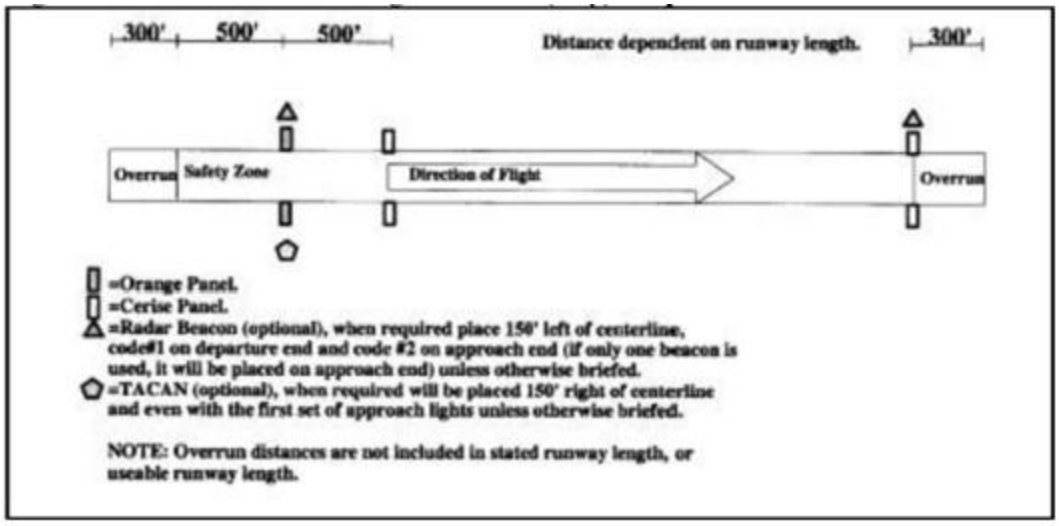


Figure A10.2. Airfield Marking Pattern- 3 (Night) Amp-3 Field Markers Lights To Be 500 Feet.

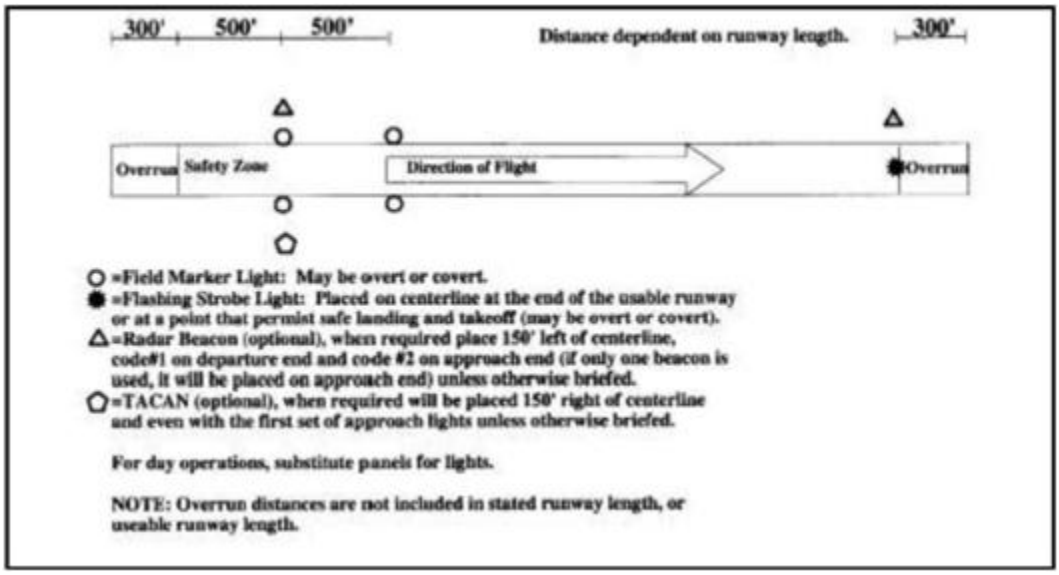

A10.4.1.2. Only qualified combat controllers will place IR lights in Box and One configuration. These personnel must have a local airfield driver's license.

A10.4.1.3. Combat controllers will monitor IR lights and advise Tower when lights are on/off or any malfunctions experienced.

A10.4.1.4. Tower will relay to the aircraft when lights are on/off or any malfunctions experienced.

A10.4.1.5. Combat controllers will report off the runway before Tower advises aircraft that can "proceed at their own risk" to land or takeoff.

A10.5. Traffic Pattern/Flow Restriction.

A10.5.1. Operations will only be scheduled when all wing flying has terminated for the day or minimal impact on flying windows will occur. Wing flying will not be delayed for NVG operations.

A10.5.2. Only base-assigned aircraft are authorized to conduct NVG operations. Non-participating aircraft will not mix with participating NVG aircraft in any traffic pattern or on any controlled movement area. Normal taxi routes and traffic patterns apply.

A10.5.3. If non-participating aircraft are inbound for arrival, they will hold outside of Tower's airspace as directed by NATCF or Tower controllers until NVG operations are terminated.

A10.5.4. Vehicles operating lights-out during periods of reduced airfield lighting should mount an IR strobe on the vehicle's roof so aircrew can see the vehicle on the airfield. Vehicles are still required to meet AFI 13-213 and local airfield requirements to maintain radio communication with the Tower while operating within the movement area. Vehicle operations will not be commingled with nonparticipating vehicles and apron operations will be kept to a minimum during periods of reduced airfield lighting.

A10.6. Knock It Off (KIO) Procedures.

A10.6.1. The Tower Watch Supervisor, pilot or IR monitor can terminate operations in the interest of flying safety. Phraseology will be: "KNOCK IT OFF, KNOCK IT OFF" (and reason, if time). KIOs will be acknowledged by all players and airfield lighting will immediately be restored to normal operations. "CONTINUE TESTING" will be used to restore covert lighting operations and can only be issued by the player who initiated the KIO. Note: If lost communications ever occur, it's an automatic KIO and all lights will be immediately returned to normal operation. All pilots will remove NVGs, terminate test operations and recover the aircraft IAW lost communication procedures.

A10.7. Transition between Airfield Lighting Configuration.

A10.7.1. Lights will be returned to normal setting when NVG operations have terminated or for non-participating inbound aircraft coordinated by NATCF.

A10.7.2. Tower will make a blanket-broadcast to all aircraft before turning the lights off during NVG operations and before returning the lights to normal settings after NVG operations.

A10.7.3. Lights will be operated IAW paragraph **A12.3** of this instruction.

A10.7.4. Jolly Pad lighting will be set in accordance with aircrew and AFI 11-2MDSV3 requirements. Unlighted use of Jolly Pad while airfield lights are configured IAW guidance in this attachment is authorized.

A10.8. Combat Controllers Responsibility. Combat controllers will provide one qualified person in the Tower and one qualified person on the airfield during lights out operations.

Attachment 11

NELLIS AFB BARRIER CERTIFICATION PROCEDURES

A11.1. Purpose. To outline procedures for barrier maintenance and to request barrier certification from the 57 OSS/OSOS.

A11.2. Responsibilities. Barrier maintenance will:

A11.2.1. Review barrier certification and maintenance records and coordinate with 57 OSS/OSOS for scheduling of barrier certification.

A11.2.2. Control all certifications from the barrier maintenance vehicle. The pilot will communicate with the Tower and the Tower will relay that information to barrier maintenance and AMOPS.

A11.2.3. 57 OSS/OSOS will notify AMOPS of the date, aircraft type and call sign prior to each scheduled engagement. AMOPS will notify the agencies in **Table A16.1**..

Table A11.1. Barrier Engagement Notification.

Flight Safety (57 WG/SEF)	Tower (57 OSS/OSAT)
Fire Protection (99 CES/CEF)	Sweeper (99 CES/CEOHP)
Barrier Maintenance (99 CES/CEOFP)	BULLSEYE SOF (57 WG/WGV)
Crash Recovery (57 MXG/MXMTR)	

A11.3. Procedures.

A11.3.1. Aircraft returning from a flight will dearm and then follow Tower's directions. Aircraft scheduled for a taxi only barrier certification may proceed directly to the runway with Tower's permission.

A11.3.2. Prior to the engagement, barrier maintenance will confirm the aircraft's gross weight with the aircraft commander via the Tower, then compute engagement speed according to AFMAN 32-1040. The aircrew will target the engagement for the minimum airspeed in the target airspeed window.

A11.3.3. The aircraft will be in flyable condition, with the canopy(s) closed and tail hook shear pin installed (F-16 only). Aircraft will be cleared into position and specifically cleared to engage the cable by the Tower. Unless otherwise briefed, conduct certification on pre-coordinated frequency.

A11.3.4. The aircraft will stabilize engines at normal run-up parameters (i.e. 80% RPM), release brakes, then track down the runway and attempt to engage within 5 feet of runway centerline.

A11.3.5. When crash recovery notifies the aircrew to disengage from the barrier, add power to roll forward then throttle to idle to allow aircraft to roll back. Add power without braking to stop roll back.

A11.3.6. Retract hook on signal from barrier crew. Notify the Tower of actual airspeed, gross weight, call sign and tail number, then taxi to parking on signal from barrier crew. If taxiing the aircraft after a barrier certification is not possible, the aircraft will be shut down and towed off the runway.

Attachment 12

PRIMARY CRASH ALARM SYSTEM (PCAS) AND SECONDARY CRASH NET PROCEDURES

A12.1. Primary Crash Alarm System (PCAS). When an in-flight or ground emergency is declared, Tower will activate the PCAS. Situations that warrant activation of the primary crash net are contained in **Table A12.1**. Tower will pass at a minimum the information contained in **Table A12.2**. Activation of the PCAS will not be delayed for incomplete information. Tower will pass additional information as it becomes available. If the PCAS is inoperative, Tower will notify all agencies on the PCAS by the most expeditious means available. Listed below are the agencies on the PCAS.

A12.1.1. Airfield Management Operations – AMOPS (57 OSS/OSAA).

A12.1.2. Fire Department (99 CES/CEF).

A12.1.3. Hospital -- Flight Medicine (99 MDG/SGPF) during duty hours; Emergency Room (99 MDG/SGOME) after normal duty hours.

Table A12.1. Primary Crash Net Activation Criteria.

Declared airborne emergencies
Anticipated or actual barrier engagements
Aircraft mishaps or crashes
Ground emergencies
Exercises
Single-Ship No Radio (NORDO) aircraft
Unauthorized landing
Anytime 99 ABW/CP directs

Table A12.2. Primary Crash Net Information.

Call sign
Type of aircraft
Nature of emergency
Ordnance
Fuel on board (minutes/hours preferred)
Souls on board
Landing runway
Estimated time of arrival (ETA)
Pilot’s intentions
Radio frequency
Wind speed and direction

A12.2. Secondary Crash Net. AMOPS activates the Secondary Crash Net (SCN) whenever the primary crash net is activated or upon direction from 99 ABW/CP. If AMOPS receives emergency information from a source other than the Control Tower, they will immediately activate the SCN and then pass the information to the Control Tower. If the SCN is inoperative, AMOPS will call

each agency by using the Alternate SCN Conference call. **Table A12.3** lists the agencies on the SCN.

A12.2.1. Any agency requesting to move SCN phone must coordinate this with Airfield Management prior to the move. All agencies on the SCN must use a noise reduction feature such as push-to-talk handsets or Confidencor (Trademark of National Communications Inc.) that filters out background noise. Any agency violating the above could be removed from the SCN or made listen capability only.

Table A12.3. Secondary Crash Net Agencies.

Fire Department (99 CES/CEF)	Flight Medicine (99 MDG/SGXY)
Emergency Room (99 MDG/SGOE)	Emergency Management (99 CES/CEX)
Command Post (99 ABW/CP) or Alt CP	Weather Flight (57 OSS/OSW)
Base Defense Ops Center (99 SFS/BDOC)	57 WG MOCC (57 MXG/MOCC)
Emergency Operation Center	99 ABW Safety (99 ABW/SE)
Explosive Ordnance Disposal (99 CES/CED)	Rescue MOC
Crash Recovery (57 MXG/MXMTR)	57 WG Safety (57 WG/SEF)

Attachment 13

DISTINGUISHED VISITORS (DV) AND SPECIAL HANDLING PROCEDURES

A13.1. Distinguished Visitors. A DV is any individual holding the rank of colonel or above, a civilian equivalent or any other individual identified by HQ USAFWC/CC. DVs are parked on DV 1 or DV 2 immediately in front of AMOPS unless prior coordination for parking has been approved by USAFWC Protocol, 57 WG Public Affairs or AMOPS. AMOPS will notify NATCF as soon as they are aware of the estimated time of arrival of aircraft requiring DV handling. Consistent with operational priorities, NATCF will notify AMOPS when the DV aircraft is inbound to Nellis AFB. In turn, AMOPS will notify the 99 ABW/CP. During large force exercises, DV aircraft with a wingspan of 130 feet or larger will be parked on DV-2 unless the arriving/departing DV is DV Code 4 or higher (or unless otherwise directed by leadership). Refer to General Planning for explanation of DV Codes.

A13.2. Special Handling Procedures. Special handling procedures will be used for distinguished military visitors above the rank of major general, civilian equivalent visitors and any other persons identified by HQ USAFWC/CC. Aircraft requiring special handling will be given priority to land, taxi, and takeoff. These procedures supplement the DV handling procedures outlined above.

A13.2.1. The Airfield Manager or their representative shall inform Tower when special handling procedures begin and end.

A13.2.2. Taxi operations will continue on Taxiways Delta, Echo and Foxtrot leading to the runways; however, no aircraft movement, engine starts or runs will take place on the transient parking ramp and all areas north of row 45 (TA Building).

A13.2.3. Locally assigned helicopters may start engines and run at low power during DV special handling while remaining in their parking spot.

Attachment 14

AIRFIELD OPERATIONS BOARD MEMBERSHIP AND ANNUAL AGENDA ITEMS

A14.1. The Nellis Airfield Operations Board (AOB). IAW *AFMAN 13-204V1*, the AOB provides a forum for discussing, updating and tracking various activities in support of the wing flying mission. The board will convene at least once per quarter, and is chaired at a minimum by the 57 OG/CC, as delegated by the 57 WG/CV.

A14.2. Membership. The 57 OG/CC has appointed the following members of the board:

A14.2.1. 57th Wing Safety (57 WG/SEF/SEG/SEW)

A14.2.2. 99th Air Base Wing Command Post (99 ABW/CP)

A14.2.3. 57th Wing Standardization and Evaluation (57 WG/WGV)

A14.2.4. 57th Operations Support Squadron (57 OSS/CC)

A14.2.4.1. 57 OSS Airfield Operations Flight (57 OSS/OSA, OSAD, OSAR, OSAA, OSAM, & OSAT)

A14.2.4.2. 57 OSS Weather Flight (57 OSS/OSW)

A14.2.4.3. 57 OSS Airspace Management (57 OSS/OSOP)

A14.2.5. 99th Mission Support Group (99 MSG/CC)

A14.2.6. 99th Civil Engineer Squadron (99 CES/CC & 99 CES/CEN)

A14.2.7. FAA Air Traffic Representative (ATREP)

A14.2.8. Invited but not required:

A14.2.8.1. NTTR Director of Operations (NTTR/DO)

A14.2.8.2. 66th Rescue Squadron (66 RQS)

A14.2.8.3. 414th Combat Training Squadron (414 CTS)

A14.2.8.4. 422nd Test and Evaluation Squadron (422 TES)

A14.2.8.5. 549th Combat Training Squadron (549 CTS)

A14.2.8.6. USAF Air Demonstration Squadron “Thunderbirds” (USAFADS)

A14.2.8.7. 64th Aggressor Squadron (64 AGRS)

A14.2.8.8. USAF Weapons School (USAFWS)

A14.2.8.9. 57th Maintenance Group (57 MXG)

A14.3. Airfield Operations AOB Agenda Items. The following requirements are IAW *AFMAN 13-204V1*.

A14.3.1. ATC/Flying Procedures

A14.3.2. Airspace (terminal, enroute and SUA)

A14.3.3. Military/FAA Concerns

A14.3.4. Airfield Operations Flight (AOF Staff, AM, and ATC) Staffing

A14.3.5. RAWS

A14.3.6. Airfield Environment

A14.3.7. Airfield waivers approved by HQ ACC for violations of airfield planning and design criteria, deviations of visual air navigation (airfield lighting & signs) systems criteria, deviations of airfield (pavement & obstruction) markings, and temporary waivers for construction activities, air shows, and temporary installation of aircraft arresting systems.

A14.3.8. AF Management Internal Control Toolset (MICT) Open Items

A14.3.9. Status of Airfield Driving Training Program

A14.3.10. Runway Incursions/Controlled Movement Area Violations

A14.3.11. Safety Items: HATRs/BASH

A14.4. Airfield AOB Annual Agenda Items. The following requirements are IAW *AFMAN 13-204V1*.

A14.4.1. Terminal Instrument Procedures.

A14.4.2. Air Installation Compatible Use Zone (AICUZ).

A14.4.3. Results of Annual Self Inspection.

A14.4.4. Special Interest Items (SII).

A14.4.5. Aircraft Parking Plan.

A14.4.6. Results of the Annual Airfield Certification/Safety Inspection.

A14.4.7. Status of Existing Airfield Waivers (including lighting waivers) – Provide number and statu*s of permanent and temporary airfield waivers and associated correction plans IAW* UFC 3-260-1.

A14.4.8. In accordance with *AFMAN 13-204V1*, the 57 OSS Airfield Operations Flight Commander (AOF/CC) shall implement and maintain operational LOPs (Table A14.1.). LOPs will be reviewed annually by the designated Office of Primary Responsibility (OPR) in collaboration with the AOF/CC during its assigned quarter. As needed, the OPR will coordinate with organizations outside the OSS to finalize review. The final results will be reported to the AOF/CC NLT one week prior to the corresponding AOB where the LOP will be discussed and documented.

Attachment 15

FREQUENCIES

A15.1. UHF and VHF Radio Frequencies. All Nellis AFB based aircraft equipped with UHF and VHF radios except the USAFADS are channelized as outlined below. Air traffic controllers may assign channel numbers to locally based aircraft. RED FLAG and GREEN FLAG participants should refer to their respective IFG.

A15.2. Frequencies and Channelization.

Table A15.1. Local Standard Channelization.

CHANNEL	UHF	VHF	AGENCY
1			Squadron common
2	289.4	120.9	Nellis Clearance Delivery
3	275.8	121.8	Nellis Ground
4	327.0	132.55	Tower
5	350.225	135.1	Nellis Approach/Departure West
6	273.55	124.95	Nellis Approach/Departure East
7	317.525	126.65	Nellis Control -- Sally
8	254.4	119.35	Nellis Control -- Lee
9	305.6	143.00	SOF (Bullseye SOF)
10	343.725		Emergency Single Frequency Approach
11	270.1		ATIS
12	360.625	118.3	Creech AFB Tower

Attachment 16

PARACHUTE OPERATIONS

A16.1. Authorization. Nellis AFB assigned units are authorized to conduct parachute operations at Nellis on a recurring basis. Other units desiring to conduct parachute operations at Nellis require 57 OSS coordination and 57 WG/CC approval. All units conducting parachute operations at Nellis AFB will comply with this instruction.

A16.2. General. Gunfighter DZ is located approximately 2,670 yards east of Runway 21L, approach end threshold (**Figure A16.1**); center point is located at N3614.70 / W11459.70 (MGRS Coordinates: 11S PA 80163 12990) with a 570 yard radius. The 563 RQG will ensure 57 OSS/OSA has current DZ surveys on file. Using units are responsible for ensuring DZ survey is current and for reporting any significant changes to the DZ.

A16.2.1. Parachute operations at Gunfighter DZ shall be conducted outside the fixed wing flying window. Static line jumps may be scheduled within normal fly window when there are scheduled periods of greater than two hours with no Nellis aircraft planned airborne. Due to the complexity of sequencing parachute operations within Class B airspace, parachute operations at Gunfighter DZ, such as Military Freefall (MFF) and static line jumps shall not be scheduled within the normal fly window. Wing scheduling (57 OSS/OSOS) shall coordinate MMF jumps with Airfield Operations Flight Commander (AOF/CC) prior to requesting 57 OG/CC approval.

A16.2.1.1. Users are responsible for confirming with AMOPS of parachute operations 24 hours prior to activity. Confirm/notify planned operation, block times and duration of activity.

A16.2.1.2. Users are responsible for notifying the Base Defense Operations Center (BDOC) the day of parachute operations. Pass date, time and location of the jumps.

A16.2.2. Parachute operations at Gunfighter DZ are normally conducted between 7,000 and 14,000 feet MSL for MFF operations and below 1,500 feet AGL for Static Line (S/L) operations, but may vary due to mission set, training objectives or weather. Jump operations deviating from the altitude standard will be briefed to AMOPS and Tower. Aircraft are not authorized to arrive or depart Nellis AFB while jumpers are airborne. Tower will terminate normal operations NLT the drop aircraft being established on final. Normal operations will commence no sooner than the last jumper landing. The Drop Zone Controller (DZC) will notify the drop aircraft once all jumpers are on the ground. The drop aircraft will relay this call to Tower to allow normal operations to continue.

A16.2.3. Fixed wing flying has priority over parachute operations at Gunfighter DZ. Scheduled parachute operations may experience significant delays due to conflicts with arriving/departing aircraft. Arriving/departing aircraft will take priority unless jumpers have already exited the aircraft. Tower WS has the authority to deviate from prescribed procedures as needed in the interest of flight safety.

A16.3. Drop Scheduling. The 57 OSS/OSOS is the POC for scheduling and deconflicting parachute operations between the using unit and 57th Wing flying operations. Requesting units will coordinate with 57 OSS/OSOS, normally via email, to schedule MFF or S/L operations. Coordination for operations is accomplished NLT the Wednesday prior to the week of intended

use of the DZ and is scheduled through 57 OSS/OSOS. 57 OSS/OSOS will notify the using unit via email of approval/disapproval/modification of the requested parachute operations. In addition, Gunfighter DZ users requiring TA or parking support will coordinate with 57 OSS/OSOS or 57 OSS/DO for ramp parking NLT the Wednesday prior to the week of execution.

A16.3.1. Using units will include the following information when coordinating for use of Gunfighter DZ:

A16.3.1.1. Type Aircraft

A16.3.1.2. Call Sign

A16.3.1.3. Date

A16.3.1.4. Start and end time of operations (Zulu and Local time)

A16.3.1.5. Number of Passes

A16.3.1.6. Number of Jumpers and Number of Jumpers per Pass

A16.3.1.7. Type of Jump

A16.3.1.8. Altitude at which operations will take place

A16.3.2. 57 OSS/OSOS will coordinate approved drop times with AMOPS via email NLT 72 hours prior to the proposed parachute operation for safety and local NOTAM actions. A NOTAM must be in effect prior to parachute operations. Parachute operations must begin and jumpers must be secure within the time limits listed in the NOTAM. AMOPS will call NATCF and Tower to advise them of the scheduled drop and contact the BDOC and pass date, time and location of the jumps.

A16.3.3. Any changes to approved DZ use requires coordination/deconfliction with 57 OSS/OSOS. Changes may cancel or delay DZ use.

A16.4. Static Line Operations. Static Line (S/L) operations are normally conducted to a controlled time over target (TOT). Self-contained navigation to the DZ is highly desired to maximize training. Drop aircraft run-in for TOT drops will be straight to the DZ, at or below 4,200 feet MSL. The descent to drop altitude must be within confines of the Las Vegas Class B airspace (avoid built-up areas). When a situation requires Tower to cancel the drop, Tower will transmit: “NO DROP,” state the reason (time permitting) and issue appropriate instructions.

A16.5. Military Freefall Operations. During Military Freefall (MFF) operations, drop aircraft will remain in communication with NATCF and Tower. Aircraft run-in is straight to the DZ at the designated drop altitude. When a situation requires Tower to cancel the drop, Tower will transmit: “NO DROP,” state the reason (time permitting) and issue appropriate instructions.

A16.6. Radio Procedures. The drop aircraft will contact NATCF prior to entering the Class B with call sign, position, and intentions (example: “KING 91, 20 NM EAST, VFR, INBOUND FOR NELLIS PARACHUTE OPERATION”). When transferred to Tower, the aircraft will call inbound for parachute operation and coordinate the post drop maneuver (example: “KING 91 INBOUND FOR PARACHUTE OPERATION REQUEST VFR STRAIGHT-OUT DEPARTURE”). Once jumpers have exited the aircraft, the aircraft will notify Tower “JUMPERS AWAY” and then execute the approved post drop maneuver. During MFF parachute operations, notify NATCF when two minutes prior to jumpers away.

A16.6.1. The DZC will notify the aircraft when all the jumpers are on the ground and the aircraft will, in turn, notify Tower. The using unit is responsible for recovery of jumpers and associated equipment.

A16.7. Post Drop Maneuver. The pilot of the drop aircraft will coordinate with Tower and get approval for the post drop maneuver prior to the drop. Post drop maneuvers shall be limited to rectangular traffic, re-enter, re-run or straight-out VFR/IFR departure.

A16.8. Drop Zone Communications. The DZC will maintain radio contact with the drop aircraft and with Tower during operations. The DZC will notify Tower "JUMPERS SECURE" when all parachute operations are completed and "DZ IS CLOSED" when all jumpers are accounted for and departing the DZ.

A16.9. Emergency Procedures. Emergency procedures of primary concern for parachute operations include Towed Jumper (S/L) or Cutaway (MFF). Emergency procedures for malfunctions will be IAW current procedures. The drop aircraft will notify Tower of intentions and when emergency is resolved.

A16.9.1. For an injured jumper, the DZC notify the drop aircraft and Tower of injury. Once extent of injury is determined, DZC will inform drop aircraft and Tower of the situation, and follow-on actions.

A16.10. Drop Zone Controller Requirements.

A16.10.1. The Drop Zone Controller (DZC) represents the appropriate commander as provided in the mission request.

A16.10.2. The DZC ensures that adequate medical and evacuation coverage is available prior to personnel airdrops.

A16.10.3. The DZC observes and evaluates:

A16.10.3.1. All factors that may adversely affect the safety of the operation and ensures transmission of weather information when required.

A16.10.3.2. Condition of the DZ prior to the airdrop.

A16.10.3.3. Placement of personnel and equipment on the DZ. Only designated vehicles and personnel will remain on the DZ. Recovery and medical personnel and equipment must be positioned so that constant contact is maintained with the DZC. Note: If the ceiling is less than 600 feet, direct all personnel and equipment off the DZ to ensure safety.

A16.10.3.4. The operation of other aircraft that could endanger the drop aircraft, equipment load, or parachutists.

A16.10.4. The DZC should have immediate access to ground-to-air communications equipment or sufficient signaling aids to operate the DZ. Ground-to-air communication is required for IMC airdrops.

A16.10.5. The DZC insures non-DZC personnel are aware of the "NO DROP" signal in order to prevent an inadvertent signal to the aircraft.

A16.10.6. In the event conditions are unsafe for airdrop operations, the DZC ensures that:

A16.10.6.1. "NO DROP" signals are displayed on the DZ.

A16.10.6.2. “NO DROP” or drop cancellation information is transmitted to the aircraft.

A16.10.6.3. “NO DROP” advisories are transmitted early enough to allow time for authentication; specifically, not later than 1 minute prior to actual TOT, unless an emergency arises.

A16.10.6.4. If last minute conditions preclude a safe drop and time for proper authentication is not available, the DZC will immediately and repetitively transmit cancellation of drop clearance, “NO-DROP, NO-DROP, NO-DROP.”

A16.10.7. The DZC will contact AMOPS a minimum of two hours prior to DZ operations beginning. All DZ times will be verified prior to the start of operations.

A16.10.8. Coordinate with the Tower prior to conducting DZ operations. In the event jumpers land in an area other than the designated DZ, to include on the airfield, the DZC will notify Tower and will not enter any controlled movement area without Tower’s approval. The DZC is responsible for ensuring all personnel supporting the DZ operations are under their control at all times.

A16.10.9. DZC will ensure all jumpers and DZ support personnel have accounted for all gear and equipment.

A16.10.10. Inform AMOPS when operations are complete.

Figure A16.1. Gunfighter Drop Zone.



Attachment 17

IFF MODE 3/A BEACON CODE ALLOCATIONS

A17.1. General.

A17.1.1. The FAA in coordination with 57 OSS/OSA, allocates IFF Mode 3/A beacon codes to Nellis/Creech AFB IAW *FAAO 7110.66F Western Service Area (WSA) Supplement 1* and the National Beacon Code Allocation Plan as coordinated with 57 OSS/OSA.

A17.1.2. 57 OG/CC further delegates to 57 OSS/OSA, Mode 3/A assignment authority for Nellis/Creech AFB. FAA allocations of Mode 3/As are a limited resource and sub-delegated in the following tables; submit local change requests to **57oss.osa.airfieldoperations@us.af.mil**.

Table A17.1. USAFWS.

* USAFWS (16)	16 WPS (12)	17 WPS (4)	34 WPS (5)
0175-0176 0274-0277 0366-0367 4340-4347	0250-0257 0260-0263	0171-0174	4360-4363 0177
66 WPS (4)	**26 WPS (4)**	**433 WPS (8)**	**6 WPS (14)**
0270-0273	4310-4313 4316-4317	4330-4337	0350-0357 0360-0365
Note: USAFWS Mode 3/A allocation provide a pool of beacon codes for TDY units. Central Scheduling (USAFWS/WSS) will allocate codes to aircraft supporting syllabus, integration and WSINT phases. USAFWS codes are not intended for RED FLAG use.			

Table A17.2. The 57 OG.

64 AGRS (8)	65 AGRS (2)	57 OSS (12)	* SPARES (15)
0264-0267 0340-0343	0344-0345	4364-4367 4370-4377	0211-0317 0240-0245 0346-0347
Note. Spares are assigned temporarily by 57 OSS/OSAR.			

Table A17.3. The 53 TEG.

* 422 TES (21)	556 TES (4)	88 TES (2)
0230-0237 0370-0376 4301-4305	4314-4315	4356-4357
Note: 422 TES can further secure Mode 3/A beacon codes for adversary/support aircraft from the USAFWS pool by coordinating with USAFWS/WSS.		

Table A17.4. Other Organizations.

432 WG (12)	USAFADS (8)	NTTR (1)
4306-4307 4320-4327 0246-0247	0220-0227	0377

A17.1.3. Units requiring up to 10 additional beacon codes should make a request for temporary code(s) assignments from 57 OSS/OSAR, 653-4540/4644.

A17.1.4. Units requiring more than 10 additional beacon codes should make a request for temporary code assignments via email to AFNORTH at **AFNORTH.AIRSPACE@tyndall.af.mil**

Attachment 18

CROSS-COUNTRY AND DIVERT PROCEDURES

A18.1. Mission Preparation:

A18.1.1. Flight orders (unit)

A18.1.2. DD Form 175 flight plan (Base Ops)

A18.1.3. Call sign (Command Post)

A18.1.4. PPR numbers, billeting reservations

A18.2. Items to Bring:

A18.2.1. Fuel credit card

A18.2.2. Safety pins, grounding wires

A18.2.3. Aircraft forms (781)

A18.2.4. JOAP sample kits (1/engine/stop)

A18.2.5. Covers (intake, exhaust, AOA, pitot tube, HUD, seat)

A18.2.6. Maintenance cross-country kit (if applicable)

A18.3. Restrictions (fighters only):

A18.3.1. Storage of baggage or equipment in unoccupied rear cockpit is IAW applicable 11-2F series regulations.

A18.3.2. Maximum of three sorties per day (third sortie cannot be at night).

A18.3.3. Must acquire JOAP within 30 minutes of engine shutdown for:

A18.3.3.1. A10: 1st and 3rd flight; results of 1st must be analyzed before 3rd flight.

A18.3.3.2. F15C/E: 1st flight of the day; results must be analyzed before 3rd flight.

A18.3.3.3. F16: every flight; results must be analyzed after every flight if facilities are available.

A18.3.4. If facilities are not available after 1st flight, sample will be taken to next base where 1st and 2nd flight samples will be analyzed before 3rd flight.

A18.3.5. Ensure minimum runway length and width is IAW MDS 11-2F regulations.

A18.3.6. Tail hook aircraft will take off towards compatible arresting system, and aircraft will ensure cable configurations are compatible with takeoff and landing.

A18.4. After Landing and Before Takeoff Procedures:

A18.4.1. Close flight plan after landing (civil airfields only).

A18.4.2. Aircrew are responsible for security of aircraft at destination.

A18.4.3. Safe all ejection seat pins, ensure other appropriate pins are installed.

A18.4.4. Aircrew must stay with aircraft during servicing and refueling if TA personnel are not qualified.

A18.4.5. Ensure fuel receipts and JOAP results are placed in the aircraft forms.

A18.4.6. Brief ground crew on start procedures, hazards, quick check location and requirements.

A18.4.7. Ensure engine FOD check accomplished.

A18.5. Command and Control:

A18.5.1. Upon landing, call CP with aircraft status and telephone number.

A18.5.2. For diverts, ensure CP has coordinated aircraft security. If aircraft security is in question, remain with the aircraft until security is confirmed.

A18.5.3. All planned deviations from originally approved itinerary will be approved in advance by the applicable Group Commander.

A18.5.4. All unplanned deviations will be briefed to the applicable Group Commander prior to departing on the next leg.

A18.6. Phone Numbers:

A18.6.1. Command Post DSN: 682-2446/2447; Commercial: 702-652-2446/2447 (call collect)

Attachment 19

NELLIS AFB PRIOR PERMISSION REQUIRED (PPR) PROGRAM

A19.1. Nellis AFB PPR Request Form.

A19.1.1. The Airfield Manager (57 OSS/OSAA) is the authority to approve or deny PPRs for Nellis AFB. For most up to date PPR form, email **nellis.baseops@us.af.mil**.

A19.1.1.1. PPRs must utilize the PPR Request Form (**Figure A19.1**) to submit requests to 57 OSS/OSAA no earlier than 7 days prior to arrival.

Figure A19.1. Nellis AFB PPR Request Form.

PPR REQUEST FOR NELLISAFB, NEVADA (KLSV)				
1. Requester/Organization Information				
a. Requester Name:	b. Requester Rank, Branch:	c. Requester Squadron:	d. Date of Request:	
e. Requester Phone:	f. Requester Email:	g. (#) of Aircrew:	h. (#) of PAX:	
2. Aircraft Information				
a. # of A/C and Type:	b. Callsign:	c. Aircraft Tail #:	d. CALP/ALAN #:	e. Arriving After Published Hours
f. Arrival Date:	g. Local Time: ICAO (prior to KLSV):	h. Departure Date:	i. Local Time: ICAO (after KLSV):	
3. Mission Information				
a. Weight Bearing Waiver? Max operating Wt. at Nellis (KIPS)	Distinguished Visitors' (DV) Code: DV Name, Rank, Title (if available)	c. Type of Cargo and # of Pallets:		
d. Fuel Requested (LBS/Gallons):	e. HAZ Cargo (1.1 - 1.4):	f. Net Explosive Weight:		
g. Local Sponsor Info/Local Sorties:	h. Mission #:	i. RON:		
j. Is TA Required? If needed after hours (2000-0800) provide justification:	k. Purpose of Visit:	l. Customs Needed:		
4. Form Information				

1. After Completion of PPR Request Form send to nellis.baseops@us.af.mil, Airfield Management will review before issuing PPR #.
2. All aircraft must contact Nellis Command Post UHF 381.3 or at DSN 312-682-2446 30 minutes prior to landing with arrival/departure and cargo/PAX/fuel info or service delays can be expected.
3. DV/VIP: Aircraft with DV Code 7 or above must contact Nellis AMOPS on DSN 312-682-4601
4. If requester does not have sponsoring unit please contact Nellis Gatekeepers 57wg.visit.requests@us.af.mil, additionally inform Gatekeepers if flying in local sorties, training flights, or LFEs.
5. Ensure that all Nellis AFB NOTAMs and FLIPs are checked for quiet hours, restrictions, and closures. For any clarifications contact AFM at DSN 312-682-4601.
6. Airfield Hours change weekly, for current hours check Nellis NOTAMS at https://www.daip.jcs.mil/daip/mobile/index<https:// www.daip.jcs.mil/daip/mobile/index>.Type in KLSV.
7. Due to limited parking, PPR numbers will not be issued earlier than 7 days prior to requested arrival date. All PPRs are slotted; any aircraft 30 minutes from their arrival/departure time must re-coordinate PPR or aircraft may be diverted. USAF/USN/USMC/USA units conducting local training or any units/aircraft requesting to remain at Nellis for training must coordinate through Nellis Afld Mgmt. All coordination should be initiated NLT 2 days prior to flight for approval by AM OPS if required.

Section Completed by AM OPS	
KLSV PPR #Grade/Name of Approver:	

PPR # will be sent to requester upon approval. For questions regarding PPRs, call DSN (682-4601)
Commercial: 702-652-4601