BY ORDER OF THE
SECRETARY OF THE AIR FORCE

AIR FORCE MANUAL 11-2C-17V3
ADDENDA-A

8 JULY 2024

Flying Operations

C-17 CONFIGURATION AND MISSION PLANNING

COMPLIANCE WITH THIS PUBLICATION IS MANDATORY

ACCESSIBILITY: Publications and forms are available for downloading or ordering on the e-Publishing website at **www.e-publishing.af.mil**.

RELEASABILITY: There are no releasability restrictions on this publication.

OPR: AMC/A3VX

Certified by: AF/A3T
(Col Jonathan H. MaGill)

Supersedes: AFMAN11-2C-17V3ADD-A, 17 September 2018

Pages: 42

This supporting manual implements Air Force Policy Directive (AFPD) 11-2, *Aircrew Operations*, supersedes equipment requirements listed in AFMAN 11-301, Vol 2, *Management and Configuration Requirements for Aircrew Flight Equipment (AFE)*, and is incomplete without Air Force Manual (AFMAN) 11-2C-17 Volume 3, *C-17 Operations Procedures*. This is a specialized publication intended for use by Airmen who have graduated from technical training related to this publication. It establishes guidance for the configuration of the C-17 aircraft to accomplish safely and successfully their worldwide mobility missions. It applies to individuals at all levels operating C-17 aircraft, including the Air Force Reserve Command (AFRC) and National Guard Bureau (NGB), except when noted otherwise. This publication does not apply to the United States Space Force. This AFMAN may be supplemented at any level, but all supplements that directly implement this publication must be routed to the office of primary responsibility (OPR) for coordination prior to certification and approval. Refer recommended changes and questions about this publication to the OPR using the Department of the Air Force (DAF) Form 847, *Recommendation for Change of Publication*. Route DAF Forms 847 from the field through the appropriate functional chain of command. The authorities to waive wing/unit level requirements in this publication are identified with a Tier ("T-0, T-1, T-2, T-3") number following the compliance statement. See DAFMAN 90-161, *Publishing Processes and Procedures,* for a description of the authorities associated with the Tier numbers. Submit requests for waivers through the chain of command to the appropriate Tier waiver approval authority or to the publication OPR for non-tiered. Ensure all records generated as a result of processes prescribed in this publication adhere to Air Force Instruction

33-322, *Records Management and Information Governance Program*, and are disposed in accordance with (IAW) the Air Force Records Disposition Schedule, which is located in the Air Force Records Information Management System.

SUMMARY OF CHANGES

Equipment configurations are consolidated, and additional resources are provided on the configuration planning worksheet. Publication references and cargo handling procedures are updated.

Chapter 1—POLICY **4**

1.1. General. 4

1.2. Responsibilities. 4

1.3. Standard Cargo Compartment Configuration Codes. 4

Table 1.1. Standard Cargo Compartment Configuration Letter Codes. 4

1.4. Deviations. 4

1.5. Weight and Balance. 5

1.6. Revisions. 5

Chapter 2—CONSOLIDATED EQUIPMENT TABLES **6**

2.1. Scope. 6

Table 2.1. Aircraft Equipment. 6

Table 2.2. Configuration/Mission Equipment. 8

Chapter 3—REFERENCE DATA, STANDARD EQUIPMENT, WEIGHT AND BALANCE DATA, AND FLOOR PLANS **12**

3.1. Scope. 12

3.2. Personnel Considerations. 12

3.3. Aeromedical Considerations. 12

3.4. Airdrop Considerations. 13

3.5. Parachute Requirements. 13

3.6. Miscellaneous Data. 13

Table 3.1. Lavatory Personnel Limitations (See Notes). 13

Table 3.2. Cargo Pallet/Passenger Seat Availability (See Notes). 14

Table 3.3. Seat Pallet/Pallet Position Availability (See Notes). 15

Table 3.4. Standard Passenger, Patient, and Troop Weights. 15

Table 3.5. Standard Crew and Crew Baggage Weight and Distribution. 16

Table 3.6. Standard and Additional Configuration/Mission Steward's Equipment for Reference 5, DD Form 365-4..... 17
Table 3.7. Standard and Additional Configuration/Mission Emergency Equipment for Reference 6, DD Form 365-4..... 17
Table 3.8. Standard and Additional Configuration/Mission Extra Equipment for Reference 7, DD Form 365-4..... 18
Figure 3.1. AE-1 Configuration. 19
Figure 3.2. AE-2 Configuration. 20
Figure 3.3. AE-3 Configuration. 21
Figure 3.4. C-1 Configuration. 22
Figure 3.5. C-2 Configuration. 23
Figure 3.6. C-3 Configuration. 24
Figure 3.7. P-1 Configuration. 25
Figure 3.8. CP-X Configuration. 26
Figure 3.9. SP-X Configuration. 27
Figure 3.10. ADP-1 Configuration. 28
Figure 3.11. ADP-2 Configuration. 29
Figure 3.12. ADP-3 Configuration. 30
Figure 3.13. ADC-1 Configuration. 31
Figure 3.14. ADC-2 Configuration. 32
Figure 3.15. CDS-1 Configuration. 33
Figure 3.16. DV-1 Configuration. 34
Figure 3.17. SD-1 Configuration. 35
Figure 3.18. SLC-1 Configuration. 36
Chapter 4—AIRCREW FLIGHT EQUIPMENT CONFIGURATION REQUIREMENTS 37
4.1. Aircraft-Installed AFE Procedures. 37
4.2. Aircraft Configuration. 37
Table 4.1. Aircrew Flight Equipment Life Sustaining Items. 37
Attachment 1—GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION 39
Attachment 2—C-17 CONFIGURATION PLANNING SHEET 41

Chapter 1

POLICY

1.1. General. This manual establishes C-17A basic cargo compartment configurations, standard equipment, and location of such equipment for mission planning and calculating weight and balance. Personnel using this manual should be aware of the infinite number of available variations and include configuration/reconfiguration times when planning. All C-17A aircraft are normally configured with standard quantities of life support equipment IAW this manual. TO 1C-17A-9, *Loading Instructions,* TO 1C-17A-5-2, *Loading Data,* and TO 1C-17A-2-10JG-70-2, *Ground Handling Mission Reconfiguration – Cargo Compartment,* and this manual will be used by maintenance personnel to configure the aircraft.

1.2. Responsibilities. Mobility units performing services on the C-17A aircraft (e.g. aircraft maintenance unit, terminal services, support equipment branch, and Aircrew Flight Equipment) are responsible for configurations and inventory of the aircraft with the equipment listed in this manual, TO 1C-17A-5-2, TO 1C-17A-2-10JG-70-2, or as outlined in the mission directives. **(T-3)** This includes the installation/removal/stowage of the equipment IAW the configurations and equipment tables outlined here. Personnel engaged in planning operations must consider the most appropriate configurations to satisfy mission requirements and minimize variations.

1.3. Standard Cargo Compartment Configuration Codes. Mission directives identify the cargo compartment configuration by a letter code. **Table 1.1** lists the standard cargo compartment configuration letter codes for the C-17A. The letter code followed by a number identifies a variation of the configuration capability outlined in this manual.

Table 1.1. Standard Cargo Compartment Configuration Letter Codes.

Letter Code	Definition
AE	Aeromedical Evacuation
C	Cargo
CP	Cargo and Passengers
P	Passengers
SP	Seat Pallet (Cargo and Passengers)
ADP	Airdrop Personnel
ADC	Airdrop Cargo
CDS	Container Delivery System
DV	Distinguished Visitor (VIP Support Flights)
SD	Static Display
SLC	Senior Leader In-transit Conference Capsule

1.4. Deviations. Cargo compartment configurations listed in this manual may require deviations to meet mission requirements. Deviations will be identified on the mission directive, and must be carefully analyzed to ensure safety of flight, compatibility with aircraft equipment, and weight and balance revisions. An example of a deviation would be an aeromedical evacuation mission that requires more litters than available in configuration AE-1. The mission directive will indicate the number of additional litters and the position of the litter tier provisions to be installed. Aircraft supporting Joint Chiefs of Staff Operation Order (OPORD)-007 will be configured IAW OPORD-

007. Any deviations to OPORD-007 aircraft will be coordinated through Air Mobility Command Special Missions Division (AMC/XOOS).

1.5. Weight and Balance. Changes in configurations, equipment, and supplies affect the weight and balance of the aircraft. **Table 2.1** lists the aircraft equipment included in the basic weight of the aircraft and the location of the items. Equipment listed in **Table 2.2** is added as necessary for configuration or mission requirements, and is entered into references 5, 6, or 7 of DD Form 365-4, *Weight and Balance Clearance Form F***.** For simplicity, the loadmaster may enter the weight and moment data contained in standard equipment **Table 3.6**. **–** **Table 3.8**. Adjustments will be made when the actual on board quantity vary from the data shown. The weight listed in the standard equipment table accounts for all variations of that type, and does not need to be adjusted (e.g., parachutes: BA-22 or BA-30 are 30 lbs. each). Use placarded weight of Roll-On/Roll-Off equipment if different than the weight shown in **Table 2.2**. When aircraft equipment is moved from its stowage location, aircraft moment changes are not required on the DD Form 365-4. Electronic computer data sheets may be used in lieu of the DD Form 365-4 provided these sheets contain essentially the same data listed on DD Form 365-4.

1.6. Revisions. See AFMAN 11-2C-17V3, Chapter 1, for DAF Form 847, *Recommendation for Change of Publication***,** and instructions. Route through Stan/Eval channels.

Chapter 2

CONSOLIDATED EQUIPMENT TABLES

2.1. Scope. Aircraft basic weight includes equipment listed in **Table 2.1**. Items listed in **Table 2.2** are added as necessary to attain a specific configuration and/or comply with mission directives.

Table 2.1. Aircraft Equipment.

Item	Equipment	Quantity	Location
1	Aerial Delivery System (ADS) rail bridge	1	Fuselage Station (FS) 1035 left side
2	Aeromedical stanchion	3 kits	FS 554 left and right 620 right side
3	Aircraft ground wires	2	FS 758 outside right wheel pod
4	CDS Buffer Stop Assembly (BSA)	1	FS 1421 left and right
5	CDS cargo sling assembly	2	Cargo Door
6	CDS gate release cable	6	(4) FS 1395 thru 1446 left/(2) cargo door
7	CDS wishbone assembly	2	Cargo Door
8	Centerline Seat Kit	8 sets	FS 1540 thru 1630
9	Chain/MB-1 CGU-4/E 10,000 lbs.	46	FS450 thru 1231 left and right
10	Chain/MB-2 CGU-3/E 25,000 lbs.	46	FS 450 thru 1231 left and right
11	Comm ext cord set 50 & 100 ft	2	Loadmaster drawer
12	Crash axes	2	FS 260 right 530 right side
13	Core Thrust Reverser (TR) torque limiter	1	FS 1588 cargo door
14	Device MB-1/CGU4/E 10,000 lbs.	46	FS 413 thru 1184 left and right
15	Device MB-2/CGU3/E 25,000 lbs.	46	FS 438 thru 833 left and right
16	ADS rail tool	2	Loadmaster drawer
17	Engine anti-rotate wedge	4	FS 1588 cargo door
18	Engine core exhaust cover	4	FS 1588 cargo door
19	Engine fan brake	1	FS 1588 cargo door
20	Engine fan exhaust cover	4	FS 1588 cargo door
21	Engine inlet covers	4	Cargo Door
22	Enhanced container vertical restraint kit	1	FS 738 Rt Fwd Gear Pod
23	Extinguishers, fire	9	FS 227 thru 1060 left and right
24	Fan TR duct hand pump	1	FS 1588 cargo door
25	Fan TR torque limiter	1	FS 1588 cargo door

26	Fan TR valve lockout pin	4	FS 1588 cargo door
27	First aid kit	6	FS 260 thru 760 left and right
28	Foam mattress	2	Crew rest area
29	Gate release mechanism assy	6	(4) FS 1476 left and right / (2) cargo door
30	Heads Up Display (HUD) dust cover	2	FS 175 left and right
31	Misc. rel pin	2	Loadmaster drawer
32	Maint. hatch warning streamer	2	FS 320 under deck
33	Maintenance ladder	1	FS 620 left side
34	Maintenance safety lanyard	1	Loadmaster drawer/Cargo Door
35	Landing gear pin	6	FS 380 right side
36	Oxygen bottles, portable	10	FS 200 thru 945 left and right side
37	Oxygen masks, Smoke goggles	15	IAW TO 1C-17A-1, *Flight Manual*
38	Paratroop anchor cable	4	FS 1265 left and right side
39	Paratroop retrieval system	2	FS 1200 left FS 1175 right
40	Pitot cover install tool	1	FS 554 left side
41	Pitot tube cover	4	Loadmaster drawer
42	Rel Pins, Maintenance lanyard	2	Loadmaster drawer
43	Ramp ADS link plug	2	FS 1370 left and right side
44	Ramp edge cover	1	FS 1442 cargo door
45	Ramp latch drive wrench	1	FS 1205 left side behind panel
46	Ramp toe guide rail	2	FS 1731
47	Ramp toe roller conveyor	16	FS 1540 cargo door
48	Remote winch control	1	FS 240 left side
49	Restraint harness PCU-17/P	2	Loadmaster drawer
50	Retriever yoke assembly	2	FS 1190 right and 1240 left side
51	Snatch block assembly	4	FS 375 right side
52	Tiedown ring receptacle cover	4	Loadmaster drawer
53	Tiedown strap 5,000 lbs.	50	FS 400 thru 1203 left and right
54	Tow plate mechanism cover	1	FS 1185 center line
55	TR core bolts and fan nut set	1	FS 1588 cargo door
56	Vent extension tube adapter	5	Adjacent to each vent
57	Van Zelm device	12	FS 1433 left and right side
58	Water fill hoses/funnel assembly	1	FS 210 right side
59	Wheel chock	4	FS 738 right wheel pod (DP> Survival Locker)

Table 2.2. Configuration/Mission Equipment.

Item	Equipment	Quantity	Weight Per Item	Location	Moments Per Item
1	Aeromedical Litter	As Required	14	Variable	Variable
2	Aeromedical Litter Stanchions (Additional up to 9)	As Required	60	Variable	Variable
3	Aircraft Armor[5]	1	947	FS 233	22
4	Aircrew Body Armor (Level IIIA)	5	8	FS 280, Survival Equipment Locker	0.2
5	Aircrew Helmet[1,5]	As Required	5	Variable	Variable
6	Air Transportable Galley/Lavatory (ATGL) – Serviced[2,3]	1	3620	FS 391 or FS 401	141.5
7	Air Transportable Galley/Lavatory (ATGL) – Unserviced[2]	1	3200	Variable	Variable
8	Anti-Exposure Suit, CWU-16/P[7]	As Required	10	FS 280, Survival Equipment Locker	0.3
9	Blanket Large (Crew)	6	3.5	FS 280, Crew Rest Area	0.1
10	Blanket Small (Passenger)	As Required	1	Variable	Variable
11	Emergency Passenger Oxygen System (EPOS)	102	2	FS 744 (Distributed) 54 stored in sidewall seats (1 in each) 1 bag of 24 in the Survival Equipment Locker 1 bag of 24 stored in the cargo door storage bin. Seat pallets will be delivered with 1 per seat.	Variable
12	Expendable Supplies	1	10	FS 260, Crew galley	0.3

Item	Equipment	Quantity	Weight Per Item	Location	Moments Per Item
13	Flares/Flare Can[5]	6	42.5	FS 744 (Distributed) Flare Cans are stored in the Cargo Door storage containers.	19.0
14	Flare Hazard Placard[5]	4	5	FS 400, FWD left tie-down device bin.	0.8
15	Hot Cup	1	3	FS 260, Crew galley right side	0.1
16	Human Waste Clean-up Kit	1	5	FS 280, Survival Equipment Locker	0.1
17	Life Preserver LPU-6/P Infant Cot (Infants up to 18 months/30 pounds)	3	4	FS 280, Survival Equipment Locker	0.1
18	Life Preserver LPU-10/P (Used in conjunction with parachute, body armor, and/or survival vest)	2	4	FS 280, Survival Equipment Locker	0.1
19	Life Preserver Adult/Child (A/C)[6]	110	1.5	FS 744 (Distributed) one each in sidewall seat, 1 bag of 28 stored in survival locker 1 bag of 28 stored in cargo door storage bin. Seat pallets will be delivered with 1 per seat.	Variable
20	Maintenance Technical Order File	1	15	FS 305, FWD LM Station, left stowage drawer	0.5
21	Mobility/Deployment A/C-Bag, Combined General/Ground Chemical Equipment[1,5]	As Required	30	Variable	Variable
22	Mobility/Deployment B-Bag, Cold-Weather Gear[1,5]	As Required	15	Variable	Variable

Item	Equipment	Quantity	Weight Per Item	Location	Moments Per Item
23	Mobility/Deployment D-Bag, Aircrew Chemical-Defense Ensemble (ACDE)[1,5]	As Required	43	Variable	Variable
24	Night Vision Goggle (NVGs)[1,5]	As Required	8	Variable	Variable
25	Oxygen Bottles, Portable (Additional)	As Required	6	Variable	Variable
26	Oxygen Masks (Additional)	As Required	3	Variable	Variable
27	Passenger Demo Kit	1	3	FS 380, FWD left tie-down device bin.	0.1
28	Passenger Information Card	As Required	3	Variable	0.1
29	Parachutes	2	30	FS 280, Survival Equipment Locker	0.8
30	Pillow Large w/Case	6	2	FS 280, Crew Rest Area	0.1
31	Pillow Small w/Case	As Required	0.5	Variable	Variable
32	Protective Breathing Equipment	6	5	FS 540 (Distributed) 2 crew rest area 1 at FWD LM station 1 at FS 395 left side 2 at FS 960 (1 left/1 right side)	1.6
33	Protective Clothing Kit	1	36	FS 280, Survival Equipment Locker	1
34	Restraint Harnesses (Additional)	As Required	10	FS 280, Survival Equipment Locker	0.3
35	Seat Pallet, 5 Seat DV[4]	As Required	591	Variable	Variable
36	Seat Pallet, 10 Seat DV[4]	As Required	767	Variable	Variable
37	Seat Pallet, 15 Seat[4]	As Required	943	Variable	Variable

Item	Equipment	Quantity	Weight Per Item	Location	Moments Per Item
38	Senior Leaders In-transit Conference Capsule (SLICC) (Unoccupied)	1	4660	FS 685	319.2
39	SLICC Berthing Capsule	1	3790	FS 580	219.8
40	Senior Leaders In-transit Pallet (SLIP) (Unoccupied)	1	1350	Variable	Variable
41	Standard 2 Gallon Liquid Container	1	25	FS 260, Crew galley right side	0.7
42	Survival Vest	5	8	FS 280, Survival Equipment Locker	0.2
43	Survival Backpack	2	18	FS 280, Survival Equipment Locker	0.5
44	Water Container (5 gal)	1	40	FS 358	1.4
45	60 Hz Backup Converter	1	43	FS 252	1.1

Notes:

1. Aircrew are required to obtain equipment prior to flight operations.

2. The Air Transportable Galley/Lavatory (ATGL) may be transported as cargo in either aircraft rail system. When transported as cargo, power will not be applied to the unit. When loaded on the aircraft for operational use, the ATGL is loaded into the (ADS) 10 inches forward of pallet position 1 at FS 391. When a seat pallet is positioned in ADS pallet position 2, the ATGL is loaded into ADS pallet position 1 with centroid at FS 401 to minimize tripping hazards while accessing the ATGL lavatories. ATGLs loaded on the aircraft ramp will be drained of all fluids.

3. Equipment for ATGLs will be determined by local base operating policy. Each lavatory should contain at a minimum of one roll of toilet paper, 1 pack of paper towels, and soap.

4. Palletized seats will only be occupied when loaded facing forward in the aircraft. When loaded as cargo (not occupied), palletized seats may be loaded in any orientation in either the ADS or logistics rails.

5. When directed for contingency missions or by the Threat Working Group.

6. LPU-10/P may be used as an authorized substitute for the A/C life preservers for the flight crew.

7. Operations planners, schedulers, or crew will request Anti-Exposure Suits for primary aircrew members on any missions planned to operate above 78 degrees North or below 60 degrees South latitude. If requested, suits will be made available by Aircrew Flight Equipment (AFE) and pre-positioned in the Survival Equipment Locker. **(T-2)**

Chapter 3

REFERENCE DATA, STANDARD EQUIPMENT, WEIGHT AND BALANCE DATA, AND FLOOR PLANS

3.1. Scope. This chapter contains reference data, cargo compartment configurations in tabular and floor plan format, including weight, location, and moment data for associated standard and additional equipment to assist personnel in load planning and calculating weight and balance.

3.2. Personnel Considerations.

3.2.1. The Lavatory Personnel Limitations Chart, **Table 3.1,** reflects the number of personnel (crews and passengers/troops) that the crew lavatory and aircraft urinals can accommodate. **Table 3.1** will be considered when determining number of passengers/troops that can be airlifted without an ATGL.

3.2.2. When carrying more than 40 passengers in any configuration, maximum seating capacity must be reduced by one to accommodate the requirement for an additional C-17 qualified loadmaster or pilot in the cargo compartment for takeoff and landing. This restriction does not apply to personnel airdrop missions with no planned airland mission legs.

3.2.3. Crew/Passenger/Troop Drinking Water. Adequate amount of drinking water must be provided for all personnel on board. Normally, three 5-gallon water containers are provided for operational missions, and one 5-gallon container for local training missions. An ATGL containing sufficient drinking water may be provided for all passenger configurations.

3.2.4. Passengers will not be seated alongside pallets loaded in the Logistics Rail System, regardless of pallet construction. **(T-3)** When the payload consists of palletized netted cargo or cargo that is secured with straps, a 30-inch space will be maintained between the cargo and the nearest forward occupied seat, litter, or nuclear cargo. **(T-3)** When the cargo (palletized or non-palletized) is secured with chains, or when a plywood barrier and chain bridle(s) are installed to attain all forward restraint on netted cargo, the 30-inch spacing is not required. **Exception:** For patient access, the 30-inch spacing is always required when carrying litter patients regardless of type tiedown used.

3.2.5. Palletized seats are not intended for prolonged over water flights. EPOS is the primary emergency oxygen source for palletized seats. When EPOS is used as the primary source of oxygen, flights will not be planned above FL 410. **(T-3)** Consider Equal Time Point (ETP) requirements.

3.3. Aeromedical Considerations.

3.3.1. A minimum of 10 seats are required for aeromedical evacuation crewmembers. Passenger seats are released at discretion of the MCD. Cargo must be positioned centerline with a clear unobstructed path to the cargo ramp on both sides. Pallets will be loaded in the ADS rail system.

3.3.2. Additional aeromedical aircraft equipment may be obtained from other aircraft. Coordinate equipment movements between aircraft with controlling agency (Air Operations Center (AOC), Air Mobility Division (AMD), etc.) Annotate changes in the gaining and losing aircraft's AFTO Forms 781-A, *Maintenance Discrepancy and Work Document*.

3.4. Airdrop Considerations. Several factors must be considered during planning of cargo airdrop operations.

3.4.1. Weight and balance will be considered at all times. For sorties with multiple equipment airdrops, calculations will be made prior to takeoff to determine the aircraft center of gravity (CG) after each load has exited. This is accomplished to ensure in-flight CG envelope limits are not exceeded. For sequential airdrop, calculations will be made to ensure CG limits are not exceeded in the event of a malfunction resulting in cargo remaining on the aircraft.

3.4.2. In the event of a planned airdrop of personnel near or over large bodies of water, the unit being airdropped will furnish required parachute-compatible life preservers. However, A/C life preservers will be provided to fulfill emergency ditching requirements.

3.5. Parachute Requirements. Two parachutes are normally supplied for all missions.

3.5.1. Airdrop missions require one parachute for each loadmaster. IAW AFMAN 11-2C-17V3, a safety harness may be substituted if it can be adjusted to allow enough mobility to perform all required duties. This option will be at the discretion of the loadmaster.

3.5.2. If deemed necessary for hazardous acceptance/functional check flights, or when identified in the mission directive, one parachute will be available for each crewmember.

3.6. Miscellaneous Data. **Table 3.1. – Table 3.8** and **Figure 3.1. – Figure 3.18** are provided to aid in configuration planning and weight and balance. Equipment in **Table 3.6. – Table 3.8** listed as 'Standard Equipment' is accounted for in all depicted cargo compartment configurations. Equipment listed as 'Additional Equipment' will be added as necessary to meet mission requirements. Planning agencies will ensure specific items needed, above quantities in the basic configuration, are annotated on the mission directive. Figures are not to scale with respect to actual aircraft and equipment location.

Table 3.1. Lavatory Personnel Limitations (See Notes).

Total Personnel	Lavatory	Urinal # 1	Urinal # 2	Total Hours
190	4.6	0.9	0.9	6.4
180	4.7	1.0	1.0	6.7
170	4.9	1.1	1.1	7.1
160	5.2	1.2	1.2	7.6
150	5.5	1.3	1.3	8.1
140	5.9	1.4	1.4	8.7
130	6.3	1.5	1.5	9.3
120	6.8	1.7	1.7	10.2
110	7.5	1.8	1.8	11.1
100	8.2	2	2	12.2
90	9.1	2.2	2.2	13.5
80	10.3	2.5	2.5	15.3
70	11.7	2.9	2.9	17.5

60	13.7	3.3	3.3	20.3
50	16.4	4	4	24.4

Notes:

1. Service aircraft lavatory and urinals at the station requiring airlift of maximum personnel.
2. Crew members must be subtracted from the figures given to arrive at maximum troop load.
3. Do not consider children up to 7-years old when computing maximum load figures.
4. If the toilet leaks, maintenance facilities will be notified to repair the toilet before passengers are airlifted. If maintenance is not available or toilet leak cannot be repaired, passengers will not be airlifted. **Exception**: At the discretion of the aircraft commander, passengers may be carried on flights of one hour or less provided the lavatory can be repaired at the next station.

Table 3.2. Cargo Pallet/Passenger Seat Availability (See Notes).

Configuration Code	Pallets Available	Seats Available[1]	Log Pallet Positions Used[2]	ADS Pallet Positions Used	Center Seat Positions Used[3]	Sidewall Seats Used[2]
CP-0	6	99	8 & 9	8 & 9	1 thru 8	All
CP-1	8	83	8 & 9	6 thru 9	1 thru 5	All
CP-2	9	77	8 & 9	5 thru 9	1 thru 4	All
CP-3	10	69	8 & 9	4 thru 9	1 thru 3	All
CP-4	11	59	8 & 9	3 thru 9	1	All
CP-5	13	53	8 & 9	1 thru 9		All
CP-6	14	41	6 thru 9	1 thru 6		1 thru 21
CP-7	15	32	5 thru 9	1 thru 5		1 thru 16
CP-8	16	24	4 thru 9	1 thru 4 (Note 4)		1 thru 12
CP-9	17	4	2 thru 9	1		1 and 2

This table is for planning purposes only and reflects the maximum seats available for a specific number of pallets or the maximum number of pallets for a specific number of seats. Two additional seats may be obtained in some configurations with the use of a forward barrier IAW TO 1C-17A-9.

Notes:

1. When the payload consists of palletized netted cargo or when the cargo is secured with straps, a 30-inch space will be maintained between the cargo and nearest occupied row of seats. When a plywood barrier and chain bridle(s) are installed to attain all forward restraint on the netted cargo or when the cargo is secured with chains, the 30-inch spacing is not required. When these requirements cannot be achieved, subtract five-seats from number available.

2. Passengers will not be seated alongside pallets loaded in the logistics rails on the same side of the aircraft.

3. All centerline seats start at position 1.

4. ADS rail sections aft of station 665 will be lowered. Portion of the pallet in ADS 4 will be out of rails, additional restraint will be required for lateral left/right and vertical. Additional forward/aft restraint may be required based on pallet weight.

Table 3.3. Seat Pallet/Pallet Position Availability (See Notes).

Configuration Code	Seat Pallets Used	Passenger Seats Available[1,2]	Pallets Positions Available[2,3]
SP-1	1	68	12
SP-2	2	83	11
SP-3	3	98	10
SP-4	4	113	9
SP-5	5	128	8
SP-6	6	143	7
SP-7	7	158	6
SP-8	8	173	5
SP-9	9	188	4

Notes:

1. Numbers based on 15-person seat pallets and utilization of 54 sidewall seats. One seat has been allocated for the additional crewmember required in the cargo compartment when more than 40 passengers are carried.

2. When the payload consists of palletized netted cargo or when the cargo is secured with straps, a 30 inch space will be maintained between the cargo and nearest occupied row of seats. When a plywood barrier and chain bridle(s) are installed to attain all forward restraint on the netted cargo (install IAW TO 1C-17A-9) or when the cargo is secured with chains, the 30-inch spacing is not required. When these requirements cannot be achieved, subtract five-seats from number available.

3. Numbers based on utilization of ADS pallet positions on the cargo floor, and Logistic pallet positions on the cargo ramp. Ramp will not be available for ground evacuation when pallets are placed side-by-side in Logistics pallet positions 8 and 9.

Table 3.4. Standard Passenger, Patient, and Troop Weights.

Standard Passengers, Patient, and Troops	Weight (lbs.)
Passenger (without bags)	175
Passenger Baggage	70

Litter (includes weight of patient)	195
Ambulatory (without bags)	175
Ground Troop (with web gear and weapon)	210
Ground Troop (with web gear, weapon, and ruck sack) Training	250
Ground Troop (with web gear, weapon, and ruck sack) Combat	300
Ground Troop (with web gear, weapon, ruck sack, and duffel bag) Training	350
Ground Troop (with web gear, weapon, ruck sack, and duffel bag) Combat	400
Parachutist (with web gear, weapon, and ruck sack) Training	300
Parachutist (with web gear, weapon, and ruck sack) Combat	350
Parachutist (without weapon or equipment) Hollywood	220
Ruck sack (Training)	40
Ruck sack (Combat)	80

Table 3.5. Standard Crew and Crew Baggage Weight and Distribution.

Standard Crew Weight and Distribution (200 lbs. Each)				
No	Crew Pos	FS	Weight	Moment
2	Pilot/Co-Pilot Seat	177	400	7.0
1	ACM Seat	225	200	4.5
2	ACM Seat	225	400	9.0
1	Crew Rest Area Seat	271	200	5.4
2	Crew Rest Area Seat	271	400	10.8
1	FWD LM Station Seat	304	200	6.1
X	Extra Crew Mbrs	Variable	200	Variable

Standard Crew Baggage Weight and Distribution (50 lbs. Each)			
No	Weight	FS 280 Moment	FS 365 Moment
3	150	4.2	5.5
4	200	5.6	7.3
5	250	7.0	9.1
6	300	8.4	11.0
7	350	9.8	12.8

Table 3.6. Standard and Additional Configuration/Mission Steward's Equipment for Reference 5, DD Form 365-4.

Reference 5, DD Form 365-4 (Steward's Equipment)				
Standard Equipment	**Quantity**	**Weight**	**Station**	**Moment**
Water container (5 Gallon)	3	120	358	4.3
Std 2 gal liquid containers	1	25	260	0.7
Hot cup	1	3	260	0.1
Human Waste Clean-up kit	1	5	280	0.1
Expendable supplies	1	10	260	0.3
	TOTAL	**277**	**448**	**12.4**
Additional Equipment	**Quantity**	**Weight**	**Station**	**Moment**
Blankets, large	6	21	280	0.6
Pillows, large w/case	6	12	280	0.3
Pillows, small	54	54	744 (dist)	4.0
Pillows, small w/case	54	27	744 (dist)	2.0
Passenger Information Card	102	3	744 (dist)	0.1
ATGL (Serviced)	1	3620	391/401	145.1
Seat Pallet 5 Seat DV	1	591	Variable	Variable
Seat Pallet 10 Seat DV	1	767	Variable	Variable
Seat Pallet 15 Seat Mass	1	943	Variable	Variable
SLICC Berthing Capsule	1	3790	580	219.8
SLICC Conference Capsule (unoccupied)	1	4460	685	305.5
SLIP (unoccupied)	1	1350	884	119.3

Table 3.7. Standard and Additional Configuration/Mission Emergency Equipment for Reference 6, DD Form 365-4.


Reference 6, DD Form 365-4 (Emergency Equipment)				
Standard Equipment	**Quantity**	**Weight**	**Station**	**Moment**
LPU-6/P life preservers (infant cot)	3	12	280	0.3
LPU-10/P life preservers (crew)	2	8	280	0.2
A/C life preservers	110	165	744 (dist)	12.3
Protective Clothing Kit	1	36	280	1.0
Emergency Passenger Oxygen System (EPOS)	102	204	744 (dist)	15.2
Protective Breathing Equipment	6	30	540 (dist)	1.6
Parachute	2	60	280	1.7
Aircrew Body Armor (Level IIIA)	5	40	280	1.1
Survival Backpack	2	36	280	1.0
Passenger Demo Kit	1	3	380	0.1
	TOTAL	**618**	**579**	**35.8**
Additional Equipment	**Quantity**	**Weight**	**Station**	**Moment**

Survival Vest	5	40	280	1.1
Oxygen Bottle, Portable (Additional)	1	6	Variable	Variable
Oxygen Mask/Goggles (Additional)	1	3	Variable	Variable

Table 3.8. Standard and Additional Configuration/Mission Extra Equipment for Reference 7, DD Form 365-4.

Reference 7, DD Form 365-4 (Extra Equipment)				
Standard Equipment	**Quantity**	**Weight**	**Station**	**Moment**
Maintenance Technical Order File	1	15	305	0.9
Aircraft Armor	1	946	234	22.1
Flares/Flare Cans	6	255	744 (dist)	19.0
Flare Hazard Placards	4	20	400	0.8
	TOTAL	**1251**	**342**	**42.8**
Additional Equipment	**Quantity**	**Weight**	**Station**	**Moment**
Aircrew Helmet	3	15	365	0.2
A/C-Bag	3	90	Variable	Variable
B-Bag	3	45	Variable	Variable
D-Bag	3	129	Variable	Variable
NVG	3	24	365	0.9

Figure 3.1. AE-1 Configuration.

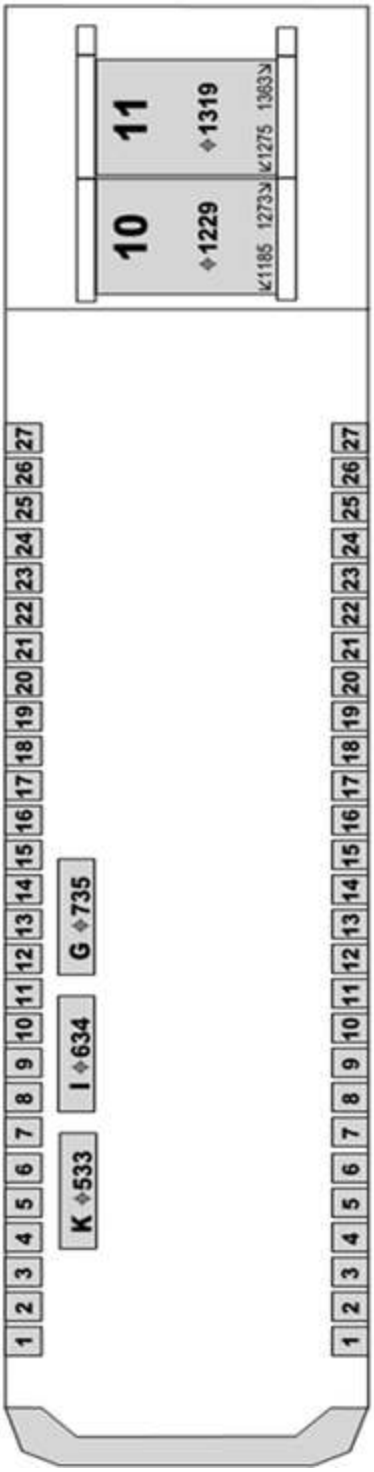

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This AE configuration provides up to 9 litter spaces and 54 seats. Additional cargo may be added at the discretion of the Medical Crew Director (MCD). Litter stations may be placed at X = +/- 62 or X = +/- 88. Litter stations will be placed at X = +/- 88 if adjacent to a centerline seat. The number of seats offered for ambulatory patients is based on the number of aeromedical evacuation crew members (AECM) and Critical are Air Transport Team (CCATT) members. The final litter configuration and AECM/CCATT seating will be determined by the MCD.

2. If litter stanchions are installed at X = +/- 88, centerline seats will be installed for CCATT patients.

3. Sidewall seats are numbered front to rear and are identified by side seat number left/right. Litter tiers are identified alphabetically starting right to left from the rear to front.

4. Ramp cargo is restricted to two pallets loaded in the ADS rail system or floor loaded cargo. Pallets in the ADS rail system are loaded on the 108-inch bias. Floor loaded cargo will be placed X = +/- 54.


5. Additional cargo may be loaded centerline with ample room for evacuation on both the left and right side with a minimum of 30 inch spacing to an installed litter stanchion.

6. For pallet loading, ramp toes should be installed in low position along with rollers and guide rails, and configure ADS rails and rollers. For passenger/patient loading, outboard ramp toes must be installed in the high position with rollers removed and stowed. Outboard ramp toes will be stowed on the cargo door for taxi/flight.

7. Install litter stanchions IAW TO 1C-17A-1, and Job Guides. The 60 Hz backup converter may be installed.

8. Time to configure with two people is 25 minutes.

Figure 3.2. AE-2 Configuration.

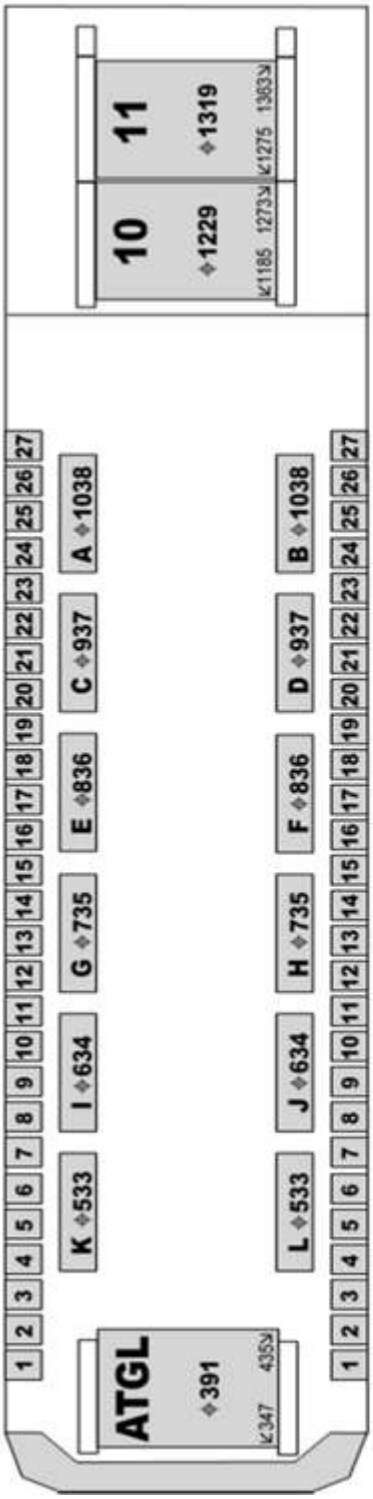

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This AE configuration provides up to 36 litter spaces and 54 seats. Additional cargo may be added at the discretion of the Medical Crew Director (MCD). Litter stations may be placed at X = +/- 62 or X = +/- 88. Litter stations will be placed at X = +/- 88 if adjacent to a centerline seat. The number of seats offered for ambulatory patients is based on the number of aeromedical evacuation crew members (AECM) and CCATT members. The final litter configuration and AECM/CCATT seating will be determined by the MCD.

2. If litter stanchions are installed at X = +/- 88, centerline seats will be installed for CCATT patients.

3. Sidewall seats are numbered front to rear and are identified by side seat number left/right. Litter tiers are identified alphabetically starting right to left from the rear to front.

4. ATGL positioned at FS 391. Ramp cargo is restricted to two pallets loaded in the ADS rail system or floor loaded cargo. Pallets in the ADS rail system are loaded on the 108-inch bias. Floor loaded cargo will be placed X = +/- 54.


5. Additional cargo may be loaded centerline with ample room for evacuation on both the left and right side with a minimum of 30 inch spacing to an installed litter stanchion.

6. For pallet/ATGL loading, ramp toes should be installed in low position along with rollers and guide rails, and configure ADS rails and rollers. For passenger/patient loading, outboard ramp toes must be installed in the high position with rollers removed and stowed. Outboard ramp toes will be stowed on the cargo door for taxi/flight.

7. Install litter stanchions IAW TO 1C-17A-1, and Job Guides. The 60 Hz backup converter may be installed.

8. Time to configure with two people is one hour and 25 minutes.

Figure 3.3. AE-3 Configuration.

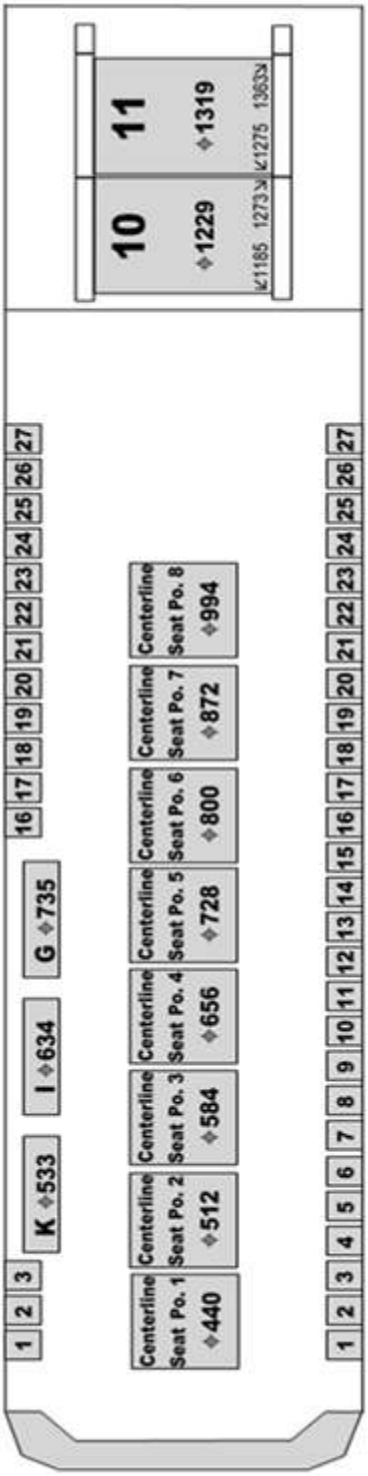

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This AE configuration provides up to 9 litter spaces and 90 seats. Additional cargo may be added at the discretion of the Medical Crew Director (MCD). Litter stations may be placed at X = +/- 62 or X = +/- 88. Litter stations will be placed at X= +/- 88 if adjacent to a centerline seat. The number of seats offered for ambulatory patients is based on the number of AECM and CCATT members. The final litter configuration and AECM/CCATT seating will be determined by the MCD.

2. If litter stanchions are installed at X = +/- 88, centerline seats will be installed for CCATT patients.

3. Sidewall seats are numbered front to rear and are identified by side seat number left/right. Each centerline seat kit has 6 seats and are identified by position number and seat left/right. Litter tiers are identified alphabetically starting right to left from the rear to front.

4. Ramp cargo is restricted to two pallets loaded in the ADS rail system or floor loaded cargo. Pallets in the ADS rail system are loaded on the 108-inch bias. Floor loaded cargo will be placed X = +/- 54.


5. Additional cargo may be loaded centerline with ample room for evacuation on both the left and right side with a minimum of 30 inch spacing to an installed litter stanchion.

6. For pallet loading, ramp toes should be installed in low position along with rollers and guide rails, and configure ADS rails and rollers. For passenger/patient loading, outboard ramp toes must be installed in the high position with rollers removed and stowed. Outboard ramp toes will be stowed on the cargo door for taxi/flight.

7. Install litter stanchions IAW TO 1C-17A-1, and Job Guides. The 60 Hz backup converter may be installed.

8. Time to configure with two people is 1 hour and 30 minutes.

Figure 3.4. C-1 Configuration.

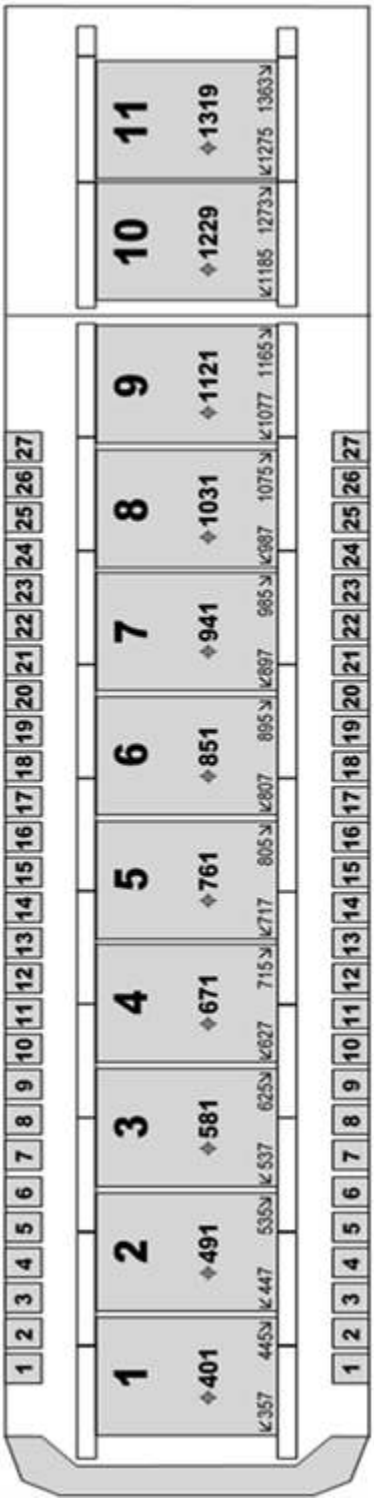

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:


1. This cargo configuration provides up to 11 pallet positions in the ADS rail system and 54 seats. If more than 40 passengers are carried, seat availability is reduced by 1 to accommodate the required additional loadmaster or pilot in the cargo compartment. Large crew complements may further reduce the number of seats offered.

2. Pallets in the ADS rail system are loaded on the 108-inch bias.

3. For pallet loading, ramp toes should be installed in low position along with rollers and guide rails. Outboard ramp toes may be stowed.

4. Time to configure with two people is 25 minutes.

Figure 3.5. C-2 Configuration.

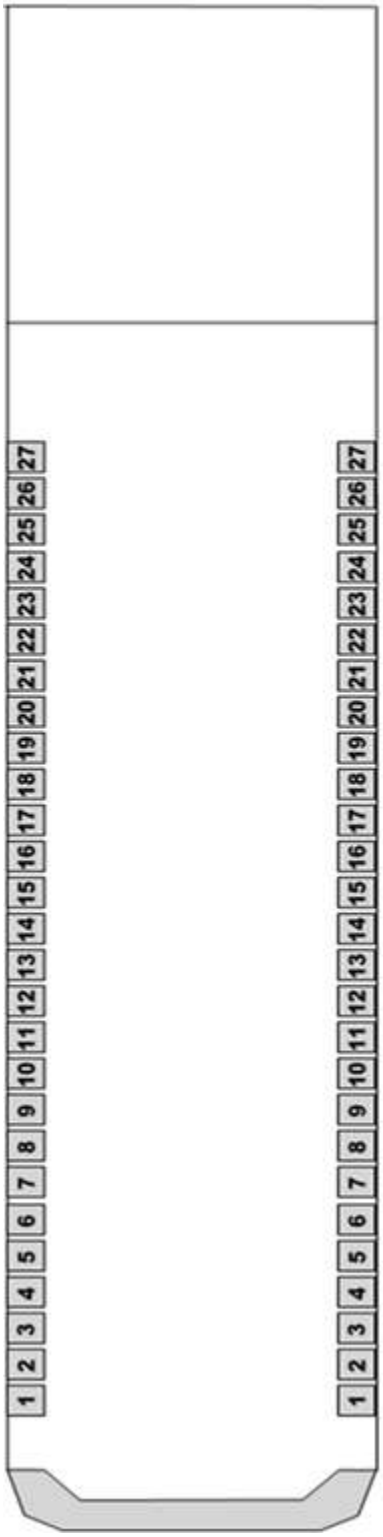

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This cargo configuration provides area for loading bulk cargo/vehicles and up to 54 seats. If more than 40 passengers are carried, seat availability is reduced by 1 to accommodate the required additional loadmaster or pilot in the cargo compartment. Large crew complements may further reduce the number of seats offered.


2. Sidewall seats are numbered front to rear and are identified by side seat number left/right.

3. Sidewall seats adjacent to cargo extending past X = +/- 85 will not be used.

4. ADS rails, logistic rails and roller conveyors are stowed.

5. Time to configure with two people is 15 minutes

Figure 3.6. C-3 Configuration.

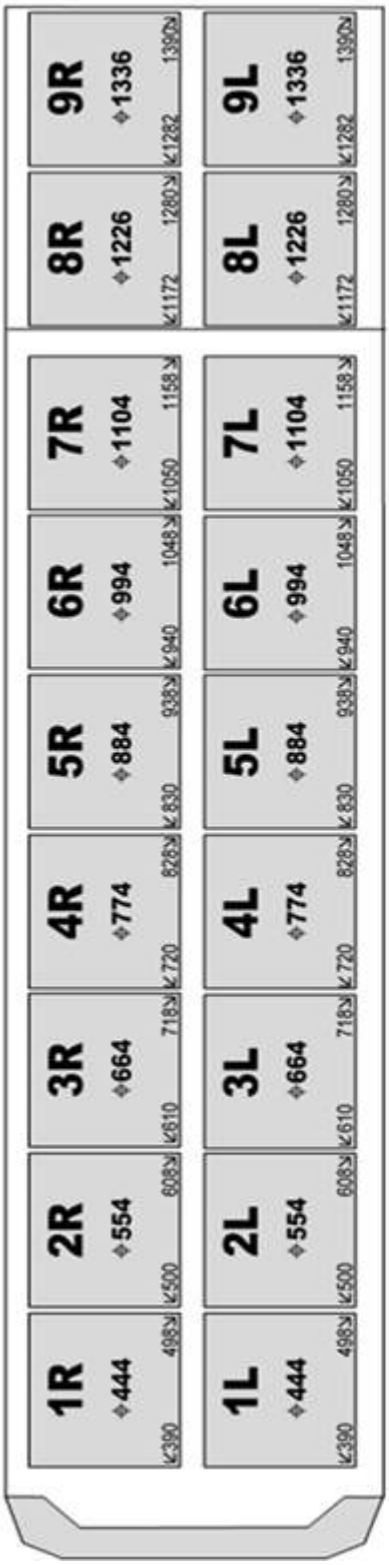

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:


1. This cargo configuration provides up to a maximum of 18 pallet positions in the logistic rail system. Passengers will not be seated alongside pallets loaded in the logistics rail system, regardless of pallet construction. **(T-3)**

2. Pallets in the logistic rail system are loaded on the 88-inch bias.

3. For pallet loading, ramp toes should be installed in low position along with rollers and guide rails.

4. Time to configure with two people is 20 minutes.

Figure 3.7. P-1 Configuration.

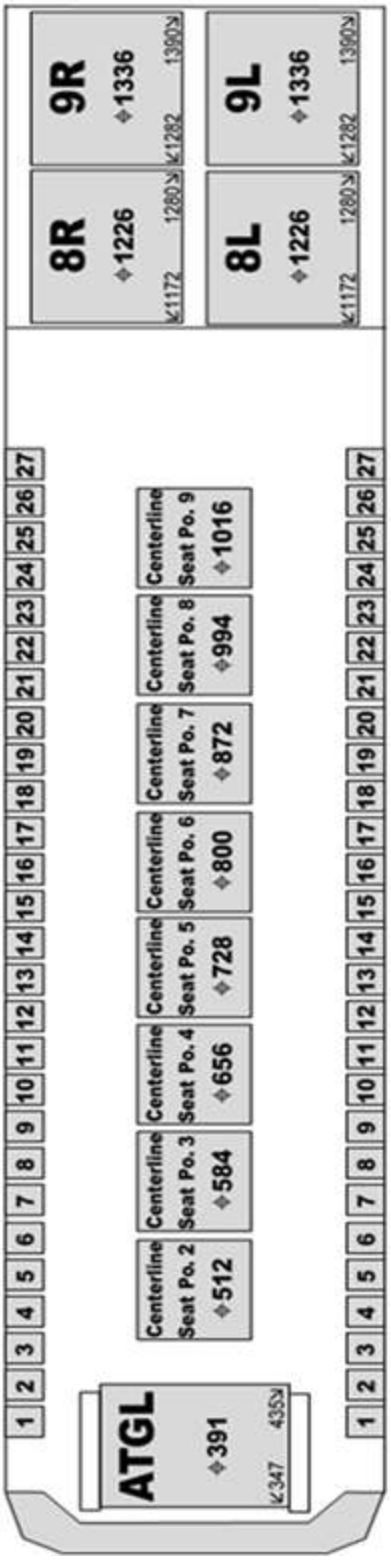

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	ATGL	3620	391	145.1
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This passenger configuration provides up to 102 seats and 4 pallet positions. If more than 40 passengers are carried, seat availability is reduced by 1 to accommodate the required additional loadmaster or pilot in the cargo compartment. Large crew complements may further reduce the number of seats offered.


2. Sidewall seats are numbered front to rear and are identified by side seat number left/right. Each centerline seat kit has 6 seats and are identified by position number and seat left/right.

2. ATGL positioned at FS 391. Pallets in the ADS rail system are loaded on the 108-inch bias. Pallets in the logistic rail system are loaded on the 88-inch bias.

3. For pallet loading, all ramp toes should be installed in low position along with rollers and guide rails, configure rails and rollers for the ATGL in ADS and logistic ramp positions.

5. Time to configure with two people is 2 hours.

Figure 3.8. CP-X Configuration.

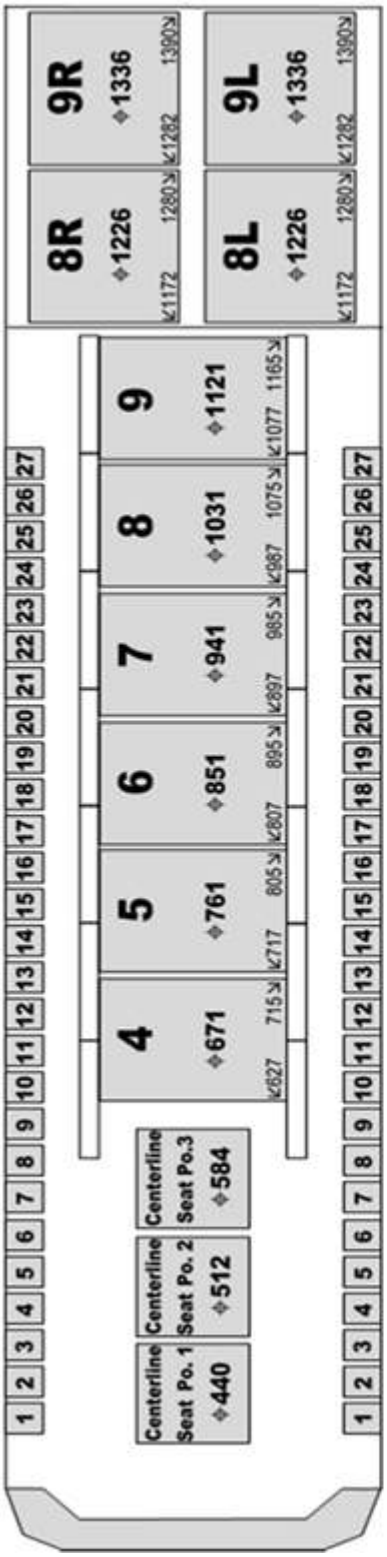

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:


1. Cargo Passenger configurations provide a maximum amount of seat availability based on number and configuration of pallets positions used. See **Table 3.2** for a complete list of CP configurations and restrictions. If more than 40 passengers are carried, seat availability is reduced by 1 to accommodate the required additional loadmaster or pilot in the cargo compartment. Large crew complements may further reduce the number of seats offered.

2. Sidewall seats are numbered front to rear and are identified by side seat number left/right. Each centerline seat kit has 6 seats and are identified by position number and seat left/right.

3. For pallet loading, ramp toes should be installed in low position along with rollers and guide rails. Configure rails and rollers for the ATGL in ADS and logistic ramp positions.

4. Time to configure with two people varies between 1 hour and 2 hours based on the number of center line seats to be installed.

Figure 3.9. SP-X Configuration.

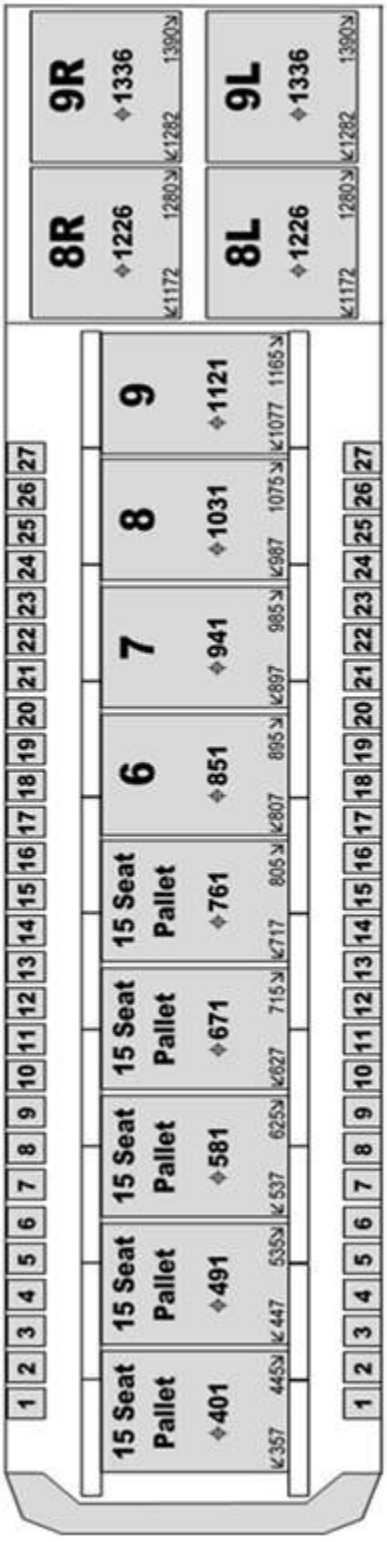

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. Seat Pallet configurations provide up to 188 seats. The number of seats are based on the number and configuration of pallets. See **Table 3.3** for a complete list of SP configurations and restrictions. If more than 40 passengers are carried, seat availability is reduced by 1 to accommodate the required additional loadmaster or pilot in the cargo compartment. Large crew complements may further reduce the number of seats offered.

2. Seat pallets can be configured in 5, 10, or 15-seat configurations. See **Table 2.2** for seat pallet weights.

3. Maximum personnel for prolonged over-water flights will be limited to 138 total (including crew), based on life raft capacity. Over-water flights with more than 138 total (including crew) require a MAJCOM/A3 waiver.

4. EPOS will be used as the primary source of supplemental oxygen for seat pallets. Equal Time Point (ETP) requirements will be considered.


5. Sidewall seats are numbered front to rear and are identified by side seat number left/right. Palletized seats are identified front to rear by row and numbered left to right.

6. Pallets in the ADS rail system are loaded on the 108-inch bias. Pallets in the logistic rail system are loaded on the 88-inch bias.

7. For pallet loading, ramp toes should be installed in low position along with rollers and guide rails, configure rails and rollers for the ADS and logistic rail systems as required.

8. Time to configure with two people is 2 hours.

Figure 3.10. ADP-1 Configuration.

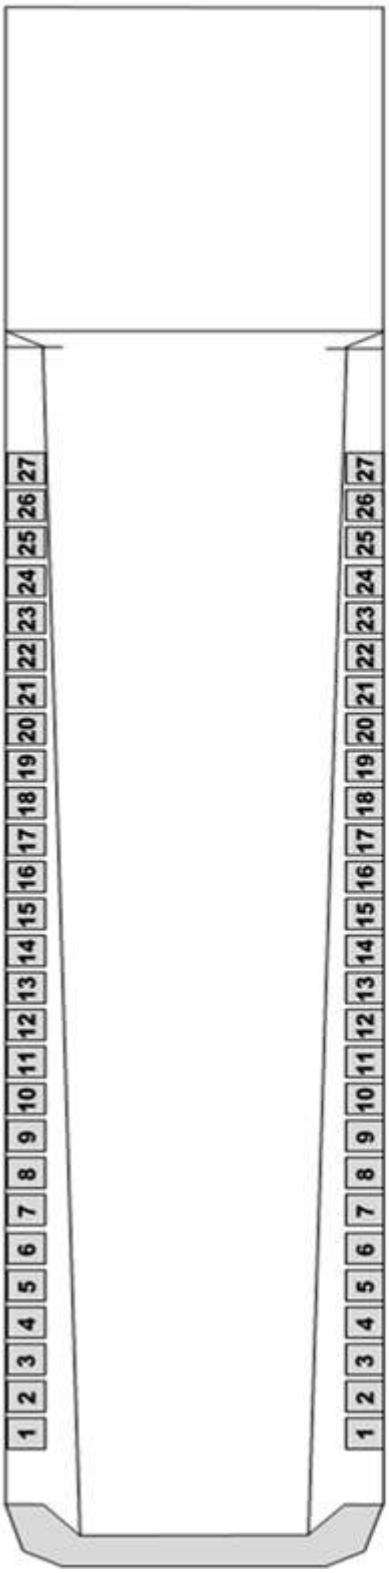

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This personnel airdrop configuration provides up to 54 paratroop seats. If more than 40 passengers are carried, there is no requirement to reduce seat availability by 1 to accommodate the required additional loadmaster unless there are airland segments planned prior to the drop. Crew complement and mission profile governs number of seats offered. Large crew complements may further reduce the number of seats offered.

2. Sidewall seats are numbered front to rear and are identified by side seat number left/right.

3. ADS rails, logistic rails, and roller conveyors stowed. A maximum of four pallets may be loaded on the ramp.

3. All airland cargo/baggage loaded on the cargo floor must not obstruct the path of paratrooper exit, interfere with installed anchor cables, or exceed a maximum width of 144 inches with both troop doors used, or 178 inches if only one door is used.

4. When aft anchor cable supports are installed, maximum pallet heights in the logistics rail system will be limited as follows: 8L/R, 54"; 9L/R, 37".


5. For paratrooper loading, install ramp toes in the high position with rollers removed and all ramp/cargo floor rails and rollers lowered.

6. For paratrooper and pallet loading, install outboard ramp toes in the high position with rollers removed, inboard ramp toes in low position with rollers and guide rails, and lower the ramp/cargo floor rollers in the path of boarding.

7. Install anchor cable supports and anchor cables IAW TO 1C-17A-1-4, and Job Guides.

8. Time to configure with two people is 25 minutes.

Figure 3.11. ADP-2 Configuration.

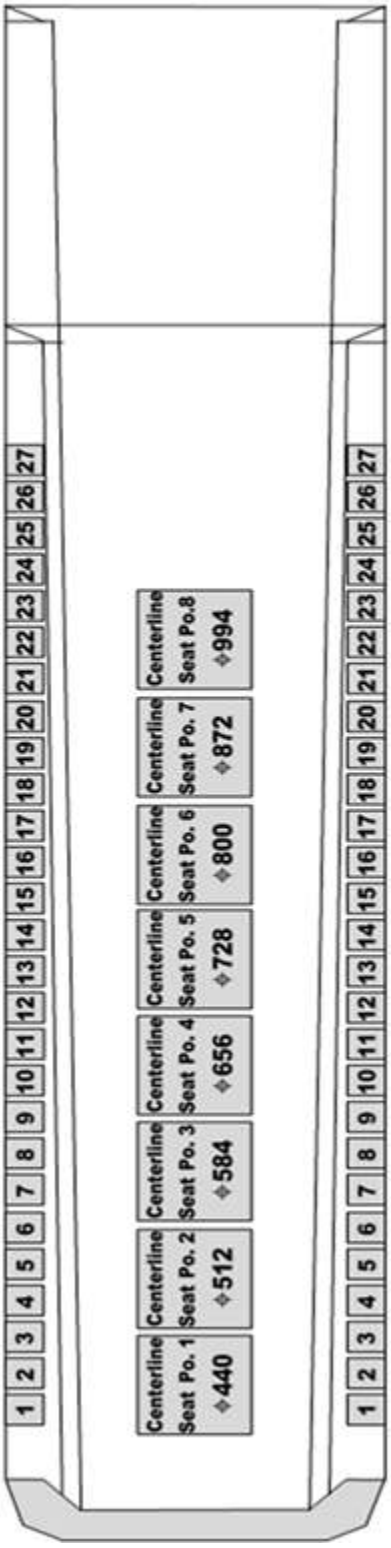

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This personnel airdrop configuration provides up to 102 paratroop seats. If more than 40 passengers are carried, there is no requirement to reduce seat availability by 1 to accommodate the required additional loadmaster unless there are airland segments planned prior to the drop. Crew complement and mission profile governs number of seats offered. Large crew complements may further reduce the number of seats offered.

2. Centerline seats may start at Po. 1 or Po. 2.

3. ADS rails, logistic rails and roller conveyors stowed. A maximum of four 463L pallets can be loaded on the ramp.

4. All airland cargo/baggage on the cargo floor must not obstruct the path of paratrooper exit, interfere with installed anchor cables, or exceed a maximum width of 144 inches with both troop doors used or 178 inches if only one door is used.

5. When aft anchor cable supports are installed, maximum pallet heights in the logistics rail system will be limited as follows: 8L/R, 54"; 9L/R, 37".


6. For paratrooper loading, install ramp toes in the high position with rollers removed and all ramp/cargo floor rails and rollers lowered.

7. For paratrooper and pallet loading, install outboard ramp toes in the high position with rollers removed, inboard ramp toes in low position with rollers and guide rails, and lower the ramp/cargo floor rollers in the path of boarding.

8. Install anchor cable supports and anchor cables IAW TO 1C-17A-1-4, and Job Guides.

9. Time to configure with two people is 1 hour and 35 minutes.

Figure 3.12. ADP-3 Configuration.

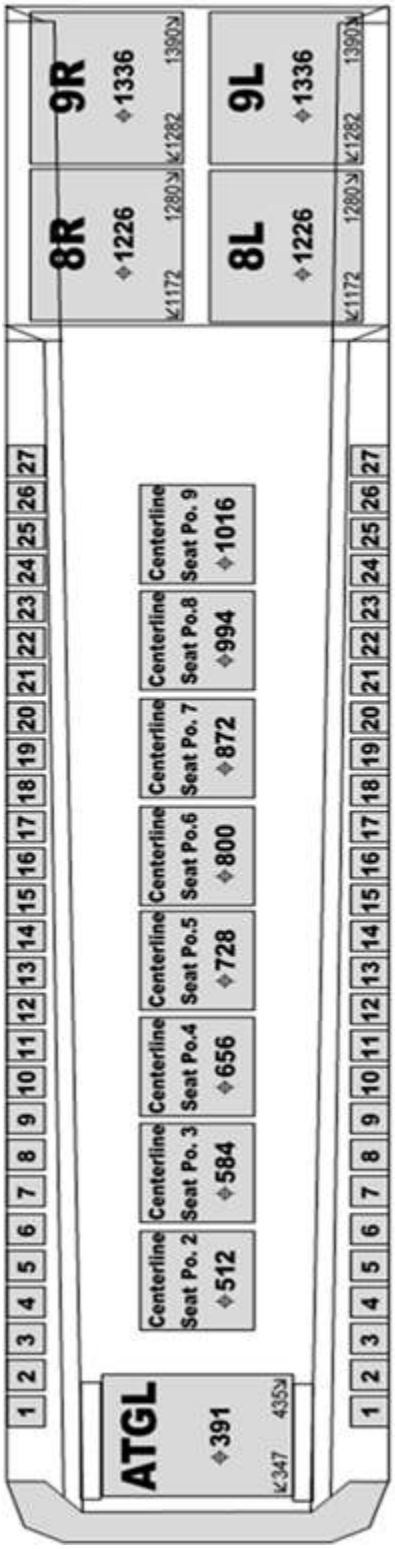

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	ATGL	3620	391	145.1
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This personnel airdrop configuration provides up to 102 paratroop seats and 4 ramp pallet positions. If more than 40 jumpers are carried, there is no requirement to reduce seat availability by 1 to accommodate the required additional loadmaster unless there are airland segments planned prior to the drop. Crew complement and mission profile governs number of seats offered. Large crew complements may further reduce the number of seats offered.

2. All airland cargo/baggage on the cargo floor must not obstruct the path of paratrooper exit, interfere with installed anchor cables, or exceed a maximum width of 144 inches with both troop doors used or 178 inches if only one door is used.

3. When aft anchor cable supports are installed, maximum pallet heights in the logistics rail system will be limited as follows: 8L/R, 54"; 9L/R, 37".


4. For paratrooper loading, install ramp toes in the high position with rollers removed and all ramp/cargo floor rails and rollers lowered.

5. For paratrooper and pallet loading, install outboard ramp toes in the high position with rollers removed, inboard ramp toes in low position with rollers and guide rails, and lower the ramp/cargo floor rollers in the path of boarding.

6. Install anchor cable supports and anchor cables IAW TO 1C-17A-1-4, and Job Guides.

7. Time to configure with two people is 2 hours and 15 minutes.

Figure 3.13. ADC-1 Configuration.

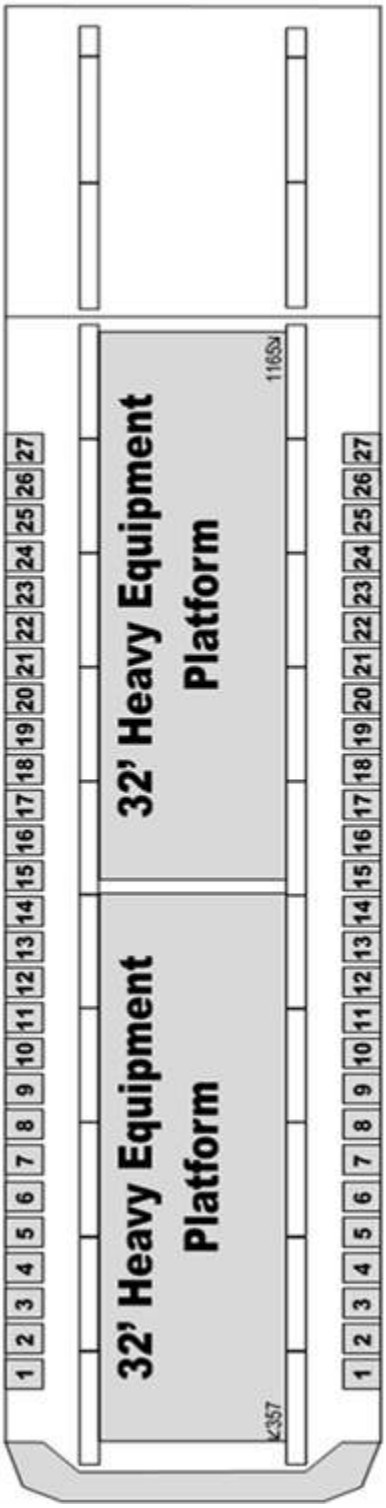

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This cargo airdrop configuration provides the capability to airdrop up to 110,000 pounds using multiple Type V airdrop platforms. A combination of 8, 12, 16, 20, 24, 28, and 32 foot platforms, totaling 64 feet, may be airdropped singularly or sequentially.

2. This configuration provides up to 54 seats for passengers and/or paratroopers. If more than 40 passengers (non-jumpers) are carried, seat availability is reduced by 1 to accommodate the required additional loadmaster or pilot in the cargo compartment. Reduction of seat availability is not required for paratroopers unless there are airland segments planned prior to the drop. Crew complement and mission profile governs number of seats offered. Large crew complements may further reduce the number of seats offered.

3. No airland cargo may be loaded aft of or on the ramp when platforms are rigged for airdrop. Airland cargo width must not obstruct the view or hinder access to the airdrop platform in the event an airdrop malfunction occurs.


4. For platform loading, ramp toes should be on the cargo door, raise the ADS rails and rollers, install ramp edge cover and left side ADS rail bridge. Omni-directional rollers are not permitted for airdrop use and must be exchanged for bi-directional rollers outboard of the ADS rails.

5. If airdropping a combination of CDS and Type V platforms the center pair of ramp toes may be used for loading. Refer to TO 1C-17A-1 for ramp toe limitations.

6. If airdropping personnel on the same sortie reference **Figures 3.10 – 3.12**, as appropriate, for configuration descriptions/limitations.

7. Time to configure with two people is 15 minutes.

Figure 3.14. ADC-2 Configuration.

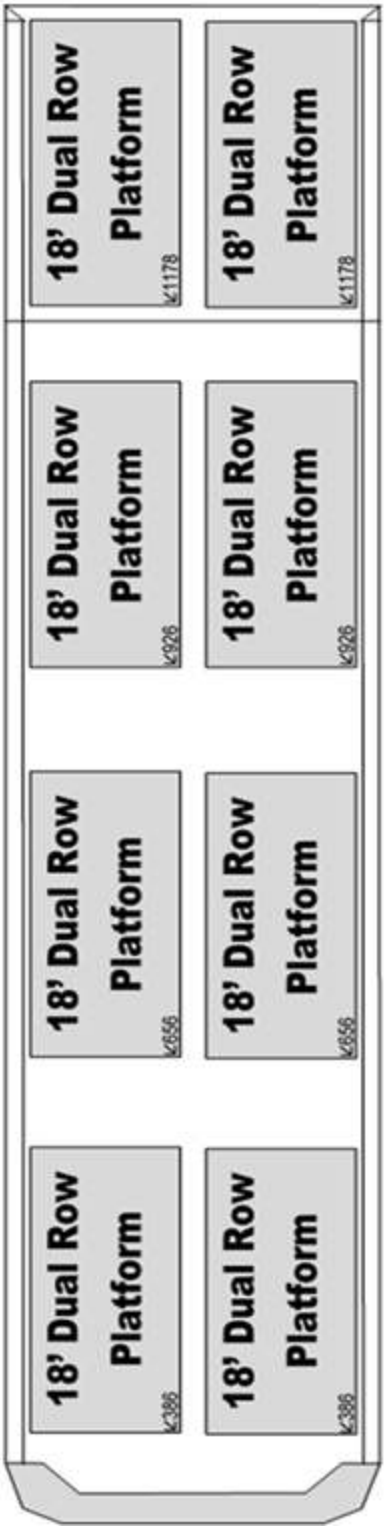

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This cargo airdrop configuration provides the capability to airdrop 116,000 pounds using multiple Dual Row Airdrop System (DRAS) platforms or 121,350 pounds on 463L cargo pallets. Up to 12 8-foot, 8 18-foot by 88-inch DRAS platforms, or 12 463L pallets may be airdropped. No additional cargo space or passenger seats are available without a reduction in the number of airdrop platforms/pallets being reduced.


2. All airland cargo/baggage on the cargo floor must not impede the path of platform exit, interfere with installed anchor cables, obstruct the view or hinder access to the platforms in the event of an airdrop malfunction. Cargo adjacent to platforms is limited to a maximum width of 110 inches and aft end of cargo must be forward of FS 1280. Airland pallets or platforms that will not be dropped must be restrained to the cargo floor.

3. For platform/pallet loading, ramp toes may be installed in low position with rollers and guide rails. Raise logistic rails and rollers, retract vertical restraint lips. Refer to TO 1C-17A-1 for ramp toe limitations. Omni-directional rollers on the ramp will be exchanged for bi-directional rollers and positioned at X = +/- 41 beginning at FS 352 through FS 992.

4. Install anchor cable supports and anchor cables IAW TO 1C-17A-1-4, and Job Guides.

5. Time to configure with two people is 45 minutes.

Figure 3.15. CDS-1 Configuration.

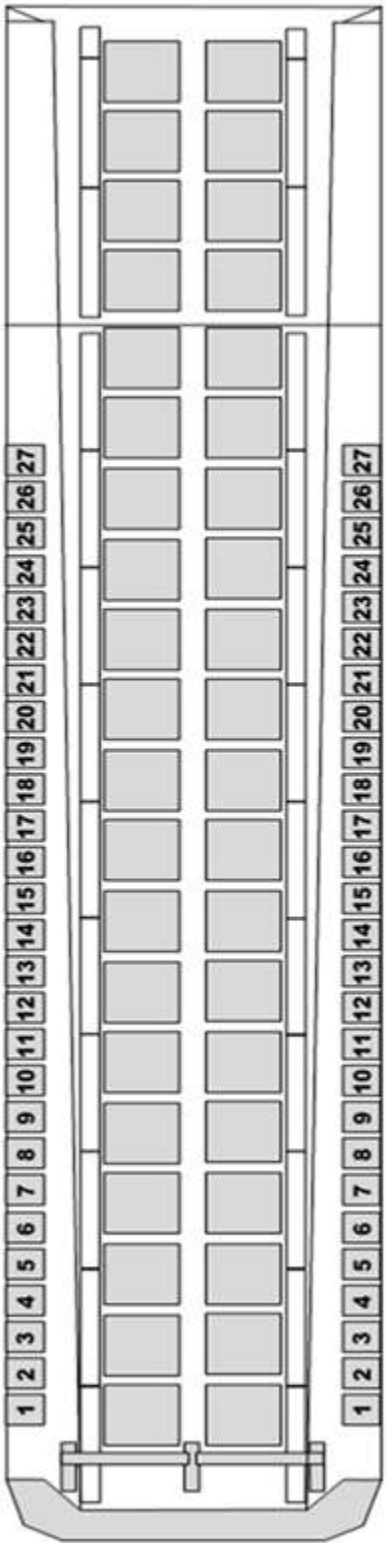

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	277	448	12.4
Additional Equipment	None			
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This container delivery airdrop configuration provides the capability to airdrop up to 40 maximum weight containers rigged on 48 inch by 48 inch skidboards, 32 on the cargo floor and 8 on the ramp. Skidboard dimensions of 48 inches by 72 inches, and 48 inches by 96 inches may be used.

2. This configuration provides up to 54 seats for passengers and/or paratroopers. If more than 40 passengers (non-jumpers) are carried, seat availability is reduced by 1 to accommodate the required additional loadmaster or pilot in the cargo compartment. Reduction of seat availability is not required for paratroopers unless there are airland segments planned prior to the drop. Crew complement and mission profile govems number of seats offered. Large crew complements may further reduce the number of seats offered.


3. All airland cargo/baggage on the cargo floor must not impede the path of bundles exit, interfere with installed anchor cables, obstruct the view or hinder access to the containers in the event of an airdrop malfunction. Cargo forward of the containers is limited to a maximum width of 144 inches with both anchor cables configured or 178 inches if only one anchor cable is configured. Cargo adjacent to containers is limited to a maximum width of 110 inches and aft end of cargo must be forward of FS 1280.

4. For container loading, install the center ramp toes in low position with rollers and guide rails. Raise the ADS rails and rollers, raise inboard logistic rails, and retract vertical restraint lips. Omni-directional rollers are not permitted for airdrop use and must be exchanged for bi-directional rollers outboard of the ADS rails. Enhanced Container Vertical Restraint will be installed for containers aft of FS 1100.

5. Install anchor cable support, anchor cables, and BSA IAW TO 1C-17A-1-4 and Job Guides. Most forward position of the BSA is FS 365.

6. Time to configure with two people is 40 minutes.

Figure 3.16. DV-1 Configuration.

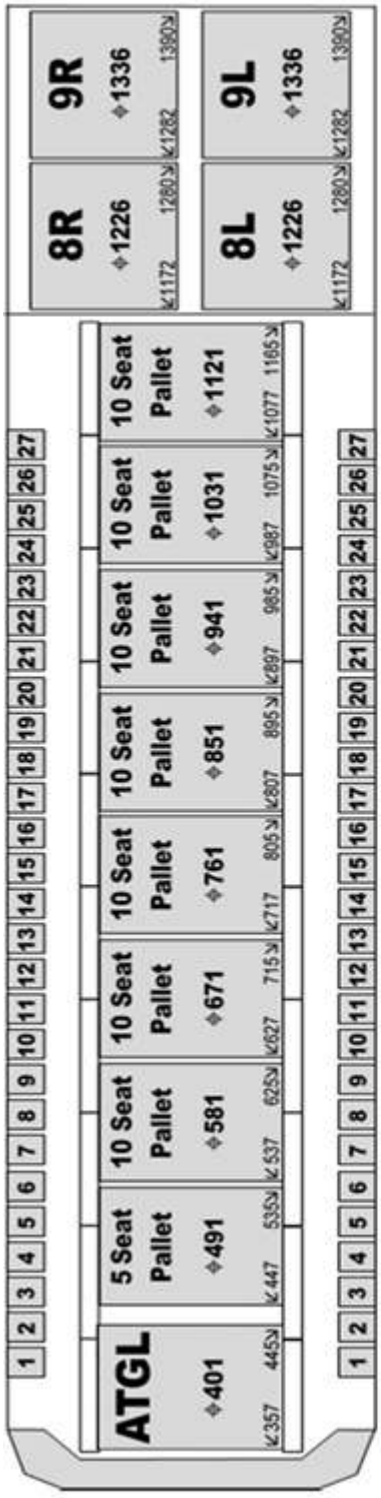

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	Wgt	Sta	Mom
Standard Equipment	Standard	277	448	12.4
Additional Equipment	ATGL	3620	401	145.1
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. This distinguished visitor configuration provides up to 129 seats with an ATGL. Without an ATGL, up to 144 seats are provided by replacing the 5-seat pallet with a 10-seat pallet and adding an additional 10-seat pallet. The amount of cargo pallet positions available are based on the number and configuration of the seat pallets. 15-seat pallets are normally not used for distinguished visitors, but may be used for additional capacity. If more than 40 passengers are carried, seat availability is reduced by 1 to accommodate the required additional loadmaster or pilot in the cargo compartment. Large crew complements may further reduce the number of seats offered.

2. Seat pallets can be configured in 5, 10, or 15-seat configurations. See **Table 2.2** for seat pallet weights.

3. Maximum personnel for prolonged over-water flights will be limited to 138 total (including crew), based on life raft capacity. Over-water flights with more than 138 total (including crew) require a MAJCOM/A3 waiver.

4. EPOS will be used as the primary source of supplemental oxygen for seat pallets. Equal Time Point (ETP) requirements will be considered.


5. Sidewall seats are numbered front to rear and are identified by side seat number left/right. Palletized seats are identified front to rear by row and numbered left to right.

6. Pallets in the ADS rail system are loaded on the 108-inch bias. Pallets in the logistic rail system are loaded on the 88-inch bias. 30-inch spacing is required between netted cargo and nearest occupied row of seats, unless a plywood barrier with chain bridle(s) is installed for forward restraint.

7. For pallet loading, ramp toes should be installed in low position along with rollers and guide rails. Configure rails and rollers for the ADS and logistic rail systems as required.

8. Time to configure with two people is one hour.

Figure 3.17. SD-1 Configuration.

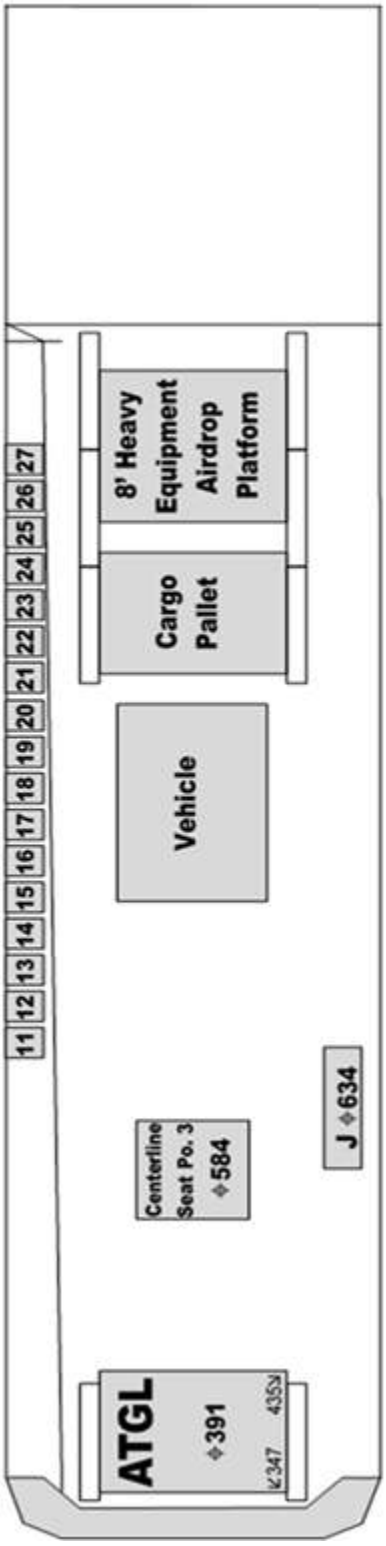

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	277	448	12.4
Additional Equipment	ATGL	3620	391	145.1
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:


1. **Figure 3.17** is an example of a configuration used for a static display presentation. This configuration may be modified as required. Reference appropriate publications and job guides as required for display presentation.

2. For pallet/platform loading, ramp toes should be installed in low position along with rollers and guide rails, and configure ADS rails and rollers as required.

3. For the static display presentation, all rails and rollers between cargo will be lowered, and ramp toes will be installed in the high position with rollers and guide rails removed. **Exception:** If an extraction parachute is rigged on the ramp, keep the ramp ADS rails and rollers raised, and remove the center ramp toes.

4. Time to configure with two people is 1 hour and 30 minutes.

Figure 3.18. SLC-1 Configuration.

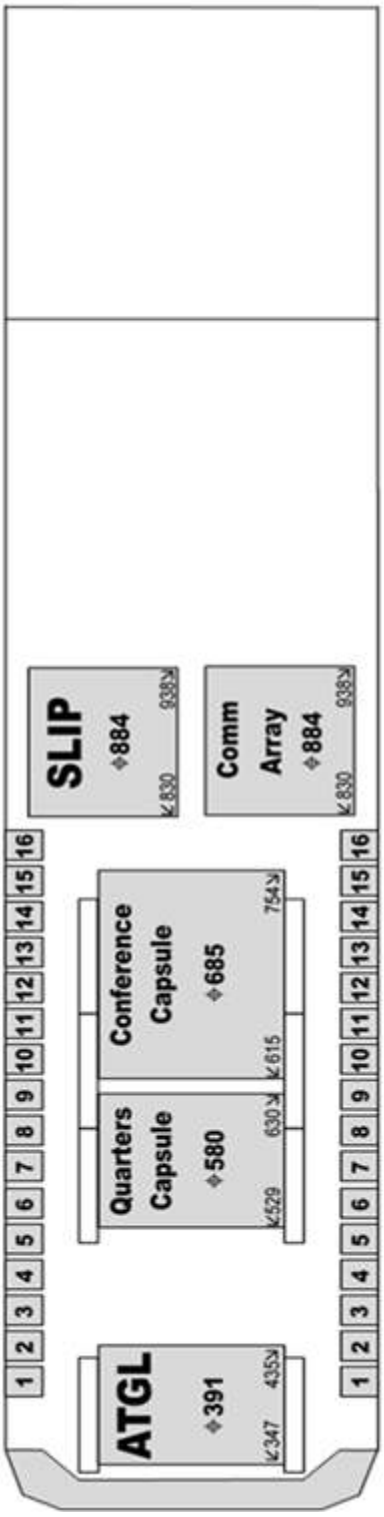

Reference 5, DD Form 365-4 (Steward's Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	277	448	12.4
Additional Equipment	ATGL	3620	391	145.1
	SLICC B/C	4660	580	270.2
	SLICC C/C	3790	685	259.6
	SLIP	1350	884	119.3
Reference 6, DD Form 365-4 (Emergency Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	618	579	35.8
Additional Equipment	None			
Reference 7, DD Form 365-4 (Extra Equipment)				
	Quantity	**Wgt**	**Sta**	**Mom**
Standard Equipment	Standard	1251	342	42.8
Additional Equipment	None			

Notes:

1. The Senior Leader In-transit Conference Capsule (SLICC) System consists of a conference and quarters capsule. Each Senior Leader In-transit Pallet (SLIP) has 4 seats, and maximum of 4 operational SLIPs may be airlifted. Cargo and passenger seat availability is based on number and configuration of SLIPs positions used. If more than 40 passengers are carried, seat availability is reduced by 1 to accommodate the required additional loadmaster or pilot in the cargo compartment.

2. EPOS will be used as the primary source of supplemental oxygen for SLICC and SLIPs. Equal Time Point (ETP) requirements will be considered.

3. For pallet loading, ramp toes should be installed in low position along with rollers and guide rails, raise rails and rollers for the ADS and logistic rail systems as required.

4. SLICCs will be loaded in the ADS rail system on the 108-inch bias. SLIPs will be loaded in the logistic rail system on the 88-inch bias when occupied. 30-inch spacing is required between netted cargo and nearest occupied row of seats, unless a plywood barrier with chain bridle(s) is installed for forward restraint. Quarters capsules may be loaded in the ADS or logistic rail systems. SLIPs should be loaded into the same side of the logistics rails to simplify the inter-SLIP electrical connections.

5. All power connections will be made by qualified maintenance personnel.

6. All cables will be routed and tied/taped down so as not to impede egress or passage during flight and to reduce tripping hazards. Rollers between SLICC and SLIPs will be lowered.

7. Time to configure with two people is 45 minutes.

Chapter 4

AIRCREW FLIGHT EQUIPMENT CONFIGURATION REQUIREMENTS

4.1. Aircraft-Installed AFE Procedures. Handle AFE with care to avoid damage. Prepositioning equipment IAW this publication allows flexibility while the aircraft is away from home-station and standardizes AFE configurations Air Force-wide. For Air Education Training Command (AETC) flying units where AMC is the lead command, units are authorized to load aircraft with only the mission-required AFE. AETC Operations Group Commanders (or equivalent) will ensure an Operational Risk Management assessment (ORM) is accomplished regarding utilization of AFE to safely support mission requirements. In the event installed AFE inspection comes due while aircraft is on alert status or away from home station, follow guidance provided in TO 00-20-1, *Aerospace Equipment Maintenance Inspection, Documentation, Policies, and Procedures*.

4.2. Aircraft Configuration. Configure aircraft IAW TO 1C-17A-1 and TO 1C-17A-5-2. Store AFE equipment not utilized in the survival equipment locker or as depicted in TO 1C-17A-5-2. Crewmembers must return all AFE to the proper storage locations after each mission. Aircraft Commanders may request additional equipment be positioned aboard aircraft to accommodate aircrew and passenger increases.

Table 4.1. Aircrew Flight Equipment Life Sustaining Items.

Minimum Required Equipment	Standard	Programmed Depot Maintenance Input	Notes
Mask, 358-series, w/goggles	15	3	1
Restraint Harness, PCU-17/P	2	2	
Protective Breathing Equipment	6	3	7
Life Raft Assembly, 46-Person	3	3	3,7
Emergency Passenger Oxygen System	102	0	7
Life Preserver, LPU-6/P (Infant Cot)	3	0	5,7
Life Preserver, LPU-10/P	2	0	2,7
Life Preserver, Adult/Child (A/C)	110	3	4,7
Passenger Demo Kit	1	0	
Parachute	2	0	2,7
Protective Clothing Kit	1	0	
Survival Backpack	2	0	7
Aircrew Body Armor (Level IIIA)	5	0	
Anti-Exposure Suit	As Req'd	0	6

Notes:

1. One mask for each primary crewmember onboard is required.

2. Parachutes are pre-positioned for TO 1C-17A-1, Section 3, emergency procedures and airdrop missions. Parachutes are installed for "fall out" safety, not for bailout purposes. As required, LPU-10/P life preservers are used in conjunction with the parachutes

3. On overwater flights exceeding power-off gliding distance from land, raft quantity will be adequate to accommodate total persons onboard.

4. On overwater flights exceeding power-off gliding distance from land, one A/C life preserver per crewmember and passenger is required.

5. On overwater flights exceeding power-off gliding distance from land, one LPU-6/P life preserver is required for each child 18-months and younger.

6. Operations planners, schedulers, or crew will request Anti-Exposure Suits for primary aircrew members on any mission planned to operate above 78 degrees North or below 60 degrees South latitude. If requested, suits will be made available by AFE and pre-positioned in the Survival Equipment Locker. **(T-2)**

7. Equipment is hazardous and will not be transported in baggage aboard commercial flights.

ADRIAN L. SPAIN, Lt Gen, USAF
Deputy Chief of Staff, Operations

Attachment 1

GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION

References

AFI 33-322, *Records Management And Information Governance Program,* 23 March 2020

AFMAN 11-2C-17 Volume 3, *C-17 Operations Procedures*, 30 July 2019

AFMAN 11-301, Vol 2, *Management and Configuration Requirements for Aircrew Flight Equipment*, 13 February 2020

AFPD 11-2, *Aircrew Operations*, 31 January 2019

DAFMAN 90-161, *Publishing Processes and Procedures*, 18 Oct 2023

TO 00-20-1, *Aerospace Equipment Maintenance Inspection, Documentation, Policies, and Procedures*, 26 September 2022

TO 1C-17A-1, *Flight Manual,* 1 May 2023

TO 1C-17A-1-4, *Airdrop Mission Crew Manual,* 1 May 2023

TO 1C-17A-2-10JG-70-2, *Ground Handling Mission Reconfiguration – Cargo Compartment*, 1 December 2021

TO 1C-17A-5-2, *Loading Data,* 1 March 2023

TO 1C-17A-9, *Loading Instructions,* 1 February 2024

Adopted Forms

DAF Form 847, *Recommendation for Change of Publication*

DD Form 365-4, *Weight and Balance Clearance Form F*

AFTO Form 781-A, *Maintenance Discrepancy and Work Document*

Abbreviations and Acronyms

A/C——Adult/Child

ADS——Aerial Delivery System

AE——Aeromedical Evacuation

AECM——Aeromedical Evacuation Crew Member

AETC—Air Education Training Command

AFE—Aircrew Flight Equipment

AFMAN—Air Force Manual

AFPD—Air Force Policy Directive

AFRC—Air Force Reserve Command

AMC—Air Mobility Command

AMD—Air Mobility Division

AOC—Air Operations Center

ATGL—Air Transportable Galley/Lavatory

BSA—Buffer Stop Assembly

CCATT—Critical Care Air Transport Team

CDS—Container Delivery System

CG——Center of Gravity

EPOS—Emergency Passenger Oxygen System

ETP—Equal Time Point

FS——Fuselage Station

HUD—Heads Up Display

IAW—In Accordance With

MAJCOM—Major Command

MOM—Moment

NGB—National Guard Bureau

NVG—Night Vision Goggle

OPR—Office of Primary Responsibility

SLICC—Senior Leaders In-transit Conference Capsule

SLIP—Senior Leaders In-transit Pallet

Stan/Eval——Standardization and Evaluation

TO——Technical Order

TR——Thrust Reverser

Office Symbols

AMC/A3V——Air Mobility Command Aircrew Standardization and Evaluation Division

Attachment 2

C-17 CONFIGURATION PLANNING SHEET

Figure A2.1. C-17 CONFIGURATION PLANNING SHEET.

C-17 CONFIGURATION PLANNING SHEET

Maximum Payload	
w/o ER	170, 900 pounds
w/ ER	164,900 pounds
Maximum Compartment Payloads	
FS 347 to FS 578 (D)	72,000 pounds
FS 578 to FS 1074 (E)	170,900 pounds
FS 1074 to FS 1165 (F)	35,000 pounds
FS 1165 to FS 1403 (G)	40,000 pounds
Maximum Dimensional Loading Areas	
Loadable Width	216 inches
Loadable Length	1,056 inches
FS 347 to FS 1165	818 inches (Floor)
FS 1165 to FS 1403	238 inches (Ramp)
Loadable Height – Cargo Floor	
FS 347 to FS 827	148 inches
FS 827 to FS 937	158 inches
FS 937 to FS 1165	162 inches
Loadable Height – Cargo Ramp	
FS 1165 to FS 1403	Varies 156 to 116 inches
Aircraft Passenger Seats – 102 Total	
Sidewall	54 (27 each side)
Centerline	48 (6 per kit)
Venting Ports	
FS 604 and FS 924	Cryogenic (Left Side)
FS 604 and FS 924	Exhaust (Right Side)
FS 372	ATGL (Right Side)
Maximum Litters	36 (3 per stanchion)
(9 with onboard aircraft equipment)	

Litter Stanchion CB	Left Side	Right Side
FS 533	L	K
FS 634	J	I
FS 735	H	G
FS 835	F	E
FS 937	D	C
FS 1038	B	A

