

Cross-fitted selective recovery under controlled multi-sensor corruption

Riyang Luo^{1,*}

¹School of Mechanical and Power Engineering, Nanjing Tech University,
30 South Puzhu Road, Nanjing 211816, Jiangsu Province, China

*Correspondence: lry@njtech.edu.cn

Abstract

An available sensor group can remain in the inference path after its representation has been corrupted. A recovery model may then correct a wrong decision or overturn a correct one. We address this trade-off with paired clean-faulted training and a cross-fitted router that selects between a bounded base model and a recovery-supervised endpoint without test labels or fault-type inputs. The primary deployment objective is hard-decision safety, measured by prevented negative transfers, retained corrections and net utility; ranking and probability quality are secondary outcomes. On 1,436 held-out observations per mechanism with a controlled fault that reached an available group, the two-pass Lite-CF router prevented 94.7% of recovery-induced negative transfers while retaining 9.7% of available corrections. Its mean macro-AUROC was 0.8151, compared with 0.8115 for the base model and 0.8175 for unconditional recovery. Mechanism-fixed intervals supported a positive Lite-CF effect for Gaussian and stuck-at corruption, but not uniformly for offset or drift. With equal values assigned to a correction and a harm, Lite-CF gained 15.8 correct decisions per 10,000 strict observations; this advantage disappeared when a harm was valued at more than approximately 2.9 corrections. The method requires two endpoint passes, and no energy measurements were made. The evidence supports a risk-control protocol for controlled available-group corruption, not population-level claims about natural sensor failures or device-independent field recovery.

Keywords: multi-sensor fusion; sensor corruption; fault-tolerant classification; selective recovery; negative transfer; cross-fitting

1 Introduction

Scientific and industrial systems increasingly combine several channels whose availability and fidelity can change after deployment. Missing inputs, delayed diagnostics and distribution shifts can invalidate a model even when its architecture performs well on a static benchmark [1–4]. This problem is distinct from ordinary random missingness because a faulty sensor can remain present and produce plausible but biased, clipped, noisy or unresponsive measurements. A robust fusion rule must therefore decide not only whether a channel exists, but how strongly it should influence the prediction.

Several training strategies improve tolerance to absent or inconsistent sources. Modality dropout, masking and self-distillation expose models to missing inputs [5–7]. Representation refinement, gradient decoupling and expert routing address source imbalance or train–test mismatch [8–11]. Reliability-aware fusion additionally uses predictive uncertainty, learned credibility or rejection [12–17]. Quality-aware multimodal fusion (QMF) provides a published failure-aware

comparator by deriving modality confidence from predictive energy and aligning confidence with historical loss trajectories [18]. These approaches establish useful design patterns, but they do not make an arbitrary weighting response physically calibrated or comparable across sensors.

Sensor-fault diagnosis has a complementary engineering literature. Redundant sensor networks can localize offset, drift, noise, peaks and stuck responses, and can distinguish local sensor faults from global system changes [19–21]. Hydraulic condition-monitoring studies further show the value of heterogeneous pressure, flow, temperature, power and vibration measurements for component-state classification [22–25]. These studies motivate physically defined sensor groups and independent condition-monitoring validation rather than arbitrary computational groupings alone.

Most open benchmarks nevertheless encode sensor failure through simulation, laboratory intervention or post hoc feature corruption. A recent public AHU resource instead provides one year of building-management-system records from an office, an auditorium and a hospital, with return- and supply-air temperature sensor faults annotated by experienced HVAC engineers [26, 27]. These labels create a useful external field test, although they are rule- and expert-adjudicated operational annotations rather than maintenance-confirmed hardware replacement events.

Recent AHU studies show that the direct diagnosis problem differs from fault-tolerant recovery. Transformer models can exploit long temporal dependencies within a continuously operating hospital, while attention-based transfer and temporal-contextual learning explicitly address building shift and limited labels [28–30]. These architectures preserve fault signatures to identify the failure itself. In contrast, fault-tolerant classification seeks to suppress corrupted evidence while retaining another target, so superiority in one task need not transfer to the other.

We study paired-degradation responsive fusion (PDRF). “Responsive” denotes an operational change in fusion weight after a controlled sensor degradation; it does not imply physical health, calibrated risk or sensor variance. Each training observation is paired with a view in which one available sensor group is degraded. The model learns a bounded response, and directional losses encourage the affected sensor’s response to rise and its fusion weight to fall. The formulation does not invoke an identifiable causal counterfactual. Predictive calibration is evaluated separately because discrimination, uncertainty and calibration are different properties [31–37].

The study makes four contributions. First, it defines a strict recovery estimand that includes only controlled interventions that reach an available sensor group. Second, it formulates selective recovery as hard-decision risk control and cross-fits both the routing score and operating threshold. The primary Lite-CF implementation uses six endpoint features and two forward passes. Third, it audits the sparse routing problem through repeated grouped splits, coefficient and sign stability, regularization paths, calibration-size sensitivity, an all-row three-outcome model, a shallow tree and a staged cascade. Fourth, it separates mechanism-fixed, batch-fixed and fitting-seed variation and reports the final routed probabilities on discrimination and calibration metrics. The title and claims are limited to controlled corruption. Hydraulic results are single-rig sensitivity evidence, and expert-annotated air-handling-unit diagnosis remains a negative task boundary because it lacks an independent downstream recovery target.

2 Related work

2.1 Missing and unreliable sensor inputs

Missing-data mechanisms affect the interpretation of any robustness experiment [38]. Random sensor dropout tests tolerance to absent channels, whereas the present study targets channels that remain available but become corrupted. Corruption augmentation and consistency distillation can improve this setting, but they can also make an apparently novel fusion rule indistinguishable from

robust training. Our comparator design therefore gives the main gates identical paired degradations, labels, minibatches and additional forward passes, and separately evaluates early and uniform fusion with clean distillation and modality-dropout self-distillation.

2.2 Bounded operational responses and probability calibration

Input-dependent losses can represent aleatoric variation under valid probabilistic assumptions, whereas PDRF uses its bounded response only for weighting [31, 32]. Response ordering and isotonic audits therefore do not convert it into physical variance. Probability quality is assessed separately with NLL, Brier score, multiple ECE definitions and temperature scaling because calibration depends on both multiclass structure and binning [37, 39, 40]. Entropy weighting, deep ensembles and conformal sets provide uncertainty-oriented comparators, not device-health estimates [33, 41]. Cross-building AHU controls likewise distinguish source-only GroupDRO from target-feature adaptation by CORAL or target normalization [42–44].

2.3 Selective prediction and model fallback

Selective classification and reject-option learning trade coverage for lower predictive risk [45–47]; recent work additionally studies selection under distribution shift [48]. Learning-to-defer methods route difficult cases to a human or another expert whose error pattern may differ from that of the primary predictor [49, 50]. Classifier cascades explicitly trade predictive accuracy against evaluation cost, while dynamic classifier and ensemble selection estimate which member is locally competent [51, 52]. Mixture-of-experts routing provides a related differentiable allocation mechanism [14]. The present fallback problem is narrower: both endpoints are fixed models of the same sensor-fusion task, no observation is rejected, and the selector specifically controls recovery-induced negative transfer while retaining corrections. Its operating curve is therefore prevention versus retained recovery, rather than conventional risk versus coverage, human deferral utility or average cascade cost.

2.4 Evidence and statistical estimands

Classifier comparisons can change with the resampling unit and evaluation estimand [53, 54]. Optimization seeds describe repeated fitting, whereas sample bootstrap intervals describe a fixed set of fitted predictors [55]. McNemar’s paired test evaluates discordant hard decisions on the same observations [56]. We report these levels separately and do not treat observations from one instrument as independent devices. Precision–recall metrics are included because class imbalance can make ROC summaries incomplete [57].

3 Methods

3.1 Problem definition

For observation i and sensor group m , let $\mathbf{x}_{im} \in \mathbb{R}^d$ be the feature vector, $a_{im} \in \{0, 1\}$ the availability indicator, $q_{im} \in (0, 1]$ an optional diagnostic-quality covariate and $y_i \in \{1, \dots, C\}$ the target. PDRF estimates

$$p(y_i \mid \{\mathbf{x}_{im}, a_{im}, q_{im}\}_{m=1}^M). \quad (1)$$

When no quality metadata are available, all q_{im} equal one. Every evaluated observation contains at least one available group. If all groups are unavailable, the implementation abstains before inference because normalized fusion is undefined.

For the routing audit, let b_i indicate that the base endpoint is correct, r_i that the recovery endpoint is correct and s_i that the router emits the recovery output. Table 1 fixes the event terminology used throughout.

Table 1: Hard-decision event definitions. “Prevention” is one minus the fraction of harm opportunities that are realized. A harmful switch and a residual harm are the same event expressed per observation rather than per harm opportunity.

Quantity	Event definition	Reported rate
Correction	$\neg b_i \wedge r_i$	retained corrections / corrections
Negative transfer	$b_i \wedge \neg r_i$	prevented harms / harm opportunities
Residual harm	$b_i \wedge \neg r_i \wedge s_i$	residual harms / observations
Recovery selection	s_i	selected recovery outputs / observations
Harmful switch	$b_i \wedge \neg r_i \wedge s_i$	harmful switches / observations
Net correct change	corrections retained – harms realized	events per 10,000

3.2 Architecture and bounded weighting

Each sensor group is encoded by affine layers $d \rightarrow 64 \rightarrow 32$, with a ReLU after each hidden affine transformation and no normalization or dropout. A biased linear $32 \rightarrow C$ output produces group-specific logits μ_{im} . The response head is exactly $\text{Linear}(32, 16, \text{bias} = \text{true})$, ReLU, then $\text{Linear}(16, 1, \text{bias} = \text{true})$. There is no activation after the final linear layer, so its raw response u_{im} can be positive or negative. The bounded operational response is

$$\begin{aligned} r_{im} &= B \tanh(u_{im}/B), \\ -B &< r_{im} < B. \end{aligned} \tag{2}$$

where the prespecified main setting uses $B = 3$. This layer placement matches the released implementation and gives the symmetric open interval in Eq. (2). Across 17,650 clean and faulted seed–observation responses from 10 fitted RO-PDRF-Full models, the observed float32 range was -2.899454 to 3.000000 ; the latter is numerical rounding of a value below the mathematical open boundary. Clean responses ranged from -2.757962 to 2.997449 . Unnormalized and normalized weights are

$$\begin{aligned} \tilde{w}_{im} &= a_{im} q_{im} \exp(-\beta r_{im}), \\ w_{im} &= \frac{\tilde{w}_{im}}{\sum_k \tilde{w}_{ik}}. \end{aligned} \tag{3}$$

with $\beta = 0.25$. Fused logits are $\ell_i = \sum_m w_{im} \mu_{im}$. The implementation applies a 10^{-6} lower guard to the normalization denominator, but the guard is inactive under the stated input constraints because every observation has at least one available group and $q_{im} \geq 0.01$ after clipping.

This construction differs from an unconstrained softmax gate in three testable ways. First, the weight is factorized into availability, an optional externally measured quality term and one bounded operational response; it is not an unrestricted function of the concatenated sensor representation. Second, the perturbed group is known during paired degradation, so its response and normalized weight receive directional supervision rather than only a task-gradient signal. Third, the same response that controls fusion is regularized by a group-specific predictive loss. Thus the response is operationally coupled to group evidence, although it is not asserted to be a physical health variable.

146 The factorization also gives two elementary stability properties. For an available group, fixed q
 147 and any $k \neq m$,

$$\begin{aligned}\frac{\partial w_{im}}{\partial r_{im}} &= -\beta w_{im}(1 - w_{im}) \leq 0, \\ \frac{\partial w_{ik}}{\partial r_{im}} &= \beta w_{ik} w_{im} \geq 0.\end{aligned}\tag{4}$$

148 For two available groups with equal quality, bounded responses imply

$$e^{-2\beta B} < \frac{\tilde{w}_{im}}{\tilde{w}_{ik}} < e^{2\beta B}.\tag{5}$$

149 At $B = 3$ and $\beta = 0.25$, one response alone can therefore create at most a 4.48-fold unnormalized-
 150 weight ratio between equal-quality groups. These properties do not guarantee that the learned
 151 ordering is correct; the experiments separately test that question.

152 The response regularizer, retained as $\mathcal{L}_{\text{score}}$ in the implementation for reproducibility, combines
 153 a bounded heteroscedastic-style term and a boundary penalty. For a minibatch $\mathcal{B}$, write $s_{im} =$
 154 $\omega_{y_i}[-\log \text{softmax}(\boldsymbol{\mu}_{im})_{y_i}]$, where $\omega_c = n/(Cn_c)$ is the training-set class weight, and let $h_{im} =$
 155 $e^{-r_{im}} s_{im} + r_{im}$. Then

$$\mathcal{L}_{\text{score}} = \frac{\sum_{i \in \mathcal{B}} \sum_m a_{im} h_{im}}{\sum_{i \in \mathcal{B}} \sum_m a_{im}},\tag{6}$$

156

$$\mathcal{L}_{\text{bound}} = \frac{\sum_{i \in \mathcal{B}} \sum_m a_{im} (r_{im}/B)^4}{\sum_{i \in \mathcal{B}} \sum_m a_{im}}.\tag{7}$$

157 Because cross-entropy is non-negative and $r_{im} > -B$, $\mathcal{L}_{\text{score}} > -B$. The complete objective
 158 therefore has a finite lower bound. This statement concerns optimization stability, not calibration
 159 of the bounded operational response.

160 3.3 Paired degradation and directional losses

161 For each minibatch observation, one available group m^* is drawn from a fixed training prior. A
 162 retention factor $\rho_i \sim \text{Uniform}(0.15, 0.50)$ controls additive Gaussian degradation with scale $2.5(1 -$
 163 $\rho_i)$. In half of the pairs, q_{im^*} is multiplied by ρ_i ; otherwise it is unchanged. Let primed symbols
 164 denote the degraded view and $d_i = 1 - \rho_i$.

165 The clean and degraded task losses use the class-weighted mean implemented by PyTorch. With
 166 $e_i(\boldsymbol{\ell}) = -\log \text{softmax}(\boldsymbol{\ell})_{y_i}$,

$$\begin{aligned}\mathcal{L}_{\text{task}} &= \frac{\sum_{i \in \mathcal{B}} \omega_{y_i} e_i(\boldsymbol{\ell}_i)}{\sum_{i \in \mathcal{B}} \omega_{y_i}}, \\ \mathcal{L}_{\text{deg}} &= \frac{\sum_{i \in \mathcal{B}} \omega_{y_i} e_i(\boldsymbol{\ell}'_i)}{\sum_{i \in \mathcal{B}} \omega_{y_i}}.\end{aligned}\tag{8}$$

167 Let $\mathcal{V}_{\mathcal{B}} = \{i \in \mathcal{B} : \sum_m a_{im} > 1\}$ denote observations for which the selected group can be re-
 168 moved while another group remains. For $i \in \mathcal{V}_{\mathcal{B}}$, the removal prediction $\mathbf{p}_i^{(-m^*)}$ defines a severity-
 169 interpolated target $\mathbf{t}_i$; write $\hat{\mathbf{t}}_i = \text{stopgrad}(\mathbf{t}_i)$:

$$\begin{aligned}\mathbf{t}_i &= (1 - d_i) \mathbf{p}_i + d_i \mathbf{p}_i^{(-m^*)}, \\ \mathcal{L}_{\text{cons}} &= \frac{1}{|\mathcal{V}_{\mathcal{B}}|} \sum_{i \in \mathcal{V}_{\mathcal{B}}} \|\mathbf{p}'_i - \hat{\mathbf{t}}_i\|_2^2.\end{aligned}\tag{9}$$

170 If $\mathcal{V}_{\mathcal{B}}$ is empty, $\mathcal{L}_{\text{cons}}$ and the removal-dependent directional terms are omitted, equivalently set
 171 to zero. Directional terms operate on the affected normalized weight and raw response and are
 172 averaged over eligible observations. With $[z]_+ = \max(0, z)$ and $\Delta w_i = w'_{im*} - w_{im*}$,

$$\mathcal{L}_{\text{mono}} = |\mathcal{V}_{\mathcal{B}}|^{-1} \sum_{i \in \mathcal{V}_{\mathcal{B}}} [\Delta w_i]_+. \quad (10)$$

173 With $\gamma_i = 0.5d_i/0.85$ and $\Delta r_i = \text{stopgrad}(r_{im*}) - r'_{im*}$, the response-ranking term is

$$\mathcal{L}_{\text{rank}} = |\mathcal{V}_{\mathcal{B}}|^{-1} \sum_{i \in \mathcal{V}_{\mathcal{B}}} [\gamma_i + \Delta r_i]_+. \quad (11)$$

174 The final loss is

$$\begin{aligned} \mathcal{L} = & \mathcal{L}_{\text{task}} + 0.20\mathcal{L}_{\text{score}} \\ & + 0.50\mathcal{L}_{\text{bound}} + 0.15\mathcal{L}_{\text{deg}} \\ & + 0.10\mathcal{L}_{\text{cons}} + 0.05\mathcal{L}_{\text{mono}} \\ & + 0.15\mathcal{L}_{\text{rank}}. \end{aligned} \quad (12)$$

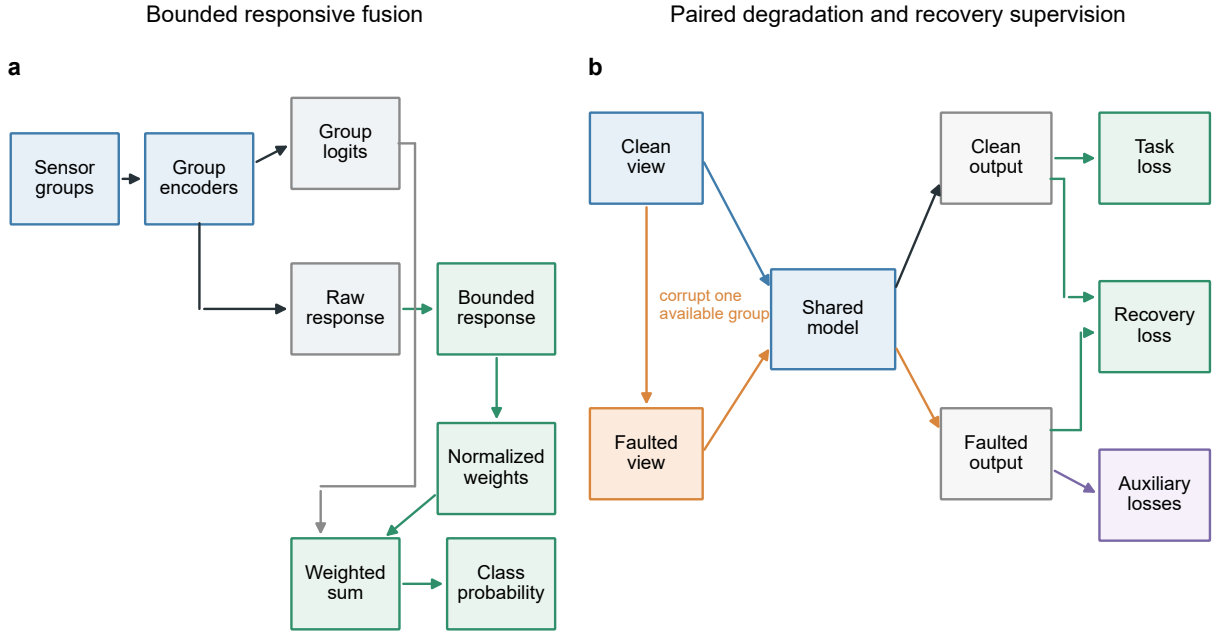


Figure 1: **Bounded responsive fusion and recovery supervision.** **a**, Each sensor group produces class logits and a bounded operational response. Availability, optional diagnostic quality and the response determine normalized fusion weights. Distinct connector ports separate the logit and weight contributions to the fused prediction. **b**, Clean and faulted views share model parameters. The detached clean prediction supervises recovery of the faulted prediction; proper-scoring and ranking terms are auxiliary controls.

175 3.4 Comparators and mechanism ablations

176 Early fusion concatenates zero-filled group features, masks and quality values before a $128 \rightarrow 64 \rightarrow$
 177 C multilayer perceptron. Uniform fusion averages group logits. EF-PD and UF-PD receive the

same paired degradations and degraded-task loss as PDRF. The corruption-aware gated fusion model (CAGF) concatenates the four 32-dimensional group representations, masks and quality values, then applies a $64 \rightarrow M$ softmax gate. It is the matched mixture-of-experts-style comparator: group classifiers act as experts and a sample-dependent unrestricted gate supplies their mixing coefficients. CAGF receives the same paired degradation, consistency and normalized-weight monotonicity losses. Direct weight ranking (DWR) adds a margin directly to the gate weight. The quality-only model uses $a_{im}q_{im}$ without a learned gate or bounded operational response.

To test whether a stronger interaction model alters the architecture comparison, RO-AT-GATE maps each physical sensor group to a 32-dimensional token, adds a learned group-identity embedding, and applies one four-head self-attention layer with a 64-unit feed-forward block. Unavailable groups are masked before attention. A shared $32 + 2 \rightarrow 16 \rightarrow 1$ head converts each contextualized token, availability flag and quality value into an unrestricted softmax gate. This compact attention baseline has 26,809 parameters, close to CAGF’s 26,588, and receives exactly the same paired views and complete recovery objective as RO-CAGF. It is a sensor-group adaptation of modern cross-modal attention practice rather than a claim to reproduce a task-specific vision or language system [6, 12, 13].

The recovery-oriented multi-expert router (RO-MER) is a stronger sample-dependent control motivated by recent failure-resilient expert routing [14]. Its candidate set contains one classifier from each physical group and one joint expert that maps all group representations, availability indicators and quality values through a 64-unit hidden layer. A separate 64-unit router produces probabilities $\alpha_{i1}, \dots, \alpha_{iM}, \alpha_{iJ}$ over the available group experts and the joint expert. The prediction uses this unmodified $(M + 1)$ -expert distribution. For losses that require physical-group weights, the differentiable effective allocation is

$$w_{im}^{\text{eff}} = \alpha_{im} + \alpha_{iJ} \frac{a_{im}}{\sum_k a_{ik}}. \quad (13)$$

The joint probability is therefore distributed uniformly only for the shared monotonicity and gate-regularization terms. This allocation is not detached, but it does not alter the routed prediction. RO-MER has 35,811 trainable parameters and receives the same faults, batches, seeds and checkpoint rule as RO-CAGF and RO-PDRF-Full.

The complete RO-MER objective is

$$\begin{aligned} \mathcal{L}_{\text{RO-MER}} = & \mathcal{L}_{\text{task}} + 0.15\mathcal{L}_{\text{deg}} + 0.10\mathcal{L}_{\text{cons}} + 0.05\mathcal{L}_{\text{mono}} \\ & + 0.30\mathcal{L}_{\text{rec}} + 0.05\mathcal{L}_{\text{Brier}} + 0.10\mathcal{L}_{\text{AUC}} + 0.005\mathcal{L}_{\text{router}}, \end{aligned} \quad (14)$$

where $\mathcal{L}_{\text{router}}$ is the mean clean-plus-degraded Kullback–Leibler divergence from $\mathbf{w}_i^{\text{eff}}$ to the uniform distribution over available physical groups. RO-CAGF uses the same coefficients and terms, with its native M -group softmax weights replacing Eq. (13). RO-PDRF-Full replaces $\mathcal{L}_{\text{router}}$ with the response-interior penalty because its bounded responses have a different geometry. Thus recovery supervision, proper scoring, pairwise ranking, paired views and task losses are matched, whereas only the architecture-specific regularizer differs. RO-MER tests whether the conclusion survives explicit cross-group interaction rather than merely widening the original gate.

We additionally adapt Quality-aware Multimodal Fusion (QMF) to the same four sensor groups while retaining its detached energy-confidence fusion and historical-loss ranking rule [18]. This QMF-PD control shares the present encoders, corruptions, optimizer, split and checkpoint criterion; it is a sensor-group adaptation rather than an exact reproduction of the original backbones or tasks. Implementation choices and sensitivity variants are specified in the Supplementary Information.

218 PDRF contains 19,740 trainable parameters on the chemical array, compared with 26,588 for
 219 CAGF and DWR, 35,811 for RO-MER, 26,182 for early fusion and 17,560 for uniform fusion. Ab-
 220 lations comprise paired degradation only (PD-ONLY), paired degradation plus normalized-weight
 221 monotonicity (PD-MONO), paired degradation plus response ranking (PD-RANK), the complete
 222 objective without $\mathcal{L}_{\text{score}}$ (NO-LSCORE), and $\mathcal{L}_{\text{score}}$ without $\mathcal{L}_{\text{rank}}$ (LSCORE-NO-LRANK). A
 223 PDRF-NOQ model is trained and tested with all quality values fixed to one.

224 3.5 Recovery-oriented extension

225 The mechanism audit showed that reducing an affected group’s weight was often necessary but not
 226 sufficient for prediction recovery. We therefore define recovery-oriented PDRF (RO-PDRF), which
 227 retains the PDRF architecture and adds recovery supervision. First, the degraded prediction is
 228 distilled from the detached clean-view prediction. Write $\hat{\mathbf{p}}_i = \text{stopgrad}(\mathbf{p}_i)$; then

$$\mathcal{L}_{\text{rec}} = \frac{1}{|\mathcal{V}_{\mathcal{B}}|} \sum_{i \in \mathcal{V}_{\mathcal{B}}} D_{\text{KL}}[\hat{\mathbf{p}}_i \parallel \mathbf{p}'_i]. \quad (15)$$

229 As with the removal consistency term, $\mathcal{L}_{\text{rec}}$ is defined only for observations with at least two avail-
 230 able groups, because removing the degraded group from a single-group observation leaves no valid
 231 recovery view; it is omitted when $\mathcal{V}_{\mathcal{B}}$ is empty. In the frozen chemical run, this eligibility rule
 232 excluded $0.386\% \pm 0.052\%$ of 5,933 training rows across seeds. The exclusion rate and counts are
 233 reported in the Supplementary Information. This label-free teacher targets recovery of the clean
 234 class distribution instead of assuming that downweighting alone repairs the decision. We denote
 235 the base PDRF objective plus $0.30\mathcal{L}_{\text{rec}}$ as RO-PDRF-Lite. Label-assisted, confidence-weighted,
 236 exponential-moving-average and agreement-gated teachers are sensitivity controls rather than se-
 237 lector inputs [58]. Their definitions, decay grid and conditional recovery/error-transfer results are
 238 reported in the Supplementary Information; no held-out label is used by the deployed selector.

239 Second, multiclass Brier losses on clean and degraded predictions provide proper-scoring super-
 240 vision,

$$\begin{aligned} \mathcal{L}_{\text{Brier}} = & \frac{1}{|\mathcal{B}|} \sum_{i \in \mathcal{B}} \|\mathbf{p}_i - \mathbf{e}_{y_i}\|_2^2 \\ & + \frac{1}{|\mathcal{B}|} \sum_{i \in \mathcal{B}} \|\mathbf{p}'_i - \mathbf{e}_{y_i}\|_2^2. \end{aligned} \quad (16)$$

241 The Brier term is the unweighted multiclass score averaged over observations; class weights are
 242 used for cross-entropy but are not inserted into the proper score. This preserves its standard
 243 probabilistic interpretation while classwise calibration is reported separately. Third, a weak log
 244 barrier discourages boundary occupancy without removing the original finite quartic penalty. With
 245 $\epsilon = 10^{-4}$, define $b_{\epsilon}(r) = -\log\{\max[\epsilon, 1 - (r/B)^2]\}$, $\bar{b}_{im} = b_{\epsilon}(r_{im}) + b_{\epsilon}(r'_{im})$ and $Z_{\mathcal{B}} = \sum_{i \in \mathcal{B}} \sum_m a_{im}$.
 246 Its exact clean-plus-degraded implementation is

$$\mathcal{L}_{\text{interior}} = Z_{\mathcal{B}}^{-1} \sum_{i \in \mathcal{B}} \sum_m a_{im} \bar{b}_{im}. \quad (17)$$

247 Unavailable groups are excluded by a_{im} ; the clamp is solely a numerical safeguard near the open
 248 boundary. Fourth, a smooth one-versus-rest pairwise ranking loss directly supervises degraded-view
 249 class ordering. For class c , let P_c and N_c denote positive and negative observations in a minibatch,

let $\mathcal{C}_{\mathcal{B}} = \{c : |P_c| > 0, |N_c| > 0\}$ be the eligible class set, and let $\phi_{ijc} = \text{softplus}[-(\ell'_{ic} - \ell'_{jc})]$:

$$\begin{aligned}\mathcal{L}_{\text{AUC}} &= \frac{1}{|\mathcal{C}_{\mathcal{B}}|} \sum_{c \in \mathcal{C}_{\mathcal{B}}} A_c, \\ A_c &= \frac{\sum_{i \in P_c} \sum_{j \in N_c} \phi_{ijc}}{|P_c| |N_c|}.\end{aligned}\tag{18}$$

Pairwise losses target class ordering directly rather than using cross-entropy as an indirect surrogate [59]. A class contributes only when the current minibatch contains at least one positive and one negative example; absent classes are skipped, and the pairwise term is omitted if no class is eligible. RO-PDRF-Full adds $0.30\mathcal{L}_{\text{rec}} + 0.05\mathcal{L}_{\text{Brier}} + 0.005\mathcal{L}_{\text{interior}} + 0.10\mathcal{L}_{\text{AUC}}$ to Eq. (12). The formal hierarchy is fixed throughout: RO-PDRF-Lite is the primary practical model and software default; RO-PDRF-Full is the mechanistic full model used for complete-objective architecture comparisons; and RO-PDRF-EMA is a calibration-oriented sensitivity based on Full. The clean-view teacher is the formal specification because it removes label-assisted teacher selection without reducing affected-subset discrimination in the teacher audit. The test set is not used to fit model or ensemble parameters.

To separate recovery supervision from architecture, we also train recovery-oriented CAGF (RO-CAGF). It receives the same clean-view distillation, Brier and degraded-view ranking losses as RO-PDRF-Full. Its unrestricted softmax gate uses a weak KL-to-uniform regularizer (weight 0.005), whereas RO-PDRF-Full uses the response-interior penalty. The matched data, fixed faults, seeds, minibatches and checkpoint rules isolate architecture subject to this necessary regularizer difference. Regularizer grids, early/uniform-fusion controls, modality-dropout self-distillation and confidence-thresholded distillation are reported in the Supplementary Information [5, 6].

3.6 Cross-fitted selective recovery

Unconditional recovery can repair a wrong base prediction but can also overturn a correct one. We therefore treat routing as hard-decision risk control. The primary deployment pair is PDRF versus RO-PDRF-Lite, because both endpoints require one ordinary forward pass and have the same 19,740-parameter architecture. The heavier PDRF/RO-PDRF-Full pair is retained as a mechanistic sensitivity and for comparison with the earlier leave-one-group-out selector.

Batch 7 is divided chronologically into two disjoint halves. The first half fits one scalar temperature for each endpoint by minimizing multiclass negative log-likelihood. The second half contains two calibration-only realizations of Gaussian, offset, drift and stuck-at corruption. Only rows on which the intervention reaches an available affected group enter selector development. Every routing feature is calculated from these temperature-scaled endpoint probabilities. The emitted vector is the selected endpoint’s temperature-scaled vector; no post-routing recalibration is fitted.

Lite-CF uses six prespecified inputs: base confidence, recovery confidence, their difference, base normalized entropy, recovery normalized entropy and their difference. It receives neither the class label nor fault type at inference. Let z_{ij} denote standardized feature j . An L_2 -regularized logistic model produces the *conditional preference score*

$$\pi_i = \sigma \left(\gamma_0 + \sum_{j=1}^6 \gamma_j z_{ij} \right),\tag{19}$$

using calibration rows on which PDRF and RO-PDRF-Lite differ in correctness. The target equals one when recovery is correct and the base endpoint is wrong. This conditional score is not a

calibrated reliability probability for the full stream. Lite-CF uses $C = 0.05$, the `lbfgs` solver, balanced class weights, tolerance 10^{-4} , 2,000 maximum iterations and random state 0.

Coefficient fitting is separated from threshold selection by five-fold stratified group cross-fitting. All realizations and mechanisms originating from the same calibration observation remain in one fold. Candidate thresholds are 0.50, 0.525, $\dots$, 0.90 and are evaluated only on pooled out-of-fold scores. Selection is lexicographic: minimize realized harms, maximize selected accuracy, maximize retained corrections and, if all three remain tied, choose the highest threshold. The formal Lite-CF fits had a mean of 1.5 tied thresholds (range 1–4). The final coefficients are refitted on all informative rows while the threshold remains frozen. A newly trained deployment model follows the same reserved chronological-calibration protocol. If both preference classes are not present in every grouped fold, the selector is declared unsupported and routing falls back to PDRF; test observations are never borrowed to complete a fit.

We probe the selected-sample and sparse-event risks in four ways. First, ten repeated grouped splits are run for each of 10 fitted endpoint pairs. Second, standardized coefficient distributions, sign frequencies and $C \in \{0.01, 0.05, 0.1, 0.5, 1, 5\}$ are audited. Third, calibration groups are subsampled to 25%, 50%, 75% and 100%. Fourth, an all-row multinomial model predicts three outcomes—base better, equivalent or recovery better—from the same six features. A depth-two tree with minimum leaf size 35 supplies a nonlinear, compute-matched learned baseline. These models use the same grouped cross-fitting and calibration budget as Lite-CF.

The legacy Safe-CF-12 sensitivity routes between PDRF and RO-PDRF-Full. It adds endpoint Jensen–Shannon disagreement, leave-one-group-out consensus disagreement and consensus-class agreement features, and therefore requires $M + 2$ passes. A staged Cascade-25 first evaluates the cheap six-feature model. It computes the four leave-one-group-out views only for the 25% of calibration scores closest to the cheap threshold. This yields 2.91 passes on average in the held-out strict set. Always-endpoint, scalar confidence, entropy, random-selection and correctness-opportunity controls remain as additional baselines. The correctness oracle can attain perfect prevention and retention while having lower AUROC than unconditional recovery because it optimizes hard-decision correctness, not cross-observation score ranking.

The deployment audit reuses the same endpoints, temperatures, selector and test realization for every stream. It includes the strict fault-applied-and-available subset, a complete 40%-prevalence mixed stream and a no-imposed-fault stream with the same fixed 20% group-missingness process. Probability quality is reported separately for endpoint-class agreement and disagreement. The primary outcomes are negative-transfer prevention, recovery retention and

$$U = V_C N_C - C_H N_H - \lambda(P - 1), \quad (20)$$

where N_C and N_H are retained corrections and realized harms per 10,000 observations, V_C is correction value, C_H is harm cost, P is mean forward-pass count and λ is a transparent pass-cost proxy. We vary C_H/V_C over 1, 2, 5 and 10, the imposed-fault prevalence, and λ . Energy was not measured, so forward passes and counted linear-layer FLOPs are reported only as computational proxies.

3.7 Chemical-sensor dataset and fixed faults

The UCI Gas Sensor Array Drift Dataset contains 13,910 observations from 16 metal-oxide sensors, six gas classes and 10 acquisition batches over 36 months [60, 61]. Each sensor contributes eight extracted response features. The principal grouping uses four consecutive sensors per group. All models receive the same grouping. Sensitivity analyses additionally use interleaved and five fixed random partitions; no partition is called a physical modality.

Batches 1–6 train the models. Their feature means and standard deviations are the only quantities used for standardization. The same transform is applied to batches 7–10, after which each feature is clipped to $[-8, 8]$ before sensor grouping. The first 60% of Batch 7 selects checkpoints, and the remaining 40% is reserved for calibration; the routing experiment further divides that calibration partition into temperature and selector halves. Batches 8–10 are never used to fit preprocessing, endpoints, temperatures, selectors or thresholds.

Controlled faults are imposed after this training-only preprocessing in grouped standardized space. The formal test assigns 40% of observations a scale-3 intervention on group 1 and fixes $q = 1$. Fault assignment and 20% group missingness are generated independently to isolate their factorial effects. This is a stress design, not a claim that all missingness–corruption combinations occur naturally. Of 4,364 test observations, 1,765 are assigned the intervention; group 1 remains available and receives it in 1,436, whereas it is masked in 329. The strict recovery estimand is the former *fault-applied-and-available* subset. Fault indices, missingness masks and intervention values are fixed across methods and optimization seeds.

The complete test set contains 294, 470 and 3,600 observations in batches 8, 9 and 10. Its six class counts are 691, 685, 740, 708, 821 and 719. The corresponding strict-subset batch counts are 91, 165 and 1,180, and its Gaussian class counts are 230, 220, 230, 253, 266 and 237. Complete mechanism-by-batch class tables are supplied in the Supplementary Information.

Checkpoint selection and temperature calibration use separate fault-free views with independently generated 10% group missingness; no controlled Gaussian, offset, drift or stuck-at intervention is added to either subset. The checkpoint criterion is unweighted cross-entropy on the complete selection subset. For the cross-fitted deployment run, temperature is fitted on the first chronological half of the calibration partition, not an affected subset, by minimizing unweighted multiclass negative log-likelihood. The resulting scalar is specific to each fitted seed and method and is applied unchanged to every deployment stream. Controlled-fault and no-fault deployment streams use the same fixed 20% group-missingness process so that fault prevalence is the changing factor. Earlier natural-view analyses without imposed test missingness remain supplementary sensitivity evidence.

The expanded fault study crosses four prespecified mechanisms with realizations 70001–70008 and fitted seeds 101–105. Model fitting always uses the Gaussian paired degradation defined above; offset, drift and stuck-at are test-time interventions only. Gaussian faults add independent standardized noise. Offset faults add a featurewise signed displacement. Drift multiplies that displacement by a monotone 0.25–1.00 trajectory over held-out acquisition order. Stuck-at faults replace the affected group’s standardized features by a fixed signed vector. Within each realization, all mechanisms share affected rows and missingness masks, while intervention values remain fixed across methods. These are controlled repeats on one instrument.

Table 2 translates the formal scale into empirical training-distribution displacement. At scale 3, median absolute shifts were 1.89–3.10 training standard deviations and median percentile shifts were 0.36–0.56. Only 9.4–45.7% of corrupted values remained inside the training 1st–99th percentile interval. The formal setting is therefore a severe standardized stress test, not a typical natural-failure model. Scale-1 and scale-5 summaries and representative inverse-transformed feature examples are reported in the Supplementary Information.

Exploratory controls vary diagnostic-quality metadata, leave-one-group-out training, response bounds, weighting slope, ranking weight, fault group, severity and prevalence. They share observations and fitted models, are not treated as independent replications and do not replace the prespecified main setting. Full specifications and results are reported in the Supplementary Information.

Table 2: Fault-plausibility audit in the strict subset. Fractions are calculated featurewise against batches 1–6. “Training range” denotes the observed training minimum–maximum, not a physical sensor limit.

Mechanism (scale 3)	Median $ \Delta z $	Median percentile shift	Within training 1–99%	Within training range
Gaussian	2.015	0.360	0.379	0.609
Offset	3.000	0.538	0.332	0.632
Drift	1.888	0.440	0.457	0.697
Stuck-at	3.105	0.557	0.094	0.656

3.8 Independent hydraulic test-rig validation

The UCI Condition Monitoring of Hydraulic Systems dataset contains 2,205 raw 60-s cycles from an experimental hydraulic rig and native condition labels for cooler, valve, pump and accumulator states (DOI: 10.24432/C5CW21) [22, 62]. We retain 1,449 cycles marked as stable. Fourteen physical sensors form five groups by measured quantity: six pressure sensors, two flow sensors, four temperature sensors, motor power and vibration. This grouping is defined before model fitting and follows the measurement system rather than a random partition.

Each sensor is summarized by distributional and trend statistics. Unequal group lengths are aligned to 48 inputs; a zero-padded native-order representation audits possible smoothing. The main split preserves acquisition order within every native condition class, assigns contiguous 60%/15%/10%/15% blocks and removes five cycles at each boundary. A global chronological split would omit some condition classes from training. After guard-band removal, the test counts are 72/72/74 for the three cooler states, 54/54/54/56 for the four valve states, 74/72/72 for the three pump states and 56/54/54/54 for the four accumulator states. Recovery-objective-matched RO-PDRF-Full and RO-CAGF use five matched seeds; controlled pressure- and vibration-group faults affect the same 40% of test cycles. Component-condition labels are native to the rig, whereas sensor faults remain interventions. Representation and random-split sensitivities are supplementary [23–25].

3.9 Real-operational AHU sensor-fault validation

We additionally use the open real-operational AHU dataset from an auditorium, a hospital and a large office (Figshare DOI: 10.6084/m9.figshare.27147678.v3) [26, 27]. The binary task uses native, expert-annotated temperature-sensor-fault labels and no artificial test corruption. Seven measurements form five physical groups; each building uses a chronological 60%/15%/10%/15% split and five matched seeds. The untouched test periods contain 228/9,354 fault records in the auditorium (2.44%), 1,495/9,362 in the hospital (15.97%) and 346/19,115 in the office (1.81%). Return-air/supply-air subtype counts are 179/49, 1,487/8 and 293/53, respectively. Because the label is the sensor fault itself and no independent downstream state is available, this is a negative task-boundary audit, not downstream recovery validation. Detailed shift, adaptation, risk–coverage and conformal analyses are reported in the Supplementary Information [41–44].

3.10 Training, metrics and statistical analysis

AdamW uses learning rate 2×10^{-3} , weight decay 10^{-4} , batch size 256 and gradient clipping at 5. Chemical-array training uses at most 60 epochs, hydraulic training uses at most 80 and AHU training uses at most 12. Checkpoints minimize unweighted selection cross-entropy and stop after nine epochs without an improvement greater than 10^{-4} . RO-PDRF-Lite, RO-PDRF-Full, RO-

PDRF-EMA and all teacher controls use this identical criterion; no test metric selects a checkpoint or variant. Class weights are $n/(Cn_c)$. No dropout or batch normalization is used.

The primary deployment outcomes are negative-transfer prevention, recovery retention and the utility in Eq. (20). Macro-AUROC, macro-AUPRC, NLL, multiclass Brier score and calibration are secondary. Equal-width ECE partitions maximum class probability into 15 intervals on $[0, 1]$. Equal-mass ECE splits the sorted maximum probabilities into 15 groups. Classwise ECE applies 15 equal-width bins to each one-versus-rest probability and averages the six values. Classwise AUROC, AUPRC and recall are archived. Temperature scaling is fitted separately for each endpoint and optimization seed on the disjoint first half of Batch 7.

The deployment analyses are frozen as CEE-CF10-R2 for the Full endpoint and CEE-CF10-R2-LITE for the primary Lite endpoint. Within each seed, one endpoint pair is reused across all four faults and selector comparisons. Test realization 70001 is fixed. Means over the strict set give equal weight to the four mechanism-seed cells. Clean/no-fault summaries contain one value per fitted pair. Mechanism-specific effects use paired Student- t intervals across the 10 fitted model pairs while holding the mechanism fixed. Batch-aware sensitivity holds both mechanism and acquisition batch fixed. These intervals quantify fitting variation on the present data; they are not device- or fault-population intervals.

The previous four-mechanism crossed bootstrap is retained only as a labelled sensitivity in the Supplementary Information. It is not used for new headline inference because four top-level mechanism clusters do not support a reliable mechanism-population bootstrap. Exact Wilcoxon tests across optimization seeds are likewise reported only as fitting-stability diagnostics. Hydraulic summaries use a task-fault-seed hierarchy; AHU results remain building-specific. The strict estimand and selector analyses followed reviewer-driven audit and are not described as preregistered confirmatory analyses.

Experimental protocol, fixed interventions and evidence boundary

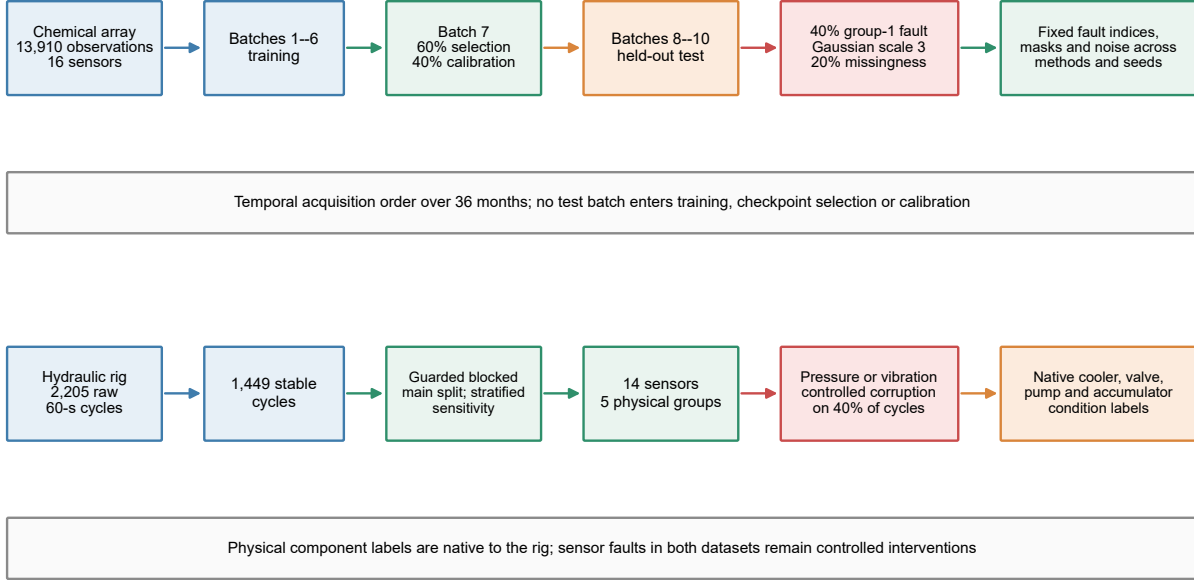


Figure 2: **Integrated experimental protocol and controlled fault design.** The upper lane follows the chemical-array acquisition order from batches 1–6 training through Batch 7 checkpoint selection/calibration to held-out batches 8–10; fault indices, masks and intervention values are fixed across methods and seeds. The lower lane follows the independent hydraulic rig from stable 60-s cycles to the guarded within-condition blocked main analysis; the earlier stratified split is retained only as a sensitivity analysis. Component-condition labels are native to the rig, whereas chemical, pressure and vibration sensor corruptions remain controlled interventions.

4 Results

4.1 Primary two-pass routing controlled hard-decision risk

The strict subset contains 1,436 observations per mechanism on which the assigned intervention reached an available group. Across the 40 mechanism–seed cells, PDRF achieved mean accuracy 0.4869 and macro-AUROC 0.8115. Unconditional RO-PDRF-Lite increased these values to 0.5002 and 0.8175. Lite-CF emitted the recovery output for 52.2% of observations, prevented 94.7% of recovery-induced negative transfers and retained 9.7% of the corrections available from unconditional recovery. Its accuracy and macro-AUROC were 0.4885 and 0.8151 (Table 3). Thus the router achieved its hard-decision safety target but did not preserve most of the recovery endpoint’s accuracy gain.

The routed probability vector improved on PDRF for NLL, Brier score, ECE and macro-AUPRC, but remained below unconditional RO-PDRF-Lite for every strict-set probability metric. On the complete 40%-prevalence stream, Lite-CF/PDRF/RO-PDRF-Lite macro-AUROC values were 0.8441/0.8426/0.8451, and NLL values were 2.1386/2.2131/2.1135. On the no-imposed-fault stream, their macro-AUROC values were 0.8629/0.8631/0.8623 and NLL values were

Table 3: **Strict-subset endpoint and routed-output quality.** Values are equal-weight means over four fixed mechanisms and 10 fitted model pairs. Probabilities are temperature-scaled before routing; no post-routing recalibration is applied. ECE uses 15 equal-width bins.

Method	Accuracy $\uparrow$	AUROC $\uparrow$	AUPRC $\uparrow$	NLL $\downarrow$	Brier $\downarrow$	ECE $\downarrow$
PDRF	0.4869	0.8115	0.5534	2.8239	0.8286	0.3492
RO-PDRF-Lite	0.5002	0.8175	0.5643	2.6023	0.7988	0.3302
Lite-CF	0.4885	0.8151	0.5598	2.6775	0.8129	0.3408

1.8636/1.9002/1.8626. Lite-CF prevented 94.2% of no-fault negative transfers but retained only 1.7% of no-fault corrections, giving -5.3 net correct decisions per 10,000. A low harmful-switch rate therefore does not imply that the routed probability vector is uniformly better.

Mechanism-fixed paired intervals replace the four-cluster bootstrap as the main inferential display (Table 4). Lite-CF gains over PDRF were supported for Gaussian and stuck-at corruption. The offset and drift intervals crossed zero. Gaussian Lite-CF gains were also positive within batches 8, 9 and 10 ($+0.0062$, $+0.0077$ and $+0.0061$); most offset and drift batch-fixed intervals crossed zero. The result is therefore mechanism-dependent and cannot be interpreted as a fault-population effect.

Table 4: **Mechanism-fixed macro-AUROC differences.** Brackets are paired 95% Student- t intervals across 10 fitted model pairs while holding the mechanism and test observations fixed. Mechanisms are not resampled as a population.

Fixed mechanism	RO-PDRF-Lite – PDRF	Lite-CF – PDRF
Gaussian	$+0.0124$ [$+0.0102$, $+0.0146$]	$+0.0064$ [$+0.0034$, $+0.0093$]
Offset	$+0.0034$ [$+0.0007$, $+0.0060$]	$+0.0028$ [-0.00002 , $+0.0057$]
Drift	$+0.0020$ [-0.0005 , $+0.0044$]	$+0.0018$ [-0.0002 , $+0.0037$]
Stuck-at	$+0.0064$ [$+0.0033$, $+0.0095$]	$+0.0034$ [$+0.0005$, $+0.0063$]

At equal correction value and harm cost and without a pass penalty, Lite-CF retained 24.20 corrections and realized 8.36 harms per 10,000 strict observations, yielding net utility $+15.84$. The net values at harm-to-correction ratios 2, 5 and 10 were $+7.49$, -17.58 and -59.37 . The break-even ratio was approximately 2.9. Adding even a transparent pass penalty reduces these values. Energy was not measured, so the analysis establishes a preference region rather than a universally optimal operating point.

4.2 Sparse calibration limited selector stability

The formal Lite-CF calibration sets contained a mean of 1,861 rows, but only 89.7 were correctness disagreements: 36.1 favoured PDRF and 53.6 favoured RO-PDRF-Lite. Frozen thresholds averaged 0.710 and ranged from 0.55 to 0.90. Repeating the grouped cross-fitting 10 times for each endpoint pair produced mean out-of-fold AUROC 0.720 (standard deviation 0.138; range 0.327–0.954), AUPRC 0.809 and Brier score 0.208. Thresholds ranged from 0.525 to 0.90. Numerical convergence therefore did not imply stable conditional discrimination.

Coefficient signs were most stable for Lite confidence (94%), base confidence (89%) and confidence change (83%). Dominant-sign fractions for the entropy terms were 61–67%. Strong shrinkage

traded away conditional discrimination: mean out-of-fold AUROC increased from 0.690 at $C = 0.01$ to 0.717 at $C = 0.05$, 0.800 at $C = 1$ and 0.811 at $C = 5$. The prespecified $C = 0.05$ is therefore a conservative estimation choice, not the value that maximizes calibration preference AUROC.

Calibration-size sensitivity showed the same boundary. Using 25%, 50%, 75% and 100% of calibration groups produced pooled mean prevention of 88.7%, 91.6%, 92.4% and 93.9%, respectively. Retention changed from 12.1% to 10.0%, while macro-AUROC remained near 0.81. These are repeated-subsampling summaries and differ from the equal-weight 40-cell headline estimand.

The all-row three-outcome model prevented 94.4% of harms and retained 8.5% of corrections, but selected recovery for only 4.6% of observations and achieved macro-AUROC 0.8117. The shallow tree prevented 91.9%, retained 9.4% and achieved 0.8120. Neither displaced Lite-CF. For the legacy Full endpoint, the staged cascade achieved 95.9% prevention, 5.3% retention and 0.8149 macro-AUROC at 2.91 mean passes. Safe-CF-12 retained more corrections (13.1%) but used six passes and prevented only 90.0% (Table 5). These comparisons show that no learned router dominates safety, recovery, ranking and compute.

Table 5: **Learned routing and compute comparison.** Full-endpoint rows route between PDRF and RO-PDRF-Full; Lite-CF routes between PDRF and RO-PDRF-Lite. Prevention and retention are hard-decision outcomes. AUROC and NLL evaluate the final emitted probability vector.

Method	Prevention $\uparrow$	Retention $\uparrow$	Recovery use	Passes	AUROC $\uparrow$	NLL $\downarrow$
PDRF endpoint	1.000	0.000	0.000	1.00	0.8115	2.8239
RO-PDRF-Full endpoint	0.000	1.000	1.000	1.00	0.8162	2.6244
Cascade-25	0.959	0.053	0.473	2.91	0.8149	2.6492
Safe-CF-12	0.900	0.131	0.440	6.00	0.8146	2.6927
Three-outcome-6	0.944	0.085	0.046	2.00	0.8117	2.8104
Tree-6	0.919	0.094	0.245	2.00	0.8120	2.7508
Lite-CF (primary)	0.947	0.097	0.522	2.00	0.8151	2.6775

4.3 Legacy Full-endpoint transport remained limited

When each calibrated fault family was omitted in turn, legacy Safe-CF-12 averaged +0.0032 macro-AUROC over PDRF, prevented 86.2% of negative transfers and retained 15.4% of recoveries (Table 6). On three mechanisms absent from selector calibration, corresponding means were +0.0019, 86.8% and 11.5%. The gain was not uniform: clipping gave -0.0002 relative to PDRF, whereas correlated dual-group corruption gave +0.0060. Safe-CF-12 remained below unconditional RO-PDRF-Full on average in both audits. These tests reduce same-family calibration leakage but do not establish natural-failure or device transfer.

At approximately matched prevention, Safe-CF-12 retained 13.1% of recoveries, compared with 5.7–8.8% for deterministic confidence, entropy and disagreement rules (Table 7). Random selection retained 49.1% but prevented only 47.3% of negative transfers. Always using PDRF or RO-PDRF-Full defines the zero-recovery and zero-prevention endpoints. The correctness-disagreement oracle defines the hard-decision opportunity corner. It is neither deployable nor an AUROC upper bound. Its AUROC can be lower than always-Full because choosing the correct class on each disagreement does not necessarily preserve the continuous one-versus-rest ranking across observations. Thus the multivariable selector adds value over one-dimensional rules, while the distance from the opportunity boundary quantifies unresolved error transfer.

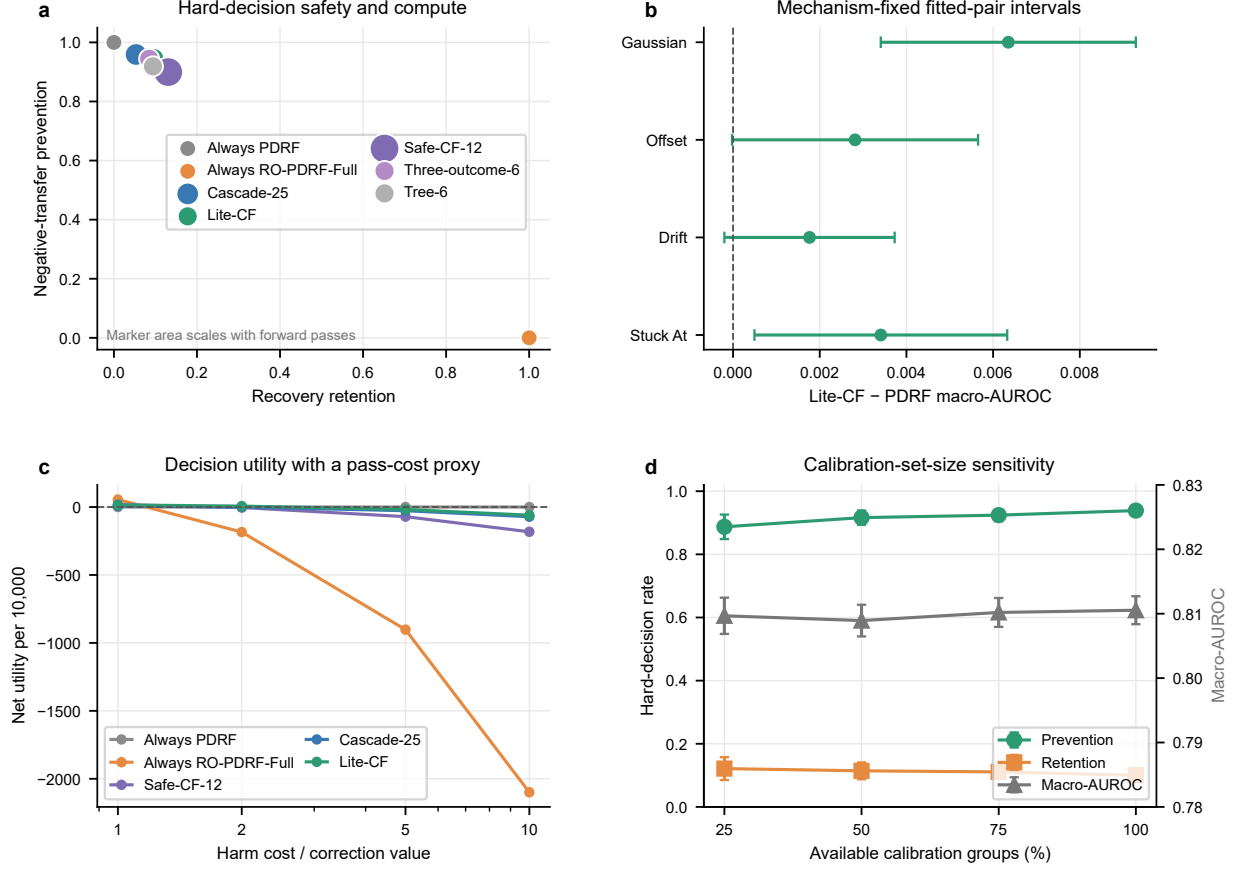


Figure 3: **Hard-decision safety, uncertainty and compute.** **a**, negative-transfer prevention versus recovery retention on the strict subset; marker area scales with mean forward passes, and the always-endpoint rows define the two corners. **b**, Lite-CF minus PDRF macro-AUROC with each fault mechanism held fixed; bars are paired 95% Student-*t* intervals across 10 fitted model pairs. **c**, net utility per 10,000 strict observations as the cost of one realized harm increases relative to the value of one retained correction; the plotted pass penalty is a forward-pass/FLOP proxy, not measured energy. **d**, repeated calibration-group subsampling; bars show 95% intervals over seed-repeat summaries.

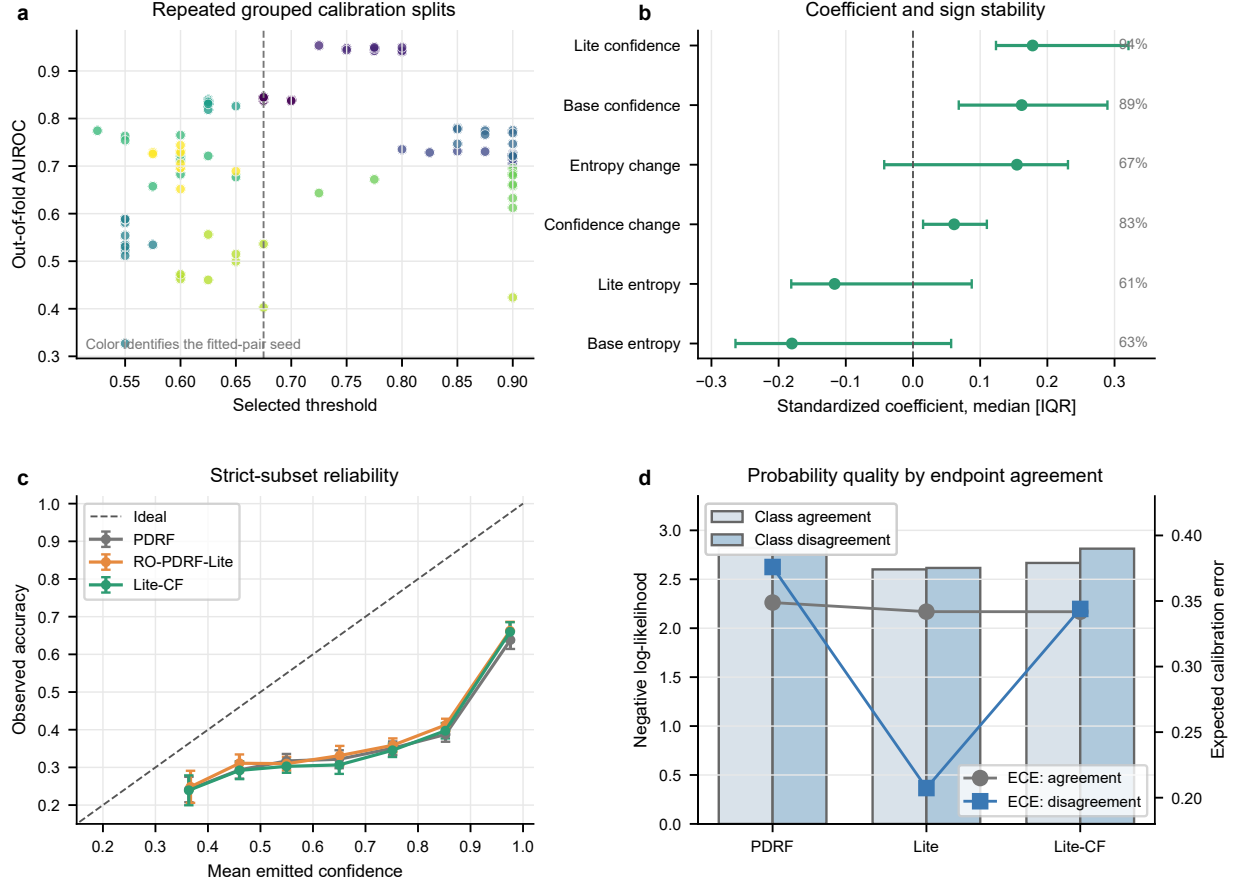


Figure 4: Selector stability and final probability quality. **a**, selected threshold and out-of-fold preference AUROC across 100 repeated grouped fits; colour identifies the fitted endpoint-pair seed and the dashed line marks the overall median threshold. **b**, median standardized Lite-CF coefficient with interquartile range; right-side percentages are dominant-sign frequencies. **c**, reliability curves for temperature-scaled strict-subset outputs; points aggregate fault-seed cells within confidence bins. **d**, negative log-likelihood bars and 15-bin expected calibration error lines after separating cases on which the endpoint classes agree or disagree.

Table 6: **Selector transport estimands.** Values are means across 10 fitted pairs on the strict applied-and-available subset. Leave-one-family-out selectors are developed on the other three families; unseen mechanisms are absent from all selector calibration.

Audit	Held-out mechanism	Safe-PDRF	Safe-Full	Prevention	Retention
Leave-one-family-out	Drift	+0.0016	+0.0014	0.912	0.115
Leave-one-family-out	Gaussian noise	+0.0068	-0.0075	0.788	0.324
Leave-one-family-out	Offset	+0.0019	+0.0010	0.825	0.118
Leave-one-family-out	Stuck-at	+0.0024	-0.0011	0.923	0.060
Unseen mechanism	Clipping	-0.0002	-0.0052	0.897	0.049
Unseen mechanism	Correlated Dual	+0.0060	-0.0075	0.744	0.270
Unseen mechanism	Gain Loss	+0.0001	-0.0002	0.963	0.026

Table 7: **Matched legacy selector-baseline estimands.** Prevention, retention and recovery-model use are equal-weight descriptive means across four fault mechanisms and 10 fitted pairs; macro-AUROC is mean $\pm$ standard deviation across the same 40 cells. Scalar thresholds are fitted on out-of-fold calibration scores and frozen before testing. The correctness-disagreement oracle optimizes class correctness only; it can have lower AUROC than always-Full because AUROC depends on continuous score ranking.

Selection rule	Matching	Prevention	Retention	Full use	Macro-AUROC
Safe-CF-12	proposed	0.900	0.131	0.440	0.8146 $\pm$ 0.0184
Higher confidence	prevention matched	0.941	0.088	0.034	0.8116 $\pm$ 0.0206
Lower entropy	prevention matched	0.933	0.070	0.057	0.8118 $\pm$ 0.0205
Lower LOO disagreement	prevention matched	0.919	0.057	0.022	0.8117 $\pm$ 0.0205
Higher JS disagreement	prevention matched	0.927	0.076	0.010	0.8116 $\pm$ 0.0206
Random matched selection	selection rate matched	0.473	0.491	0.509	0.8123 $\pm$ 0.0173
Always PDRF	endpoint	1.000	0.000	0.000	0.8115 $\pm$ 0.0210
Always RO-PDRF-Full	endpoint	0.000	1.000	1.000	0.8162 $\pm$ 0.0163
Correctness opportunity boundary	opportunity boundary	1.000	1.000	0.029	0.8141 $\pm$ 0.0210

4.4 A stronger router narrowed the architecture claim

A separate objective-matched architecture-control run tested whether the result was an artifact of the original unrestricted gate. RO-MER routes among four group experts and one joint expert using the complete objective in Eq. (14). It exceeded RO-CAGF for offset, drift and stuck-at corruption, but not Gaussian noise. RO-PDRF-Full exceeded RO-MER for all four controlled mechanisms and by +0.0154 on average (descriptive crossed-factor interval +0.0106 to +0.0206; Supplementary Table S2). This run addresses comparator strength, but it is not merged numerically with CEE-CF10-R2 and does not establish universal architectural superiority.

4.5 Downweighting remained distinct from prediction recovery

In a separate mechanism audit, the affected group’s normalized weight decreased in 80.2% of predictions, yet 41.9% still failed after that decrease. Recovery distillation was the largest leave-one-loss-out contribution (+0.0105 affected AUROC; 10/10 seeds, $P = 0.0020$). Conditional audits also exposed error transfer: RO-PDRF-Full repaired 21.7% of eligible cases when its clean teacher was correct and PDRF was wrong, but lost 29.4% when that teacher was wrong and PDRF remained correct. These paired associations do not identify one loss term causally. Agreement-

and confidence-based teacher controls did not isolate negative transfer, and 63.6% response saturation precluded interval-scale device-health interpretation. Complete ablations, teacher controls and response-calibration audits are reported in the Supplementary Information.

4.6 Guarded hydraulic blocks reduced the apparent architecture advantage

The guarded hydraulic analysis used four native component-condition tasks and controlled pressure- and vibration-group faults (Table 8). RO-PDRF-Full exceeded recovery-objective-matched RO-CAGF in six of eight task-fault conditions. The mean difference was +0.015, but the task-fault-seed hierarchical interval (-0.006 to $+0.036$) included zero. Performance ranged from near ceiling for cooler (RO-PDRF-Full macro-AUROC 0.996) to near chance for pump and accumulator (0.528 and 0.487), limiting architecture interpretation on the latter tasks.

The earlier random-stratified split yielded a larger mean difference (+0.044), indicating optimistic adjacent-cycle allocation. Guard bands reduced direct adjacency but did not create independent devices. No-interpolation and random-split results are therefore supplementary sensitivity evidence; the main result supports single-rig platform-internal robustness, not a general architecture ranking.

Table 8: Guarded-block hydraulic affected-subset macro-AUROC. Values are means $\pm$ standard deviations across five matched seeds. The eight task-fault rows are conditions from one rig, not independent devices; the earlier random-stratified results are supplementary sensitivity evidence.

Task	Fault	RO-CAGF	RO-PDRF-Full	Difference
Cooler	Pressure	0.942 ± 0.023	0.992 ± 0.004	+0.050
Cooler	Vibration	0.947 ± 0.029	1.000 ± 0.000	+0.053
Valve	Pressure	0.730 ± 0.026	0.762 ± 0.023	+0.032
Valve	Vibration	0.739 ± 0.029	0.749 ± 0.032	+0.010
Pump	Pressure	0.569 ± 0.035	0.536 ± 0.018	-0.033
Pump	Vibration	0.533 ± 0.061	0.521 ± 0.022	-0.012
Accumulator	Pressure	0.478 ± 0.022	0.491 ± 0.023	+0.013
Accumulator	Vibration	0.474 ± 0.047	0.483 ± 0.044	+0.009

4.7 AHU direct diagnosis exposed a negative task boundary

The chronological air-handling-unit tests contained 37,831 untouched future-time records, including 2,069 expert-annotated temperature-sensor faults. Because the target is the fault itself and no independent downstream state is available, this experiment cannot test whether suppressing that sensor recovers another prediction. Early fusion exceeded bounded recovery in all 15 building-seed pairs (mean AUROC difference -0.0341 for bounded recovery, $P < 0.001$), and leave-one-building-out bounded recovery collapsed to 0.298 ± 0.005 in the hospital. The operational data therefore establish a direct-diagnosis and transfer boundary, not downstream recovery validation; complete subtype, shift, adaptation and risk analyses remain in the Supplementary Information.

4.8 Routed probability quality depended on endpoint agreement

Final routed probabilities were evaluated directly rather than inferred from the hard-switch rate. On strict rows where PDRF and RO-PDRF-Lite predicted the same class, Lite-CF NLL/ECE were 2.667/0.342, between PDRF (2.821/0.349) and RO-PDRF-Lite (2.601/0.342). On endpoint-class disagreements, Lite-CF NLL/ECE were 2.813/0.344; unconditional Lite was better at 2.616/0.207, whereas PDRF was worse at 2.869/0.376. Lite-CF therefore reduced some probability loss without preserving the recovery endpoint’s calibration advantage on disagreement cases (Fig. 4c,d). Equal-mass ECE, classwise ECE, classwise AUROC/AUPRC/recall and reliability-bin counts are reported in the Supplementary Information. No tested endpoint or router dominated hard-decision safety, ranking and calibration.

4.9 Lite-CF reduced, but did not remove, deployment cost

PDRF and RO-PDRF-Lite each require one forward pass, 19,740 stored parameters and 38,528 counted linear-layer FLOPs per four-group observation. Lite-CF stores both endpoints plus six standardized coefficients and an intercept. It requires two passes and 77,056 endpoint FLOPs; the logistic operation is negligible relative to the endpoints. Mean training times on the stated CPU were 16.88 s for PDRF and 17.52 s for RO-PDRF-Lite, with identical mean checkpoint epoch 25.1. We did not repeat direct energy or latency measurements for Lite-CF, so its practical comparison uses pass count and FLOPs only. The legacy Safe-CF-12 requires six passes at four groups and scales as $M + 2$; Cascade-25 reduces this to 2.91 mean passes on the current strict set. Lite-CF is therefore the operational default, while Safe-CF-12 remains a high-cost sensitivity.

5 Discussion

The strict estimand and frozen-run discipline narrow the central interpretation. Clean-to-faulted distillation produced a useful recovery endpoint, but unconditional gains varied by mechanism. The contribution is therefore not a universal fusion architecture. It is a risk-control protocol that distinguishes fault assignment from an intervention that actually reaches an available group, measures both correction and error transfer, and freezes a cross-fitted routing threshold before test evaluation.

Cross-fitting addresses direct threshold leakage, not sparse-event estimation. Lite-CF had only 89.7 informative disagreements per endpoint pair on average. Repeated grouped fits showed wide preference-AUROC and threshold ranges, and several entropy coefficients changed sign. The six-feature, strongly shrunk model reduces dimensionality and deployment cost, but it does not make the conditional score externally calibrated. The all-row three-outcome and shallow-tree comparisons also failed to dominate. A deployment with too few examples from either preference class should therefore use the base endpoint while collecting more calibration evidence.

The safety–recovery trade-off remains substantial. Lite-CF prevented 94.7% of negative transfers but retained only 9.7% of corrections. Equal harm and correction values produced a positive net result, whereas a harm cost above approximately 2.9 correction values reversed that preference. No-fault net correct change was slightly negative. These findings explain why hard-decision safety, ranking and calibration must be reported separately. They also show why a low harmful-switch rate alone is insufficient for deployment.

The two-pass design materially improves the earlier six-pass endpoint hierarchy. It avoids leave-one-group-out views and uses the software-default RO-PDRF-Lite endpoint. Even so, it stores two models and doubles endpoint inference. The staged cascade offers another cost–safety compromise

for the Full endpoint but is not uniformly better. Because energy was not measured, the utility analysis uses transparent pass and FLOP proxies and should not be interpreted as an energy-efficiency claim.

Mechanism-fixed and batch-fixed intervals replace the four-mechanism population bootstrap for headline inference. Gaussian gains were consistent across held-out batches. Offset and drift intervals often crossed zero. All intervals still reuse one chemical instrument and the same held-out observations; they quantify fitting variation, not independent devices. The formal scale-3 interventions are also severe standardized stress tests: most corrupted values fall outside the training 1st–99th percentile interval. This improves auditability but further limits natural-failure interpretation.

Transfer tests support specified controlled-corruption robustness, not natural hardware-failure or device transfer. The hydraulic rig supplies native downstream condition labels, yet the guarded architecture interval crosses zero and several tasks are near chance. It is single-rig sensitivity evidence. The AHU target is the sensor fault itself, so direct diagnosis rewards preserving an anomalous signature that recovery may suppress. A field-recovery test requires adjudicated sensor failures together with an independent control, energy, comfort or component target.

Additional boundaries remain. Response saturation prevents interval-scale device-health interpretation. Wrong clean teachers can propagate errors. No endpoint dominates probability quality and selective risk. Misleading quality metadata create another failure route. The evidence comes from controlled feature corruptions, one chemical instrument, one hydraulic rig and expert/rule-based AHU labels. Freezing the runs does not remove researcher-level adaptive-development risk. Prospective multi-device evaluation is required before field-recovery claims are warranted.

6 Conclusion

Cross-fitted selective recovery converted a useful but fallible recovery endpoint into an explicit deployment trade-off. On the strict controlled-corruption estimand, two-pass Lite-CF prevented 94.7% of negative transfers while retaining 9.7% of corrections. Its mean macro-AUROC and probability quality lay between PDRF and unconditional RO-PDRF-Lite. Utility was positive only over a bounded range of harm costs, and no-fault net change was slightly negative. Repeated grouped calibration exposed substantial threshold and coefficient instability, while mechanism-fixed and batch-fixed analyses showed that gains were not uniform across corruption types. The supported contribution is a reproducible hard-decision risk-control protocol for controlled available-group corruption. It is not evidence for calibrated device health, a fault-population effect, maintenance-confirmed natural failures or device-independent field recovery.

Data and code availability

The Gas Sensor Array Drift Dataset (DOI: <https://doi.org/10.24432/C5RP6W>) and Condition Monitoring of Hydraulic Systems dataset (DOI: <https://doi.org/10.24432/C5CW21>) are available from the UCI Machine Learning Repository under CC BY 4.0. The operational AHU data are available from Figshare under CC BY 4.0 (DOI: <https://doi.org/10.6084/m9.figshare.27147678.v3>). Code, fixed seeds, environment information, source data for CEE-CF10-R2 and figure/table scripts are publicly available in the `cee_revision` directory at <https://github.com/Corey9999/recovery-supervision-calibrated-fallback>. The frozen computational snapshot is commit `e200607e648dbbdd230b881f150de08a6da3e525`, archived under release tag `v1.1.0-cee-q1`. A permanent software DOI has not been assigned.

Ethics statement

The study used public engineering datasets and controlled computer-generated sensor corruptions. It involved no human participants, personal data, animals or biological specimens; institutional ethics review was not applicable.

Author contributions

Riyang Luo: Conceptualization, Methodology, Software, Validation, Formal analysis, Investigation, Data curation, Visualization, Writing—original draft, Writing—review and editing, and Project administration.

Acknowledgements and funding

The author received no specific funding for this work and has no acknowledgements to declare.

Declaration of interests

The author declares that there are no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

References

- [1] X. Liu, J. Zhang, S. Zhou, et al. Towards deployment-centric multimodal ai beyond vision and language. *Nature Machine Intelligence*, 7:1612–1624, 2025. doi: 10.1038/s42256-025-01116-5.
- [2] Tapabrata Chakraborti, Christopher R. S. Banerji, Ariane Marandon, et al. Personalized uncertainty quantification in artificial intelligence. *Nature Machine Intelligence*, 7:522–530, 2025. doi: 10.1038/s42256-025-01024-8.
- [3] Robin Mitra, Sarah F. McGough, Tapabrata Chakraborti, et al. Learning from data with structured missingness. *Nature Machine Intelligence*, 5:13–23, 2023. doi: 10.1038/s42256-022-00596-z.
- [4] Renjie Wu, Hu Wang, Hsiang-Ting Chen, and Gustavo Carneiro. Deep multimodal learning with missing modality: A survey. *Transactions on Machine Learning Research*, February 2026. URL <https://openreview.net/forum?id=tc7RFcx4hT>.
- [5] Natalia Neverova, Christian Wolf, Graham Taylor, and Florian Nebout. ModDrop: Adaptive multi-modal gesture recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 38(8):1692–1706, 2016. doi: 10.1109/TPAMI.2015.2461544.
- [6] Mingcheng Li, Dingkan Yang, Yuxuan Lei, Shunli Wang, Shuaibing Wang, Liuzhen Su, Kun Yang, Yuzheng Wang, Mingyang Sun, and Lihua Zhang. A unified self-distillation framework for multimodal sentiment analysis with uncertain missing modalities. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 10074–10082, 2024. doi: 10.1609/aaai.v38i9.28871.

- [7] Sangmin Woo, Sumin Lee, Yeonju Park, Muhammad Adi Nugroho, and Changick Kim. Towards good practices for missing modality robust action recognition. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, pages 2776–2784, 2023. doi: 10.1609/aaai.v37i3.25378.
- [8] Hao Wang, Shengda Luo, Guosheng Hu, and Jianguo Zhang. Gradient-guided modality decoupling for missing-modality robustness. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 15483–15491, 2024. doi: 10.1609/aaai.v38i14.29474.
- [9] Brandon Mckinzie, Vaishaal Shankar, Joseph Yitan Cheng, Yinfei Yang, Jonathon Shlens, and Alexander T. Toshev. Robustness in multimodal learning under train–test modality mismatch. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 24291–24303. PMLR, 2023. URL <https://proceedings.mlr.press/v202/mckinzie23a.html>.
- [10] Wenfang Yao, Kejing Yin, William K. Cheung, Jia Liu, and Jing Qin. DrFuse: Learning disentangled representation for clinical multi-modal fusion with missing modality and modal inconsistency. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 16416–16424, 2024. doi: 10.1609/aaai.v38i15.29578.
- [11] Wuliang Huang, Yiqiang Chen, Xinlong Jiang, Chenlong Gao, Teng Zhang, Qian Chen, and Yifan Wang. Mitigating pervasive modality absence through multimodal generalization and refinement. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 26796–26804, 2025. doi: 10.1609/aaai.v39i25.34883.
- [12] Zixian Gao, Xun Jiang, Xing Xu, Fumin Shen, Yujie Li, and Heng Tao Shen. Embracing unimodal aleatoric uncertainty for robust multimodal fusion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 26876–26885, 2024. doi: 10.1109/CVPR52733.2024.02538.
- [13] Minkyung Cho, Yulong Cao, Jiachen Sun, Qingzhao Zhang, Marco Pavone, Jeong Joon Park, Heng Yang, and Zhuoqing Mao. Cocoon: Robust multi-modal perception with uncertainty-aware sensor fusion. In *The Thirteenth International Conference on Learning Representations*, 2025. URL https://proceedings.iclr.cc/paper_files/paper/2025/hash/6580845ce91a748a9bb09cec079aac1d-Abstract-Conference.html.
- [14] Konyul Park, Yecheol Kim, Daehun Kim, and Jun Won Choi. Resilient sensor fusion under adverse sensor failures via multi-modal expert fusion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6720–6729, 2025. doi: 10.1109/CVPR52734.2025.00630.
- [15] Sahil Sidheekh, Pranuthi Tenali, Saurabh Mathur, Erik Blasch, Kristian Kersting, and Sriraam Natarajan. Credibility-aware multimodal fusion using probabilistic circuits. In *Proceedings of the 28th International Conference on Artificial Intelligence and Statistics*, volume 258 of *Proceedings of Machine Learning Research*, pages 2305–2313. PMLR, 2025. URL <https://proceedings.mlr.press/v258/sidheekh25a.html>.
- [16] Wei Liu, Yufei Chen, and Xiaodong Yue. Enhancing multi-view classification reliability with adaptive rejection. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 18969–18977, 2025. doi: 10.1609/aaai.v39i18.34088.

- [17] Stephan Rabanser, Anvith Thudi, Kimia Hamidieh, Adam Dziedzic, Israfil Bahceci, Akram Bin Sediq, Hamza Sokun, and Nicolas Papernot. Selective prediction via training dynamics. *Transactions on Machine Learning Research*, 2025. URL <https://openreview.net/forum?id=2wgnepQjyF>.
- [18] Qingyang Zhang, Haitao Wu, Changqing Zhang, Qinghua Hu, Huazhu Fu, Joey Tianyi Zhou, and Xi Peng. Provable dynamic fusion for low-quality multimodal data. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 41753–41769. PMLR, 2023. URL <https://proceedings.mlr.press/v202/zhang23ar.html>.
- [19] Jyrki Kullaa. Distinguishing between sensor fault, structural damage, and environmental or operational effects in structural health monitoring. *Mechanical Systems and Signal Processing*, 25(8):2976–2989, 2011. doi: 10.1016/j.ymssp.2011.05.017.
- [20] Jyrki Kullaa. Detection, identification, and quantification of sensor fault in a sensor network. *Mechanical Systems and Signal Processing*, 40(1):208–221, 2013. doi: 10.1016/j.ymssp.2013.05.007.
- [21] Nikolai Helwig, Eliseo Pignanelli, and Andreas Schütze. Detecting and compensating sensor faults in a hydraulic condition monitoring system. In *Proceedings SENSOR 2015*, pages 641–646, 2015. doi: 10.5162/sensor2015/D8.1.
- [22] Nikolai Helwig, Eliseo Pignanelli, and Andreas Schütze. Condition monitoring of a complex hydraulic system using multivariate statistics. In *2015 IEEE International Instrumentation and Measurement Technology Conference Proceedings*, pages 210–215, 2015. doi: 10.1109/I2MTC.2015.7151267.
- [23] Xiangkai Ma, Pei Wang, Bozhou Zhang, and Ming Sun. A multirate sensor information fusion strategy for multitask fault diagnosis based on convolutional neural network. *Journal of Sensors*, 2021:9952450, 2021. doi: 10.1155/2021/9952450.
- [24] Aurelien Teguede Keleko, Bernard Kamsu-Foguem, Raymond Houe Ngouna, and Amèvi Tongne. Health condition monitoring of a complex hydraulic system using deep neural network and DeepSHAP explainable XAI. *Advances in Engineering Software*, 175:103339, 2023. doi: 10.1016/j.advengsoft.2022.103339.
- [25] Cevahir Yildirim, Alba M. Franco-Pereira, and Rosa E. Lillo. Condition monitoring and multi-fault classification of hydraulic systems using multivariate functional data analysis. *Heliyon*, 11(1):e41251, 2025. doi: 10.1016/j.heliyon.2024.e41251.
- [26] Seunghyeon Wang. Real operational labeled data of air handling units from office, auditorium, and hospital buildings. *Scientific Data*, 12:1481, 2025. doi: 10.1038/s41597-025-05825-9.
- [27] Seunghyeon Wang. Labelled dataset for fdd in different building types: auditorium, hospital, and large-scale office. Dataset, version 3, 2024.
- [28] Seunghyeon Wang. Automated fault diagnosis detection of air handling units using real operational labelled data and transformer-based methods at 24-hour operation hospital. *Building and Environment*, 282:113257, 2025. doi: 10.1016/j.buildenv.2025.113257.

- [29] Bowei Feng, Qizhen Zhou, Jianchun Xing, Qiliang Yang, Yin Chen, and Zhongkai Deng. Attention-empowered transfer learning method for hvac sensor fault diagnosis in dynamic building environments. *Building and Environment*, 250:111148, 2024. doi: 10.1016/j.buildenv.2023.111148.
- [30] Seunghyeon Wang. Temporal-contextual self-supervised time-series learning for automated fault detection and diagnosis of air handling units in buildings. *Building and Environment*, 292:114300, 2026. doi: 10.1016/j.buildenv.2026.114300.
- [31] Alex Kendall and Yarin Gal. What uncertainties do we need in bayesian deep learning for computer vision? In *Advances in Neural Information Processing Systems*, volume 30, 2017. URL <https://proceedings.neurips.cc/paper/2017/hash/2650d6089a6d640c5e85b2b88265dc2b-Abstract.html>.
- [32] Eyke Hüllermeier and Willem Waegeman. Aleatoric and epistemic uncertainty in machine learning: An introduction to concepts and methods. *Machine Learning*, 110:457–506, 2021. doi: 10.1007/s10994-021-05946-3.
- [33] Balaji Lakshminarayanan, Alexander Pritzel, and Charles Blundell. Simple and scalable predictive uncertainty estimation using deep ensembles. In *Advances in Neural Information Processing Systems*, volume 30, 2017. URL <https://proceedings.neurips.cc/paper/2017/hash/9ef2ed4b7fd2c810847ffa5fa85bce38-Abstract.html>.
- [34] Chuan Guo, Geoff Pleiss, Yu Sun, and Kilian Q. Weinberger. On calibration of modern neural networks. In *Proceedings of the 34th International Conference on Machine Learning*, volume 70 of *Proceedings of Machine Learning Research*, pages 1321–1330. PMLR, 2017. URL <https://proceedings.mlr.press/v70/guo17a.html>.
- [35] Yaniv Ovadia, Emily Fertig, Jie Ren, Zachary Nado, D. Sculley, Sebastian Nowozin, Joshua V. Dillon, Balaji Lakshminarayanan, and Jasper Snoek. Can you trust your model’s uncertainty? evaluating predictive uncertainty under dataset shift. In *Advances in Neural Information Processing Systems*, volume 32, 2019. URL <https://proceedings.neurips.cc/paper/2019/hash/8558cb408c1d76621371888657d2eb1d-Abstract.html>.
- [36] Matthias Minderer, Josip Djolonga, Rob Romijnders, Frances Hubis, Xiaohua Zhai, Neil Houlsby, Dustin Tran, and Mario Lucic. Revisiting the calibration of modern neural networks. In *Advances in Neural Information Processing Systems*, volume 34, pages 15682–15694, 2021. URL <https://proceedings.neurips.cc/paper/2021/hash/8420d359404024567b5aefda1231af24-Abstract.html>.
- [37] Juozas Vaicenavicius, David Widmann, Carl Andersson, Fredrik Lindsten, Jacob Roll, and Thomas B. Schön. Evaluating model calibration in classification. In *Proceedings of the Twenty-Second International Conference on Artificial Intelligence and Statistics*, volume 89 of *Proceedings of Machine Learning Research*, pages 3459–3467, 2019. URL <https://proceedings.mlr.press/v89/vaicenavicius19a.html>.
- [38] Roderick J. A. Little and Donald B. Rubin. *Statistical Analysis with Missing Data*. Wiley, 3 edition, 2019. doi: 10.1002/9781119482260.
- [39] Meelis Kull, Miquel Perello-Nieto, Markus Kängsepp, Telmo Silva Filho, Hao Song, and Peter Flach. Beyond temperature scaling: Obtaining well-calibrated multi-class

probabilities with dirichlet calibration. In *Advances in Neural Information Processing Systems*, volume 32, 2019. URL <https://proceedings.neurips.cc/paper/2019/hash/8ca01ea920679a0fe3728441494041b9-Abstract.html>.

[40] Thomas Mortier, Viktor Bengs, Eyke Hullermeier, Stijn Luca, and Willem Waegeman. On the calibration of probabilistic classifier sets. In *Proceedings of the 26th International Conference on Artificial Intelligence and Statistics*, volume 206 of *Proceedings of Machine Learning Research*, pages 8857–8870, 2023. URL <https://proceedings.mlr.press/v206/mortier23a.html>.

[41] Aleksandr Podkopaev and Aaditya Ramdas. Distribution-free uncertainty quantification for classification under label shift. In *Proceedings of the Thirty-Seventh Conference on Uncertainty in Artificial Intelligence*, volume 161 of *Proceedings of Machine Learning Research*, pages 844–853, 2021. URL <https://proceedings.mlr.press/v161/podkopaev21a.html>.

[42] Baochen Sun, Jiashi Feng, and Kate Saenko. Return of frustratingly easy domain adaptation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 30, pages 2058–2065, 2016. doi: 10.1609/aaai.v30i1.10306.

[43] Shiori Sagawa, Pang Wei Koh, Tatsunori B. Hashimoto, and Percy Liang. Distributionally robust neural networks for group shifts: On the importance of regularization for worst-case generalization. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=ryxGuJrFvS>.

[44] M. Jehanzeb Mirza, Jakub Micorek, Horst Possegger, and Horst Bischof. The norm must go on: Dynamic unsupervised domain adaptation by normalization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14765–14775, 2022. URL https://openaccess.thecvf.com/content/CVPR2022/html/Mirza_The_Norm_Must_Go_On_Dynamic_Unsupervised_Domain_Adaptation_by_CVPR_2022_paper.html.

[45] Ran El-Yaniv and Yair Wiener. On the foundations of noise-free selective classification. *Journal of Machine Learning Research*, 11(53):1605–1641, 2010. URL <https://jmlr.org/papers/v11/el-yaniv10a.html>.

[46] Yonatan Geifman and Ran El-Yaniv. SelectiveNet: A deep neural network with an integrated reject option. In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 2151–2159. PMLR, 2019. URL <https://proceedings.mlr.press/v97/geifman19a.html>.

[47] Vojtech Franc, Daniel Prusa, and Vaclav Voracek. Optimal strategies for reject option classifiers. *Journal of Machine Learning Research*, 24(11):1–49, 2023. URL <https://www.jmlr.org/papers/v24/21-0048.html>.

[48] Hengyue Liang, Le Peng, and Ju Sun. Selective classification under distribution shifts. *Transactions on Machine Learning Research*, 2024. URL <https://openreview.net/forum?id=dmxMGW6J7N>.

[49] Hussein Mozannar and David Sontag. Consistent estimators for learning to defer to an expert. In *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pages 7076–7087. PMLR, 2020. URL <https://proceedings.mlr.press/v119/mozannar20b.html>.

- [50] Dharmesh Tailor, Aditya Patra, Rajeev Verma, Putra Manggala, and Eric Nalisnick. Learning to defer to a population: A meta-learning approach. In *Proceedings of the 27th International Conference on Artificial Intelligence and Statistics*, volume 238 of *Proceedings of Machine Learning Research*, pages 3475–3483. PMLR, 2024. URL <https://proceedings.mlr.press/v238/tailor24a.html>.
- [51] Minmin Chen, Zhixiang Xu, Kilian Weinberger, Olivier Chapelle, and Dor Kedem. Classifier cascade for minimizing feature evaluation cost. In *Proceedings of the Fifteenth International Conference on Artificial Intelligence and Statistics*, volume 22 of *Proceedings of Machine Learning Research*, pages 218–226. PMLR, 2012. URL <https://proceedings.mlr.press/v22/chen12c.html>.
- [52] Rafael M. O. Cruz, Robert Sabourin, and George D. C. Cavalcanti. Dynamic classifier selection: Recent advances and perspectives. *Information Fusion*, 41:195–216, 2018. doi: 10.1016/j.inffus.2017.09.010.
- [53] Thomas G. Dietterich. Approximate statistical tests for comparing supervised classification learning algorithms. *Neural Computation*, 10(7):1895–1923, 1998. doi: 10.1162/089976698300017197.
- [54] Janez Demšar. Statistical comparisons of classifiers over multiple data sets. *Journal of Machine Learning Research*, 7:1–30, 2006. URL <https://www.jmlr.org/papers/v7/demsar06a.html>.
- [55] Bradley Efron and Robert J. Tibshirani. *An Introduction to the Bootstrap*. Chapman and Hall/CRC, 1994. doi: 10.1201/9780429246593.
- [56] Quinn McNemar. Note on the sampling error of the difference between correlated proportions or percentages. *Psychometrika*, 12(2):153–157, 1947. doi: 10.1007/BF02295996.
- [57] Takaya Saito and Marc Rehmsmeier. The precision–recall plot is more informative than the ROC plot when evaluating binary classifiers on imbalanced datasets. *PLOS ONE*, 10(3):e0118432, 2015. doi: 10.1371/journal.pone.0118432.
- [58] Antti Tarvainen and Harri Valpola. Mean teachers are better role models: Weight-averaged consistency targets improve semi-supervised deep learning results. In *Advances in Neural Information Processing Systems*, volume 30, pages 1195–1204, 2017. URL https://proceedings.neurips.cc/paper_files/paper/2017/hash/68053af2923e00204c3ca7c6a3150cf7-Abstract.html.
- [59] Zhenhuan Yang, Yunwen Lei, Siwei Lyu, and Yiming Ying. Stability and differential privacy of stochastic gradient descent for pairwise learning with non-smooth loss. In *Proceedings of the 24th International Conference on Artificial Intelligence and Statistics*, volume 130 of *Proceedings of Machine Learning Research*, pages 2026–2034, 2021. URL <https://proceedings.mlr.press/v130/yang21c.html>.
- [60] Alexander Vergara. Gas sensor array drift dataset, 2012. Licensed under CC BY 4.0.
- [61] Alexander Vergara, Shankar Vembu, Tuba Ayhan, Margaret A. Ryan, Margie L. Homer, and Ramon Huerta. Chemical gas sensor drift compensation using classifier ensembles. *Sensors and Actuators B: Chemical*, 166–167:320–329, 2012. doi: 10.1016/j.snb.2012.01.074.
- [62] Nikolai Helwig, Eliseo Pignanelli, and Andreas Schütze. Condition monitoring of hydraulic systems, 2018. Licensed under CC BY 4.0.