


Support-gated selective recovery under controlled sensor corruption

Endpoints and routing thresholds are fitted before fixed future-batch evaluation

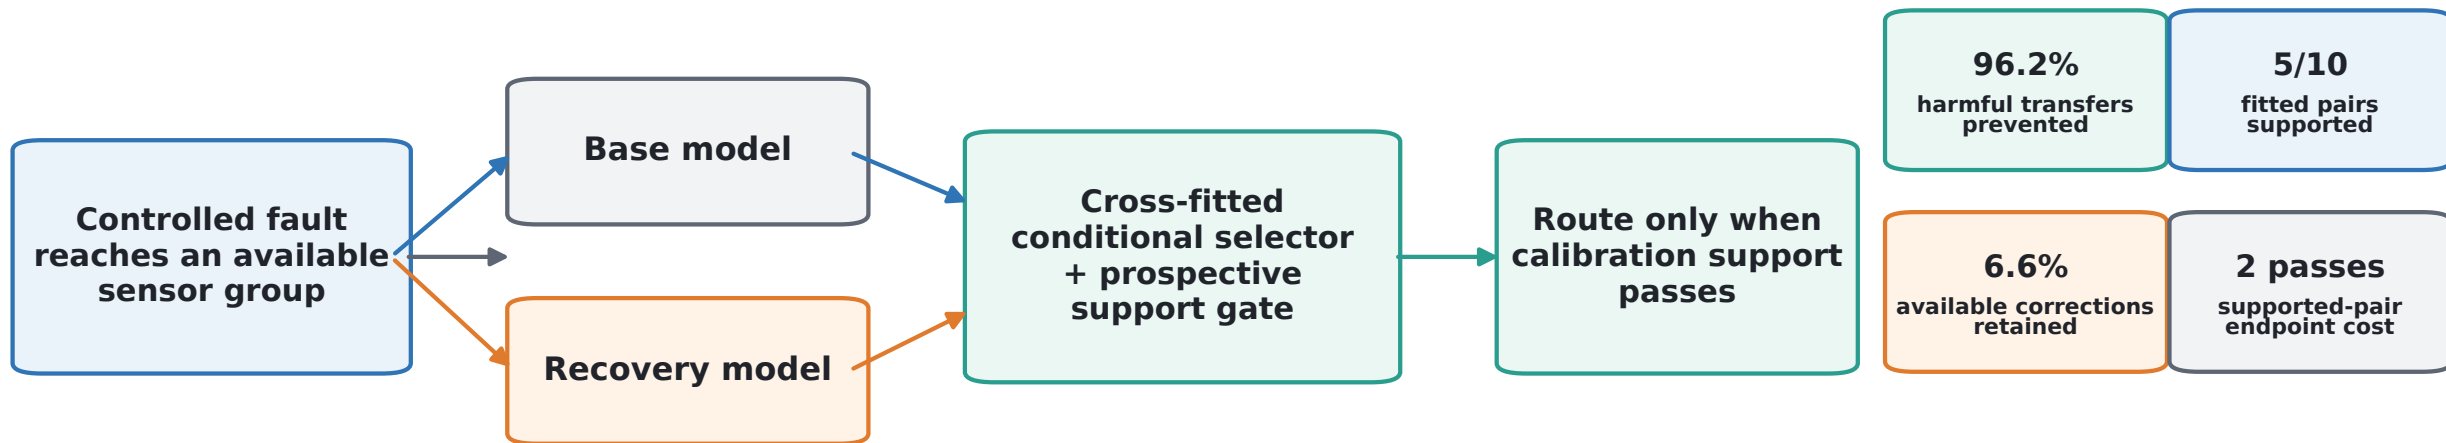

Calibration-selected all-row / two-stage utility at 1:1: +107.9 / +110.6 per 10,000; at harm ratios 5 and 10, the base endpoint dominates.

Outcome: reproducible risk control for controlled corruption; natural-failure recovery and device-independent transfer remain unproven.