


Support-gated selective recovery under controlled sensor corruption

Endpoints and routing thresholds were frozen before test; the support gate was proposed afterward and audited retrospectively

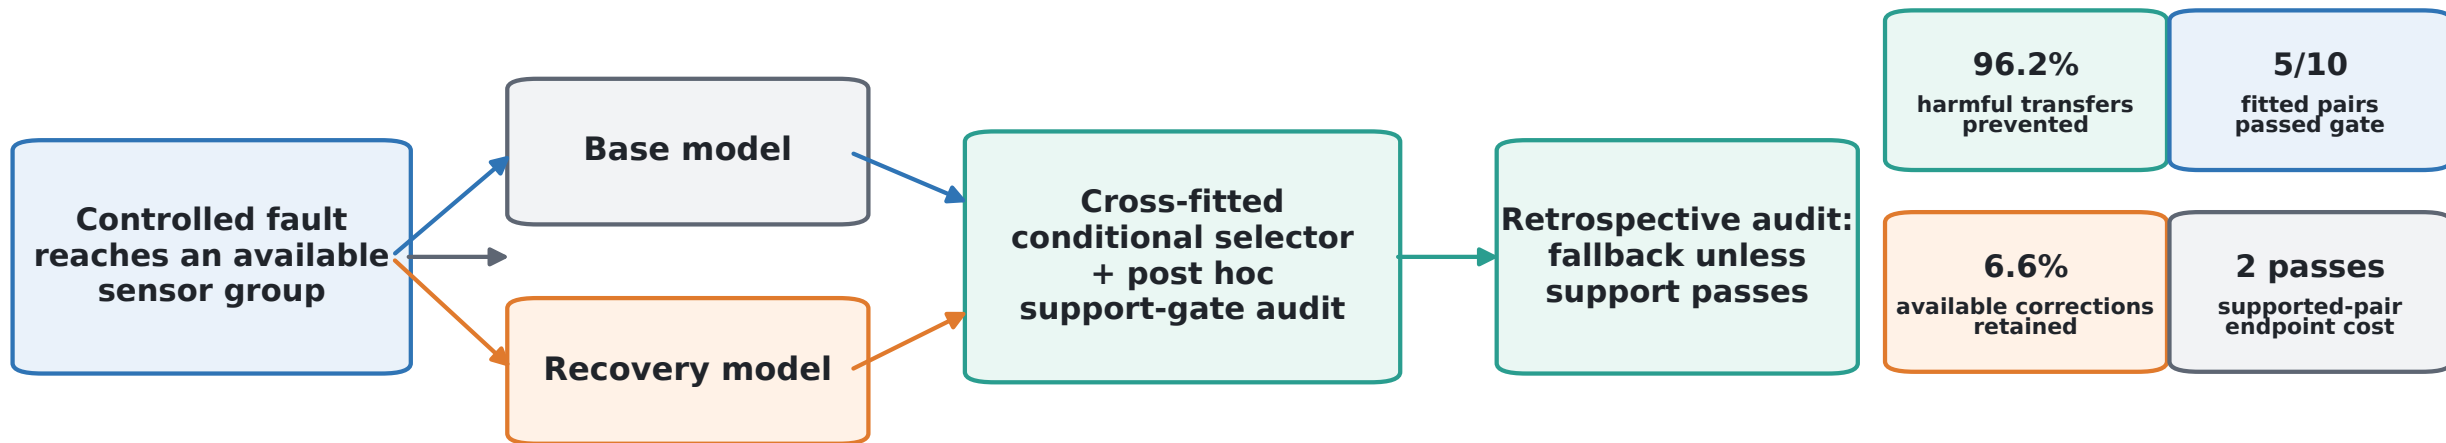

Analytical controls at 2:1: two-stage mean utility +37.8 per 10,000 (95% fitted-pair interval -2.7 to +78.3); not a deployment recommendation.

Outcome: reproducible risk control for controlled corruption; natural-failure recovery and device-independent transfer remain unproven.