

Demonstrating MagnetIO: Passive yet Interactive Soft Haptic Patches Anywhere

Alex Mazursky
University of Chicago
alexmazursky@uchicago.edu

Romain Nith
University of Chicago
rnith@uchicago.edu

Shan-Yuan Teng
University of Chicago
tengshanyuan@uchicago.edu

Pedro Lopes
University of Chicago
pedrolopes@uchicago.edu

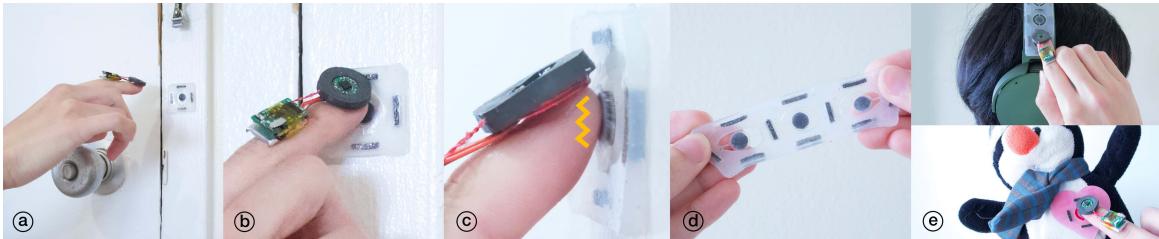


Figure 1: (a) We demonstrate a new type of haptic actuator, which we call MagnetIO, that is comprised of two parts: *any number* of soft interactive patches that can be applied anywhere and *one* battery-powered voice-coil worn on the user's fingernail. (b) When the fingernail-worn device contacts *any* of the interactive patches it detects its magnetic signature and (c) makes the patch *vibrate*. (d) To allow these otherwise passive patches to vibrate, we make them from silicone with regions doped with neodymium powder, resulting in soft and stretchable magnets. (e) This novel decoupling of traditional vibration motors allows users to add interactive patches to their surroundings by attaching them to walls, objects or even other devices or appliances without instrumenting the object with electronics.

ABSTRACT

We demonstrate a new type of haptic actuator, which we call MagnetIO, that is comprised of two parts: one battery-powered voice-coil worn on the user's fingernail and any number of interactive soft patches that can be attached onto any surface (everyday objects, user's body, appliances, etc.). When the user's finger wearing our voice-coil contacts any of the interactive patches it detects its magnetic signature via magnetometer and vibrates the patch, adding haptic feedback to otherwise input-only interactions. To allow these passive patches to vibrate, we make them from silicone with regions doped with polarized neodymium powder, resulting in soft and stretchable magnets. This stretchable form-factor allows them to be wrapped to the user's body or everyday objects of various shapes. We demonstrate how these add haptic output to many situations, such as adding haptic buttons to the walls of one's home.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

SIGGRAPH '21 Emerging Technologies, August 09–13, 2021, Virtual Event, USA

© 2021 Association for Computing Machinery.

ACM ISBN 978-1-4503-8364-6/21/08...\$15.00

<https://doi.org/10.1145/3450550.3465342>

KEYWORDS

soft magnets, ubiquitous haptics, fabrication

ACM Reference Format:

Alex Mazursky, Shan-Yuan Teng, Romain Nith, and Pedro Lopes. 2021. Demonstrating MagnetIO: Passive yet Interactive Soft Haptic Patches Anywhere. In *Special Interest Group on Computer Graphics and Interactive Techniques Conference Emerging Technologies (SIGGRAPH '21 Emerging Technologies)*, August 09–13, 2021, Virtual Event, USA. ACM, New York, NY, USA, 4 pages. <https://doi.org/10.1145/3450550.3465342>

1 INTRODUCTION

Today's interactive devices increasingly instrument every kind of surface, effectively adding interactive functionality even to passive everyday objects such as walls, tables, and rapidly prototyped objects [Wessely et al., 2020], as well as to the user's body [Nittala et al., 2020, Weigel et al., 2015]. To enable sensing these interactions, researchers engineered conformable/stretchable sensing devices so that these can comfortably fit around non-planar surfaces, which is the case for everyday objects or the human body. This led to a mature field of on-body or on-object *sensing* technologies that are easy to deploy ubiquitously and ideal for prototyping.

However, the converse is not the case, while sensing can be done in a distributed fashion around the user and in conformable form-factor, the same is not true for *actuation*. Researchers are still looking for techniques that allow deploying large numbers of actuators without the constraints of power delivery to every single

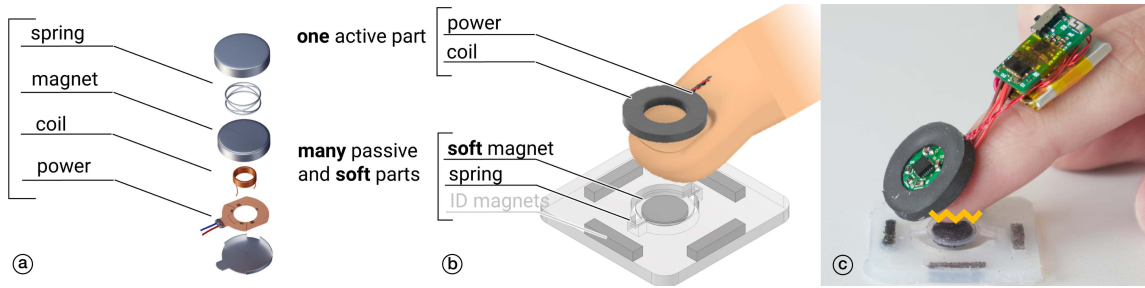


Figure 2: (a) Our device is built from the same principle as traditional linear resonant actuators (LRA). (b-c) However, our device decouples these components into two parts: *one* active element containing the coil, worn on the user’s fingernail; and, *many* passive elements, which are comprised of silicone with regions doped with neodymium powder which together realize a spring & magnet.

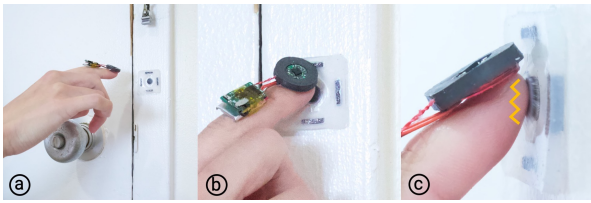


Figure 3: (a) Our user at home, wearing our coil, surrounded by surfaces with interactive patches. (b) They tap their wall, which has a passive patch that controls their home alarm. (c) The user feels the patch vibrate to indicate that their alarm is now disabled.

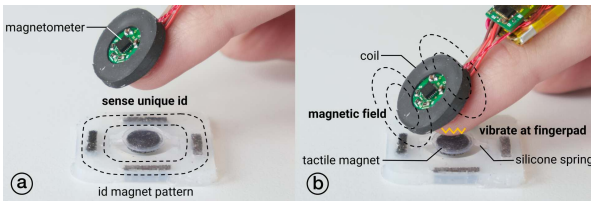


Figure 4: (a) When the user’s finger approaches an interactive patch, its magnetometer reads and recognizes its unique 3D magnetic ID and (b) activates the wearable-coil, generating a magnetic field that vibrates the patch under the fingerpad.

individual actuator, wireless communication across all actuators, microcontrollers, etc. As a result, while we have a range of interactive techniques to deploy sensing “patch”-like devices everywhere, these patches typically do not exhibit any form of haptic response, i.e., they can sense the user’s touch (e.g., to turn on/off the user’s home-alarm) but they cannot vibrate in response to that touch (e.g., to indicate the alarm is on/off), not at least, without requiring vibration motors or other haptic actuators, which in turn require batteries and circuitry. Ultimately, all these dramatically limit the ubiquitous application of these interactive patch-like devices.

In this demonstration, we display a new alternative for adding haptic feedback to everyday surfaces, which is depicted in Figure



Figure 5: (a) The user peels off the patch. Because our interactive patches are *passive* and *soft*, they can be applied to a variety of objects: (b) smartwatch bracelet, (c) water bottle, (d) and even washed (still works while wet).

1. Our approach, which we call *MagnetIO*, introduces a new type of haptic actuator that is passive (i.e., requires no electronics, no battery, etc.) until the user’s finger, which is instrumented with a wearable voice-coil, touches it, causing it to vibrate.

2 OUR APPROACH: MAGNETIO

MagnetIO is composed of *many* passive interactive patches and *one* nail-worn device, which features a miniaturized and custom-engineered voice-coil, inertial measurement unit (IMU), battery, microcontroller and wireless. MagnetIO’s complete voice-coil and circuitry fits entirely on the user’s fingernail, thus leaving the fingerpad unobstructed to feel interactions with the user’s environment and the vibrations from our passive patches.

Our interactive patches can vibrate because they are made from silicone doped with neodymium powder, resulting in stretchable magnets that are attracted and repelled by the wearable coil. Conceptually, we liken our approach to a linear resonant actuator (LRA), which is comprised of a magnet attached to a spring and a coil, shown in Figure 2.

To better illustrate our design, we make an analogy to the inner workings of an LRA: when current is supplied to the LRA’s coil, it produces a magnetic field which attracts or repels the magnet. By performing this multiple times, the momentum of this *magnet-spring* assembly creates a feelable vibration (Figure 2a).

In our case, our design takes a sharp conceptual turn from that of the LRA as we *purposely decouple* the magnet-spring from the coil (Figure 2b). This allows us to scale up the output by placing *many* spring-magnet pairs everywhere, which are activated when the user’s wearable coil contacts them (Figure 2c). The advantage is



Figure 6: Examples of how MagnetIO can enhance everyday objects by creating an ad-hoc I/O space; these objects can now sense touch interactions and vibrate in response.

that our design requires only *one* coil, meaning it also only requires *one* driver circuit, *one* communication module and *one* battery. Furthermore, all our interactive patches are passive since we implement them using silicone, an elastic material that allows us to achieve the “spring” component; subsequently, some regions are doped with neodymium powder, which allows us to realize the “magnet.” Therefore, our soft-magnets realize the “spring-magnet” component typical of LRAs. The result is that MagnetIO patches are easy to place anywhere because they are stretchable and soft, and yet they deliver haptic output to the user. Details on the implementation and characteristics of our device can be found in [Mazursky et al., 2021].

3 WALKTHROUGH: ADDING MAGNETIO PATCHES EVERYWHERE

To give the reader a complete picture of how MagnetIO allows a user to control their environment with ad-hoc interactive haptic patches, we demonstrate a simple application using our MagnetIO patches to control an internet-of-things (IoT) device at the user’s home.

Figure 3a shows our user, wearing our wearable voice-coil on their index finger, walking into their home. Figure 3b shows that as they walk in, they tap a MagnetIO patch that has been attached to their door. In response to tapping the patch, they feel two consecutive vibrations (*tz*, *zz*, pause, *tz*, *zz*) confirming that their home-alarm is now disabled, as depicted in Figure 3c. Note that this user can also perform this action *in the dark* (i.e., eyes-free) because our MagnetIO patches are inherently haptic interfaces designed to vibrate on touch.

Now that we depicted an interaction with MagnetIO from the user’s perspective, let us examine what is happening from the device’s perspective. In other words, we will describe how our patches work to deactivate the user’s IoT home alarm. Figure 4 depicts the principle behind MagnetIO interactions. As depicted in Figure 4a, as the user taps on the patch to deactivate their home-alarm, the wearable-coil approaches the patch and senses its ID, i.e., the wearable-coil recognizes that the patch the user is touching is the “home-alarm” ON/OFF patch. To sense the ID of a patch, the coil makes use of its inertial measurement unit, which includes a 3DOF magnetometer. Using this data, the wearable-coil detects the patch that the user is interacting with by comparing the current reading to pre-trained magnetic signatures. These magnetic signatures are just an example of one many possible ways our system could sense the ID of each patch. Alternatively, our system could utilize a wide variety of sensing mechanisms, such as RFIDs [Paradiso et al., 2000], acoustic IDs [Harrison et al., 2012], optical IDs [Sörös et al., 2015],

etc. After the wearable-coil has identified that the user touched the “home-alarm” patch, it communicates to the user’s IoT home-alarm via its Bluetooth module, informing it to switch to the “OFF” state. Finally, as depicted in Figure 4b, the home-alarm confirms the new state by sending a message to the wearable-coil, which the wearable device renders *haptically* by energizing the coil in a vibrotactile pattern. This creates a magnetic field which in turn attracts the magnetically-doped region of the interactive patch, making the patch vibrate under the user’s finger.

MagnetIO patches are versatile because they are *passive*, made from stretchable silicone. Figure 5a illustrates how our user detaches a patch from the wall and attaches it to new objects. These patches are sticky as their underside is made of a layer of skin safe adhesive, making our patches also suitable for ad-hoc on-body interfaces. In fact, MagnetIO patches are even weather-proof. For instance, Figure 5d depicts a user washing their smart kettle instrumented with an interactive patch. Because MagnetIO’s patches operate via magnetism alone (for both sensing and actuation, no circuitry is inside the patch), the interaction will not be affected so long as the wearable coil remains dry.

4 APPLICATIONS ENABLED BY MAGNETIO

MagnetIO patches can weave interactivity into everyday objects. Figure 6 shows how patches can (a) add dynamic interaction to a children’s coloring book; (b) add tactile cues to board games; and (c) add play, stop, record buttons with haptic feedback for their guitar’s looper. MagnetIO patches are especially useful for realizing interfaces attached to objects that are not planar; for instance (d) additional buttons with haptic feedback for a gamepad; and (e) added to one’s favorite toy to feel its heartbeat.

REFERENCES

- Chris Harrison, Robert Xiao, and Scott Hudson. 2012. Acoustic barcodes: passive, durable and inexpensive notched identification tags. *Proceedings of the 25th annual ACM symposium on User interface software and technology - UIST '12* (Cambridge, Massachusetts, USA, 2012), 1–5. DOI: <https://doi.org/10.1145/2380116.2380187>.
- Alex Mazursky, Shan-Yuan Teng, Romain Nith, and Pedro Lopes. 2021. MagnetIO: Passive yet Interactive Soft Haptic Patches Anywhere. *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems - CHI '21* (Yokohama, Japan, 2021), 1–15. DOI: <https://doi.org/10.1145/3411764.3445543>.
- Aditya Shekhar Nittala, Arshad Khan, Klaus Krutwig, Tobias Kraus, and Jurgen Steimle. 2020. PhysioSkin: Rapid Fabrication of Skin-Conformal Physiological Interfaces. *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems - CHI '20* (Honolulu, Hawaii, USA, 2020), 1–10. DOI: <https://doi.org/10.1145/3313831.3376366>.
- Joseph Paradiso, Kai-yuh Hsiao, Joshua Strickton, Joshua Lifton, and Ari Adler. 2000. Sensor systems for interactive surfaces. *IBM Systems Journal*. 39, 3.4 (2000), 892–914. DOI: <https://doi.org/10.1147/sj.393.0892>.
- Gábor Sörös, Stephan Semmler, Luc Humair, and Otmar Hilliges. 2015. Fast blur removal for wearable QR code scanners. *Proceedings of the 2015 ACM International*

- Symposium on Wearable Computers - ISWC '15* (Osaka, Japan, 2015), 117–124. DOI: [https://doi.org/ 10.1.1.728.2243](https://doi.org/10.1.1.728.2243).
- Martin Weigel, Tong Lu, Gilles Bailly, Antti Oulasvirta, Carmel Majidi, and Jurgen Steimle. 2015. iSkin: Flexible, Stretchable and Visually Customizable On-Body Touch Sensors for Mobile Computing. *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems - CHI '15* (Seoul, Republic of Korea, 2015), 2991–3000. DOI: <https://doi.org/10.1145/2702123.2702391>.
- Michael Wessely, Ticha Sethapakdi, Carlos Castillo, Jackson C. Snowden, Ollie Hanton, Isabel P.S. Qamar, Mike Fraser, Anne Roudaut, and Stefanie Mueller. 2020. Sprayable User Interfaces: Prototyping Large-Scale Interactive Surfaces with Sensors and Displays. *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems* (Honolulu HI USA, Apr. 2020), 1–12. DOI: <https://doi.org/10.1145/3313831.3376249>.