

REV.	ECN NO.	DR	DATE
00	NEW	Alex	06-Sep-14

NOTE:

- MATERIAL:**
HOUSING: LCP WITH 30% GF, UL 94V-0, BLACK COLOR.
CONTACTS: BRASS T=0.25mm.
BROD LOCK : COPPER ALLOY .
- FINISH:**
CONTACTS: GOLD FALSH PLATED ON CONTACT AREA, [100μ"] MIN..
BRIGHT-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT UNDERPLATED [50μ"] MIN.. NICKEL.
BROD LOCK : [100μ"] MIN. TIN OVER [50μ"] MIN. NICKEL ON PLATED.






3. PART NUMBER DESCRIPTION :

R SM-C052- B 22 L1 - X

HOUSING COLOR:
B-BLACK
W-WHITE

PACKING:
R-TAPE REEL
T-TRAY
E-TUBE

PLATING:
L1-[1μ"]GOLD CONTACT AREA
[100μ"]TIN SOLDER AREA
L2-[5μ"]GOLD CONTACT AREA
[100μ"]TIN SOLDER AREA

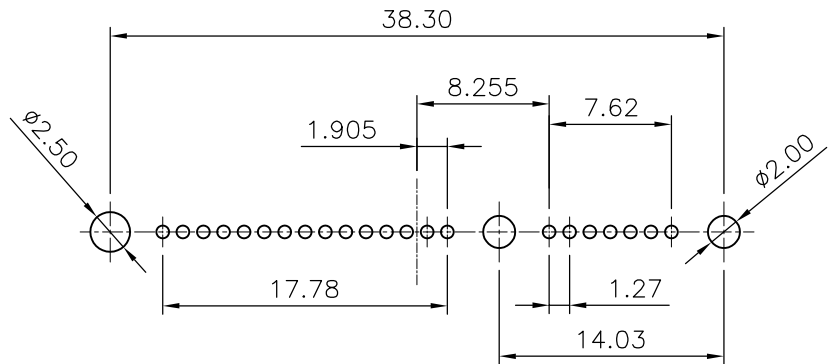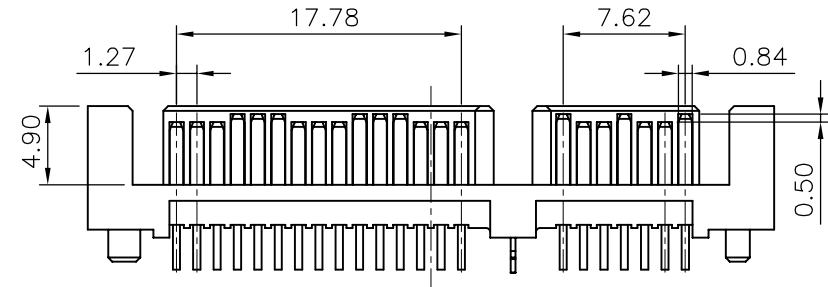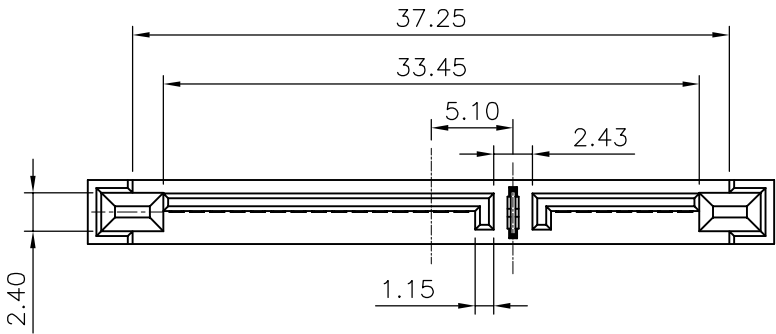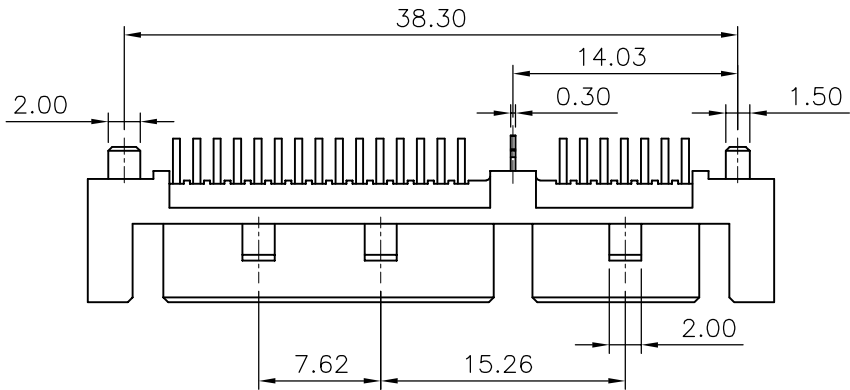

PCB LAYOUT
RECOMMENDED PCB TOLERANCE:±0.05

TOLERANCE UNLESS OTHERWISE SPECIFIED			THIRD ANGLE PROJECTION						
LINER	ANGLES	DRAWING BY & DATE Alex 06-Sep-14			DWG NO.: SM-C044-00		PART NO.: RSM-C052-X22XX-X		
.0 ± 0.25	0. ± 2°	CHECKED BY & DATE			TITLE: SATA 7+15P公座 单排180度				
.00 ± 0.15	.0 ± 1°	APPROVED BY & DATE			SIZE	UNIT	SCALE	SHEET	REV.
.000 ± 0.10	.00 ± .5°	PRODUCT FAMILY: SATA HDD MALE			A4	MM	1 : 1	1 OF 1	1