

ROHS Compliant



台灣駿品端子股份有限公司

TAIWAN KING PIN TERMINAL CO.,LTD

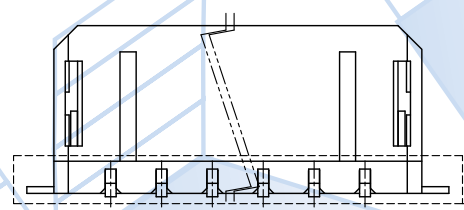

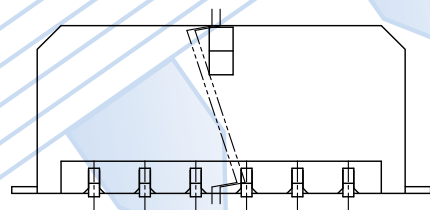
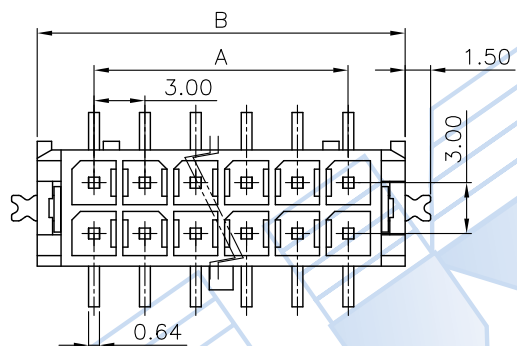
台北縣樹林市俊德街 23 號

TEL:886-2-26895596,26886112 FAX:886-2-26886110

E-mail:info@tkp.com.tw

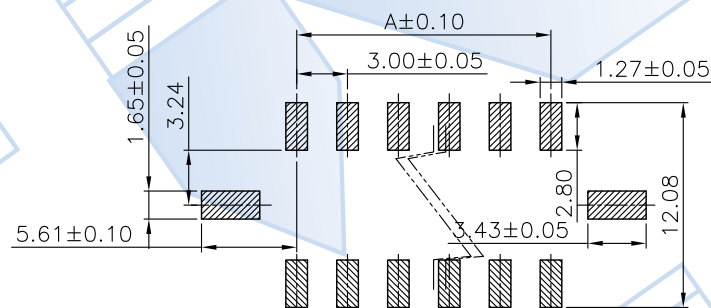
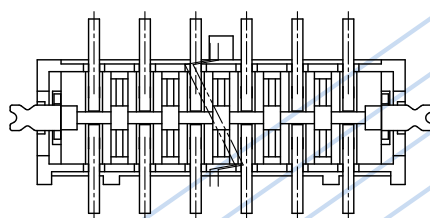
http://www.tkp.com.tw

Mylar

SMT/耳扣/塑膠共平面0.13mm
料帶毛邊不可高於塑膠

NOTE :

- * Material : Nylon UL 94V-0(Lead Free)
- * Color : Black
- * Current rating : 5A, AC/DC
- * Voltage rating : 250V, AC/DC
- * Mates with H6630R1 receptacle housings
- * 2-24 circuits available
- * Dual row




RECOMMENDED PCB LAYOUT

| CIRCUITS | PART NO. | DIM. A | DIM. B |
|----------|------------------|--------|--------|
| 2 | P6630I-02SMT(LF) | --- | 6.70 |
| 4 | P6630I-04SMT(LF) | 3.00 | 9.70 |
| 6 | P6630I-06SMT(LF) | 6.00 | 12.70 |
| 8 | P6630I-08SMT(LF) | 9.00 | 15.70 |
| 10 | P6630I-10SMT(LF) | 12.00 | 18.70 |
| 12 | P6630I-12SMT(LF) | 15.00 | 21.70 |
| 14 | P6630I-14SMT(LF) | 18.00 | 24.70 |
| 16 | P6630I-16SMT(LF) | 21.00 | 27.70 |
| 18 | P6630I-18SMT(LF) | 24.00 | 30.70 |
| 20 | P6630I-20SMT(LF) | 27.00 | 33.70 |
| 22 | P6630I-22SMT(LF) | 30.00 | 36.70 |
| 24 | P6630I-24SMT(LF) | 33.00 | 39.70 |

E118260



| | | | | | | | | | |
|---|----------------------|------|----------|--------------------|------------|--------------|-------------|--------------|---------------|
| PART NO. | P6630I-XXSMT(LF) | | | Part NO. | Material | Color/Finish | Remark | APPROVAL | |
| | | | | P6630I-XXSMT(LF) | UL94V-0 | | w/o Mylar | | DRAWN: 許萱宸 |
| TITLE | 3.00mm Wire to Board | | | P6630I-XXSMT-C | UL94V-0 | | w/ Mylar | CHECKED: 張明遠 | |
| | | | | | | | | | |
| THIRD ANGLE | SCALE | UNIT | SHEET NO | TOLERANCE | | DATE | ODD NUMBERS | REV | APPROVED: 陳泓宇 |
|  | 2:1 | mm | 1/1 | .X± 0.30 .XXX±0.10 | 2021.01.05 | ENG950947 | A5 | | |
| | 300-013 | | C300-004 | .XX± 0.20 ANGLE±2° | | | | | |