

ROHS Compliant



台灣駿品端子股份有限公司

TAIWAN KING PIN TERMINAL CO.,LTD

台北縣樹林市俊德街 23 號

TEL:886-2-26895596.26886112 FAX:886-2-26886110

E-mail:info@tkp.com.tw


http://www.tkp.com.tw



NOTE :


- * Material : Nylon UL 94V-0(Lead Free)
- * Color : Black
- * Finish : Tin over Nickel or Gold Flash
- * Electrical rating : C-UL 250V 5A, AC/DC
- * Mates with H6630R1 receptacle housings
- * 2-24 circuits available
- * Dual row

CIRCUITS	PART NO.	DIM. A	DIM. B
2	P6630L-02C(LF)	---	6.70
4	P6630L-04C(LF)	3.00	9.70
6	P6630L-06C(LF)	6.00	12.70
8	P6630L-08C(LF)	9.00	15.70
10	P6630L-10C(LF)	12.00	18.70
12	P6630L-12C(LF)	15.00	21.70
14	P6630L-14C(LF)	18.00	24.70
16	P6630L-16C(LF)	21.00	27.70
18	P6630L-18C(LF)	24.00	30.70
20	P6630L-20C(LF)	27.00	33.70
22	P6630L-22C(LF)	30.00	36.70
24	P6630L-24C(LF)	33.00	39.70

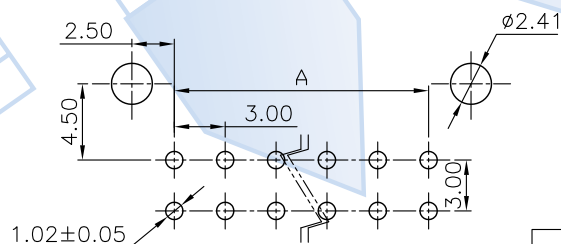

RECOMMENDED PCB LAYOUT

Part NO.	Miss pin
P6630L-06N5C	5

PART NO.	P6630L-XXC(LF)			Part NO.	Material	Color/Finish	Remark	APPROVAL
				P6630L-XXC(LF)	UL 94V-0	Tin		
TITLE	3.00mm Wire to Wire			P6630L-XXC-G	UL 94V-0	Ears Tin / Pin Gold flash		CHECKED: 張明遠
THIRD ANGLE	SCALE	UNIT	SHEET NO	TOLERANCE		DATE	ODD NUMBERS	REV
	2:1	mm	1/1	.X± 0.30	.XXX±0.10	2020.09.21	ENG950761	A5
	300-013		C300-004	.XX± 0.20	ANGLE±2°			
								APPROVED: 陳泓宇

CULUS
E118260