
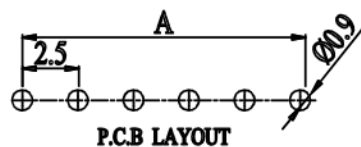

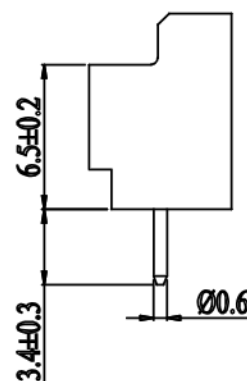
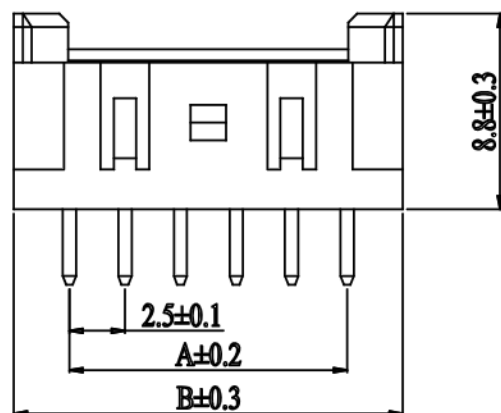




技术参数 (SPECIFICATIONS)

- 额定电压: 250V AC DC
Voltage rating: 250V AC DC
- 额定电流: 3.0A AC DC (22AWG)
Current rating: 3.0A AC DC (22AWG)
- 耐压值: 1000V AC/minute
Withstand voltage: 1000V AC/minute
- 绝缘电阻: 1000MΩ MIN
Insulation resistance: 1000MΩ MIN
- 接触电阻: 0.02Ω MAX(初始值)
Contact resistance: 0.02Ω MAX(Initial)
- 工作温度: -25°C~+85°C
Working Temperature: -25°C~+85°C
- 间距: 2.5 mm
Pitch: 2.5 mm

材料 (MATERIAL)

- 绝缘体: 尼龙66 UL94V-0
Insulator: PA66 UL94V-0
- 接触针: 黄铜镀锡
Contact PIN: Brass TIN-Plating

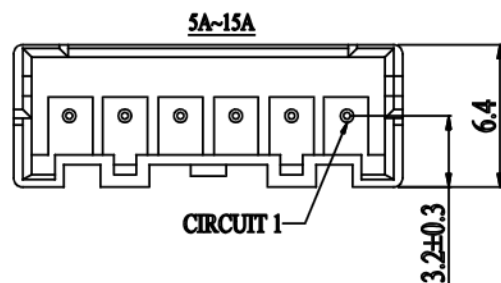



POLES	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00



序号	日期	修正内容	变更人

日期 2022-02-28	型号: A2514WV0-2P		
绘图 杨月	货品编码 16291	公差	
审核 -----	客户编号 -----	X. X±0.25	
	比例 -----	X. XX±0.20	
批准 -----	单位 mm	X. XXX±0.10	
	页面 1/1	Angle±3°	

 上海高霖电子有限公司
GaoLin Shanghai gaolin Electronic Co., Ltd

图号 GLDW20220228003	
版本V1.0	E/白色连接器