

ROHS Compliant



台灣駿品端子股份有限公司



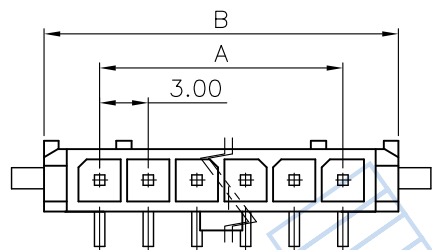
TAIWAN KING PIN TERMINAL CO.,LTD

台北縣樹林市俊德街 23 號

TEL:886-2-26895596,26886112 FAX:886-2-26886110

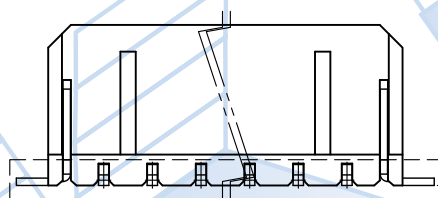

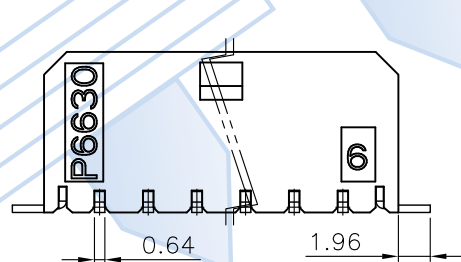
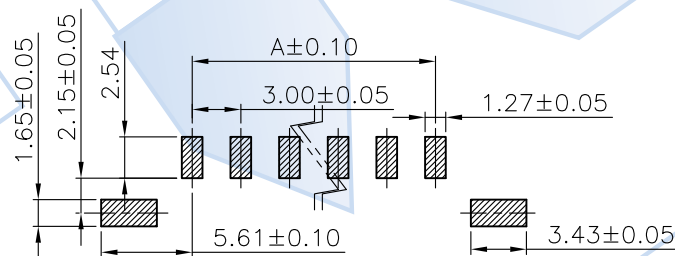
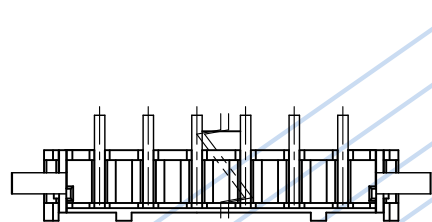
E-mail:info@tkp.com.tw

http://www.tkp.com.tw



NOTE :


- * Material : Nylon UL 94V-0(Lead Free)
- * Standard color : Black
- * Contact : Brass
- * Finish : Plated Tin over Nicked
- * Current rating : 4A, AC/DC
- * Voltage rating : 250V, AC/DC
- * Mates with H6630R1-1xX series housings
- * 2-12 circuits available
- * Single Row

SMT/耳扣/塑膠共平面0.13mm
料帶毛邊不可高於塑膠

RECOMMENDED PCB LAYOUT

CIRCUITS	PART NO.	DIM. A	DIM. B
2	P6630I-1x2SMT(LF)	3.00	9.65
3	P6630I-1x3SMT(LF)	6.00	12.65
4	P6630I-1x4SMT(LF)	9.00	15.65
5	P6630I-1x5SMT(LF)	12.00	18.65
6	P6630I-1x6SMT(LF)	15.00	21.65
7	P6630I-1x7SMT(LF)	18.00	24.65
8	P6630I-1x8SMT(LF)	21.00	27.65
9	P6630I-1x9SMT(LF)	24.00	30.65
10	P6630I-1x10SMT(LF)	27.00	33.65
11	P6630I-1x11SMT(LF)	30.00	36.65
12	P6630I-1x12SMT(LF)	33.00	39.65

C_{UL} US
E118260

PART NO.	P6630I-1xXSMT(LF)			Part NO.	Material	Color/Finish	Remark	APPROVAL
				P6630I-1xXSMT(LF)	UL94V-0		w/o cover	
TITLE	3.00mm Wire to Board			P6630I-1xXSMT-C	UL94V-0		w/ cover	CHECKED: 張明遠
								APPROVED: 陳泓宇
THIRD ANGLE	SCALE	UNIT	SHEET NO	TOLERANCE	DATE	ODD NUMBERS	REV	
	1.5:1	mm	1/1	.X± 0.30 .XXX±0.10	2021.07.08	ENG950948	A6	
	300-018		C300-006	.XX± 0.20 ANGLE±2°				