


USB A TYPE VERTICAL

WITH KINK, DIP TYPE

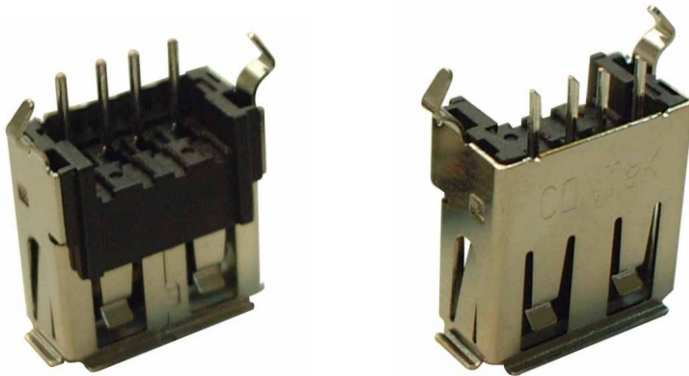

How To Order:

UR X 1 04 X-X X-XX



SHELL PLATED
L: TIN/LEAD
S: TIN
N: NICKEL

CONTACT PLATED
1: G/F
3: 30u"
5: 15u"

Mark



HOUSING COLOR
0: Natural Color(White)
1: Black

HOUSING MATERIAL
0: PBT
1: HTN

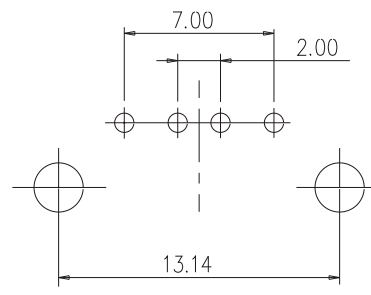

RECOMMEND P.C.B LAYOUT

(TOP VIEW)

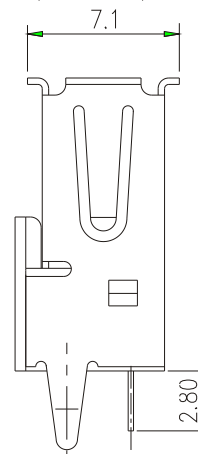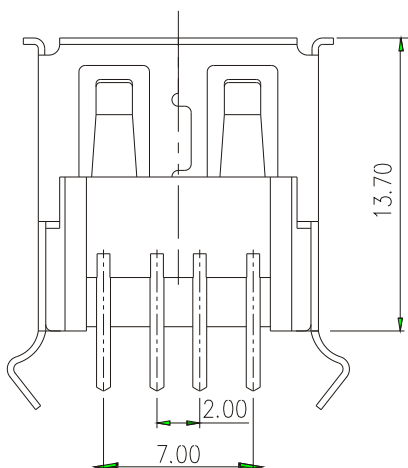

SPECIFICATION

Electrical:

Contact Resistance: 30 mohms Max.

Dielectric Withstanding Voltage:
500 VAC At Sea Level

Insulation Resistance: 1000 Mohms Min.

Mechanical:

Mating Force: 3.57Kg Max.

Unmating Force: 1.02Kg Min.

MATERIAL

Housing: Thermoplastic, Glass Fiber Filled
UL 94V-0 Rated.

Contact: Phosphor Bronze.

Shell: Brass

FINISH

Contact: Tin/Lead Plated In Soldering Area,
Gold Plated In Contact Area

Shell: Tin/Lead Plated 120 u" Min.

Tin Plated 120 u" Min.

Nickel Plated 120 u" Min.