

# Client Server

```
Cortillius-Client-1 [Running]
Command Prompt
Microsoft Windows [Version 10.0.15063]
(c) 2017 Microsoft Corporation. All rights reserved.

C:\Users\CortilliusMcKinney>ipconfig /all

Windows IP Configuration

    Host Name . . . . . : DESKTOP-ANKR04M
    Primary Dns Suffix . . . . . :
    Node Type . . . . . : Hybrid
    IP Routing Enabled. . . . . : No
    WINS Proxy Enabled. . . . . : No

Ethernet adapter Ethernet:

    Connection-specific DNS Suffix . :
    Description . . . . . : Intel(R) PRO/1000 MT Desktop Adapter
    Physical Address. . . . . : 08-00-27-EF-83-8E
    DHCP Enabled. . . . . : No
    Autoconfiguration Enabled . . . . : Yes
    IPv4 Address. . . . . : 192.168.0.103(Preferred)
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.101
    DNS Servers . . . . . : 192.168.0.101
    NetBIOS over Tcpip. . . . . : Enabled

Tunnel adapter Teredo Tunneling Pseudo-Interface:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix . :
    Description . . . . . : Teredo Tunneling Pseudo-Interface
    Physical Address. . . . . : 00-00-00-00-00-00-E0
    DHCP Enabled. . . . . : No
    Autoconfiguration Enabled . . . . : Yes

C:\Users\CortilliusMcKinney>
```

# Server-1

```
Cortilius-Server-1 [Running]
Administrator: Command Prompt
Microsoft Windows [Version 10.0.14393]
(c) 2016 Microsoft Corporation. All rights reserved.

C:\Users\Administrator>ipconfig /all

Windows IP Configuration

Host Name . . . . . : WIN-HGTG CIA01TP
Primary Dns Suffix . . . . . :
Node Type . . . . . : Hybrid
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No

Ethernet adapter Ethernet:

Connection-specific DNS Suffix . :
Description . . . . . : Intel(R) PRO/1000 MT Desktop Adapter
Physical Address. . . . . : 08-00-27-37-81-7D
DHCP Enabled. . . . . : No
Autoconfiguration Enabled . . . . : Yes
IPv4 Address. . . . . : 192.168.0.101(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 0.0.0.0
DNS Servers . . . . . : 192.168.0.101
                        127.0.0.1
NetBIOS over Tcpip. . . . . : Enabled

Tunnel adapter isatap.{C6EAC35F-98AC-4924-BE36-492BAB888257}:

Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Description . . . . . : Microsoft ISATAP Adapter
Physical Address. . . . . : 00-00-00-00-00-00-E0
DHCP Enabled. . . . . : No
Autoconfiguration Enabled . . . . : Yes

C:\Users\Administrator>
```

## Server-2

```
Cortilius-Server-2 [Running]
Server Manager
Select Administrator: Command Prompt

Host Name . . . . . : WIN-069VI3ITSBS
Primary Dns Suffix . . . . . :
Node Type . . . . . : Hybrid
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No

Ethernet adapter Ethernet:

    Connection-specific DNS Suffix . :
    Description . . . . . : Intel(R) PRO/1000 MT Desktop Adapter
    Physical Address. . . . . : 08-00-27-C9-33-3A
    DHCP Enabled. . . . . : No
    Autoconfiguration Enabled . . . . : Yes
    IPv4 Address. . . . . : 192.168.0.102(Preferred)
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.101
    DNS Servers . . . . . : 192.168.0.101
    NetBIOS over Tcpip. . . . . : Enabled

Tunnel adapter isatap.{FC2DFBC9-6ACE-4534-A609-2EE566A94F9A}:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix . :
    Description . . . . . : Microsoft ISATAP Adapter #2
    Physical Address. . . . . : 00-00-00-00-00-00-E0
    DHCP Enabled. . . . . : No
    Autoconfiguration Enabled . . . . : Yes

C:\Users\Administrator>
```

# Client Server Pings

```
Cortillius-Client-1 [Running]

C:\Users\CortilliusMcKinney>ping 192.168.0.102

Pinging 192.168.0.102 with 32 bytes of data:
Reply from 192.168.0.102: bytes=32 time<1ms TTL=128
Reply from 192.168.0.102: bytes=32 time<1ms TTL=128
Reply from 192.168.0.102: bytes=32 time<1ms TTL=128
Reply from 192.168.0.102: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.102:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\CortilliusMcKinney>
```

```
Cortillius-Client-1 [Running]

Microsoft Windows [Version 10.0.15063]
(c) 2017 Microsoft Corporation. All rights reserved.


C:\Users\CortilliusMcKinney>ping 192.168.0.101

Pinging 192.168.0.101 with 32 bytes of data:
Reply from 192.168.0.101: bytes=32 time<1ms TTL=128
Reply from 192.168.0.101: bytes=32 time<1ms TTL=128
Reply from 192.168.0.101: bytes=32 time<1ms TTL=128
Reply from 192.168.0.101: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.101:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Users\CortilliusMcKinney>
```

## Server 1 pings

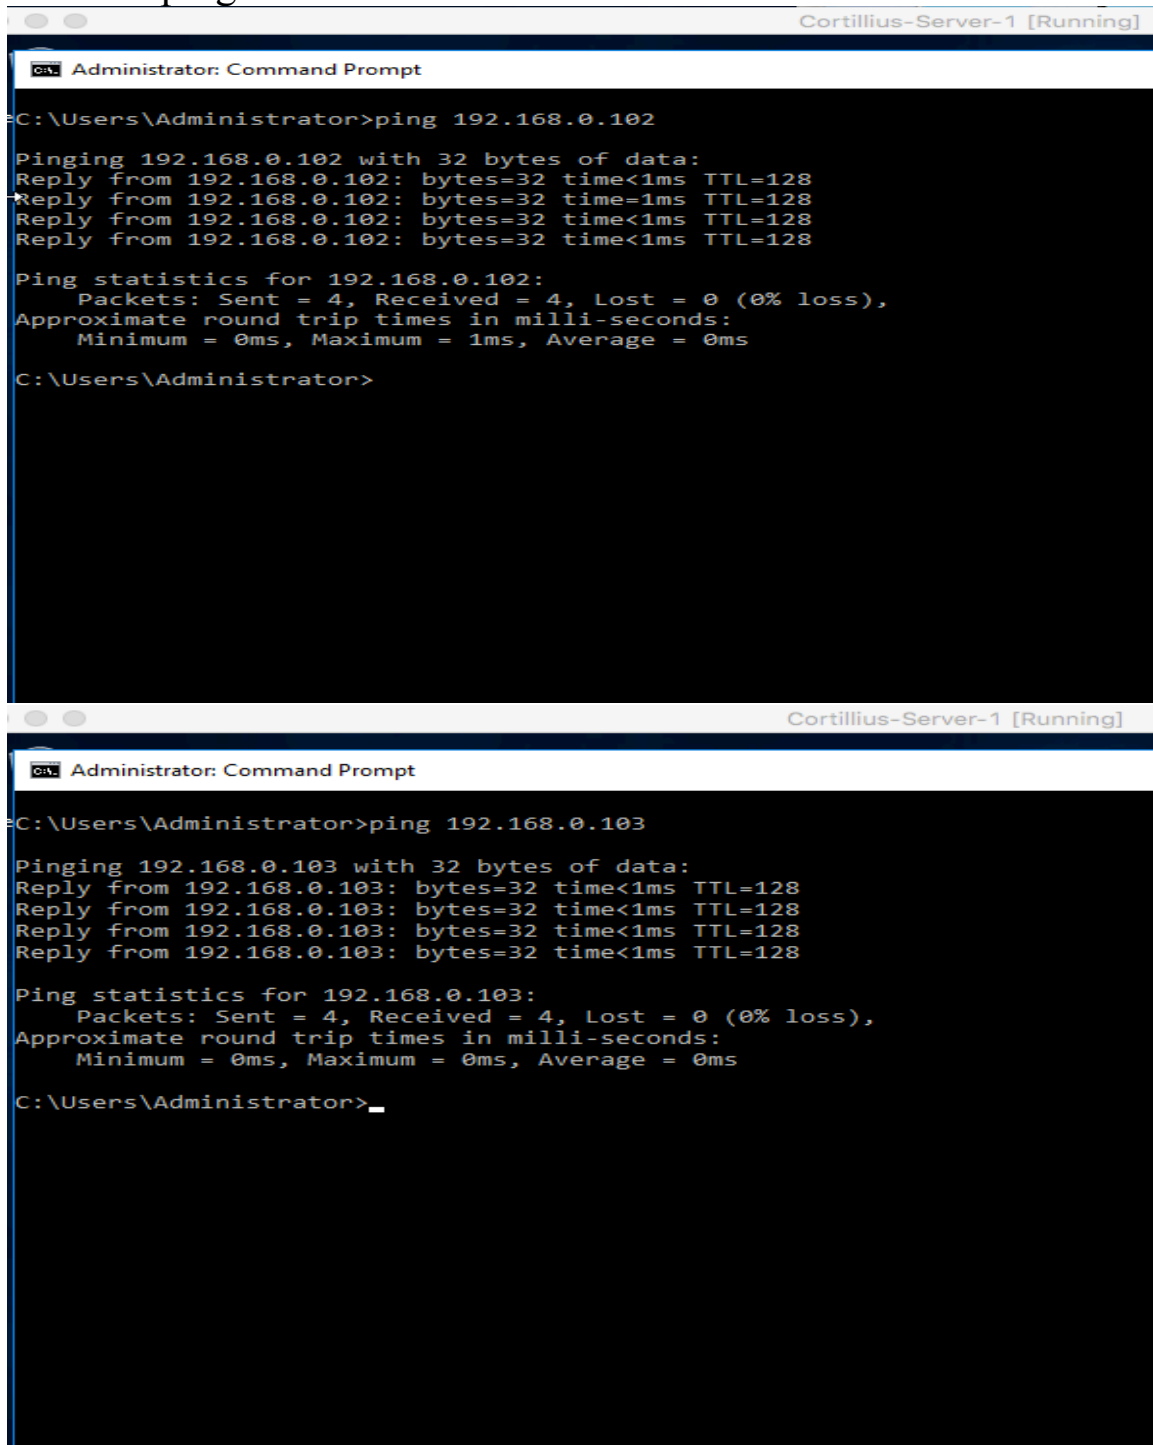

```
C:\Users\Administrator>ping 192.168.0.102

Pinging 192.168.0.102 with 32 bytes of data:
Reply from 192.168.0.102: bytes=32 time<1ms TTL=128
Reply from 192.168.0.102: bytes=32 time=1ms TTL=128
Reply from 192.168.0.102: bytes=32 time<1ms TTL=128
Reply from 192.168.0.102: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.102:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Users\Administrator>
```


```
C:\Users\Administrator>ping 192.168.0.103

Pinging 192.168.0.103 with 32 bytes of data:
Reply from 192.168.0.103: bytes=32 time<1ms TTL=128
Reply from 192.168.0.103: bytes=32 time<1ms TTL=128
Reply from 192.168.0.103: bytes=32 time<1ms TTL=128
Reply from 192.168.0.103: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.103:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\Administrator>
```

## Server 2 ping

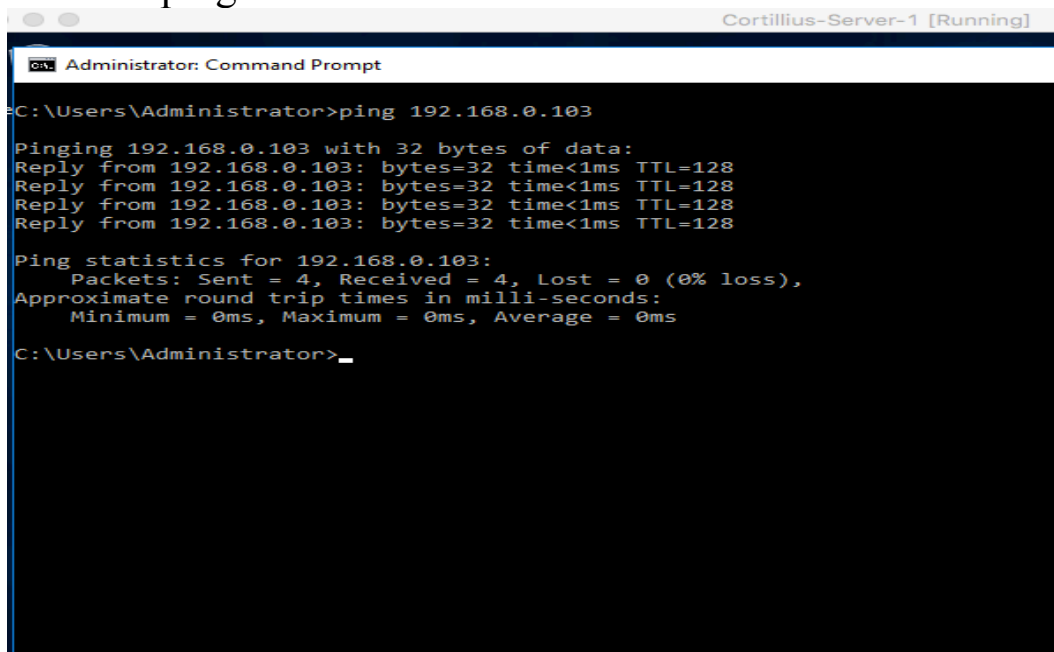


```
Administrator: Command Prompt

C:\Users\Administrator>ping 192.168.0.103

Pinging 192.168.0.103 with 32 bytes of data:
Reply from 192.168.0.103: bytes=32 time<1ms TTL=128
Reply from 192.168.0.103: bytes=32 time<1ms TTL=128
Reply from 192.168.0.103: bytes=32 time<1ms TTL=128
Reply from 192.168.0.103: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.103:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\Administrator>
```

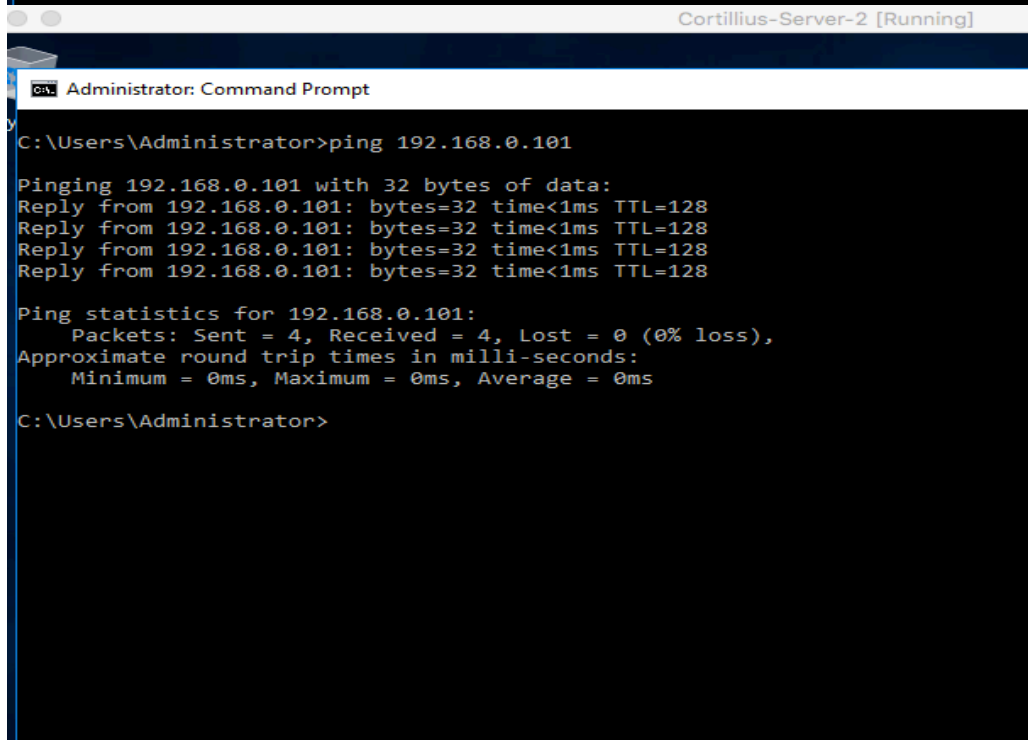

```
Administrator: Command Prompt

C:\Users\Administrator>ping 192.168.0.101

Pinging 192.168.0.101 with 32 bytes of data:
Reply from 192.168.0.101: bytes=32 time<1ms TTL=128
Reply from 192.168.0.101: bytes=32 time<1ms TTL=128
Reply from 192.168.0.101: bytes=32 time<1ms TTL=128
Reply from 192.168.0.101: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.101:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\Administrator>
```