


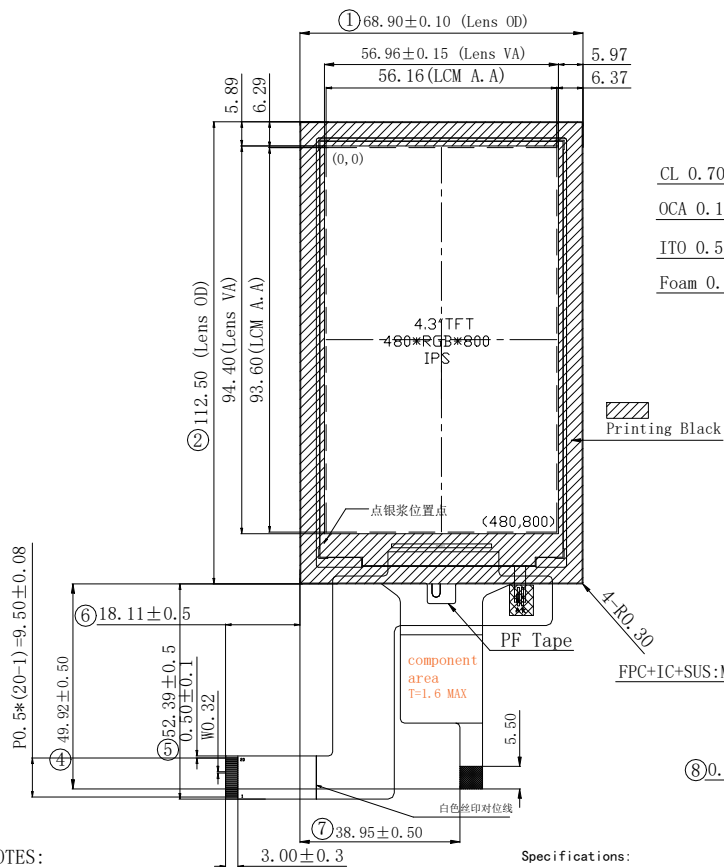




NOTES:

1. GENERAL TOLERANCE: ± 0.2
2. () REFERENCE DIMENSION
3. Important dimension: ①~⑬

LCD Type	4.3" TFT, Transmissive
	Normally black IPS
Resolution	480(RGB)*800
View Direction	All o'clock
LCD driver IC	IL9806E
Color depth	16.7M
Interface types	MIPI
Operating voltage	2.8-3.3V
With TP/Lens	with ctp (IC: GT911)
Backlight	10 LEDs, 40mA (typ), 3.0V (ref.)
Surface luminance	400cd/m ²
Operating temperature	-20°C~70°C
Storage temperature	-30°C~80°C
Color chromaticity	[white] x/y:

Specifications:

1. COVER GLASS+SENSOR GLASS+FPC
COVER GLASS: 0.7mm
SENSOR GLASS: 0.55mm
Connection: FPC: PINCH=0.5H
IC: GT911
Resolution: 480(RGB)*800
2. Voltage: 2.8-3.3V
3. Transmittance: $\geq 86\%$
4. Surface hardness: 6H (750gf)

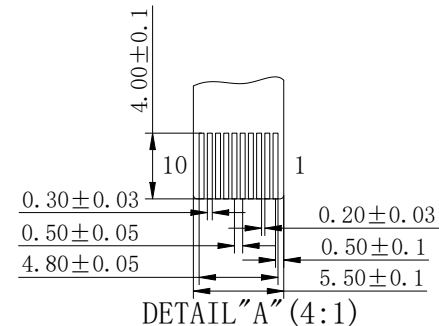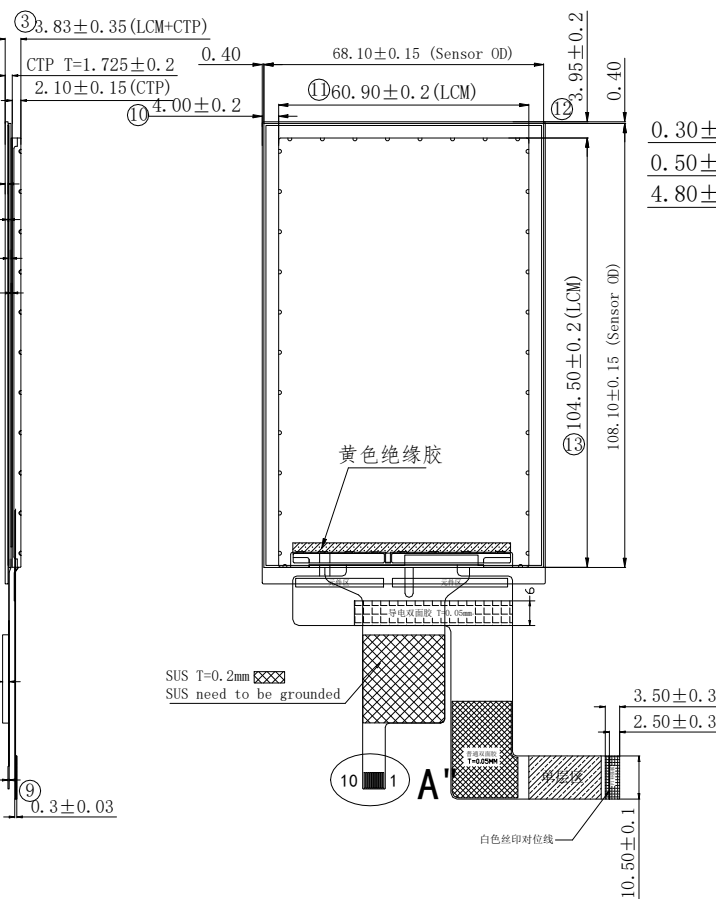

PIN NO	DEFINITION
1	NC
2	NC
3	RST
4	GND
5	INT
6	SDA (3.3V)
7	SCL (3.3V)
8	GND
9	GND
10	VDD (3.3V)

PIN	PIN NAME
1	LEDA
2	LEDA
3	LEDK
4	LEDK
5	LCDID
6	VCC
7	IDVCC
8	GND
9	LCD_TE0
10	LCD_RST_N
11	GND
12	MIPI_DI_P
13	MIPI_DI_N
14	GND
15	MIPI_DO_N
16	MIPI_DO_P
17	GND
18	MIPI_CLK_P
19	MIPI_CLK_N
20	GND

版本 (Version)	变更记录 (Revise History)	日期 (Date)	设计 (DESIGN)	Zahi
A0	Initial release	2023.02.25	审核 (CHECKED)	Bill
A1	Correct the IC of LCM	2023.03.03	批准 (APPROVED)	Aron
			客户承认 (CUSTOMER APPROVAL)	



TITLE:	LCM+CTP	页面 (Page)	1 / 1
Drawing No.	TST043WVBI-130C	单位 (Unit)	mm
		比例 (SCALE)	1 : 1
		角度 (Angle)	$\angle$