WARNING: FOR VATSIM USE ONLY

ZKPY AD 2.1 AERODROME LOCATION INDICATOR AND NAME

ZKPY - PYONGYANG / International

ZKPY AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	**ARP coordinates and site at AD**	391234N 1254021E
2	**Direction and distance from city**	20 km NW of PYONGYANG City
3	**Elevation**	89 ft
4	**MAG VAR**	9° W
5	**Type of traffic permitted(IFR/VFR)**	IFR/VFR

VATKOR
Virtual Air Traffic Simulation Network
KOREA Division

ZKPY AD 2.3 RUNWAY PHYSICAL CHARACTERISTICS

1	2	3	4	5	6	7
RWY Designations	**RWY Bearings**	**RWY Dimensions**	**RWY Surface**	**RWY End Coord**	**RWY ELEV**	**RWY Slope**
35	352°	11237 x 197	Concrete	391127N 1254033E	79 ft	-0.09%
17	172°	11237 x 197	Concrete	391313N 1253951E	89 ft	0.09%

ZKPY AD 2.4 DECLARED DISTANCES

1	2	3
RWY Designations	**TORA**	**Beyond Glide Slope**
RWY 35	11237 ft / 3425m	9961 ft / 3036m
TWY E	8596 ft / 2620m	
TWY C	5010 ft / 1527m	
RWY 17	11237 ft / 3425m	10122 ft / 3085m
RWY C	6306 ft / 1922m	

VATKOR
KOREA DIVISION

ZKPY AD 2.5 ADDITIONAL RUNWAY INFORMATIONS

RWY Designations	1	2	3	4	5	6
RWY 35	HIRL (60m)	SALS (LIH)	CL (30m spacing)	X	PAPI-L(3.0°) length 420m	HST-B
RWY 17	HIRL (60m)	PALS CAT I (LIH)	CL (30m spacing)	SFL	PAPI-L(3.0°) length 900m	HST-D&F

ZKPY AD 2.6 ATS AIRSPACE

1	**Designation and lateral limit**	Pyongyang CTR A circle, 5 NM radius centered at ARP
2	**Vertical limits**	SFC to 4 000 ft AGL
3	**Airspace classification**	B
4	**ATS unit call sign** **Languages**	Pyongyang Tower Korean and English
5	**Transition Altitude** **Transition Level**	10000 ft FL120

VATKOR
Virtual Air Traffic Simulation Network
KOREA Division

ZKPY AD 2.7 ATS COMMUNICATION FACILITIES

1	2	3
Service designation	**Call Sign**	**Frequency (MHz)**
GND	Pyongyang Ground	121.800
TWR	Pyongyang Tower	118.300
APP	Pyongyang Approach	133.900
DEP	Pyongyang Departure	130.000
CTR	Pyongyang Control	120.900
ATIS	Pyongyang ATIS	120.400

ZKPY AD 2.8 RADIO NAVIGATION AND LANDING AIDS

1	2	3	4
Type of aid	**ID**	**Frequency**	**Antenna Coord**
LOC 17	IGE	109.5 MHz	391116N 1254038E
GP 17	IGE	109.5 MHz	391304N 1254000E
DME 17	IGE	109.5 MHz	391116N 1254038E
LOC 35	LW	109.9 MHz	391324N 1253947E
GP 35	LW	109.9 MHz	391140N 1254033E
VOR/DME	GK	111.4 Mhz	391014N 1254130E

VATKOR
Virtual Air Traffic Simulation Network
KOREA Division

ZKPY AD 2.9 LOCAL AERODROME REGULATIONS

1. Airport Regulations
   - 1.1. Pilots are strongly required to monitor VHF 121.5 MHz when flying within PYONGYANG TMA.
   - 1.2. Pilots shall exercise extreme caution to avoid penetrating Prohibited Area {ZK(P)-1}, especially when flying between IAF and IF of ILS/RNP RW35 Approach.
   - 1.3. Pilots should always make sure that microphones are not stuck in the transmitting position before transmission in order to prevent frequency blockage (stuck mike) from impairing ATC.
2. GND Procedure
   - 2.1. Pilots should not enter GP critical and sensitive areas without ATC clearance.

ZKPY AD 2.10 NOISE ABATEMENT PROCEDURES

1. Aircraft Operating Procedure
   1.1. NADP 1 or NADP 2 procedures have to be used for take-off.
   1.2. RWY 17 is used for preferential RWY for noise abatement for take-off and RWY 35 for landing.
   1.3. Ground running of ACFT engines for test or maintenance is subject to ATC approval.

ZKPY AD 2.11 FLIGHT PROCEDURES

1. IFR
   1.1. IFR Clearance
      1.1.1. Pilots should contact clearance delivery and obtain clearance before flight.
      1.1.2. Clearance delivery will assign an initial altitude unless pilots' final altitude is lower. expect initial altitude to be assigned as follows:

Turbojet Aircraft	6 000 ft
Turboprop Aircraft after Turbojet	4 000 ft

   1.2. SPEED RESTRICTION
      1.2.1. All aircraft shall not exceed 250 kt IAS below 10 000 ft in PYONGYANG TMA, unless otherwise authorized by ATC. If unable to comply with this speed restriction, state minimum speed acceptable to ATC.
      1.2.2. ATC will use "NO ATC SPEED RESTRICTIONS" RTF phraseology to remove MAX 250 kt IAS below 10 000 ft.

VATKOR Virtual Air Traffic Simulation Network KOREA Division

1.3. Assignment of Standard Instrument Departure(SID)

1.3.1.

RWY	AIRWAY	SID
35	W1 / W5	SASRI21D
	A575 / B332	BODOK21D
	A575	JONJU21D
	R452 / W2	SOCHA21D
	B332 / W7	SOKGE21D
	Radar Vector	HDG 300
17	W1 / W5	SASRI11D
	A575 / B332	BODOK11D
	A575	JONJU11D
	R452 / W2	SOCHA11D
	B332 / W7	SOKGE11D
	Radar Vector	HDG 240

VATKOR
Virtual Air Traffic Simulation Network
KOREA Division

1.4. Missed Approach

1.4.1. In case of go-around, Pilots are expected to be assigned HDG 270 and 4000ft (Primary) , or instructed to execute missed approach procedure(Secondary)

2. VFR

2.1. VFR Weather Minima

2.1.1. Ground Visibility : Not less than 5 km

2.1.2. Ceiling : Not less than 1500 ft

2.2. VFR Clearance

2.2.1. Pilots flying VFR in PYONGYANG TMA should send flight plan including:

a) Departure Airport

b) Direction or Route of Flight

c) Aircraft Type

d) Altitude (ending in 500 ft unless below 3 000 ft)

2.2.2. VFR Traffic Circuit

2.2.2.1. RUNWAY 17 : Right Closed Traffic Pattern


2.2.2.2. RUNWAY 35 : Left Closed Traffic Pattern

2.2.3. VFR Circuit Altitude

2.2.3.1. All Aircraft : 1500 ft

VATKOR
Virtual Air Traffic Simulation Network
KOREA Division

VFR Traffic Circuits - PYONGYANG INTL Airport

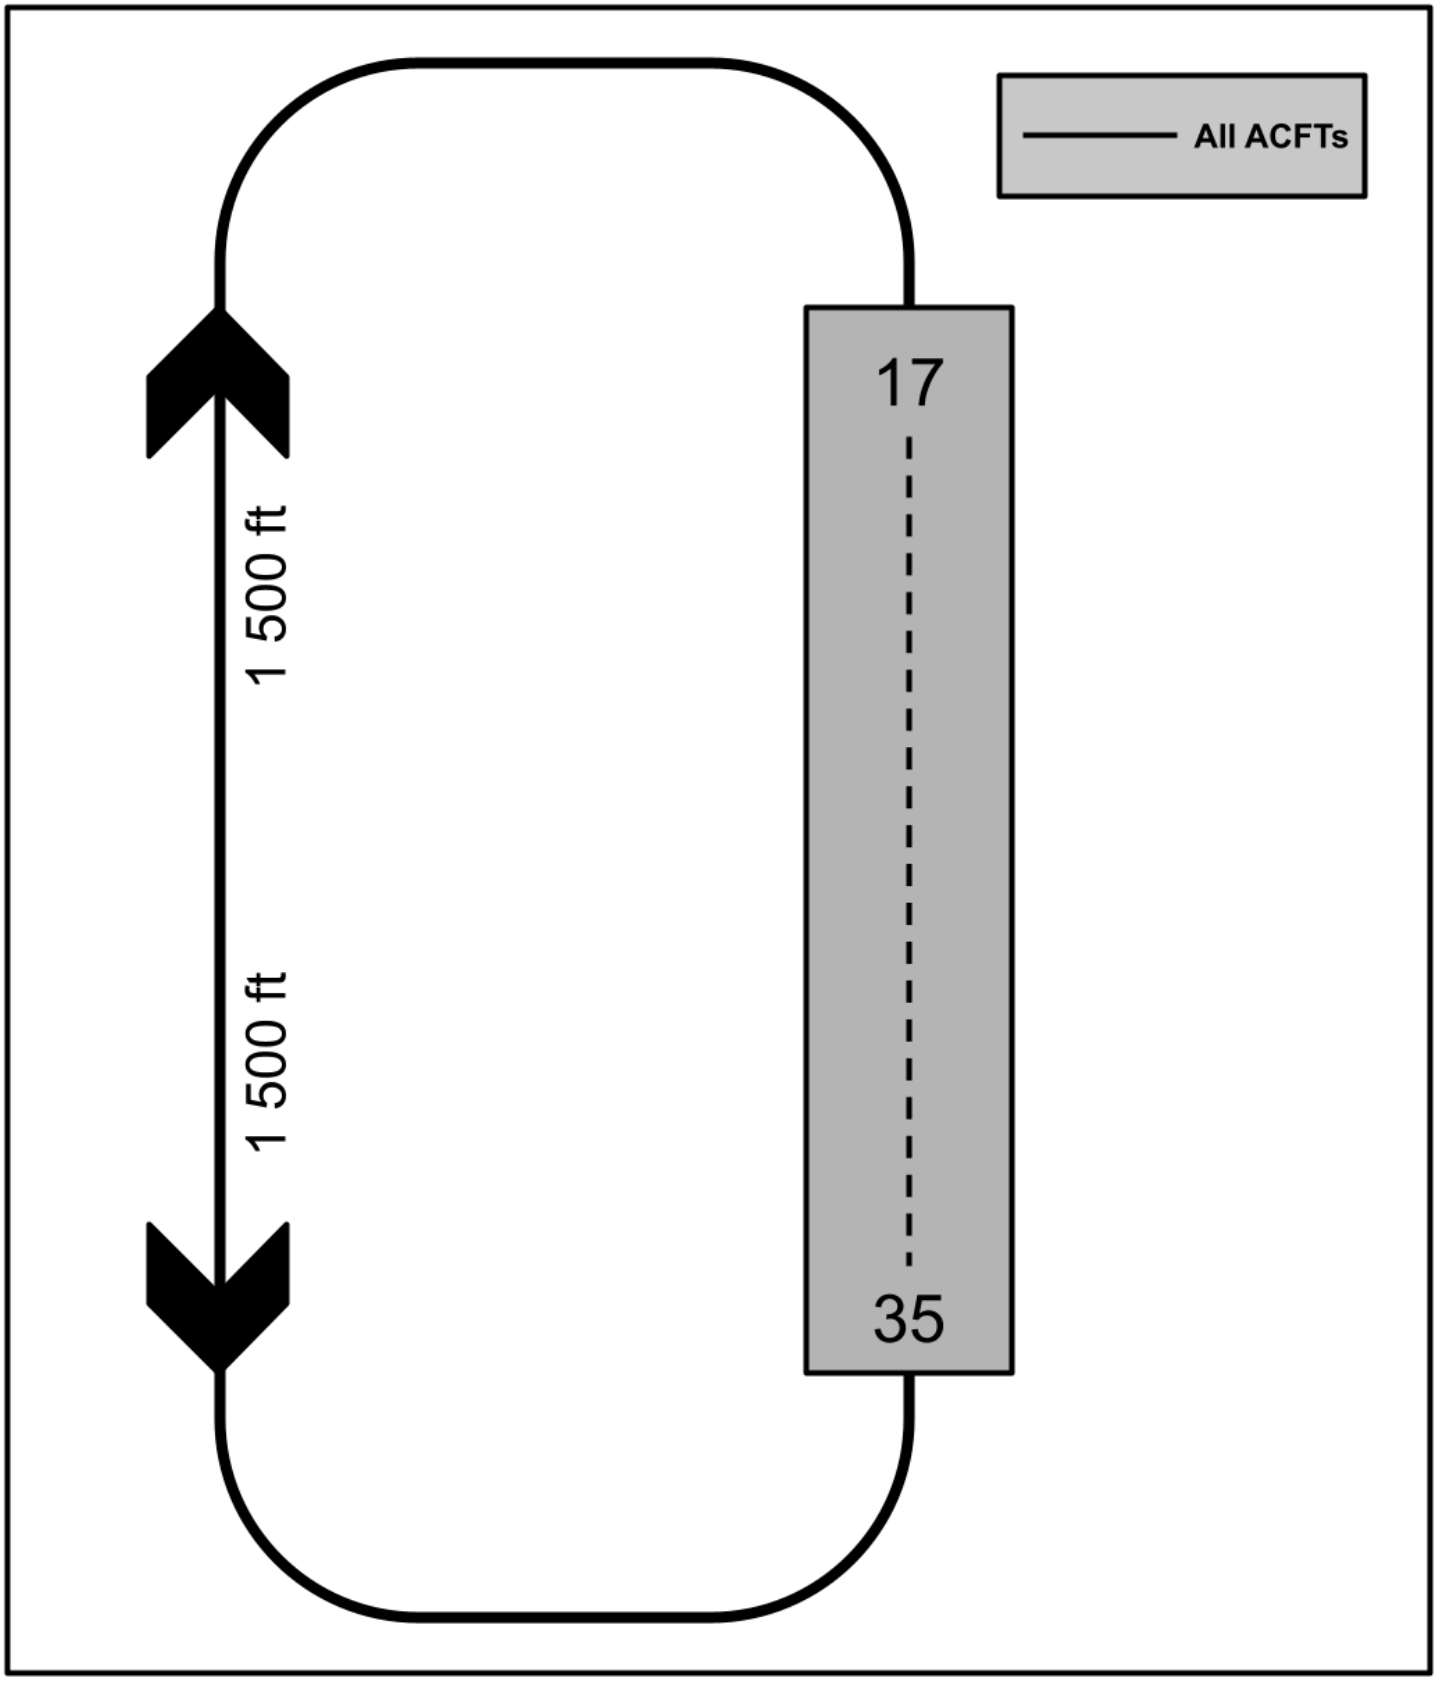

ZKPY AD 2.12 CHARTS RELATED TO THE AERODROME

AD
ZKPY-AD-CHART
AIRCRAFT PARKING AND DOCKING
ZKPY-ACFT PARK/DOCKING-CHART
SID
ZKPY-SID-CHART
STAR
ZKPY-STAR-CHART
ILS/DME 17
ZKPY-ILS17-CHART
ILS 35
ZKPY-ILS35-CHART
RNP 17
ZKPY-RNP17-CHART
RNP 35
ZKPY-RNP35-CHART

VATKOR
Virtual Air Traffic Simulation Network
KOREA Division

LAST MODIFIED DATE / 2026-07-03
(Revised TRANS LVL FL130 -> FL120 / TRANS ALT 12000ft -> 10000ft)