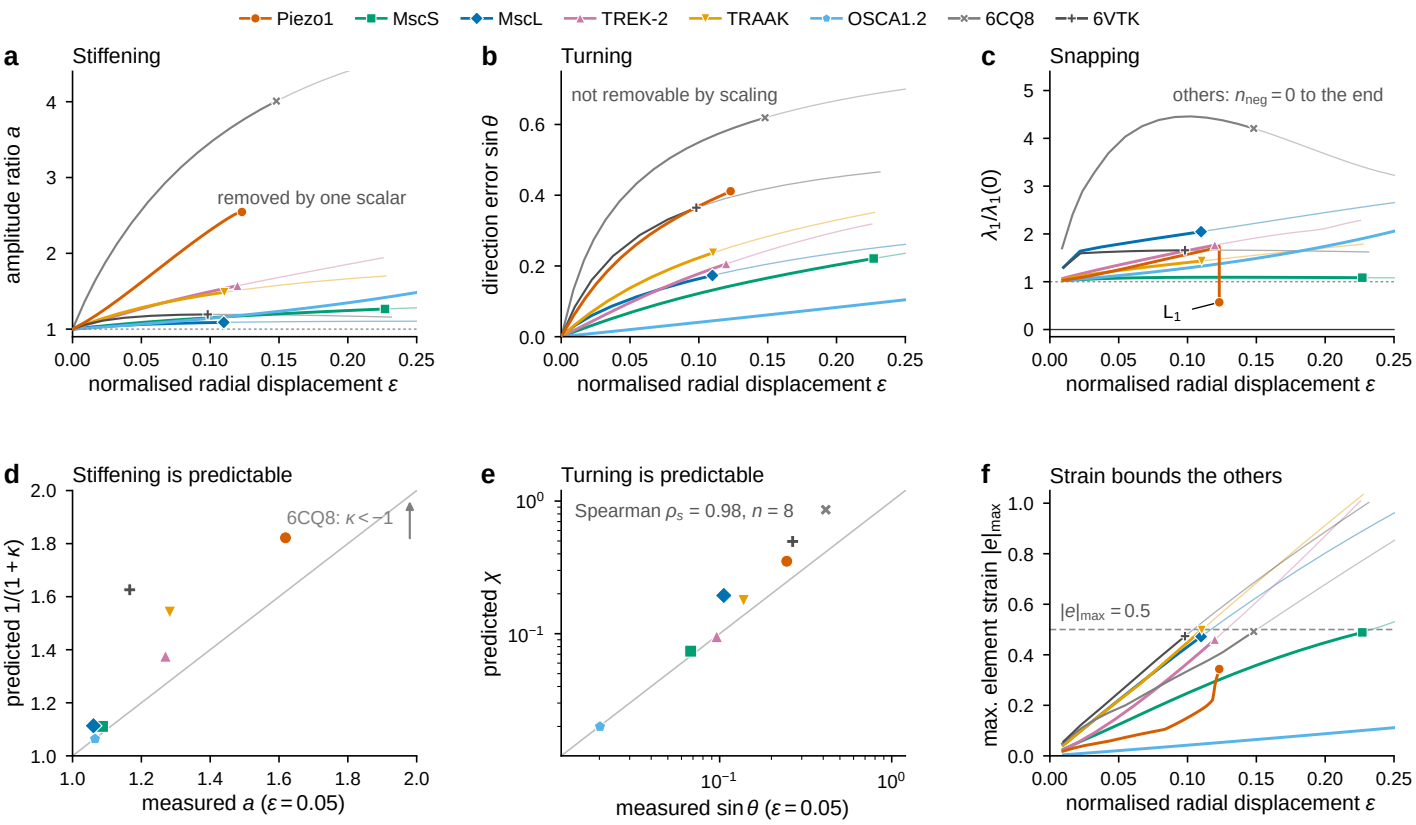
Piezo1
MscS
MscL
TREK-2
TRAAK
OSCA1.2
6CQ8
6VTK
a
Stiffening
amplitude ratio a
removed by one scalar
normalised radial displacement ε
b
Turning
direction error sin θ
not removable by scaling
normalised radial displacement ε
c
Snapping
λ1/λ1(0)
others: n_neg = 0 to the end
L1
normalised radial displacement ε
d
Stiffening is predictable
predicted 1/(1 + κ)
6CQ8: κ < −1
measured a (ε = 0.05)
e
Turning is predictable
predicted χ
Spearman ρs = 0.98, n = 8
measured sin θ (ε = 0.05)
f
Strain bounds the others
max. element strain |e|max
|e|max = 0.5
normalised radial displacement ε