

Grid Features Validation Packet -- 8Z3ESD

Every trace in this packet is simulated output from a fitted, multi-conductance single-compartment model of this cell, integrated deterministically -- not a raw current-clamp recording. What is being evaluated here is the feature-extraction methodology applied on top of that model: spike detection, burst/tonic classification, post-inhibitory rebound detection, sag depth, and spike-frequency adaptation. Each figure below reruns the actual classification algorithm on a real simulated trace and marks what it found directly on the trace.

Silencing threshold: -16.75 nA | 2500 points sampled across the current grid

Burstiness index: 0.224

Firing-rate/current slope: not available (no tonic points to fit)

Contents:

1. Feature overview

Every extracted-feature panel across the full current grid -- what the rest of this packet verifies.

2. Representative traces

Every distinct response pattern this cell produces, then one full-detail trace per pattern.

3. Spike detection

Every spike the automated detector found, marked on real traces.

4. Spike-detection threshold sensitivity

How stable spike counts are across detection thresholds.

5. Independent cross-check of spike detection

A second detection method compared against the primary one.

6. Tonic / bursting / silent classification

Interspike intervals and the statistical test for two separate interval populations.

7. Bimodality test

The full statistical-separation evidence behind the tonic/bursting distinction.

8. Burst-onset-then-silence detection

A leading onset burst followed by cessation, vs. one that sustains.

9. Post-inhibitory rebound detection

Rebound spikes after release from hyperpolarization, and the latency cutoff used.

10. Sag depth

The baseline voltage, search window, and trough behind the sag measurement.

11. Spike-frequency adaptation

Early vs. late interspike intervals on a real, sustained tonic trace.


12. Firing rate vs. injected current

Firing rate vs. current, with the linear fit used to summarize it.

13. Reproducibility check


How often re-simulation reproduces the original classification.

1. Feature overview: 8Z3ESD's full current grid

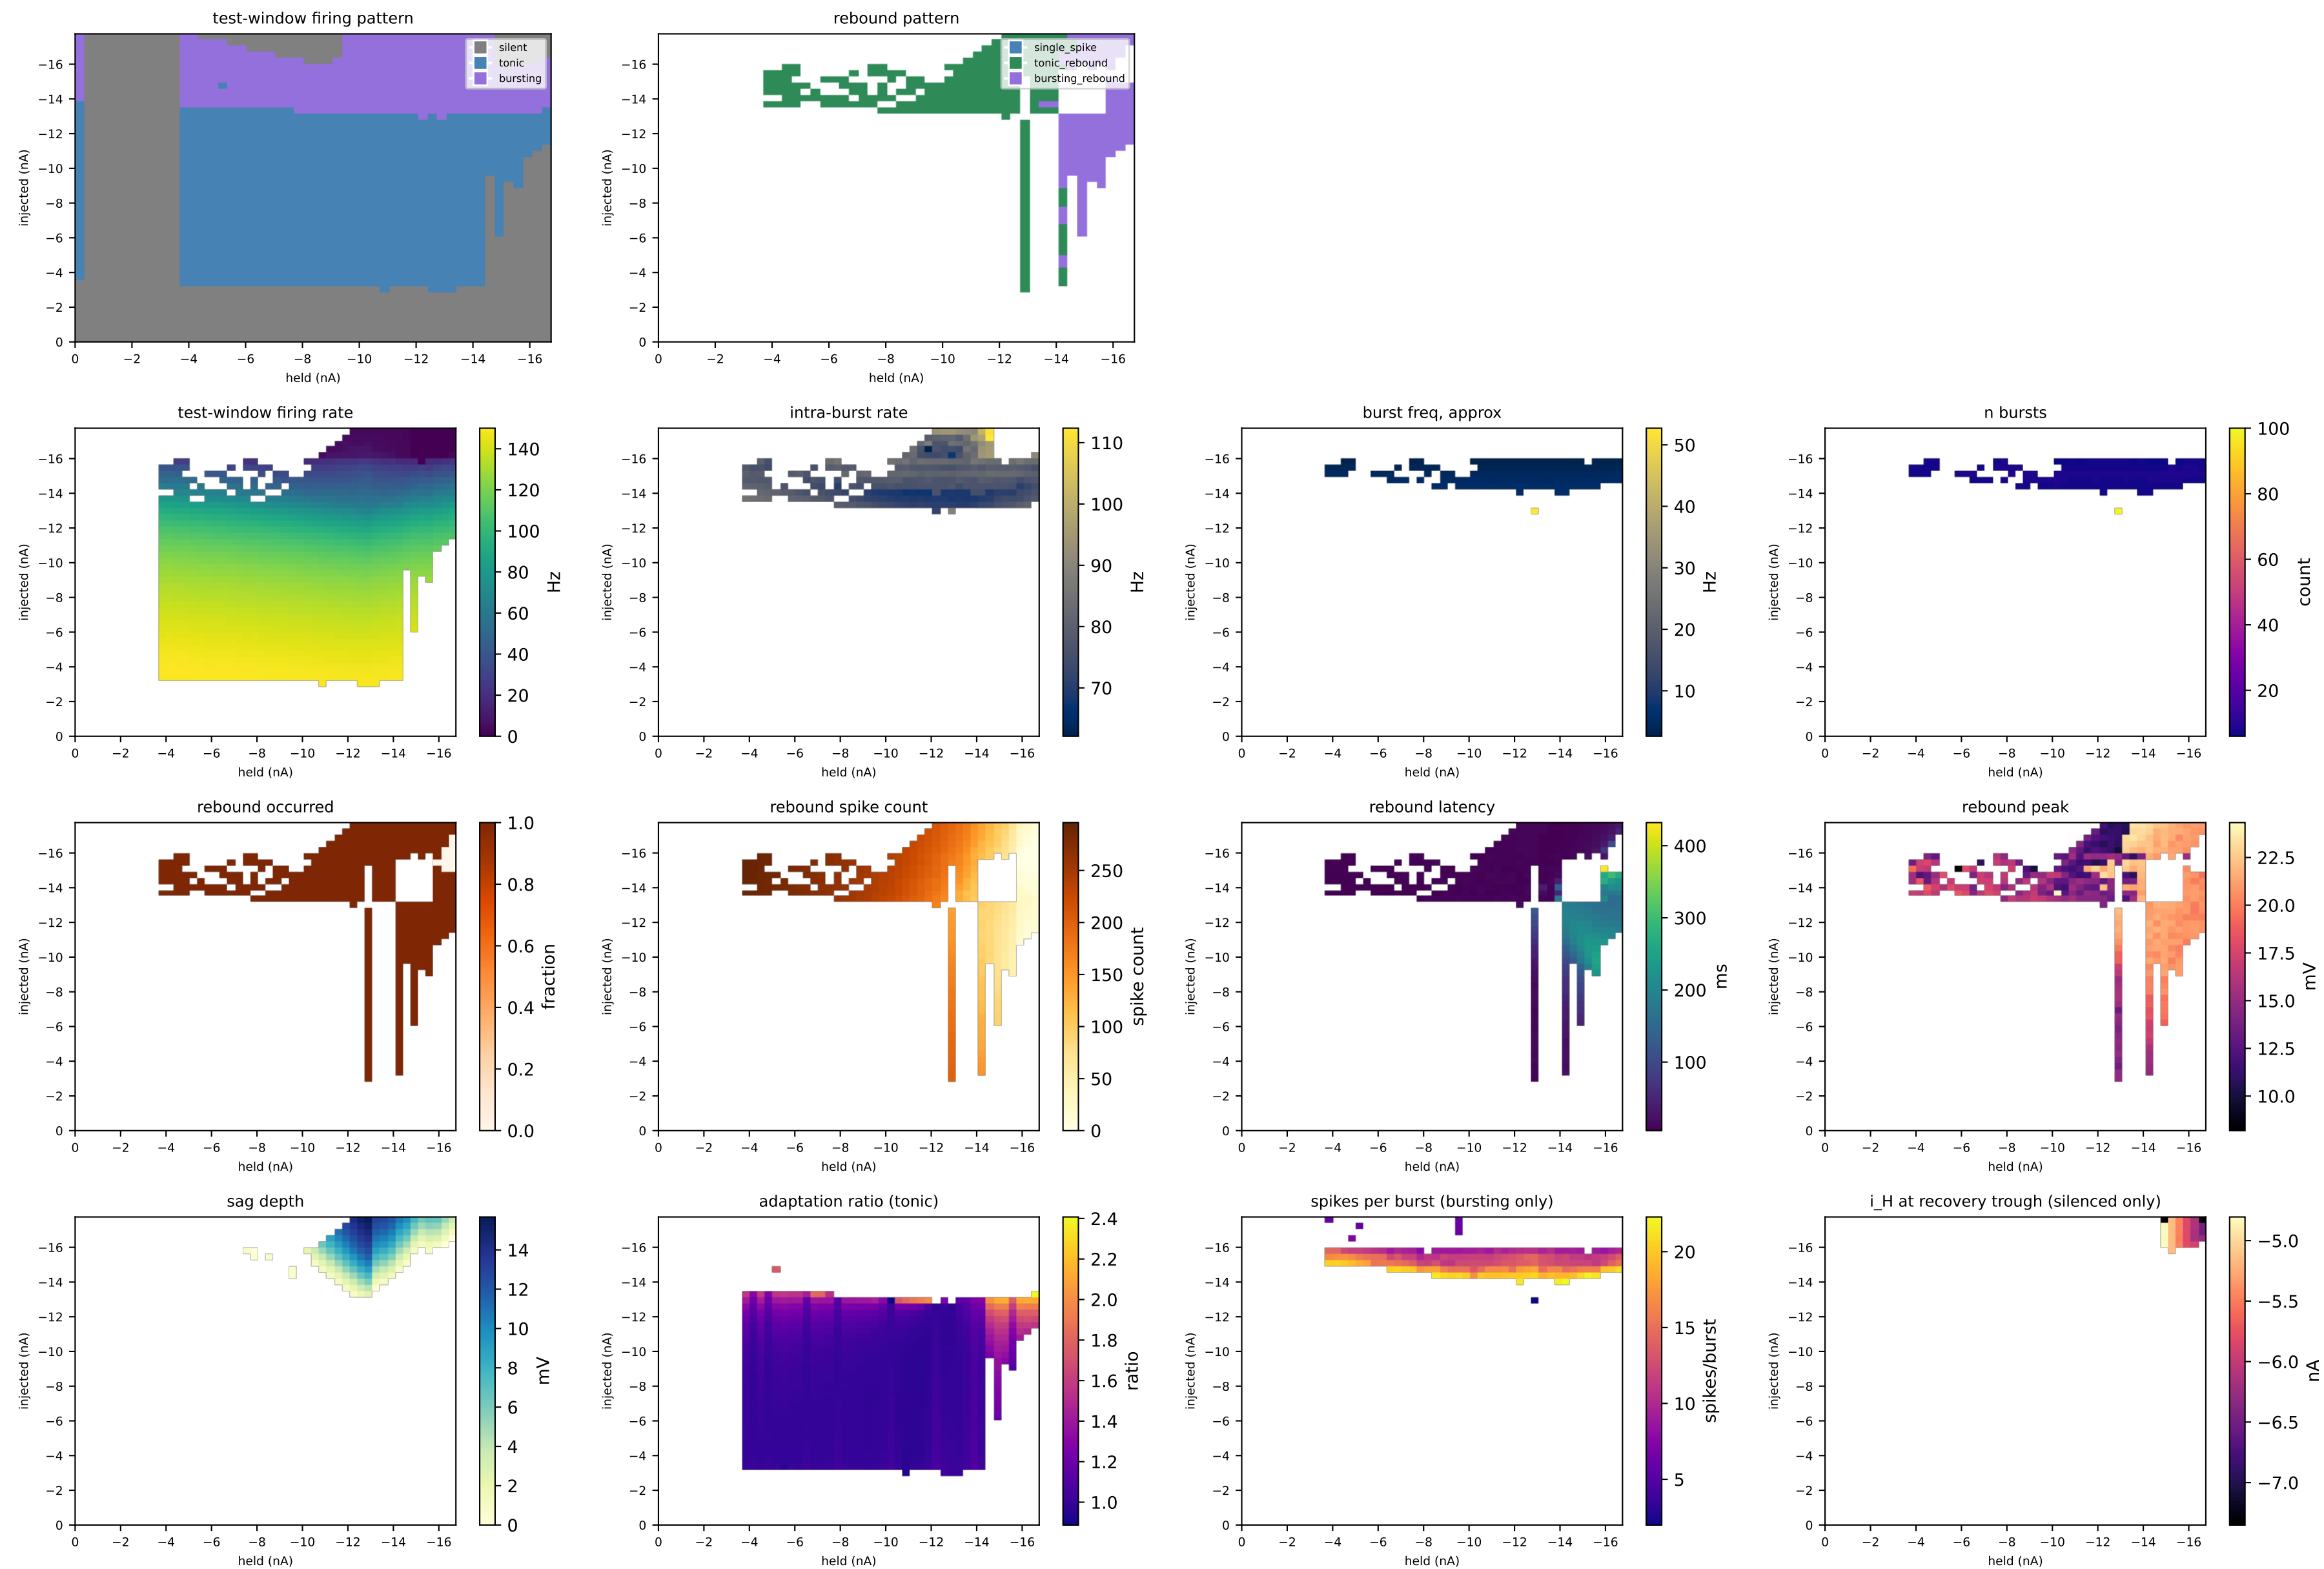


Every panel below is computed from the same 2500-point grid of held and injected current levels: which pattern each point fires in and whether it rebounds after release from hyperpolarization (top row), firing rate and burst structure (second row), rebound spike count, latency, and peak voltage (third row), and sag depth, adaptation, and burst size (bottom row). Two single-number summaries condense the whole grid: a burstiness index of 0.224 (the fraction of points classified bursting) and a firing-rate-vs-current slope that is not available (no tonic points to fit). The rest of this packet does not add new results -- it re-derives individual pieces of this same grid from real simulated traces so each one can be checked by eye against the panel it feeds.

2. Representative traces

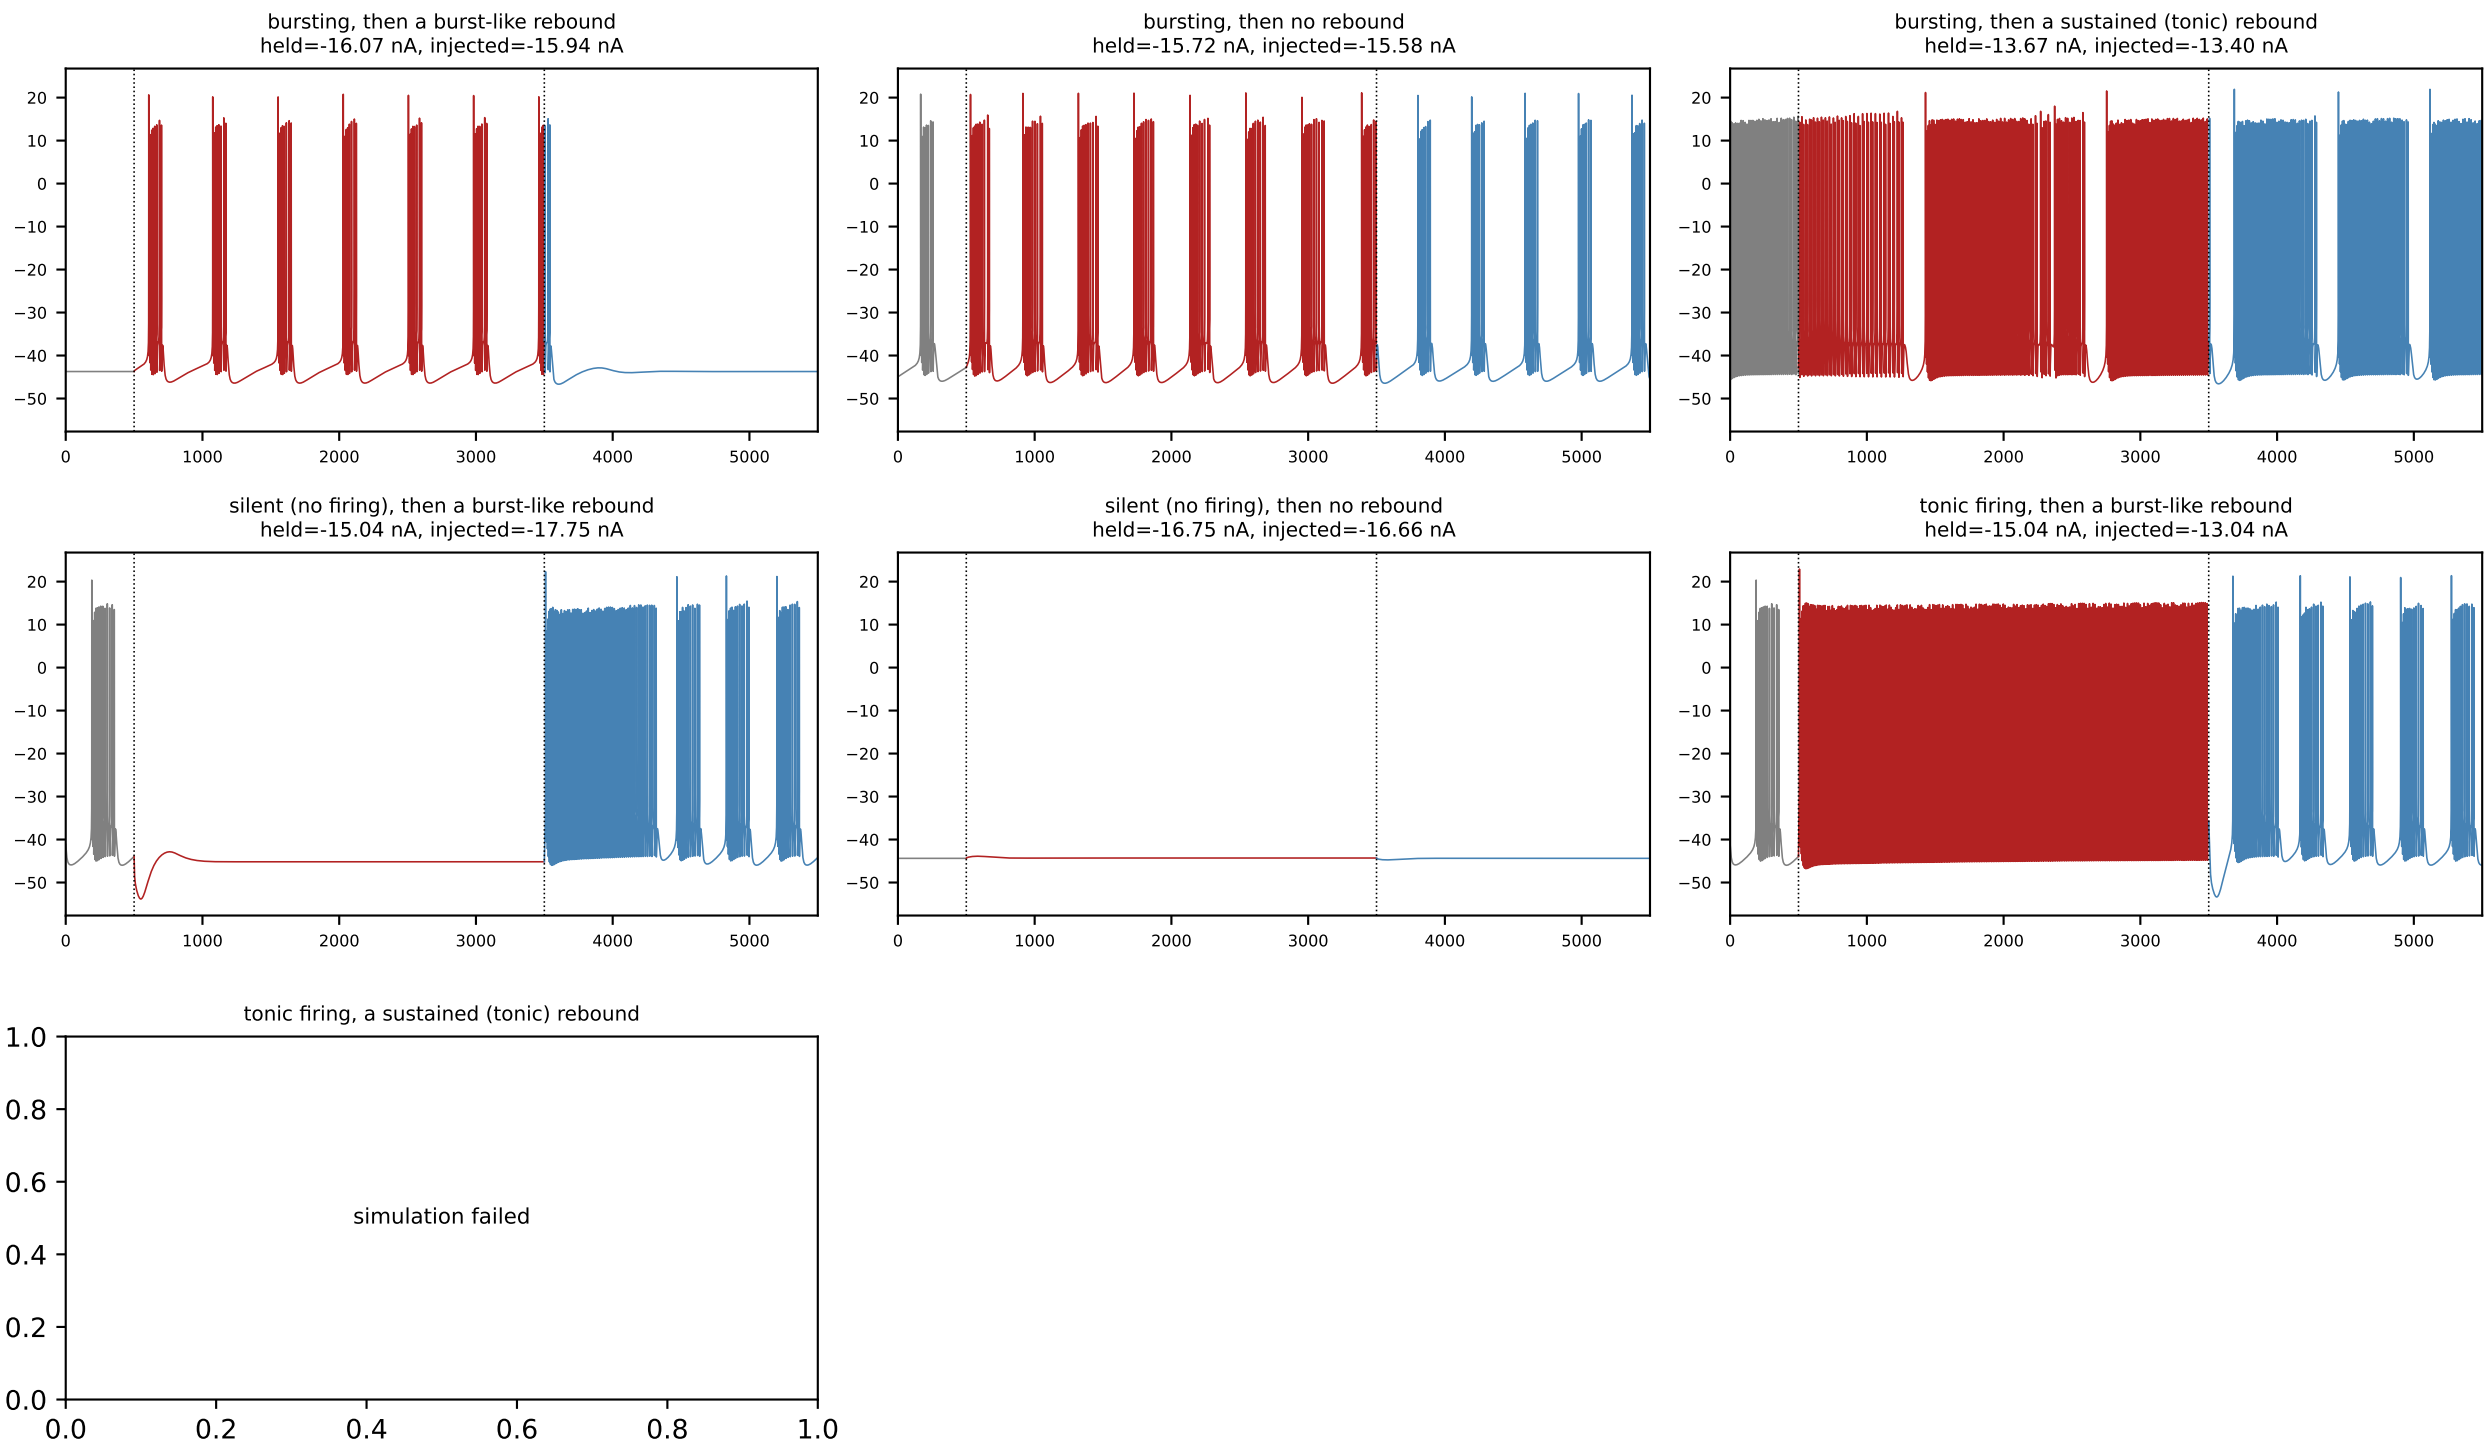


One representative trace for each distinct combination of response-to-current-step pattern and rebound pattern observed across this cell's full 2500-point grid of held and injected current levels: gray is the held baseline before the current step, red is the response during the current step, and blue is the recovery period after release back to the held level. Each combination is represented by its most clearly-expressed example among the grid points that produced it. Every panel shares the same voltage (-58 to 27 mV) and time (0-5500 ms) axes so amplitude and duration are directly comparable by eye -- without this, a small subthreshold wobble and a full-amplitude spike train would each be independently rescaled to fill the same panel and look equally prominent.


8Z3ESD: bursting during the current step, then a burst-like rebound

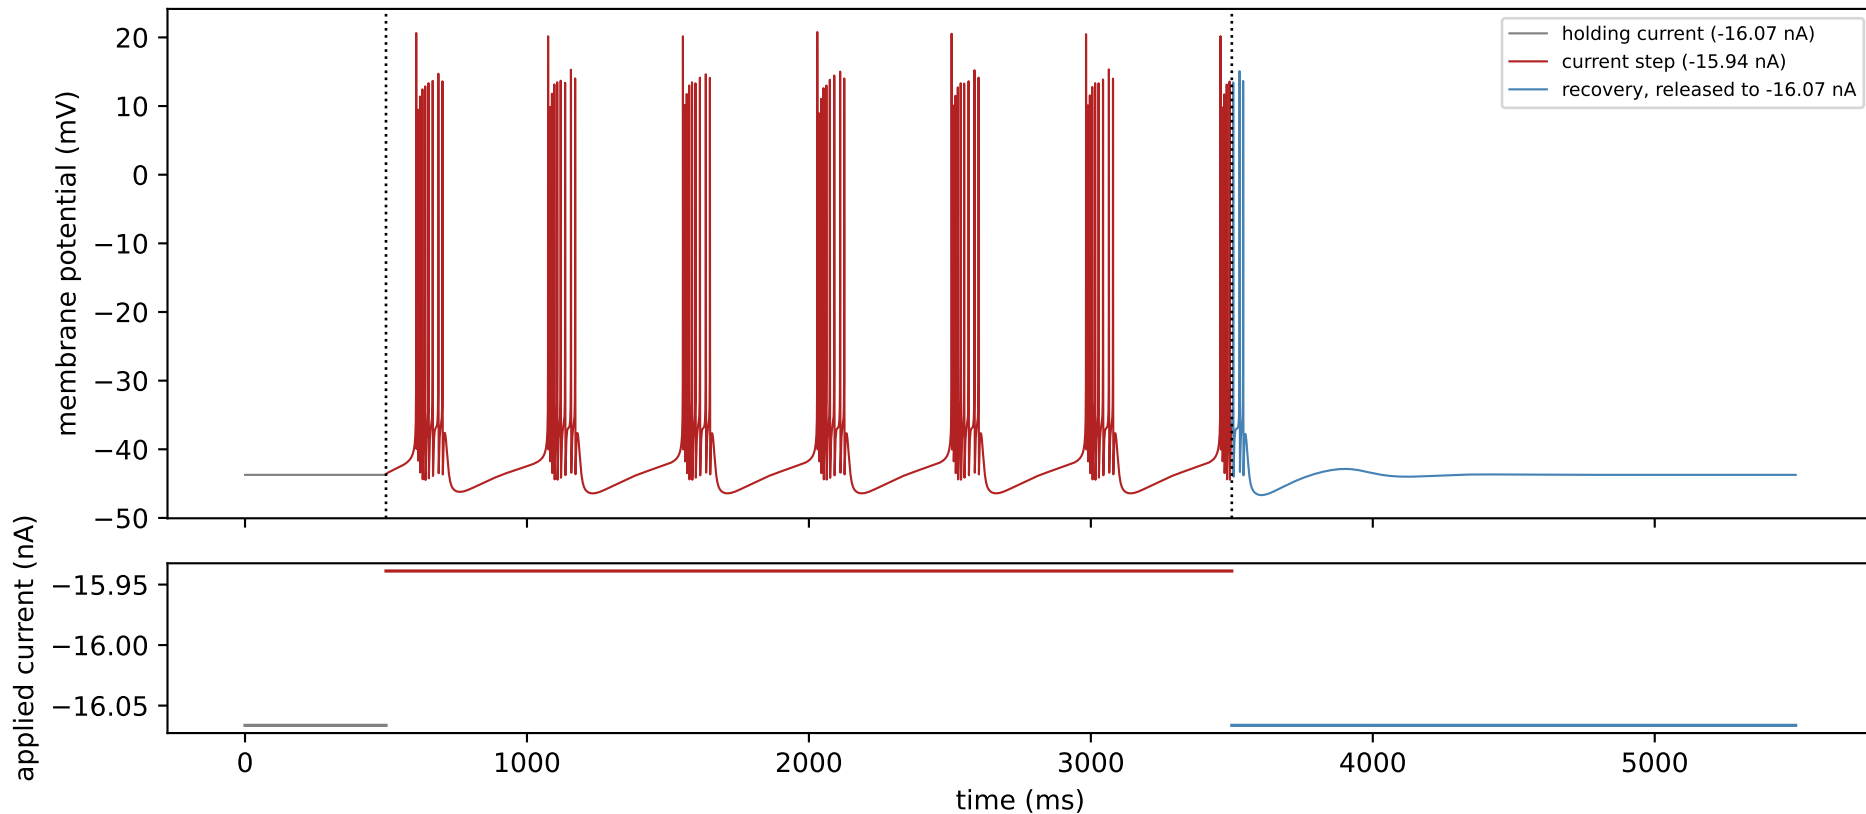


8Z3ESD: bursting during the current step, then no rebound

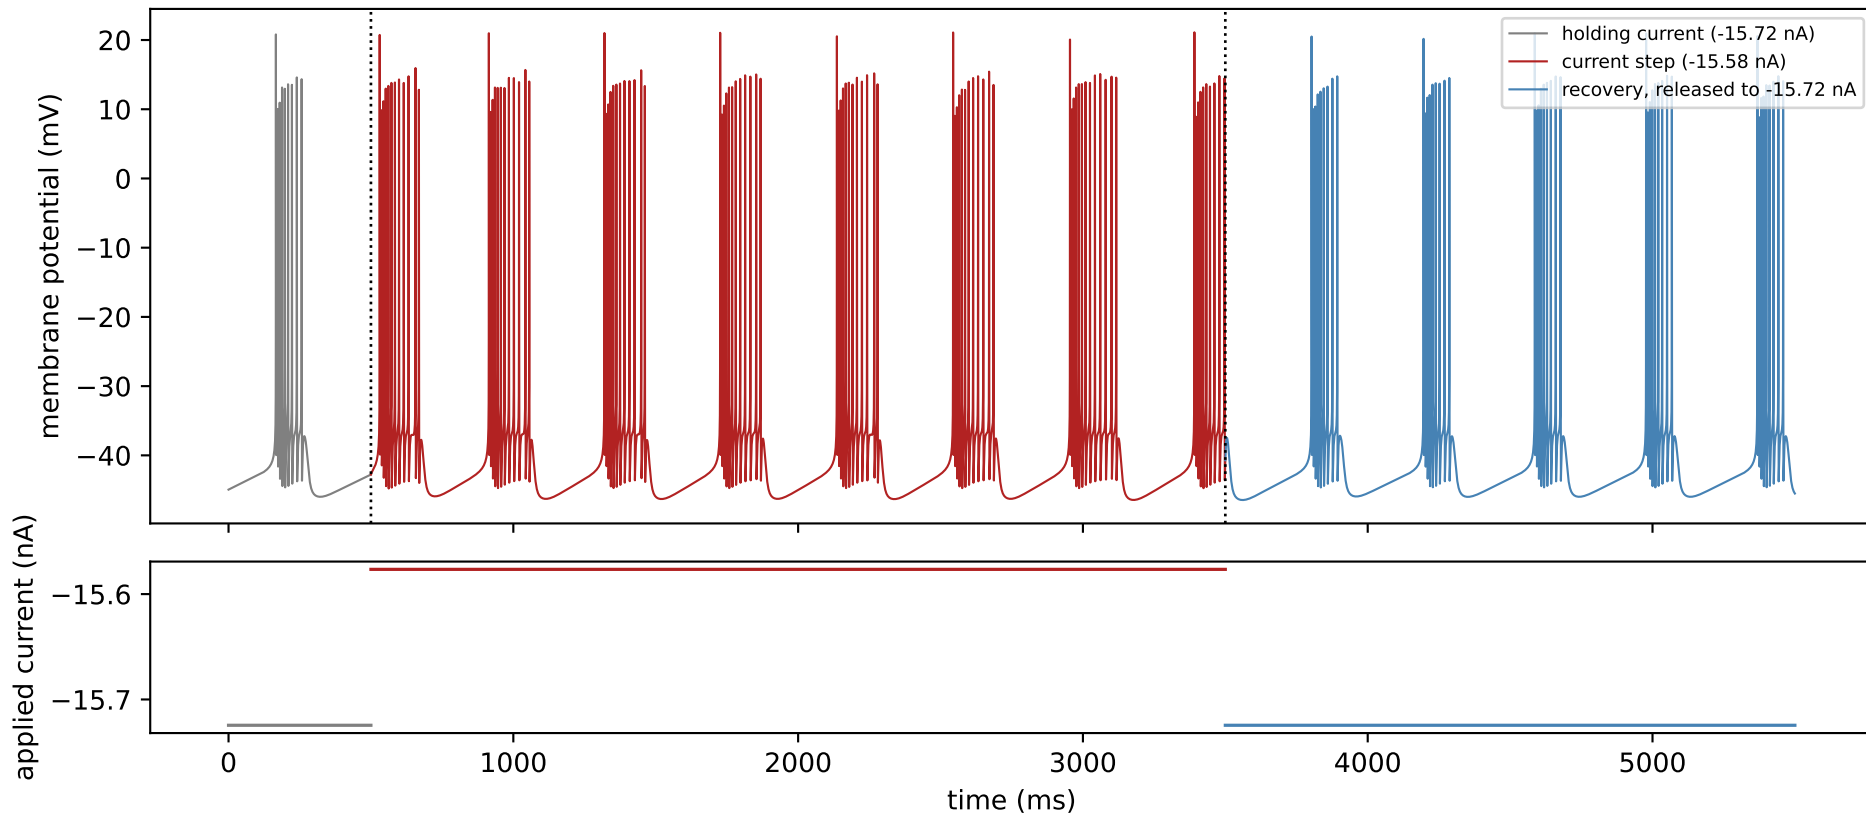


8Z3ESD: bursting during the current step, then a sustained (tonic) rebound

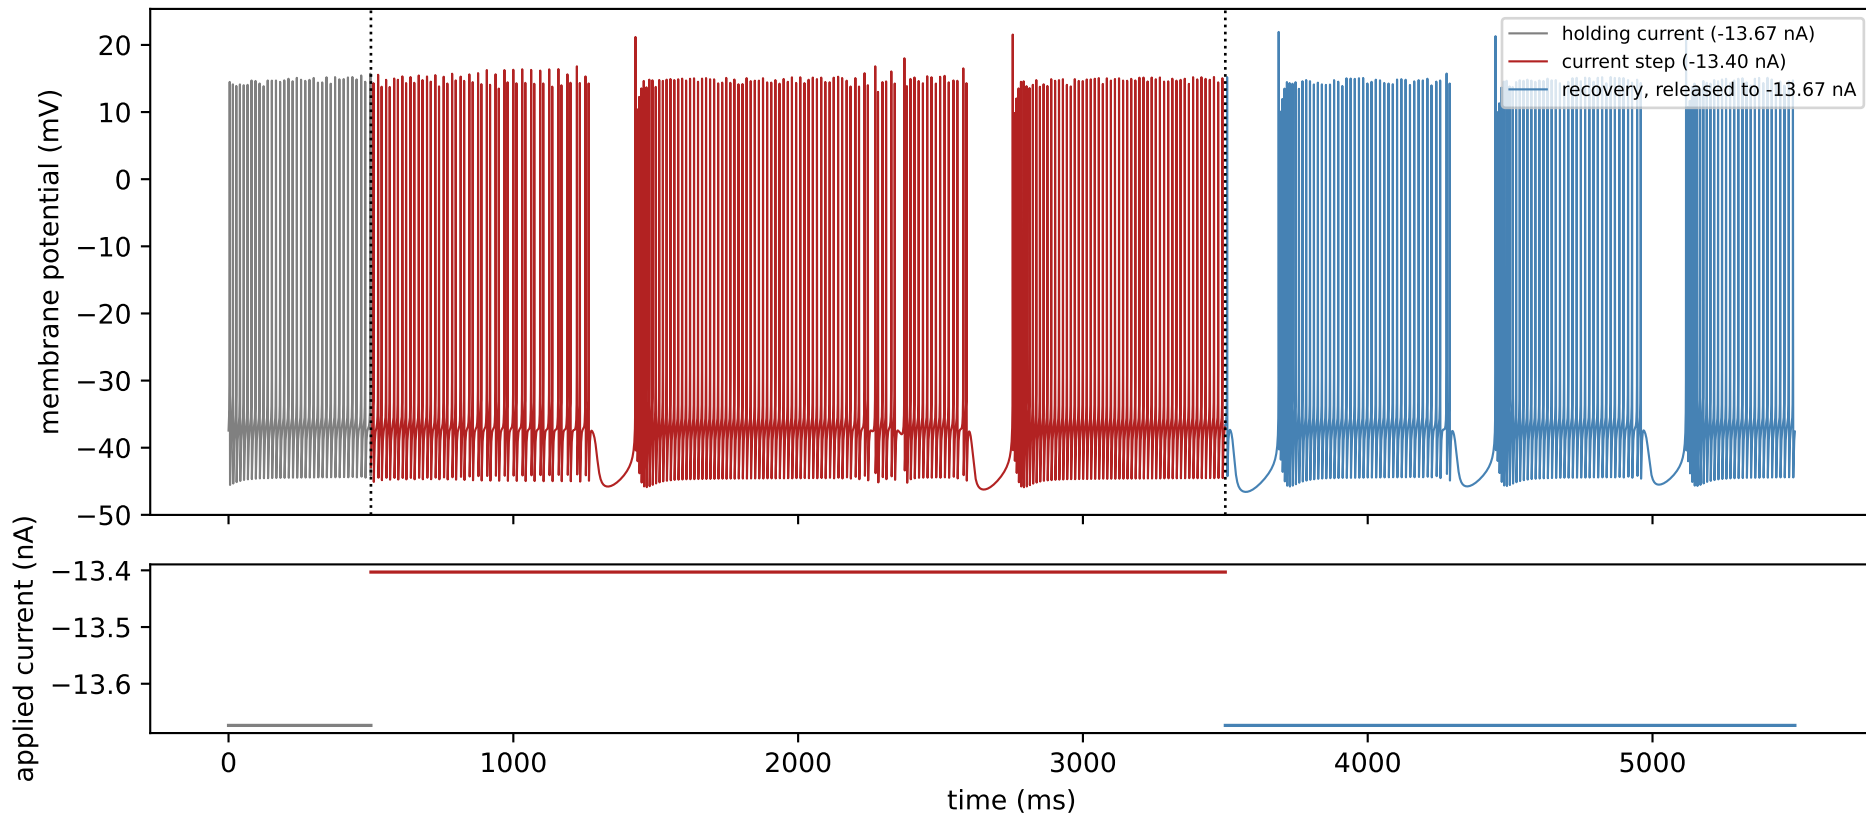

8Z3ESD: silent (no firing) during the current step, then a burst-like rebound

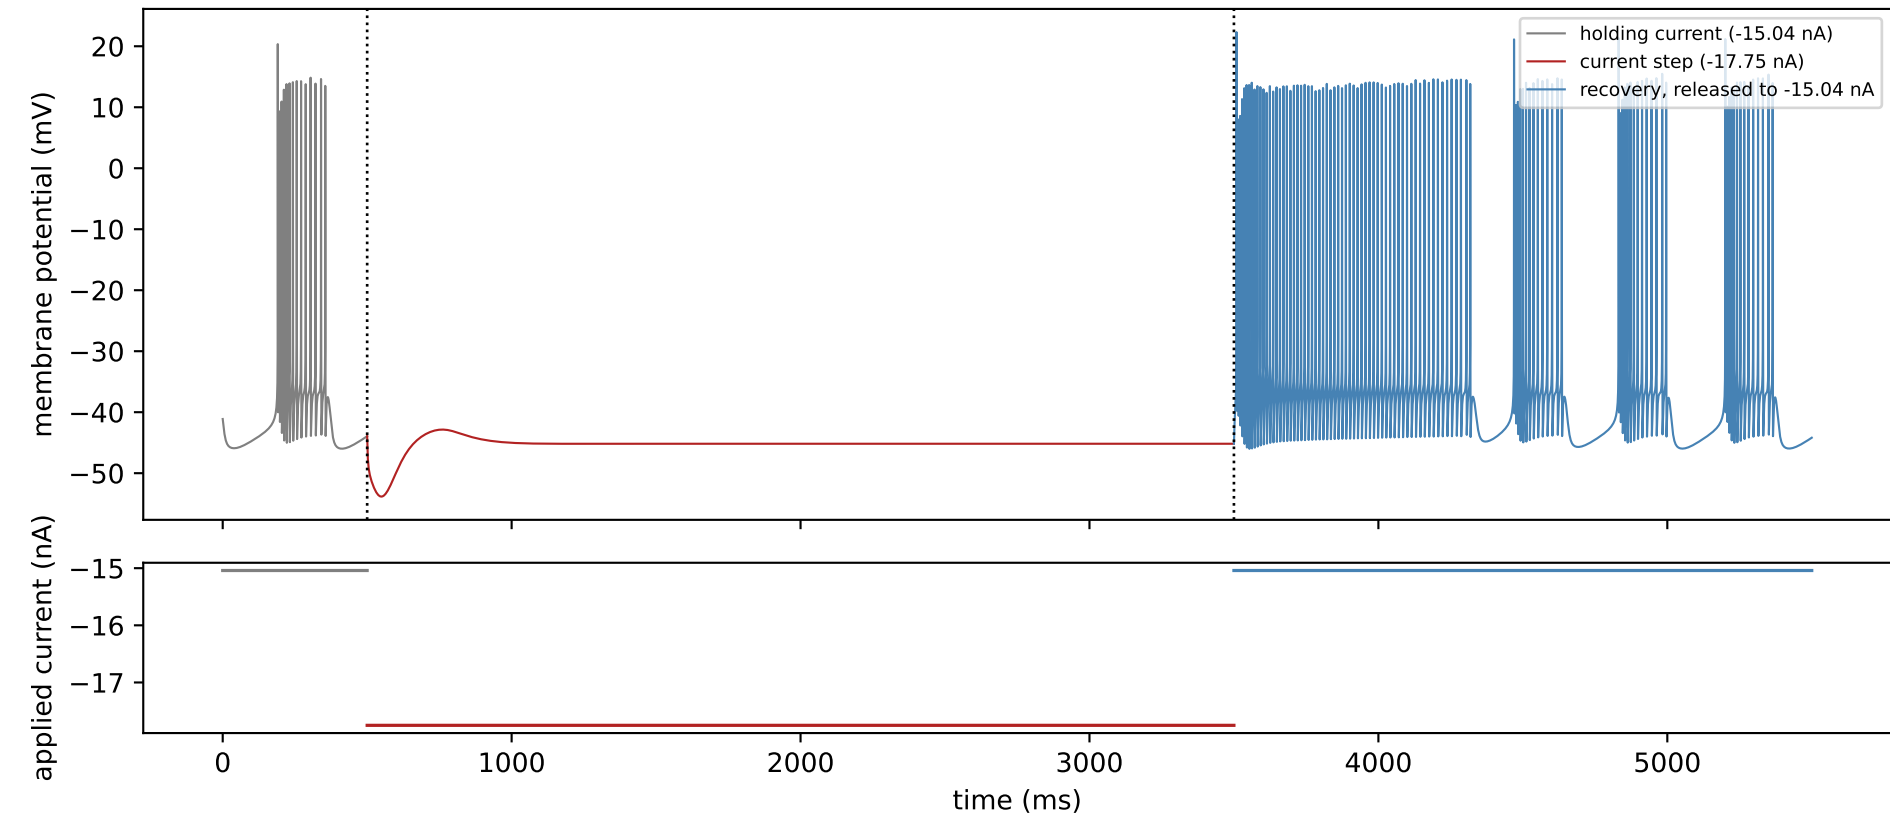

8Z3ESD: silent (no firing) during the current step, then no rebound

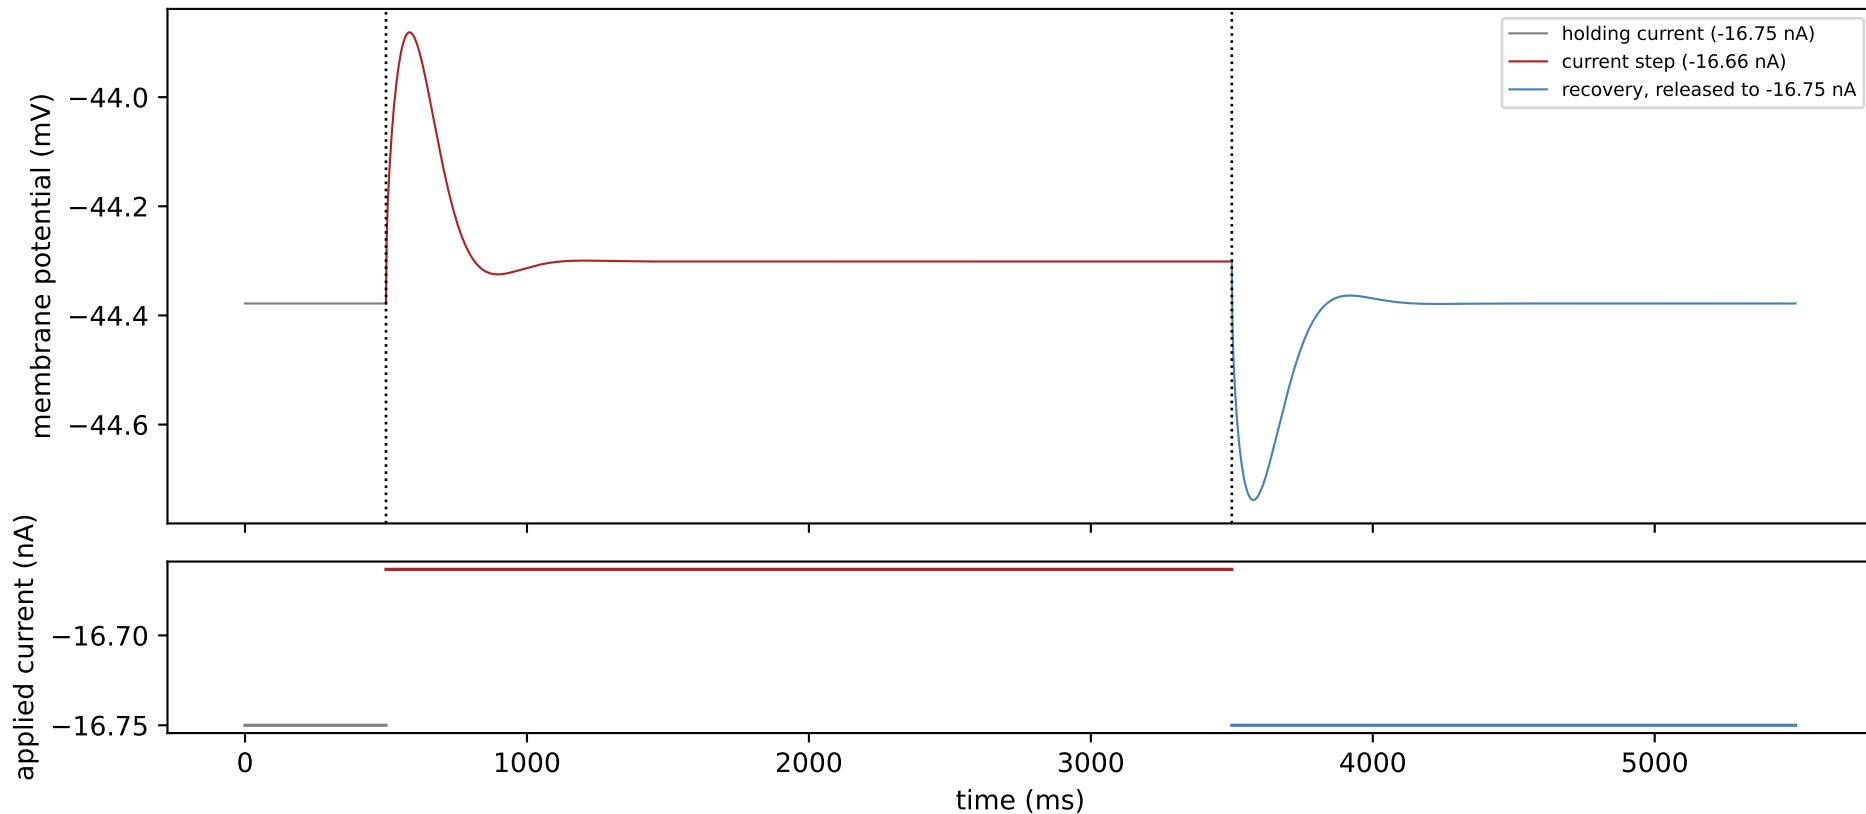

8Z3ESD: tonic firing during the current step, then a burst-like rebound

