


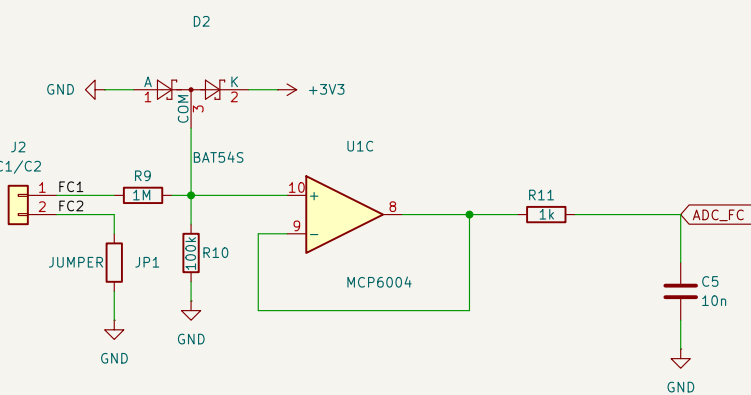

1. Board GND is bus L2 – this tap is NOT isolated.
Power the ESP32 from an ISOLATED USB wall wart.
NEVER connect laptop USB while J1 is on the bus.
Get data off over Wi-Fi (UDP), not the serial port.

- Non-isolated: ESP32 must run from an isolated supply

Title: Urmet Bibus VOP - L1/L2 + C1/C2 analog tap

Size: A3	Date: 2026-09-09	Rev: A
KiCad E.D.A. 10.0.3		Id: 1/1