


# Holden Memcal Installation Instructions

Thank you for purchasing a Kobol Systems Replacement Memcal. This guide will walk you through the steps required to correctly install your new Memcal.

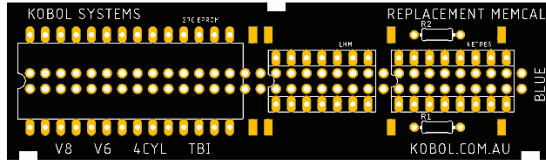

**Note:** This product may require assembly and/or programming. If so, please review the Assembly and Programming documentation before proceeding with the installation.

## Installation Steps:

### *Remove the ECU from the vehicle*

- Remove the passenger kick panel.
- Disconnect the wiring.
- Remove the bottom screw on the ECU.
- Lift and pull to release the ECU from the hooks.
- Take the ECU out of the car.
- Remove the two Torx screws on the Memcal cover.



### *Remove the Memcal from the ECU*

- Pull the blue and white levers at each end away from the Memcal, while lifting the Memcal up to release it



### *Install the Memcal in the ECU*

- Align the edge of the Memcal marked "Blue" with the blue clip on the ECU.
- Ensure the ECU pins are aligned with the socket.
- Firmly seat the Memcal into the socket and close the retaining clips.

### *Reinstall the ECU to the Vehicle*

- Reinstall the Cover and Torx screws
- Slide the ECU into the clips
- Install the retaining screws
- Reconnect the wiring connectors
- Reinstall the Kick Panel

Your Replacement Memcal is now installed and ready for use. Thank you for choosing Kobol Systems.

**Note:** As your replacement doesn't use the original keyed header connector, it is possible to install it incorrectly. Please follow these notes to ensure correct installation.