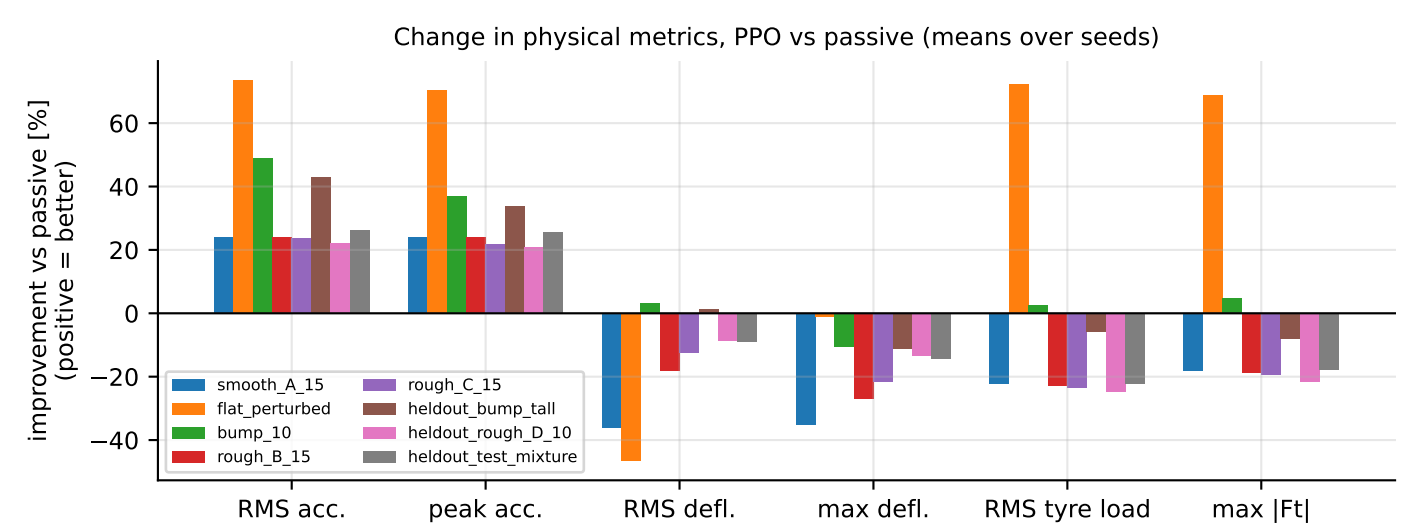
Change in physical metrics, PPO vs passive (means over seeds)
improvement vs passive [%]
(positive = better)
60
40
20
0
−20
−40
smooth_A_15
flat_perturbed
bump_10
rough_B_15
rough_C_15
heldout_bump_tall
heldout_rough_D_10
heldout_test_mixture
RMS acc.
peak acc.
RMS defl.
max defl.
RMS tyre load
max |Ft|

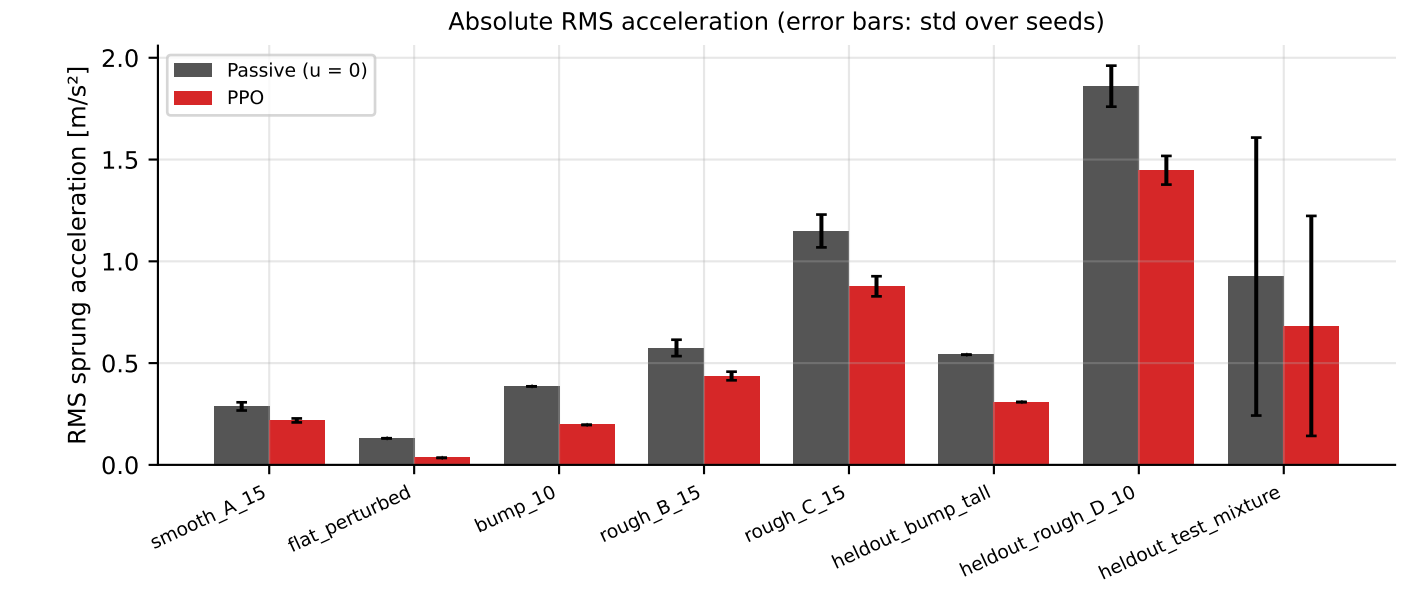
Absolute RMS acceleration (error bars: std over seeds)
RMS sprung acceleration [m/s²]
2.0
1.5
1.0
0.5
0.0
Passive (u = 0)
PPO
smooth_A_15
flat_perturbed
bump_10
rough_B_15
rough_C_15
heldout_bump_tall
heldout_rough_D_10
heldout_test_mixture