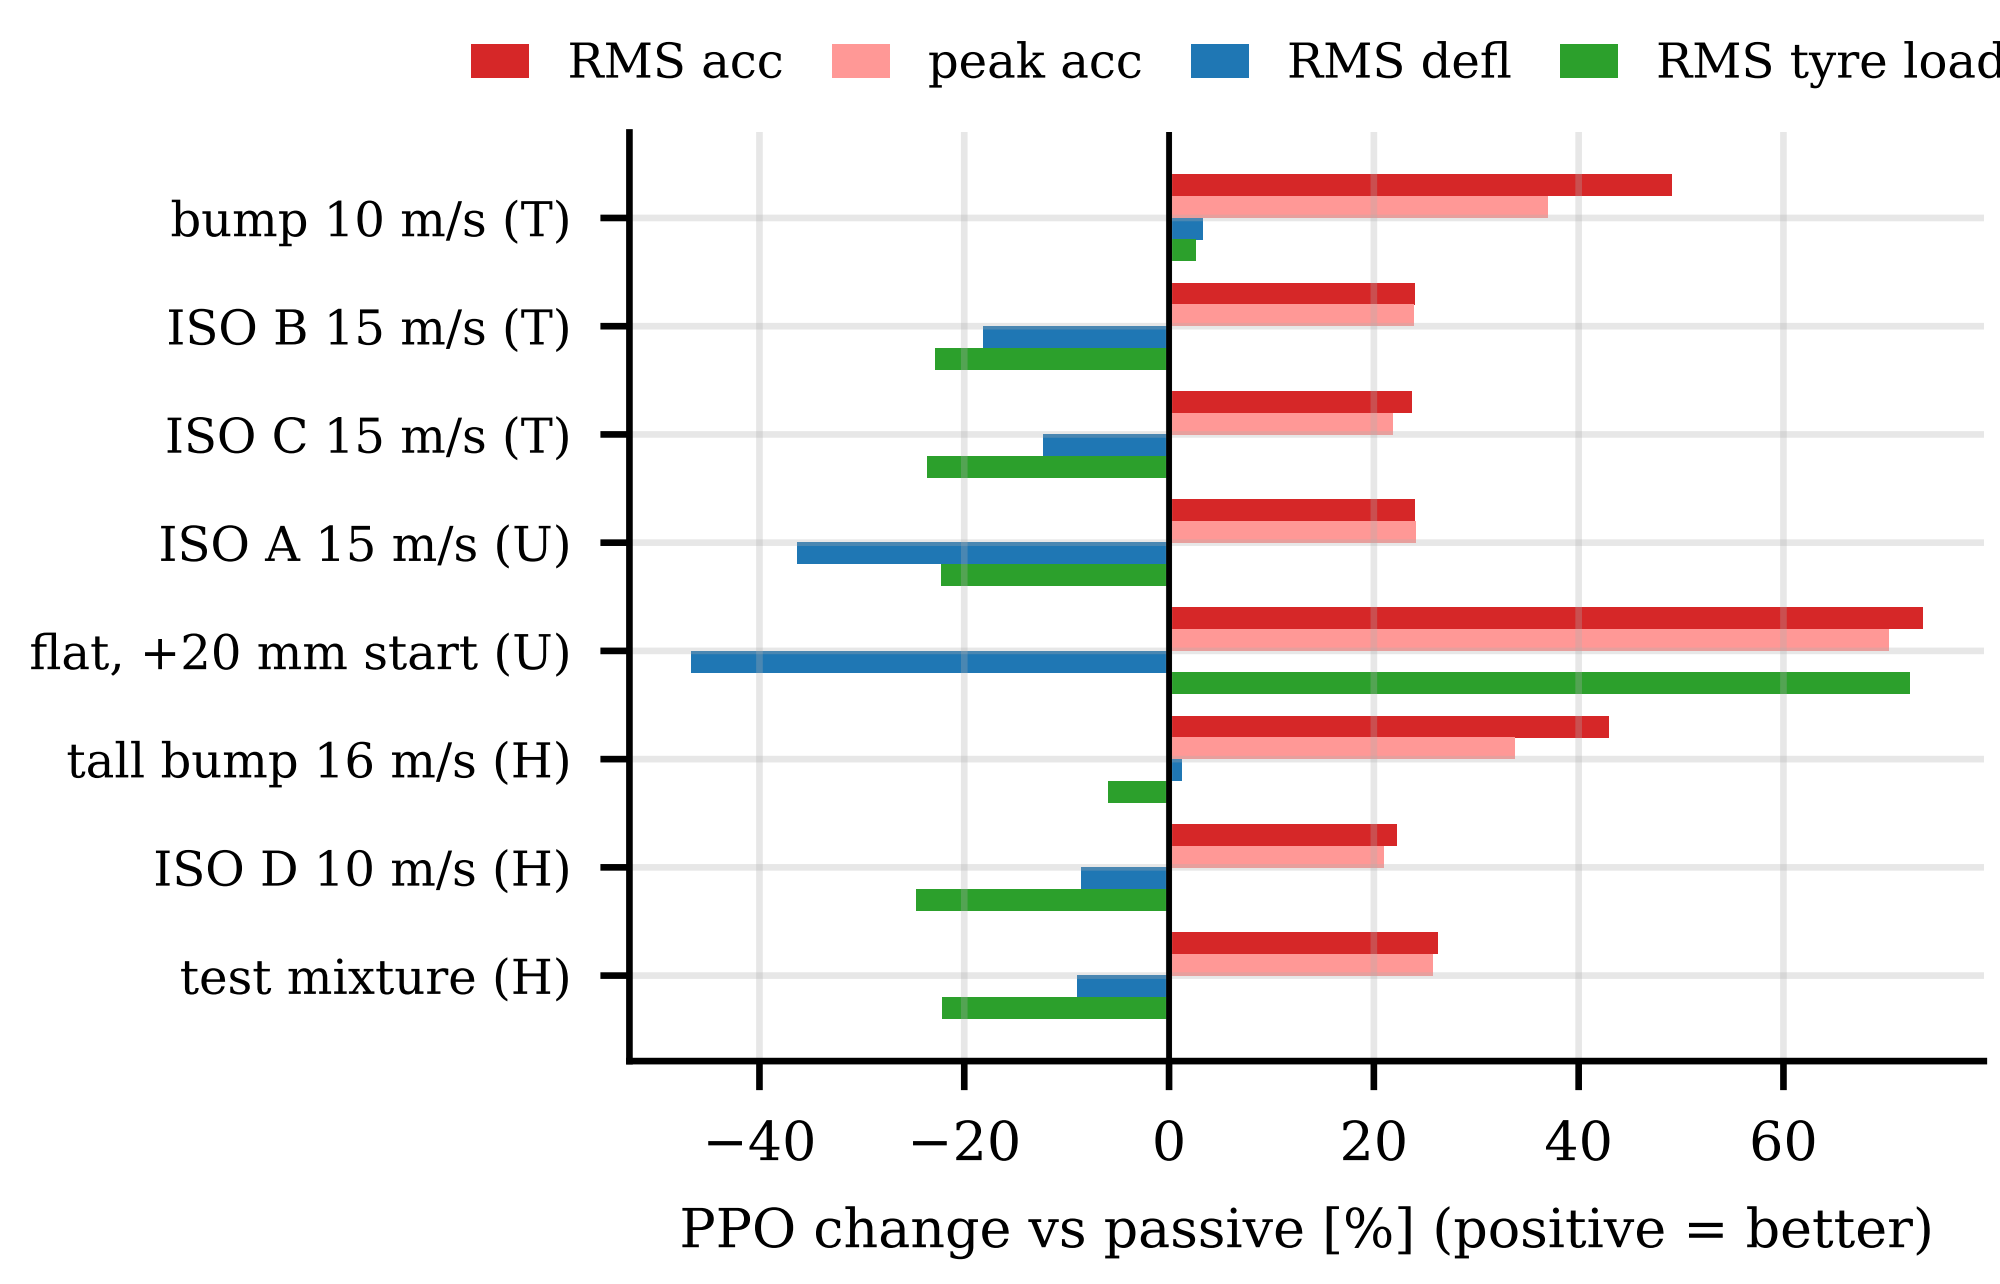
RMS acc
peak acc
RMS defl
RMS tyre load
bump 10 m/s (T)
ISO B 15 m/s (T)
ISO C 15 m/s (T)
ISO A 15 m/s (U)
flat, +20 mm start (U)
tall bump 16 m/s (H)
ISO D 10 m/s (H)
test mixture (H)
−40
−20
0
20
40
60
PPO change vs passive [%] (positive = better)