


REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
①				
②				

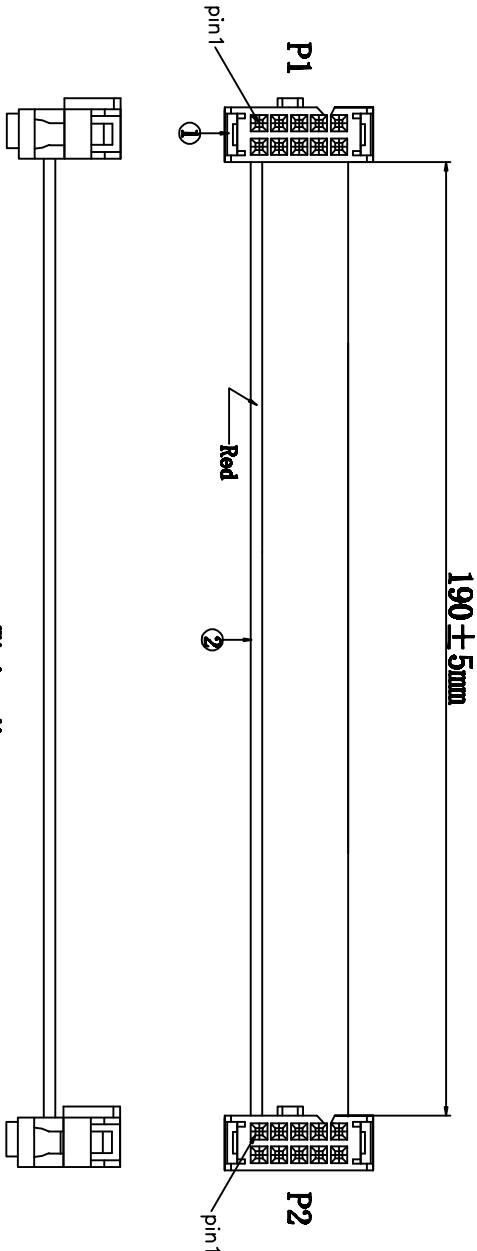

Wiring diagram:

- Note:
1. 100% Short circuit test;
 2. Test voltage: DC300V;
 3. Insulation resistance: 10MΩ
- | | | | | | | | | |
|----|---|---|---|---|---|---|---|----|
| P1 | 1 | 2 | 3 | 4 | 5 | 6 | 9 | 10 |
| | | | | | | | | |
- | | | | | | | | | |
|----|---|---|---|---|---|---|---|----|
| P2 | 1 | 2 | 3 | 4 | 5 | 6 | 9 | 10 |
| | | | | | | | | |

2	Wire	2651 28AWG Cable 7/0.10mm Tinned copper Gray	XXmm
1	Plastic shell	2.54IDC-10P Black	2PCS
No.	Name	Model	Qty.

APPROVALS		DATE	
DRAWN			
CHECKED			
ISSUED			
General Tolerance Reference GB/T 1804-m		PART NAME	
DRAWING NO. 400306096- Display Line		MATERIAL	
SIZE M1		SCALE 1:2	
UNIT: MM		REV. A	
SHEET 1 OF 1			

创想
SHENZHEN
SHENZHEN CREALITY 3D TECHNOLOGY CO., LTD

深圳市创想三维科技有限公司