

масло лимона


Sensor response profile and calculated signal features

DEVICE eNose	ОБЪЕКТ масло лимона
MEASUREMENT масло лимона	RECORDED AT 05 Jul 2026 · 16:53:39

8 SENSORS	300 SAMPLES	299 s DURATION
--------------	----------------	-------------------

01 Sensor response

Frequency shift from each sensor baseline across the measurement window.

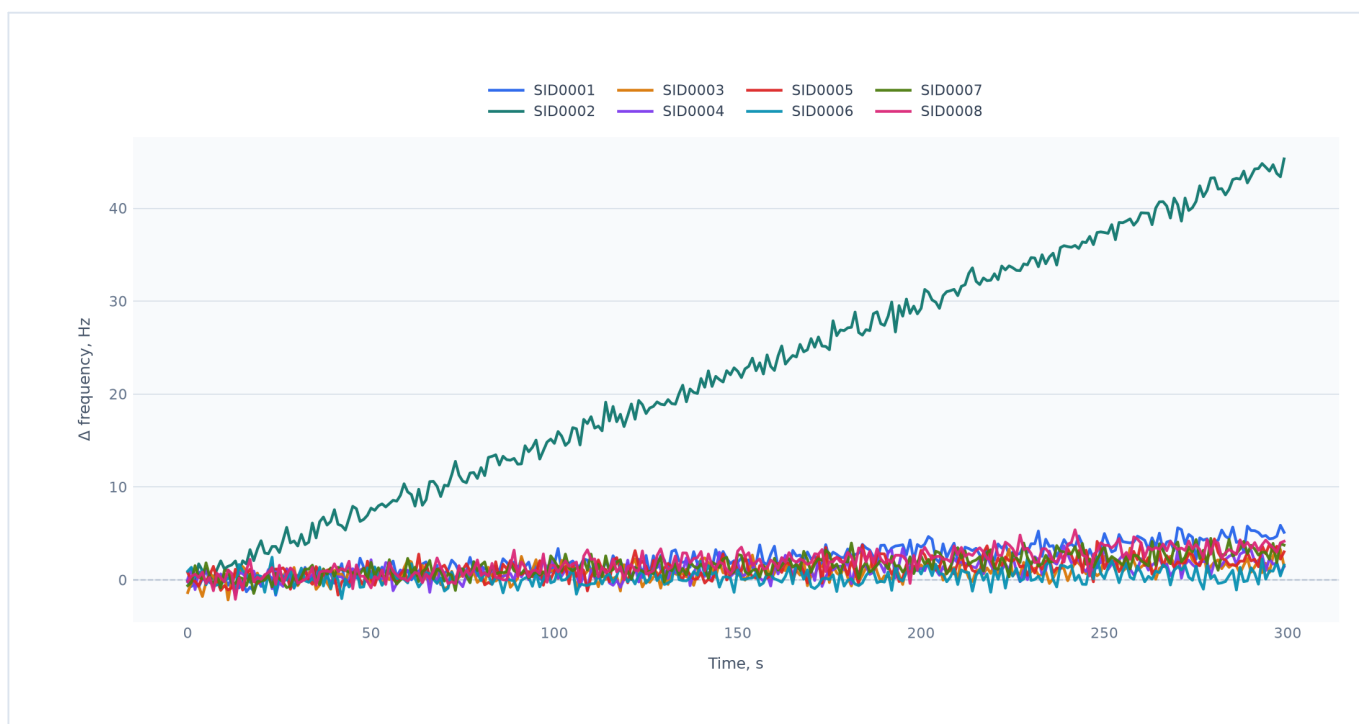

Signal descriptors calculated from baseline-corrected values (Δf).

SENSOR	Peak $ \Delta f $ Hz	Signed peak Hz	Time to peak s	Final Δf Hz	AUC Hz·s	Initial slope Hz/s	Peak – final Hz	Noise σ Hz
SID0001	5.880	5.880	298.000	5.130	670.465	0.010	0.750	1.053
SID0002	45.310	45.310	299.000	45.310	6,669.8	0.146	0.000	1.046
SID0003	3.510	3.510	297.000	1.490	248.705	0.093	2.020	1.041
SID0004	3.670	3.670	239.000	1.430	311.915	-0.031	2.240	1.094
SID0005	4.420	4.420	280.000	3.020	375.785	-0.023	1.400	1.198
SID0006	2.480	2.480	248.000	1.600	102.970	-0.063	0.880	1.172
SID0007	4.470	4.470	279.000	3.750	461.090	0.041	0.720	1.123
SID0008	5.400	5.400	242.000	4.160	573.080	0.039	1.240	1.097

AUC is the signed area under the Δf curve. Noise σ is calculated from successive signal differences.

03 · INTERPRETATION

Some interpretation