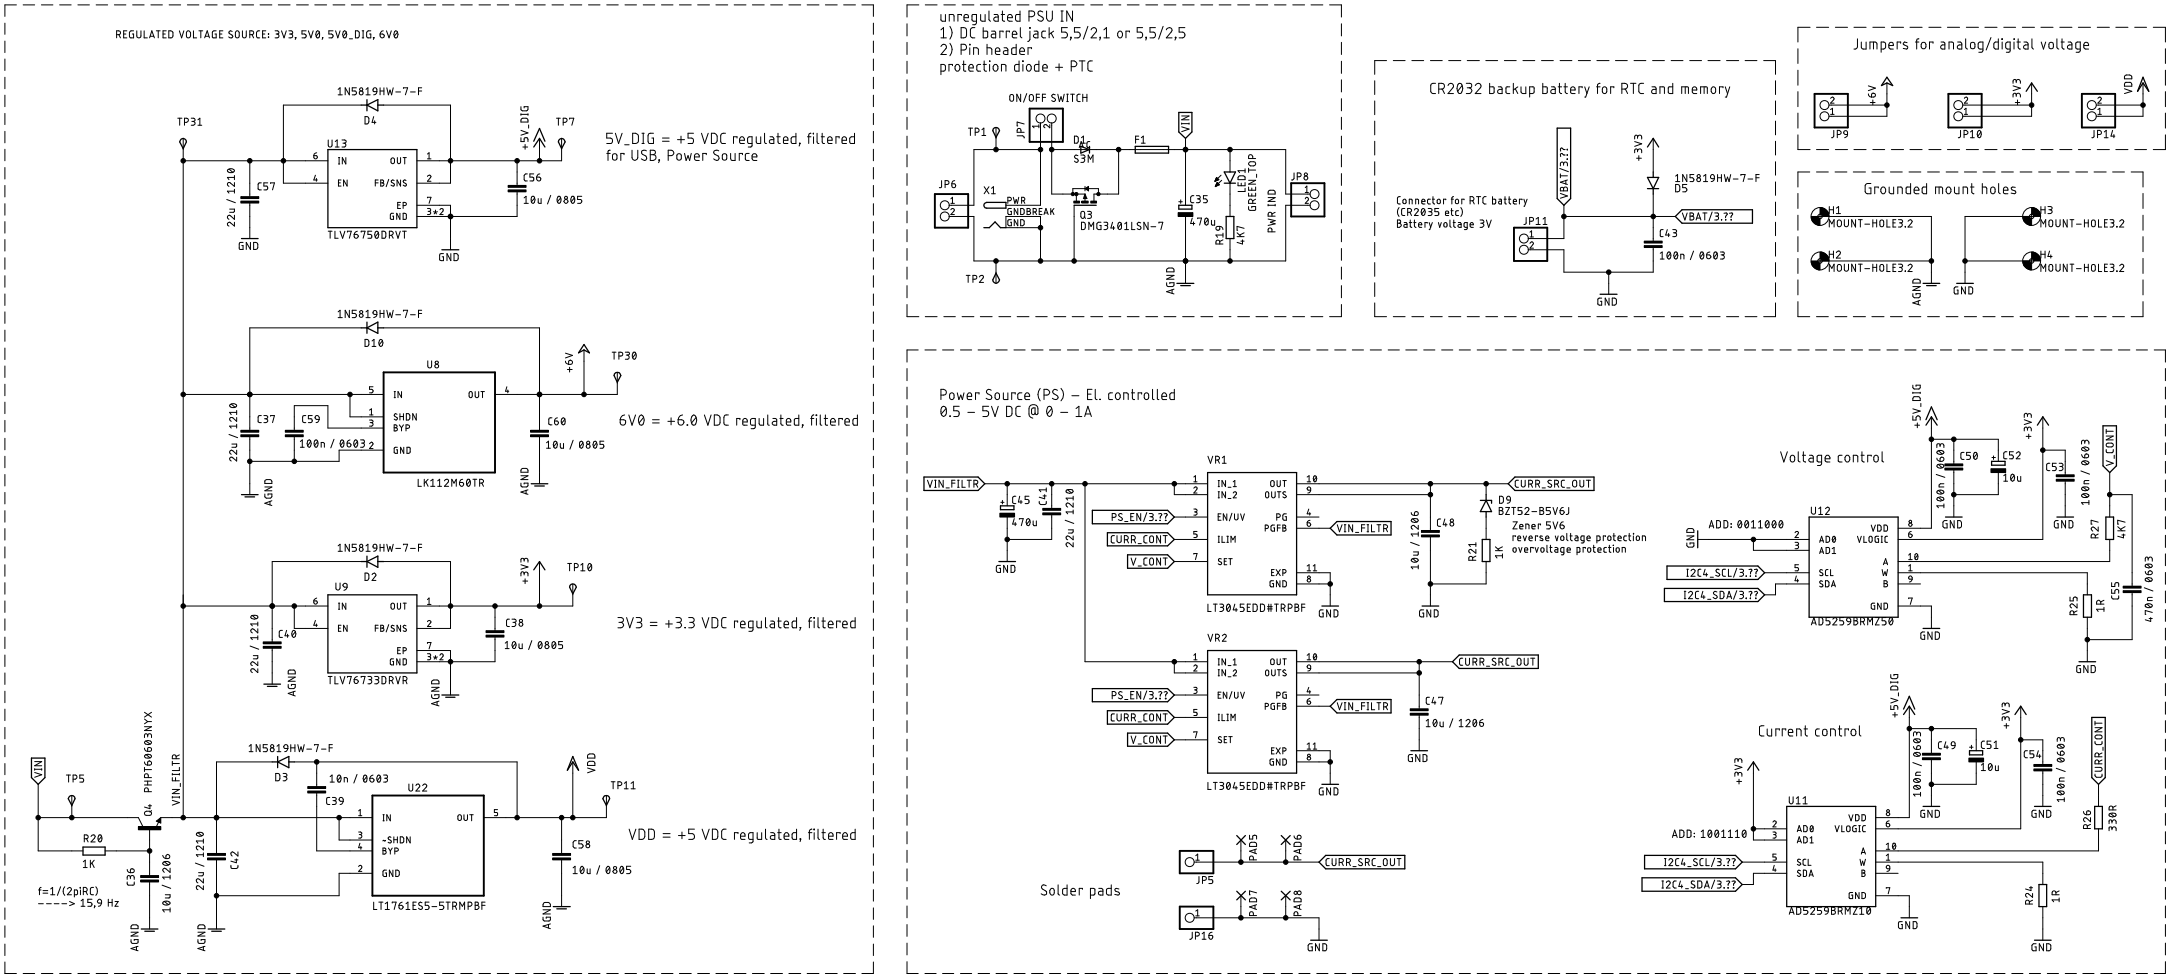
REGULATED VOLTAGE SOURCE: 3V3, 5V0, 5V0_DIG, 6V0
5V_DIG = +5 VDC regulated, filtered for USB, Power Source
6V0 = +6.0 VDC regulated, filtered
3V3 = +3.3 VDC regulated, filtered
VDD = +5 VDC regulated, filtered
f=1/(2piRC)
----> 15,9 Hz
unregulated PSU IN
1) DC barrel jack 5,5/2,1 or 5,5/2,5
2) Pin header
protection diode + PTC
ON/OFF SWITCH
CR2032 backup battery for RTC and memory
Connector for RTC battery
(CR2035 etc)
Battery voltage 3V
Jumpers for analog/digital voltage
Grounded mount holes
Power Source (PS) – El. controlled
0.5 – 5V DC @ 0 – 1A
Voltage control
Current control
Solder pads
LT3045EDD#TRPBF
LT1761ES5-5TRMPBF
TLV76750DRVT
TLV76733DRVR
LK112M60TR
AD5259BRMZ50
AD5259BRMZ10
BZT52-B5V6J
Zener 5V6
reverse voltage protection
overvoltage protection