


- Power
- GND
- Serial Pin
- External I/O Pin
- Control



Correct Board Mounting

RGB LED must be at the top of the board, above the USB connector

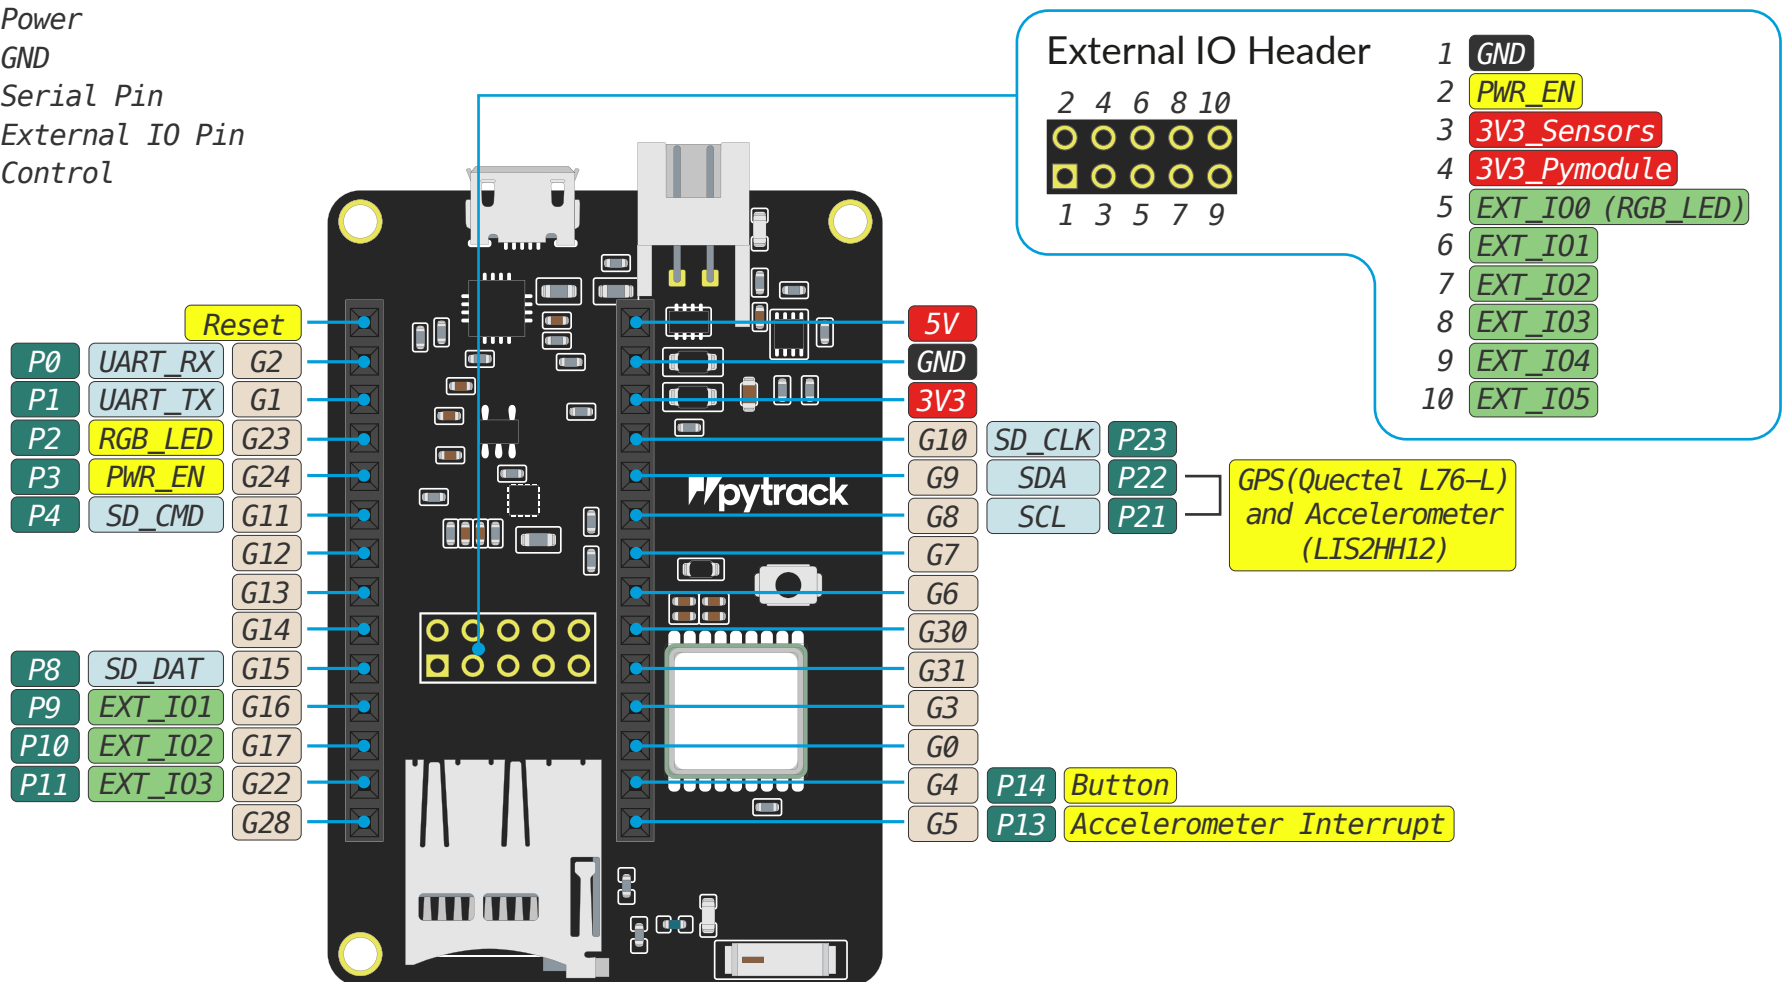