


(a) Foreground with uplink load

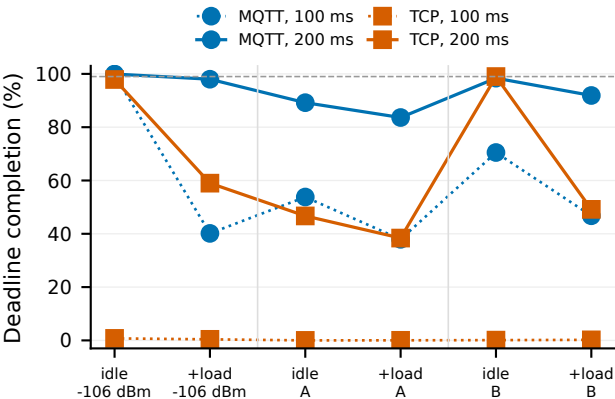

(b) Requested and observed packet marking

Requested label

default / 5qi-mapped

Observed IPv4 TOS

0x0 / 0x0