# Bathroom Concept: 5. Heating cable on the membrane

Bathroom renovation · Bathroom (no site address recorded) · pack 05 of 9 · printed 2026-10-08 · 10 A3 pages

**PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE**

The proposed in-screed heating cable route, laid by the owner and tested by the electrician before the screed. The specification sheet is the compact one-page form: route points and cable levels on one row each. Proposed, pending manufacturer and electrician review.

**For:** Electrician.


## How to read these sheets

- Dimensions in millimetres. Every figure carries its status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown. Treat anything not SC or M as a figure to check on site.
- Elevations look at a wall from inside the room; end A is on the left. Wall fittings are set out from the wall's finished (tile) face: centreline along from the return wall's face at A, bottom above the finished floor.
- F1, F2… are the fixtures (fixture schedule in 00-overview.pdf); F11.2 is service point 2 of fixture 11. "?" means not known yet and never drawn.
- Scale 1:20 at A3 on the plans and elevations. Print at 100% ("actual size"), never "fit to page".
- A wall elevation is left out when nothing new is set out on that wall at this stage; the plan and specification still cover the stage. Open decisions and what is still to measure: 00-overview.pdf.

Generated from the project model by npm run printables; the drawings are the same exports saved in the repository (shots/stage-pack, shots/sample-sheets).

## In this pack


| Sheet | Page |
|---|---|
| Plan | 2 |
| Specification | 3 |
| Heating review | 4–10 |

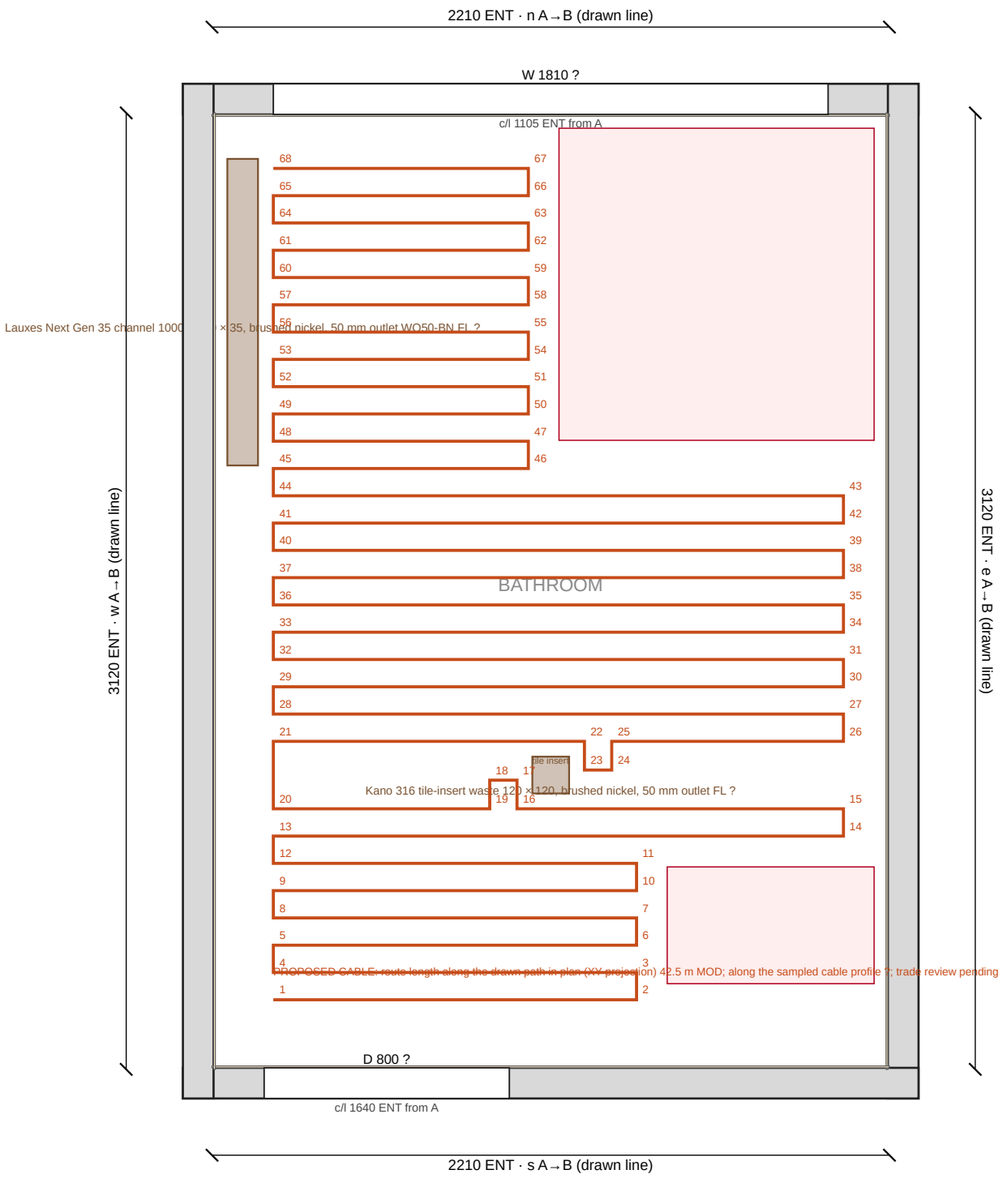


Scale 1:20 at A3. Orientation not recorded. Dimensions in mm.

## Stage: 5. Heating cable on the membrane

Shows 16 element(s) of the one project model; everything else is hidden, not removed.

Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived · ENT entered · DEF default · ? unknown

Not modelled, never drawn: pipe and cable runs between service points.

## Wall faces and layers (mm from drawn line)

Wall n right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall e right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall s right: Villaboard 6 mm: thickness 6 P · outer face position 11 E
Wall w right: Villaboard 6 mm: thickness 6 P · outer face position 11 E

## Floor (mm above datum)

Bathroom floor: substrate: substrate concrete slab, framed in place (house on piers) ENT · substrate top level -120 E · finished level target 0 P · Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target 108.5 E
Bathroom floor: Membrane (Bastion liquid polyurethane): thickness 1.5 E · top level -118.5 E

## Drainage / heating

Bathroom: proposed heating cable: manufacturer ? · model SCK0765L ENT · product length (m) 42.5 PUB · rated output (W) 765 PUB · derived spacing min 87.1 DER · derived spacing max 120 DER · plan route length (m) 42.5 MOD · spatial route length, sampled profile (m) ?
Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste ? · drain product Lauxes Next Gen 35 Custom 1000, brushed nickel NAM · grate 1000 × 100 M
Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste ? · drain product Kano 316 Tile Insert Waste 120×120, brushed nickel NAM · grate 120 × 120 tile insert M

## Unresolved in this view (15)

- Bathroom: proposed heating cable: heating_signoff: Proposed route only: manufacturer and licensed electrician must review cable identity, length, output, bend radius, spacing, exclusions, cover, sensor, cold tails, waterproofing and electrical installation. No compliance approval. No electrical approval is implied.
- Bathroom: proposed heating cable: heating_product_unresolved: sample-sck0765l-carton is not an accepted heating-cable in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- Bathroom: proposed heating cable: heating_product_unresolved: sample-mwd5-1999-cbp3 is not an accepted thermostat in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- Bathroom: proposed heating cable: heating_metadata_unknown: Unknown cable/product information: manufacturer, minSpacing, depthFromBottom.
- Bathroom: proposed heating cable: heating_route_length_unknown: Spatial cable length and confirmed product-length balance remain unknown until the whole route has resolved screed levels and cable height; the plan projection is modelled, not cable length.
- Bathroom: proposed heating cable: heating_ip_location: Thermostat printed IP21 (published, carton label — Photographed MWD5-1999-CBP3 carton label: housing IP21) vs planned location outside a wet room (Hallway wall outside the bathroom, next to the light switch (right as you look into the bathroom), 1000 mm off the floor. Not drawn on this plan.; Owner, 5 Oct 2026; height raised to 1000 mm, 7 Oct 2026). This check does not decide zone suitability; the electrician decides. No compliance approval.
- Bathroom: proposed heating cable: heating_depth_unknown: Cable section remains unresolved until screed layer, floor levels and cable height (bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top) are entered.
- Bathroom: proposed heating cable: manufacturer unknown; printed as "?" (missing manufacturer).

… 7 more: see the specification sheet

**Project: Bathroom Concept**

Site / room: Bathroom (no site address recorded)

Stage diagram: 5. Heating cable on the membrane

Scale 1:20 @ A3 · Exported 2026-10-08 · not a revision of A-01

Prepared by: ? · Plan: Bathroom Concept

**PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE**

## Specification: 5. Heating cable on the membrane

Project: Bathroom Concept · Site / room: Bathroom (no site address recorded) · Prepared by: ? · Plan: Bathroom Concept
Exported 2026-10-08 · not a revision of A-01

**PROPOSED · FOR TRADE REVIEW · NOT AS-BUILT · NOT A COMPLIANCE CERTIFICATE**

Lists exactly the 16 element(s) visible in this stage view of the one project model. Lengths in mm. Status: SC site-confirmed · M measured · PUB published · P proposed · E estimated · DER derived (converted, not published) · ENT entered (not site-confirmed) · DEF default placeholder · ? unknown. A "?" value is not known and must not be read as a measurement. Not modelled, so never listed: pipe and cable runs between service points (only the points are modelled).

| Property | Value | Status | Measured from | Source | Missing |
|---|---|---|---|---|---|
| **Walls as drawn (line, length, body)** | | | | | |
| **Wall n** | | | | | |
| length A→B along drawn line (mm) | 2210 | ENT entered | | | |
| thickness (mm) | 100 | ? unknown | | | |
| height (mm) | 2700 | ? unknown | | | |
| **Wall e** | | | | | |
| length A→B along drawn line (mm) | 3120 | ENT entered | | | |
| thickness (mm) | 100 | ? unknown | | | |
| height (mm) | 2700 | ? unknown | | | |
| **Wall s** | | | | | |
| length A→B along drawn line (mm) | 2210 | ENT entered | | | |
| thickness (mm) | 100 | ? unknown | | | |
| height (mm) | 2700 | ? unknown | | | |
| **Wall w** | | | | | |
| length A→B along drawn line (mm) | 3120 | ENT entered | | | |
| thickness (mm) | 100 | ? unknown | | | |
| height (mm) | 2700 | ? unknown | | | |
| **Wall board (e.g. Villaboard)** | | | | | |
| **Wall n right: Villaboard 6 mm** | | | | | |
| kind | board | ENT entered | | | |
| thickness (mm) | 6 | P proposed | | [1] | |
| outer face position (mm) | 11 | E estimated | [2] | | |
| **Wall e right: Villaboard 6 mm** | | | | | |
| kind | board | ENT entered | | | |
| thickness (mm) | 6 | P proposed | | [1] | |
| outer face position (mm) | 11 | E estimated | [3] | | |
| **Wall s right: Villaboard 6 mm** | | | | | |
| kind | board | ENT entered | | | |
| thickness (mm) | 6 | P proposed | | [1] | |
| outer face position (mm) | 11 | E estimated | [4] | | |
| **Wall w right: Villaboard 6 mm** | | | | | |
| kind | board | ENT entered | | | |
| thickness (mm) | 6 | P proposed | | [1] | |
| outer face position (mm) | 11 | E estimated | [5] | | |
| **Windows** | | | | | |
| **Window window_n on wall_n** | | | | | |
| width (mm) | 1810 | ? unknown | | | |
| sill above floor (mm) | 1520 | ? unknown | | | |
| height (mm) | 600 | ? unknown | | | |
| centre from end A (mm) | 1105 | ENT entered | [6] | | |
| **Doors** | | | | | |
| **Door door_s on wall_s** | | | | | |
| width (mm) | 800 | ? unknown | | | |
| height (mm) | 1900 | ? unknown | | | |
| centre from end A (mm) | 1640 | ENT entered | [7] | | |
| **Rooms (outline label)** | | | | | |
| **Room Bathroom** | | | | | |
| size w × h (mm) | 2110 × 3020 | ENT entered | | | |
| **Floor substrate and datum** | | | | | |
| **Bathroom floor: substrate** | | | | | |
| substrate | [8] | ENT entered | | | |
| substrate top level (mm) | -120 | E estimated | [9] | [10] | |
| finished level target (mm) | 0 | P proposed | [9] | [11] | |
| [12] | 108.5 | E estimated | substrate top to target | | |
| **Floor waterproofing** | | | | | |
| **Bathroom floor: Membrane (Bastion liquid polyurethane)** | | | | | |
| kind | waterproofing | ENT entered | | | |
| thickness (mm) | 1.5 | E estimated | | [13] | |
| top level (mm) | -118.5 | E estimated | [9] | | |
| **Proposed in-screed heating cable** | | | | | |
| **Bathroom: proposed heating cable** | | | | | |
| manufacturer | ? | ? unknown | | | manufacturer |
| model | SCK0765L | ENT entered | | [14] | |
| productSource | SCK0765L carton label | ENT entered | | | |
| requirements | [15] | ENT entered | | | |
| product length (m) | 42.5 | PUB published | fixture-end | [16] | |
| rated output (W) | 765 | PUB published | | [17] | |
| coverage min (m²) | 3.7 | PUB published | | [18] | |
| coverage max (m²) | 5.1 | PUB published | | [19] | |
| derived spacing min (mm) | 87.1 | DER derived | | [20] | |
| derived spacing max (mm) | 120 | DER derived | | [21] | |
| cable rated current (A) | 3.2 | PUB published | | [22] | |
| cable rated voltage (V) | 240 | PUB published | | [23] | |
| thermostat switching current (A) | 16 | PUB published | | [24] | |
| thermostat voltage min (V) | 100 | PUB published | | [25] | |
| thermostat voltage max (V) | 240 | PUB published | | [25] | |
| thermostat printed IP | IP21 | PUB published | | [26] | |
| minSpacing (mm) | ? | ? unknown | | | [27] |
| edgeClearance (mm) | 100 | PUB published | | [28] | |
| depthFromBottom (mm) | ? | ? unknown | | | [29] |
| cable depth datum | [30] | NAM named | | | |
| wall setback datum | [31] | NAM named | | | |
| plan route length (m) | 42.5 | MOD modelled | | [32] | |
| spatial route length, sampled profile (m) | ? | ? unknown | | [33] | [33] |
| remaining confirmed product length (m) | ? | ? unknown | | [34] | [35] |
| length basis | [36] | P proposed | | | |
| spacing formula | [37] | DER derived | | | |
| zone ids | bathroom | P proposed | | | |
| available zone area (m²), not heat coverage | 5.0685 | P proposed | | | |
| minimum non-adjacent spacing (mm) | 89 | MOD modelled | | | |
| installation approval | [38] | P proposed | | | |
| route points 1–68 x / y (mm) | [39] | P proposed | plan origin | | |
| [40] | ? | ? unknown | [9] | | [41] |
| keep-out Bath x / y / w / h (mm) | 1082 / 0 / 1028 / 1018 | ENT entered | | [42] | |
| keep-out Toilet x / y / w / h (mm) | 1435 / 2409.5 / 675 / 381 | ENT entered | | [43] | |
| open item codes (see Unresolved) | [44] | P proposed | | | |
| **Floor wastes** | | | | | |
| **Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN** | | | | | |
| kind | linear | ENT entered | | | |
| finished level at waste (mm) | ? | ? unknown | [9] | | [45] |
| drain product | [46] | NAM named | | | |
| grate (mm) | 1000 × 100 | M measured | | | |
| **Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet** | | | | | |
| kind | point | ENT entered | | | |
| finished level at waste (mm) | ? | ? unknown | [9] | | [45] |
| drain product | [47] | NAM named | | | |
| grate (mm) | 120 × 120 tile insert | M measured | | | |

### References (47): full text of the cells printed as [n] above


1. owner's tile and build-up choices
2. drawn line of wall_n, toward right side
3. drawn line of wall_e, toward right side
4. drawn line of wall_s, toward right side
5. drawn line of wall_w, toward right side
6. wall_n end A, along the drawn line
7. wall_s end A, along the drawn line
8. concrete slab, framed in place (house on piers)
9. existing floor surface (current tile top)
10. owner: about 120 mm below the current tile, seen from underneath; confirm after demolition
11. finished tile back at the current tile level, so the doorway stays flush (to confirm)
12. Tiler's screed (heating cable inside) + Tiler's adhesive together, to reach the target (mm)
13. owner, 7 Oct 2026: liquid polyurethane, about 1.5 mm
14. product identity (submission text, not a published figure)
15. Owner lays it on the cured membrane, before the tiler's screed, fixed with Ametalin tape (polyurethane membrane; owner holds 100 m) at the run ends and every 1–1.5 m, per the Coldbuster in-screed manual (July 2023, taken as this cable's manual: it does not name SCK0765L). The electrician tests it before and after the screed (the manual's p. 16 record, for the warranty), wires the thermostat on an RCD circuit, and runs the floor sensor's conduit. Owner, 5 Oct 2026: the thermostat end is at the bathroom doorway, where the floor beyond is timber; the 3.0 m cold tail (manual; the manual's cable is Ø6 mm) goes down through it to under the house (on piers). Owner, 7 Oct 2026: the cable runs under the shower (the electrician approved it) but not under the bath, so the heated area stays within the 5.1 m² that 42.5 m covers. Owner, 8 Oct 2026: no cable under the toilet (its pan is screwed to the floor through brackets); the cable does run under the vanity. Proposed loop: east–west runs, 100 mm off the walls, the bath and the toilet (manual, p. 6), 150 mm off the left wall to clear the linear drain, routed round the Kano waste (manual, p. 10); 89 mm throughout (owner, 8 Oct 2026: the cable kept clear of the toilet goes into closer runs and round the Kano waste), inside the derived coverage/length range (3.7–5.1 m² / 42.5 m ≈ 87–120 mm) and the Coldbuster manual's 70–120 mm for bathrooms (p. 7); two hooks beside the Kano waste take up the rest so the loop uses exactly 42.5 m. Modelling choice, not a manufacturer or code spacing requirement. Plan length is exactly 42.5 m, equal to the published heated length (zero slack): any resolved fall makes the spatial route exceed 42.5 m once screed levels resolve.
16. carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m
17. carton label — SCK0765L in-screed heating cable carton: 765 W
18. carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², minimum
19. carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², maximum
20. coverage area / cable length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, minimum 3.7 m² (published, carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², minimum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m).
21. coverage area / cable length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, maximum 5.1 m² (published, carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², maximum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m).
22. carton label — SCK0765L in-screed heating cable carton: 3.2 A
23. carton label — SCK0765L in-screed heating cable carton: 240 V AC
24. carton label — Photographed MWD5-1999-CBP3 carton label: 16 A
25. carton label — Photographed MWD5-1999-CBP3 carton label: 100–240 V AC
26. carton label — Photographed MWD5-1999-CBP3 carton label: housing IP21
27. minSpacing (mm)
28. Coldbuster In Screed Heater Kit Installation Manual (July 2023), p. 6: mark 100–200 mm from the walls; Coldbuster recommends 100 mm. Taken as this cable's manual: it does not name SCK0765L
29. depthFromBottom (mm)
30. bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top
31. selected zone boundary as stored (sample room rectangle = existing internal surface). Intended trade datum is the finished wall face; that conversion is not applied.
32. XY projection of the drawn path. Modelled, not published cable length.
33. Sampled cable profile. Modelled; unknown until screed levels and cable height resolve. Not published cable length.
34. confirmed product length − modelled spatial route length · Balance stays unknown until confirmed product length and the whole spatial profile are both numeric.
35. Balance stays unknown until confirmed product length and the whole spatial profile are both numeric.
36. Plan route length is the XY projection (modelled). Spatial route length follows the sampled cable profile (modelled) and drives confirmed product balance only when the whole profile resolves. Product length comes from the referenced brief. Unsupplied cold tails and connections are excluded.
37. coverage area / cable length: Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement.
38. Pending manufacturer / electrician review. No electrical or compliance approval.
39. 1: 150 / 2843 P; 2: 1335 / 2843 P; 3: 1335 / 2754 P; 4: 150 / 2754 P; 5: 150 / 2665 P; 6: 1335 / 2665 P; 7: 1335 / 2576 P; 8: 150 / 2576 P; 9: 150 / 2487 P; 10: 1335 / 2487 P; 11: 1335 / 2398 P; 12: 150 / 2398 P; 13: 150 / 2309 P; 14: 2010 / 2309 P; 15: 2010 / 2220 P; 16: 945 / 2220 P; 17: 945 / 2126.5 P; 18: 856 / 2126.5 P; 19: 856 / 2220 P; 20: 150 / 2220 P; 21: 150 / 2000 P; 22: 1165 / 2000 P; 23: 1165 / 2093.5 P; 24: 1254 / 2093.5 P; 25: 1254 / 2000 P; 26: 2010 / 2000 P; 27: 2010 / 1911 P; 28: 150 / 1911 P; 29: 150 / 1822 P; 30: 2010 / 1822 P; 31: 2010 / 1733 P; 32: 150 / 1733 P; 33: 150 / 1644 P; 34: 2010 / 1644 P; 35: 2010 / 1555 P; 36: 150 / 1555 P; 37: 150 / 1466 P; 38: 2010 / 1466 P; 39: 2010 / 1377 P; 40: 150 / 1377 P; 41: 150 / 1288 P; 42: 2010 / 1288 P; 43: 2010 / 1199 P; 44: 150 / 1199 P; 45: 150 / 1110 P; 46: 982 / 1110 P; 47: 982 / 1021 P; 48: 150 / 1021 P; 49: 150 / 932 P; 50: 982 / 932 P; 51: 982 / 843 P; 52: 150 / 843 P; 53: 150 / 754 P; 54: 982 / 754 P; 55: 982 / 665 P; 56: 150 / 665 P; 57: 150 / 576 P; 58: 982 / 576 P; 59: 982 / 487 P; 60: 150 / 487 P; 61: 150 / 398 P; 62: 982 / 398 P; 63: 982 / 309 P; 64: 150 / 309 P; 65: 150 / 220 P; 66: 982 / 220 P; 67: 982 / 131 P; 68: 150 / 131 P
40. cable level at 197 sampled points along plan route (mm)
41. plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness, plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level)
42. Owner, 7 Oct 2026: floor under the bath left unheated so the heated area stays within the 5.1 m² the 42.5 m cable covers
43. Owner, 8 Oct 2026: no cable under the toilet (its pan is screwed to the floor through brackets); cable stays under the vanity
44. heating_signoff, heating_product_unresolved, heating_product_unresolved, heating_metadata_unknown, heating_route_length_unknown, heating_ip_location, heating_depth_unknown
45. finished level at waste (mm)
46. Lauxes Next Gen 35 Custom 1000, brushed nickel
47. Kano 316 Tile Insert Waste 120×120, brushed nickel

### Unresolved in this view (15)

- Bathroom: proposed heating cable: heating_signoff: Proposed route only: manufacturer and licensed electrician must review cable identity, length, output, bend radius, spacing, exclusions, cover, sensor, cold tails, waterproofing and electrical installation. No compliance approval. No electrical approval is implied.
- Bathroom: proposed heating cable: heating_product_unresolved: sample-sck0765l-carton is not an accepted heating-cable in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- Bathroom: proposed heating cable: heating_product_unresolved: sample-mwd5-1999-cbp3 is not an accepted thermostat in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- Bathroom: proposed heating cable: heating_metadata_unknown: Unknown cable/product information: manufacturer, minSpacing, depthFromBottom.
- Bathroom: proposed heating cable: heating_route_length_unknown: Spatial cable length and confirmed product-length balance remain unknown until the whole route has resolved screed levels and cable height; the plan projection is modelled, not cable length.
- Bathroom: proposed heating cable: heating_ip_location: Thermostat printed IP21 (published, carton label — Photographed MWD5-1999-CBP3 carton label: housing IP21) vs planned location outside a wet room (Hallway wall outside the bathroom, next to the light switch (right as you look into the bathroom), 1000 mm off the floor. Not drawn on this plan.; Owner, 5 Oct 2026; height raised to 1000 mm, 7 Oct 2026). This check does not decide zone suitability; the electrician decides. No compliance approval.
- Bathroom: proposed heating cable: heating_depth_unknown: Cable section remains unresolved until screed layer, floor levels and cable height (bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top) are entered.
- Bathroom: proposed heating cable: manufacturer unknown; printed as "?" (missing manufacturer).
- Bathroom: proposed heating cable: minSpacing (mm) unknown; printed as "?" (missing minSpacing (mm)).
- Bathroom: proposed heating cable: depthFromBottom (mm) unknown; printed as "?" (missing depthFromBottom (mm)).
- Bathroom: proposed heating cable: spatial route length, sampled profile (m) unknown; printed as "?" (missing Sampled cable profile. Modelled; unknown until screed levels and cable height resolve. Not published cable length.).
- Bathroom: proposed heating cable: remaining confirmed product length (m) unknown; printed as "?" (missing Balance stays unknown until confirmed product length and the whole spatial profile are both numeric.).
- Bathroom: proposed heating cable: cable level at 197 sampled points along plan route (mm) unknown; printed as "?" (missing plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness, plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level)).
- Bathroom: Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).
- Bathroom: Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet: finished level at waste (mm) unknown; printed as "?" (missing finished level at waste (mm)).

# Bathroom · proposed in-screed heating

Planning and communication only. Manufacturer / electrician approval pending; not an electrical installation or compliance approval.

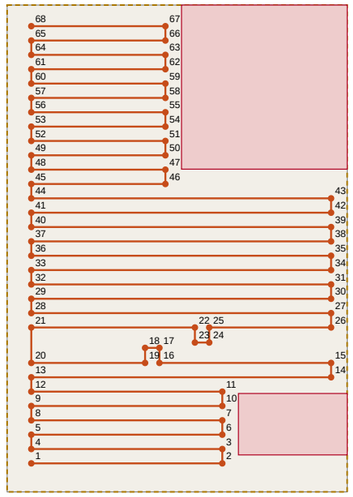


Plan route length: 42.5 m · Spatial route length (sampled profile): unknown · selected zone footprint: 6.3722 m² · zone area excluding entered keep-outs: 5.0685 m². Coverage-range check uses availableArea (zone footprints excluding entered keep-outs), the same resolver as evidence. That area is not verified heat coverage. Plan route length is the XY projection (modelled). Spatial route length follows the sampled cable profile (modelled) and drives confirmed product balance only when the whole profile resolves. Product length comes from the referenced brief. Unsupplied cold tails and connections are excluded.

Minimum non-adjacent spacing: 89 mm · boundary clearance: 100 mm · keep-out clearance: 100 mm · remaining confirmed cable length: unknown.

Cable depth datum: bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top. Wall setback datum: selected zone boundary as stored (sample room rectangle = existing internal surface). Intended trade datum is the finished wall face; that conversion is not applied.. coverage area / cable length: Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement.

| Product / constraint | Value | Kind / source |
|---|---|---|
| manufacturer | unknown | unknown |
| model | SCK0765L | product identity (submission text, not a published figure) |
| productSource | SCK0765L carton label | User-entered text |
| requirements | Owner lays it on the cured membrane, before the tiler's screed, fixed with Ametalin tape (polyurethane membrane; owner holds 100 m) at the run ends and every 1–1.5 m, per the Coldbuster in-screed manual (July 2023, taken as this cable's manual: it does not name SCK0765L). The electrician tests it before and after the screed (the manual's p. 16 record, for the warranty), wires the thermostat on an RCD circuit, and runs the floor sensor's conduit. Owner, 5 Oct 2026: the thermostat end is at the bathroom doorway, where the floor beyond is timber; the 3.0 m cold tail (manual; the manual's cable is Ø6 mm) goes down through it to under the house (on piers). Owner, 7 Oct 2026: the cable runs under the shower (the electrician approved it) but not under the bath, so the heated area stays within the 5.1 m² that 42.5 m covers. Owner, 8 Oct 2026: no cable under the toilet (its pan is screwed to the floor through brackets); the cable does run under the vanity. Proposed loop: east–west runs, 100 mm off the walls, the bath and the toilet (manual, p. 6), 150 mm off the left wall to clear the linear drain, routed round the Kano waste (manual, p. 10); 89 mm throughout (owner, 8 Oct 2026: the cable kept clear of the toilet goes into closer runs and round the Kano waste), inside the derived coverage/length range (3.7–5.1 m² / 42.5 m ≈ 87–120 mm) and the Coldbuster manual's 70–120 mm for bathrooms (p. 7); two hooks beside the Kano waste take up the rest so the loop uses exactly 42.5 m. Modelling choice, not a manufacturer or code spacing requirement. Plan length is exactly 42.5 m, equal to the published heated length (zero slack): any resolved fall makes the spatial route exceed 42.5 m once screed levels resolve. | User-entered text |
| screedLayerId | floor_screed | User-entered text |
| Cable product length | 42.5 m · published · carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m | published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m · SCK0765L in-screed heating cable carton: heated length 42.5 m |
| Rated output | 765 W · published · carton label — SCK0765L in-screed heating cable carton: 765 W | published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: 765 W · SCK0765L in-screed heating cable carton: 765 W |
| Coverage area, minimum | 3.7 m² · published · carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², minimum | published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², minimum · SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², minimum |
| Coverage area, maximum | 5.1 m² · published · carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², maximum | published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², maximum · SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², maximum |

| | | |
|---|---|---|
| Derived spacing, minimum | 0.0871 m · derived · coverage area / cable length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, minimum 3.7 m² (published, carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², minimum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m). | derived · coverage area / cable length · coverage-area / cable-length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, minimum 3.7 m² (published, carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², minimum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m). |
| Derived spacing, maximum | 0.12 m · derived · coverage area / cable length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, maximum 5.1 m² (published, carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², maximum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m). | derived · coverage area / cable length · coverage-area / cable-length · Implied loop spacing if the published coverage range is spread along the published heated length. Derived, not a manufacturer spacing instruction and not a code requirement. Inputs: coverage area, maximum 5.1 m² (published, carton label — SCK0765L in-screed heating cable carton: coverage 3.7–5.1 m², maximum) and heated cable length 42.5 m (published, carton label — SCK0765L in-screed heating cable carton: heated length 42.5 m). |
| Cable rated current | 3.2 A · published · carton label — SCK0765L in-screed heating cable carton: 3.2 A | published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: 3.2 A · SCK0765L in-screed heating cable carton: 3.2 A |
| Cable rated voltage | 240 V · published · carton label — SCK0765L in-screed heating cable carton: 240 V AC | published · project-snapshot (unresolved) · carton label — SCK0765L in-screed heating cable carton: 240 V AC · SCK0765L in-screed heating cable carton: 240 V AC |
| Thermostat rated switching current | 16 A · published · carton label — Photographed MWD5-1999-CBP3 carton label: 16 A | published · project-snapshot (unresolved) · carton label — Photographed MWD5-1999-CBP3 carton label: 16 A · Photographed MWD5-1999-CBP3 carton label: 16 A |
| Thermostat rated voltage, minimum | 100 V · published · carton label — Photographed MWD5-1999-CBP3 carton label: 100–240 V AC | published · project-snapshot (unresolved) · carton label — Photographed MWD5-1999-CBP3 carton label: 100–240 V AC · Photographed MWD5-1999-CBP3 carton label: 100–240 V AC |
| Thermostat rated voltage, maximum | 240 V · published · carton label — Photographed MWD5-1999-CBP3 carton label: 100–240 V AC | published · project-snapshot (unresolved) · carton label — Photographed MWD5-1999-CBP3 carton label: 100–240 V AC · Photographed MWD5-1999-CBP3 carton label: 100–240 V AC |
| Plan route length | 42.5 m · modelled | modelled · drawn-path · XY projection of the drawn path. Modelled, not published cable length. |
| Spatial route length | unknown (unknown; Sampled cable profile. Modelled; unknown until screed levels and cable height resolve. Not published cable length.) | unknown · drawn-path · Sampled cable profile. Modelled; unknown until screed levels and cable height resolve. Not published cable length. |
| Remaining confirmed product length | unknown (unknown; Balance stays unknown until confirmed product length and the whole spatial profile are both numeric.) | unknown · confirmed product length − modelled spatial route length · product-minus-route · Balance stays unknown until confirmed product length and the whole spatial profile are both numeric. |
| Thermostat printed IP | IP21 · published | carton label — Photographed MWD5-1999-CBP3 carton label: housing IP21 |
| Entered minimum spacing | unknown | unknown · source not supplied |
| Entered clearance | 100 mm | published · Coldbuster In Screed Heater Kit Installation Manual (July 2023), p. 6: mark 100–200 mm from the walls; Coldbuster recommends 100 mm. Taken as this cable's manual: it does not name SCK0765L |
| Cable centre above screed bottom | unknown | unknown · source not supplied |

Selected zones: bathroom

Sampled profile at vertices, plane boundaries and interval midpoints. Cable centre is measured from the bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top. Entered screed thickness applies throughout the route; local screed top follows entered finished planes minus layers above. Trade must verify variable thickness, substrate and slope.

# Cable section unresolved — missing levels / cable height

| Plan route distance (m) | Plan x / y (mm) | Screed bottom / cable / top above datum | Basis or missing |
|---|---|---|---|
| 0 | 150 mm / 2843 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 0.375 | 525 mm / 2843 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 0.75 | 900 mm / 2843 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 0.9675 | 1117.5 mm / 2843 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 1.185 | 1335 mm / 2843 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 1.2295 | 1335 mm / 2798.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 1.274 | 1335 mm / 2754 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 1.4915 | 1117.5 mm / 2754 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 1.709 | 900 mm / 2754 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 2.084 | 525 mm / 2754 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 2.459 | 150 mm / 2754 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 2.5035 | 150 mm / 2709.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 2.548 | 150 mm / 2665 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 2.923 | 525 mm / 2665 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 3.298 | 900 mm / 2665 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 3.5155 | 1117.5 mm / 2665 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 3.733 | 1335 mm / 2665 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 3.7775 | 1335 mm / 2620.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 3.822 | 1335 mm / 2576 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 4.0395 | 1117.5 mm / 2576 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 4.257 | 900 mm / 2576 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 4.632 | 525 mm / 2576 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 5.007 | 150 mm / 2576 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 5.0515 | 150 mm / 2531.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 5.096 | 150 mm / 2487 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 5.471 | 525 mm / 2487 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 5.846 | 900 mm / 2487 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 6.0635 | 1117.5 mm / 2487 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 6.281 | 1335 mm / 2487 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 6.3255 | 1335 mm / 2442.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 6.37 | 1335 mm / 2398 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 6.5875 | 1117.5 mm / 2398 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 6.805 | 900 mm / 2398 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 7.18 | 525 mm / 2398 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 7.555 | 150 mm / 2398 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 7.5995 | 150 mm / 2353.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 7.644 | 150 mm / 2309 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 8.019 | 525 mm / 2309 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 8.394 | 900 mm / 2309 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 8.949 | 1455 mm / 2309 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 9.504 | 2010 mm / 2309 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 9.5485 | 2010 mm / 2264.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 9.593 | 2010 mm / 2220 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 10.1255 | 1477.5 mm / 2220 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 10.658 | 945 mm / 2220 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 10.7048 | 945 mm / 2173.3 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 10.7515 | 945 mm / 2126.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 10.774 | 922.5 mm / 2126.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 10.7965 | 900 mm / 2126.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 10.8185 | 878 mm / 2126.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |

| | | | |
|---|---|---|---|
| 10.8405 | 856 mm / 2126.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 10.8873 | 856 mm / 2173.3 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 10.934 | 856 mm / 2220 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 11.287 | 503 mm / 2220 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 11.64 | 150 mm / 2220 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 11.75 | 150 mm / 2110 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 11.86 | 150 mm / 2000 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 12.235 | 525 mm / 2000 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 12.61 | 900 mm / 2000 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 12.7425 | 1032.5 mm / 2000 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 12.875 | 1165 mm / 2000 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 12.9218 | 1165 mm / 2046.8 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 12.9685 | 1165 mm / 2093.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 13.013 | 1209.5 mm / 2093.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 13.0575 | 1254 mm / 2093.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 13.1043 | 1254 mm / 2046.8 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 13.151 | 1254 mm / 2000 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 13.529 | 1632 mm / 2000 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 13.907 | 2010 mm / 2000 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 13.9515 | 2010 mm / 1955.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 13.996 | 2010 mm / 1911 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 14.551 | 1455 mm / 1911 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 15.106 | 900 mm / 1911 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 15.481 | 525 mm / 1911 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 15.856 | 150 mm / 1911 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 15.9005 | 150 mm / 1866.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 15.945 | 150 mm / 1822 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 16.32 | 525 mm / 1822 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 16.695 | 900 mm / 1822 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 17.25 | 1455 mm / 1822 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 17.805 | 2010 mm / 1822 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 17.8495 | 2010 mm / 1777.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 17.894 | 2010 mm / 1733 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 18.449 | 1455 mm / 1733 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 19.004 | 900 mm / 1733 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 19.379 | 525 mm / 1733 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 19.754 | 150 mm / 1733 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 19.7985 | 150 mm / 1688.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 19.843 | 150 mm / 1644 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 20.218 | 525 mm / 1644 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 20.593 | 900 mm / 1644 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 21.148 | 1455 mm / 1644 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 21.703 | 2010 mm / 1644 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 21.7475 | 2010 mm / 1599.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 21.792 | 2010 mm / 1555 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 22.347 | 1455 mm / 1555 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 22.902 | 900 mm / 1555 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 23.277 | 525 mm / 1555 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 23.652 | 150 mm / 1555 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 23.6965 | 150 mm / 1510.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 23.741 | 150 mm / 1466 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 24.116 | 525 mm / 1466 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 24.491 | 900 mm / 1466 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 25.046 | 1455 mm / 1466 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 25.601 | 2010 mm / 1466 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 25.6455 | 2010 mm / 1421.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 25.69 | 2010 mm / 1377 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 26.245 | 1455 mm / 1377 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 26.8 | 900 mm / 1377 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 27.175 | 525 mm / 1377 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 27.55 | 150 mm / 1377 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 27.5945 | 150 mm / 1332.5 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |

| | | | |
|---|---|---|---|
| 27.639 | 150 mm / 1288 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 28.014 | 525 mm / 1288 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 28.389 | 900 mm / 1288 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 28.944 | 1455 mm / 1288 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 29.499 | 2010 mm / 1288 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 29.543 | 2010 mm / 1244 mm | unknown / unknown / unknown | plane "Dry area" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 29.587 | 2010 mm / 1200 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 29.5875 | 2010 mm / 1199.5 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 29.588 | 2010 mm / 1199 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 30.143 | 1455 mm / 1199 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 30.698 | 900 mm / 1199 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 31.073 | 525 mm / 1199 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 31.448 | 150 mm / 1199 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 31.4925 | 150 mm / 1154.5 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 31.537 | 150 mm / 1110 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 31.912 | 525 mm / 1110 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 32.287 | 900 mm / 1110 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 32.328 | 941 mm / 1110 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 32.369 | 982 mm / 1110 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 32.4135 | 982 mm / 1065.5 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 32.458 | 982 mm / 1021 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 32.499 | 941 mm / 1021 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 32.54 | 900 mm / 1021 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 32.915 | 525 mm / 1021 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 33.29 | 150 mm / 1021 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 33.3345 | 150 mm / 976.5 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 33.379 | 150 mm / 932 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 33.754 | 525 mm / 932 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 34.129 | 900 mm / 932 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 34.17 | 941 mm / 932 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 34.211 | 982 mm / 932 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 34.2555 | 982 mm / 887.5 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 34.3 | 982 mm / 843 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 34.341 | 941 mm / 843 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 34.382 | 900 mm / 843 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 34.757 | 525 mm / 843 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 35.132 | 150 mm / 843 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 35.1765 | 150 mm / 798.5 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 35.221 | 150 mm / 754 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 35.596 | 525 mm / 754 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 35.971 | 900 mm / 754 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 36.012 | 941 mm / 754 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |

| | | | |
|---|---|---|---|
| 36.053 | 982 mm / 754 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 36.0975 | 982 mm / 709.5 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 36.142 | 982 mm / 665 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 36.183 | 941 mm / 665 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 36.224 | 900 mm / 665 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 36.599 | 525 mm / 665 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 36.974 | 150 mm / 665 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 37.0185 | 150 mm / 620.5 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 37.063 | 150 mm / 576 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 37.438 | 525 mm / 576 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 37.813 | 900 mm / 576 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 37.854 | 941 mm / 576 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 37.895 | 982 mm / 576 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 37.9395 | 982 mm / 531.5 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 37.984 | 982 mm / 487 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 38.025 | 941 mm / 487 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 38.066 | 900 mm / 487 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 38.441 | 525 mm / 487 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 38.816 | 150 mm / 487 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 38.8605 | 150 mm / 442.5 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 38.905 | 150 mm / 398 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 39.28 | 525 mm / 398 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 39.655 | 900 mm / 398 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 39.696 | 941 mm / 398 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 39.737 | 982 mm / 398 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 39.7815 | 982 mm / 353.5 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 39.826 | 982 mm / 309 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 39.867 | 941 mm / 309 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 39.908 | 900 mm / 309 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 40.283 | 525 mm / 309 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 40.658 | 150 mm / 309 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 40.7025 | 150 mm / 264.5 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 40.747 | 150 mm / 220 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 41.122 | 525 mm / 220 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 41.497 | 900 mm / 220 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 41.538 | 941 mm / 220 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 41.579 | 982 mm / 220 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 41.6235 | 982 mm / 175.5 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 41.668 | 982 mm / 131 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 41.709 | 941 mm / 131 mm | unknown / unknown / unknown | plane "Beside the shower (under the bath)" is unresolved (missing Kano 316 tile-insert waste 120 × 120, brushed nickel, 50 mm outlet level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |

| | | | |
|---|---|---|---|
| 41.75 | 900 mm / 131 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 42.125 | 525 mm / 131 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |
| 42.5 | 150 mm / 131 mm | unknown / unknown / unknown | plane "Shower" is unresolved (missing Lauxes Next Gen 35 channel 1000 × 100 × 35, brushed nickel, 50 mm outlet WO50-BN level, fall or a control level), cable height above screed bottom, Tiler's screed (heating cable inside) thickness, Tiler's adhesive thickness |

| Keep-out | x / y / width / height (mm) | Source |
|---|---|---|
| Bath | 1082 mm / 0 mm / 1028 mm / 1018 mm | Owner, 7 Oct 2026: floor under the bath left unheated so the heated area stays within the 5.1 m² the 42.5 m cable covers |
| Toilet | 1435 mm / 2409.5 mm / 675 mm / 381 mm | Owner, 8 Oct 2026: no cable under the toilet (its pan is screwed to the floor through brackets); cable stays under the vanity |

- warning · heating_signoff: Proposed route only: manufacturer and licensed electrician must review cable identity, length, output, bend radius, spacing, exclusions, cover, sensor, cold tails, waterproofing and electrical installation. No compliance approval. No electrical approval is implied.
- warning · heating_product_unresolved: sample-sck0765l-carton is not an accepted heating-cable in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- warning · heating_product_unresolved: sample-mwd5-1999-cbp3 is not an accepted thermostat in this library. Checks use the travelling snapshot only when its productId is that id or in its series.
- warning · heating_metadata_unknown: Unknown cable/product information: manufacturer, minSpacing, depthFromBottom.
- warning · heating_route_length_unknown: Spatial cable length and confirmed product-length balance remain unknown until the whole route has resolved screed levels and cable height; the plan projection is modelled, not cable length.
- warning · heating_ip_location: Thermostat printed IP21 (published, carton label — Photographed MWD5-1999-CBP3 carton label: housing IP21) vs planned location outside a wet room (Hallway wall outside the bathroom, next to the light switch (right as you look into the bathroom), 1000 mm off the floor. Not drawn on this plan.; Owner, 5 Oct 2026; height raised to 1000 mm, 7 Oct 2026). This check does not decide zone suitability; the electrician decides. No compliance approval.
- warning · heating_depth_unknown: Cable section remains unresolved until screed layer, floor levels and cable height (bottom face of the selected screed layer (top of the layer below / subfloor stack); not the underside of the tile unless that face is the screed top) are entered.