

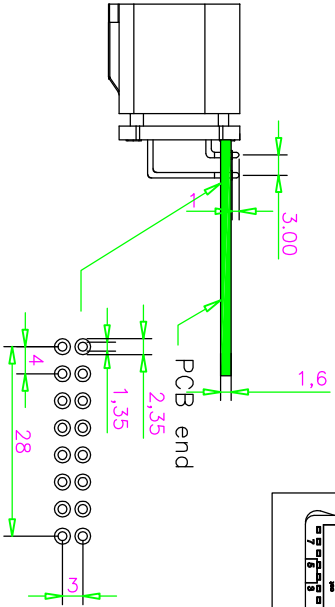
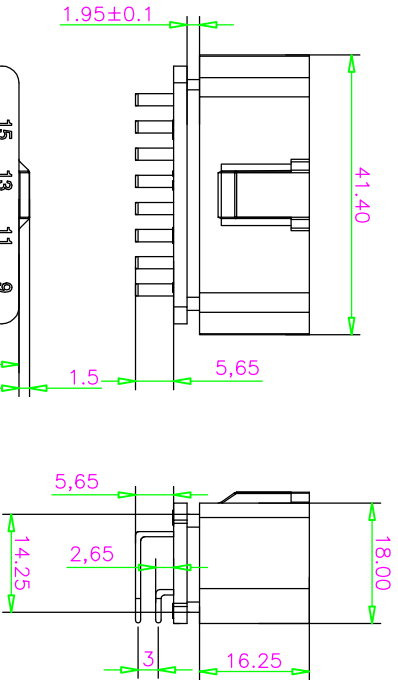


A B C D E

1 2 3 4 5 6 7 8

REVISION			
NO.	DESCRIPTION	DATE	RI

模型	模具编号	备注
	CCJT009	一四 内腔加大

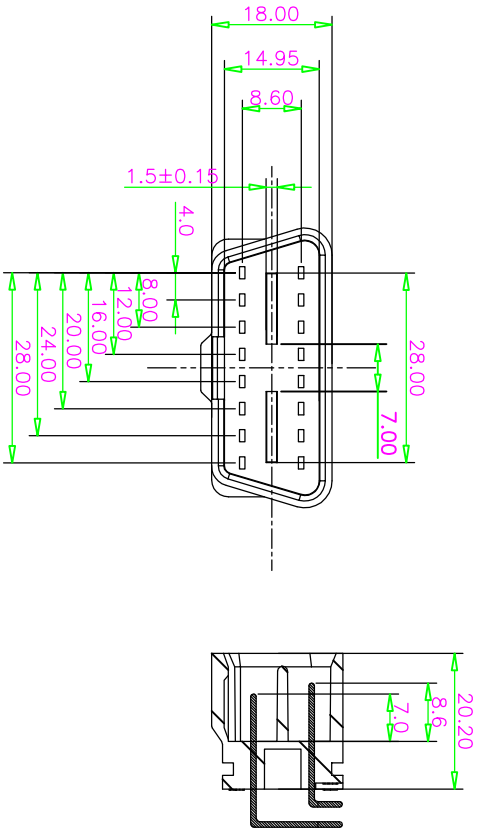

Electrical Performance

1. Dielectric Strength:1000V AC/1 Minute.
2. Contact resistance:100 m Ohm MAX.
3. Insulation Resistance:500VDC,100M Ohm Min.

Rateing and Application Wire:

1. Rated Volatage: 30V MAX
2. Rated Current: 5Amps,Wire Insulation O.D:ø1.2~ø2.6
3. Ambient Temperature Range: -20°C ~ +85°C


Notes:

1. Housing Material: PC+ABS(7:3),94V-0,Color:Black
2. The Pin 4&PIN 5 Are 8.6mm High Out of The Plastic, All of the rest pins are 7.0mm.
3. General Tolerance: ± 0.3mm

4. Needle material:brass,under plate: GOLD
5. Electroplating: gold-plated, gold-plated

COMTECH

COMTECH ELECTRONIC CO., LTD

DRAWN BY		DATE	TITLE:	
			C-0BD-11-16M(90°)-EU	
CHECKED BY		DATE	CUSTOMER	
			CUSTOMER P/N	