

Construction

Aggregate:

→ Coarse + Fine (Sand, Cement)

(Brick chips, stone chips)

→ 7.5 mm — 75 mm — 75 mm < সর্বোচ্চ
চিপান

Fine $\rightarrow$ $0.075 \text{ mm} - 9.75 \text{ mm}$, sand 

Silt particle $\rightarrow$ $0.002 \text{ mm} - 0.075$ $\rightarrow$
Silt and clay. 

Concrete $\rightarrow$ विष्मट्ट मास 
 

R.C.C. $\longrightarrow$ ~~20~~ 20 mm

ਭਿਤਰੀ ਭਾਗ $\longrightarrow$ ~~25~~ 25 mm - 40 mm

Sand

0.075 - 4.75 mm

2.3 - 3.1

~~2.3~~

2.65 - 2.67

Abrasion →

LAA → Lose

Angles Abrasion

Crushing →

ଅବ ଲୋଡ଼ନ ଅବସ୍ଥା

30%

Shape →

ଫିକ୍ସ = 3 x ଫ୍ଲାକ୍ସ (Flakx)

Leakage → Coarse, Fine

Bleeding → ~~ଅବଶିଷ୍ଟ~~ compaction, ~~ଓ~~
~~ଓ~~ ~~ସ୍ଥିତି~~, ~~କର~~ ~~ସ୍ଥିତି~~



Segregation → Fine,
Coarse

S.G.F →

Slump Test : ବୀତି କରିବା

ବାସ୍ତବ୍ୟତା ନିର୍ଣ୍ଣୟ ପାଇଁ



ତାଳକମାଡ଼ି → 15%


Sylien derz Tes:

Cube Test:

ଫାଟାଫାଟ; curing

ତାଳକମାଡ଼ି

→ 45-60%

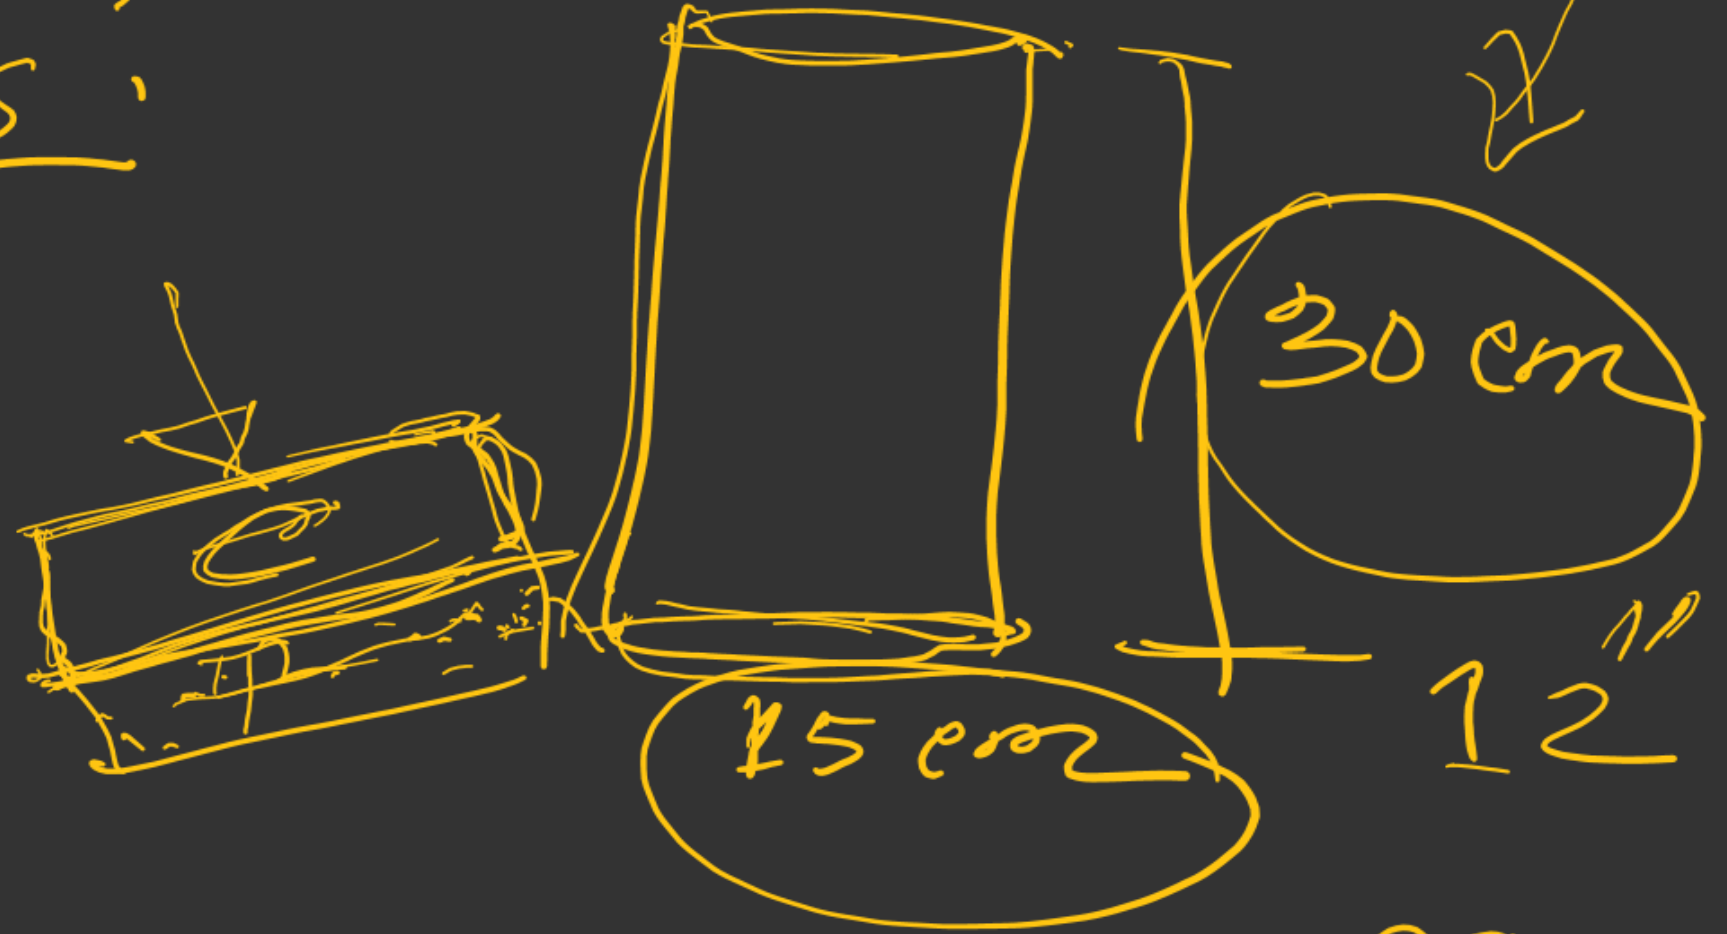

→ 28 99
→ 6" x 6" x 6"

$$M_{2.2} \rightarrow 1:1:2$$

$$M_{20} \rightarrow 1:1.5:3$$

$$M_{15} \rightarrow 1:2:4$$

$$M_{10} \rightarrow 1:3:6$$

$$M_{7.5} \rightarrow 1:4:8$$

$$0.35$$

$$1.5$$

~~$$1:2:2$$~~

$$1:2:2$$

R.C.C. $\rightarrow$ $\$ \text{ [m] 25}$ $\rightarrow$ steel

Pre-Stressed $\rightarrow$ ଖସି ଶକି ଉଠୁଥିବା

khoo,
Sand,
Cement,
water

ସମସ୍ତ ଉପକରଣ ଓ ସିମେଣ୍ଟ

ରାସାୟନ ଉପକରଣ ଓ

①:②:④ 1:3:6

water