

1. Description


1.1. Project

Project Name	STM32L053
Board Name	NUCLEO-L053R8
Generated with:	STM32CubeMX 4.21.0
Date	05/23/2017

1.2. MCU

MCU Series	STM32L0
MCU Line	STM32L0x3
MCU name	STM32L053R8Tx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

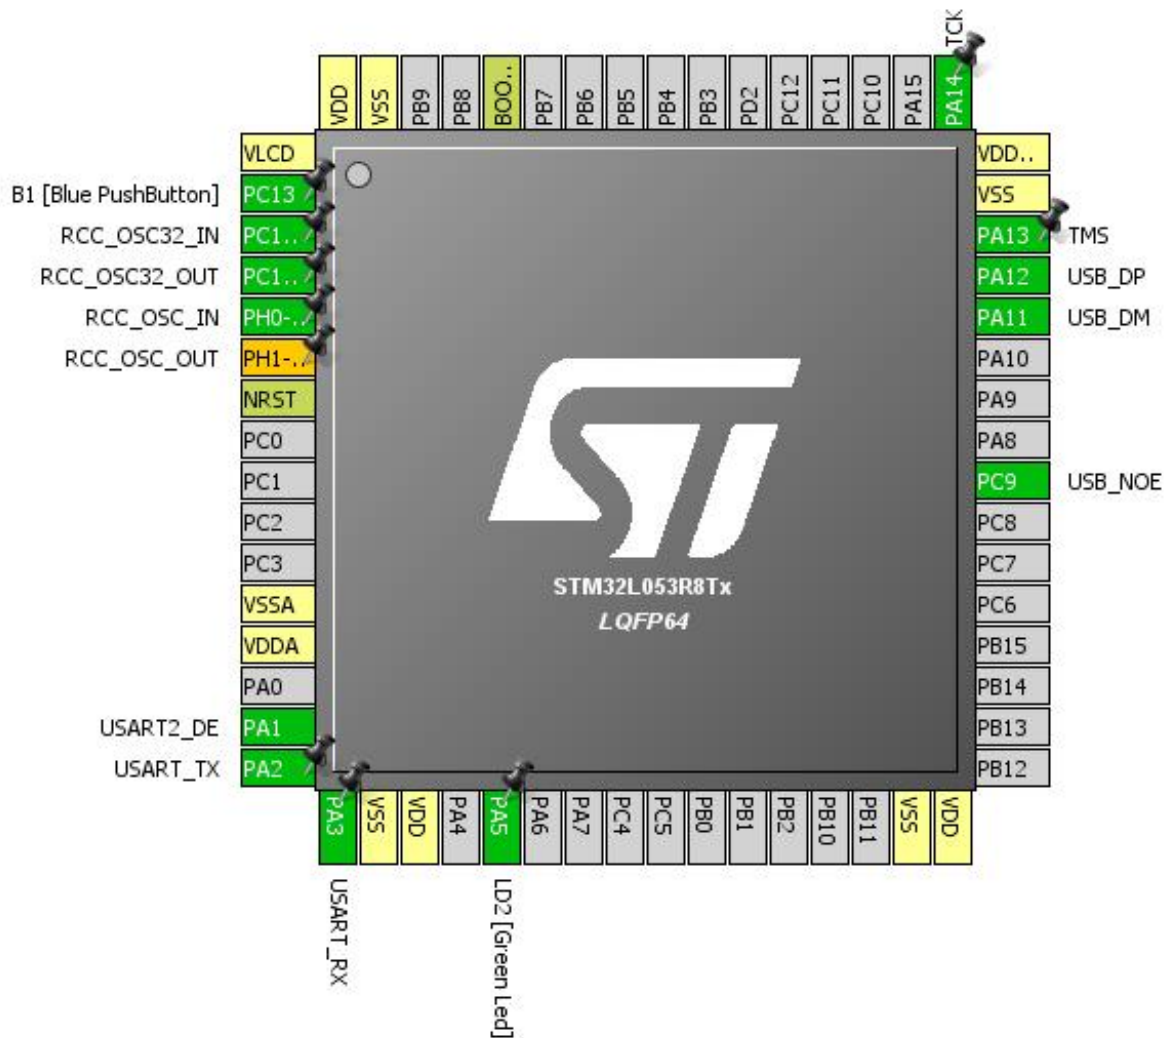


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VLCD	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
15	PA1	I/O	USART2_DE	
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	LD2 [Green Led]
31	VSS	Power		
32	VDD	Power		
40	PC9	I/O	USB_NOE	
44	PA11	I/O	USB_DM	
45	PA12	I/O	USB_DP	
46	PA13	I/O	SYS_SWDIO	TMS
47	VSS	Power		
48	VDD_USB	Power		
49	PA14	I/O	SYS_SWCLK	TCK
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

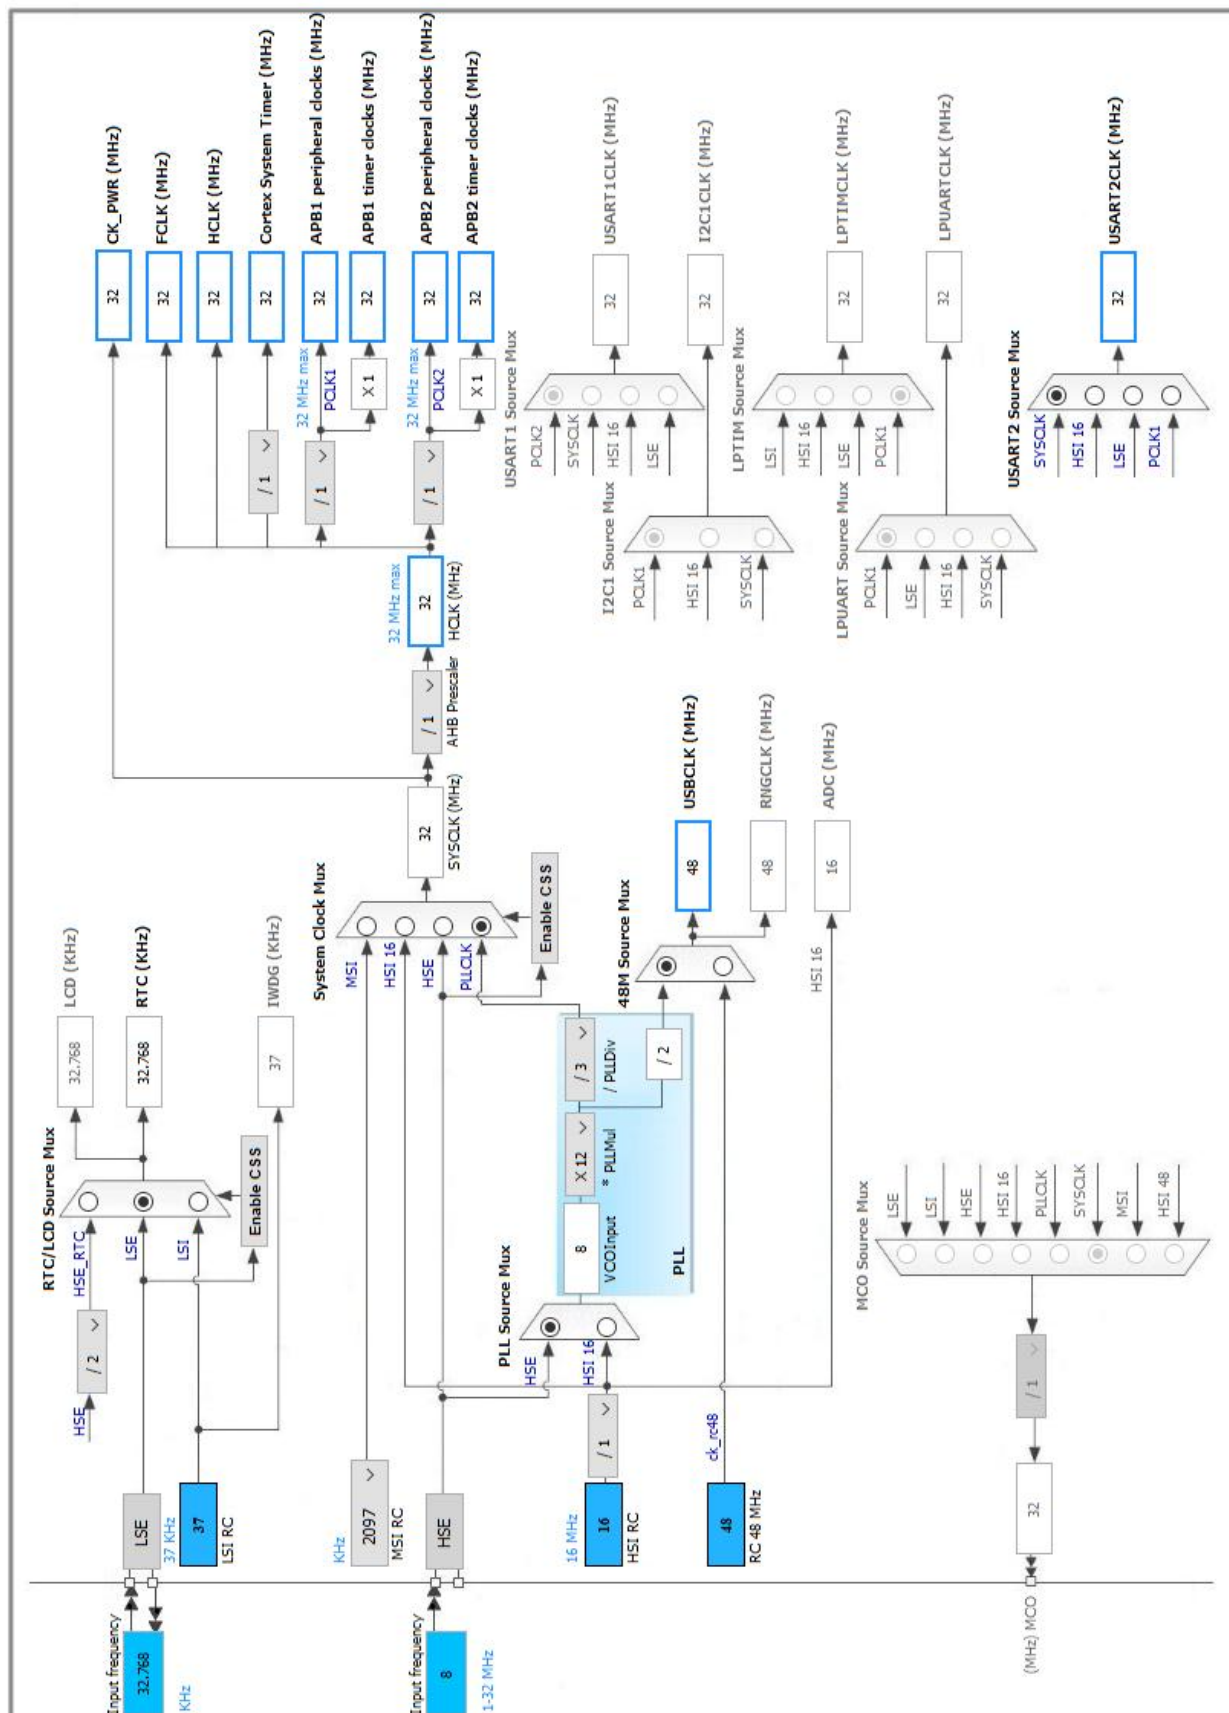

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Buffer Cache	Enabled
Prefetch	Disabled
Preread	Enabled
Flash Latency(WS)	1 WS (2 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000
LSE Drive Capability	LSE oscillator low drive capability

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

5.2. RTC

mode: Activate Clock Source

5.2.1. Parameter Settings:

General:

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

5.3. SYS

mode: Debug Serial Wire

Timebase Source: TIM22

5.4. USART2

Mode: Asynchronous

mode: Hardware Flow Control (RS485)

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	7 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable
Polarity	High
Assertion Time	0
Deassertion Time	0

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

5.5. USB

mode: Device (FS)

mode: Activate NOE

5.5.1. Parameter Settings:

Basic Parameters:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	64 Bytes
Physical interface	Internal Phy

Power Parameters:

Low Power	Disabled
Link Power Management	Disabled

5.6. FREERTOS

mode: Enabled

5.6.1. Config parameters:

Versions:

FreeRTOS version	9.0.0
CMSIS-RTOS version	1.02

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled

Memory management settings:

Memory Allocation	Dynamic
TOTAL_HEAP_SIZE	3072

Memory Management scheme heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Disabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Disabled
------------	----------

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	3
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	3

5.6.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Disabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled
xTaskAbortDelay	Disabled

xTaskGetHandle

Disabled

5.7. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

5.7.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

Class Parameters:

USBD_CDC_INTERVAL (Number of micro-frames interval)	1000
---	------

5.7.2. Device Descriptor:

Device Descriptor:

VID (Vendor Identifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor FS:

PID (Product Identifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
SYS	PA13	SYS_SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_SWCLK	n/a	n/a	n/a	TCK
USART2	PA1	USART2_DE	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	Very High *	USART_RX
USB	PC9	USB_NOE	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA11	USB_DM	n/a	n/a	n/a	
	PA12	USB_DP	n/a	n/a	n/a	
Single Mapped Signals	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Falling edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Green Led]

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
System service call via SWI instruction	true	0	0
Pendable request for system service	true	3	0
System tick timer	true	3	0
TIM22 global interrupt	true	0	0
USB event interrupt / USB wake-up interrupt through EXTI line 18	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash and EEPROM global interrupt	unused		
RCC and CRS global interrupt	unused		
EXTI line 4 to 15 interrupts	unused		
USART2 global interrupt / USART2 wake-up interrupt through EXTI line 26	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32L0
Line	STM32L0x3
MCU	STM32L053R8Tx
Datasheet	025844_Rev6

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	STM32L053
Project Folder	E:\STM32\workspace_f4\STM32L053
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_L0 V1.9.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No