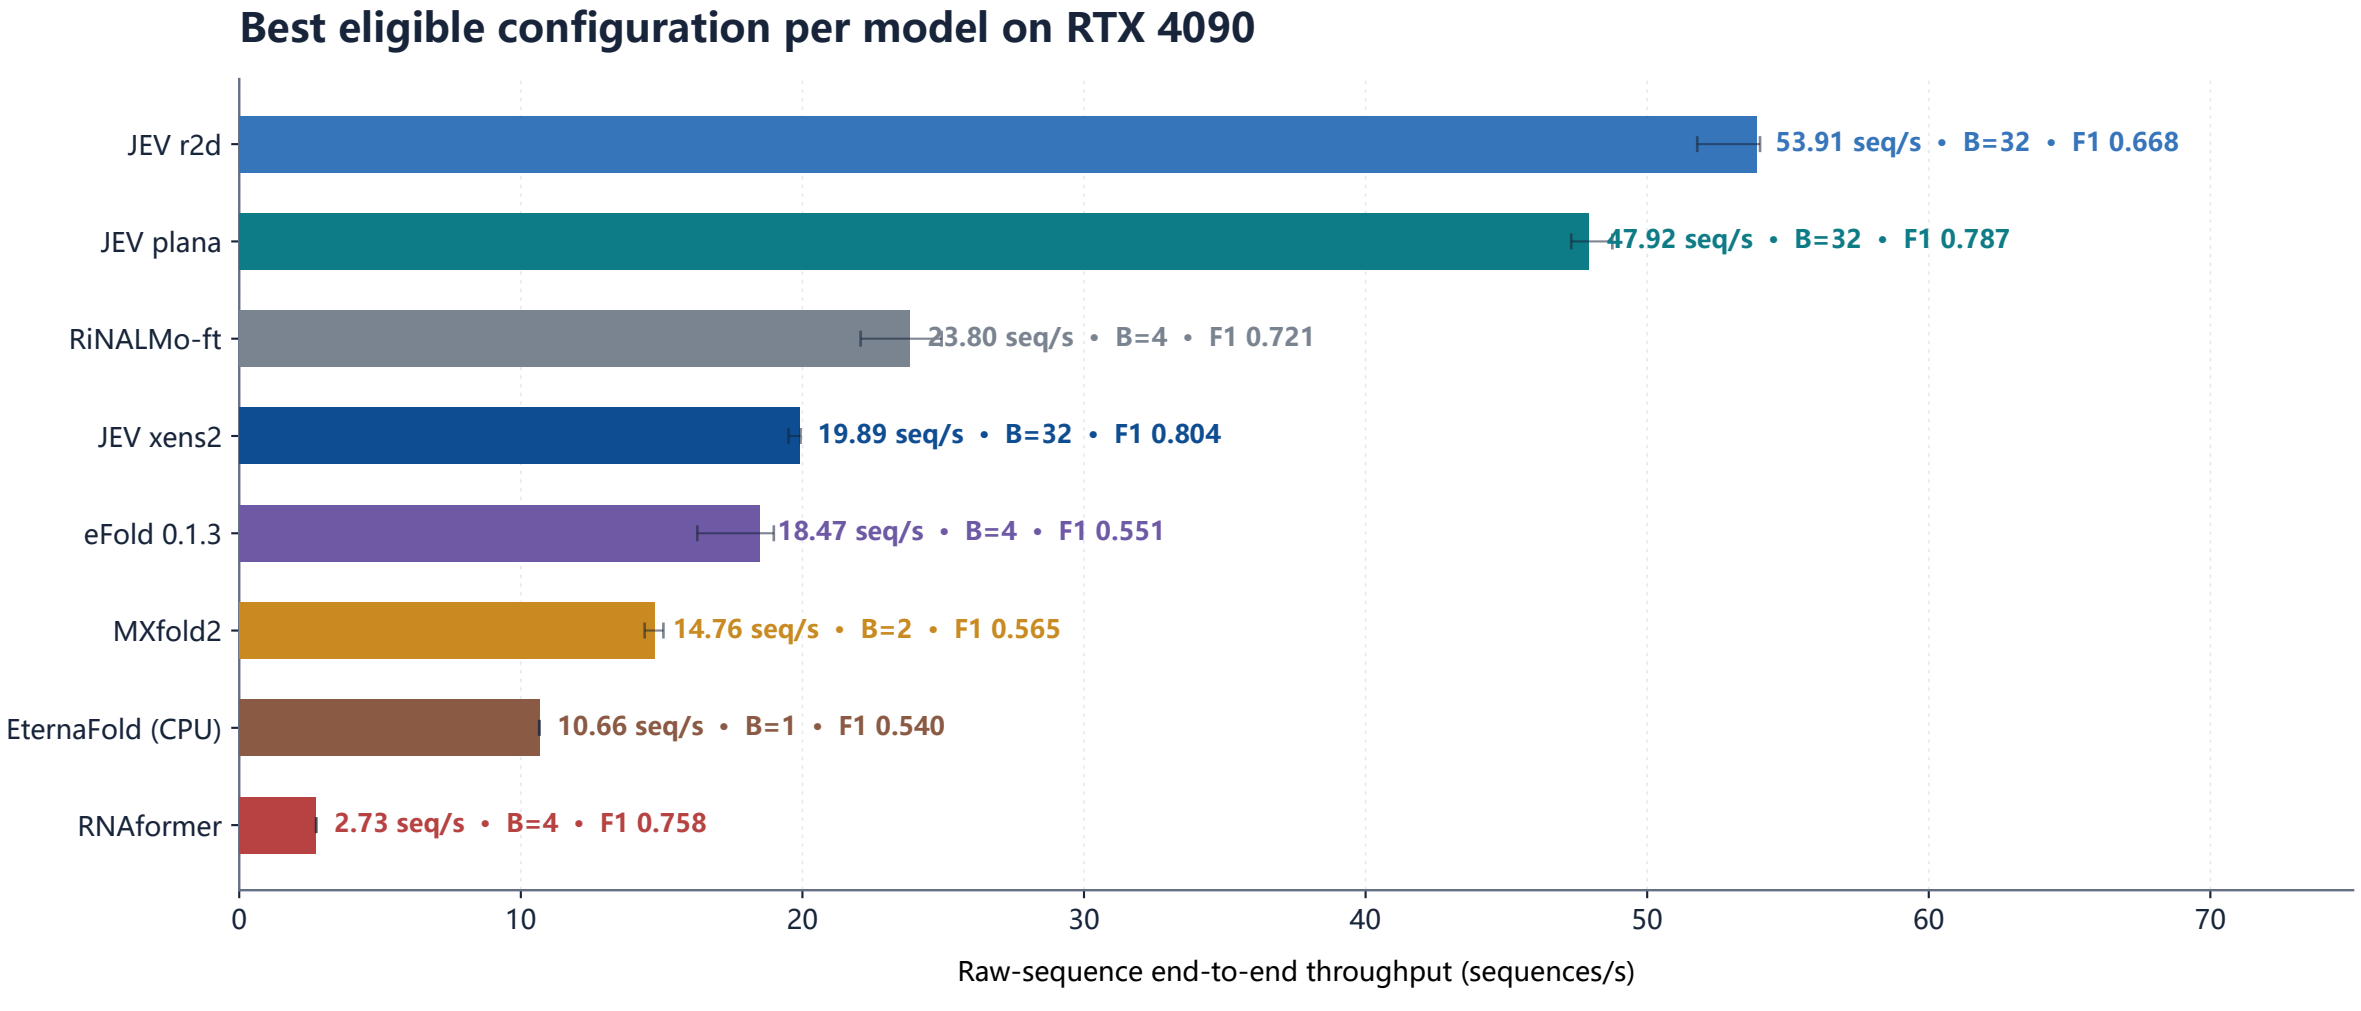

Full TS0 (n=1,288), three repeats; bars show repeat range. Raw sequence -> encoder -> task head -> required decode; no cached embeddings.
EternaFold uses its official serial CPU implementation (B=1). BPfold/UFold/E2Efold are blocked by unavailable official weights; no absolute SOTA claim.