Common Pressure Unit Conversion Table

Unit	kg/cm²	Mpa	bar	Kpa	mbar	psi	mmH_2o	mmHg	inHg	atm
kg/cm²	1	0.098066	0.980665	98.067	980.67	14.223	10000	735.559	28.964	0.96784
Mpa	10.1972	1	10	1000	10000	145.04	101971	7500.61	295.354	9.8692
bar	1.01972	0.1	1	100	1000	14.5038	10197.2	750.061	29.5354	0.98692
Kpa	0.0102	0.001	0.01	1	10	0.145	101.97	7.50062	0.2954	0.009869
mbar	0.00102	0.0001	0.001	0.1	1	0.0145	10.2	0.75	0.029543	0.000987
psi	0.0703	0.006895	0.06895	6.895	68.95	1	703.07	51.715	2.03537	0.06805
mmH_2O	0.0001	0.0000098	0.000098	0.0098	0.098	0.00142	1	0.07356	0.00289	0.000096
mmHg	0.00136	0.000133	0.00133	0.1333	1.33	0.0193	13.5951	1	0.03936	0.00132
inHg	0.03452	0.0034	0.034	3.385	33.85	0.491	346.02	25.4065	1	0.0334
atm	1.033	0.1013	1.01325	101.327	1013.17	14.695	10416.66	760	29.94	1
Pa	0.00001	0.000001	0.00001	0.001	0.01	0.000145	0.10197	0.0075	0.000295	0.00001

Gripseal (Shenzhen) Technology Co., Ltd
4/F, No. 30 Building, Chentian Industrial Park,
Xi XiangBao'an District, Shenzhen,518102,China
Email: info@gripseal.com
Tel:+86-755-86215125
Website: en.gripseal.com

Scan to
English website

GripSeal

Quick Connectors Selection Guide

R5.0

en.gripseal.com

Brand Profile

GripSeal® has more than ten years of industry experience and stays dedicated to the development and manufacture of quick sealing connectors. Our products are widely used across many industries, including automated production, industrial gas, process control, new energy vehicles, refrigeration and air conditioning, medical device manufacturing and aerospace. Tens of thousands of manufacturers have chosen GripSeal® quick connectors. GripSeal® raises production efficiency and improves productivity, thereby increasing profitability.

Each product family of GripSeal® quick connectors offers solutions for different tube shapes, bore sizes, ports and threads. With nearly a thousand standard models, users can choose a suitable standard product directly from the selection guide. GripSeal® also has a professional R&D team specialising in custom solutions for all kinds of irregular fittings. From raw materials to finished product inspection, every step of GripSeal® quick connectors is strictly controlled, and outstanding quality has earned a strong reputation in the industry.

Unlike the generally long lead times in this industry, 80% of GripSeal® standard products are available from stock, greatly improving the stability of customer production lines.

Brand Mission

Superior Quality

Wide Model Range



Competitive Price

Sealing every kind of fitting is no longer a problem!

ONE-SECOND CONNECTION INSTANT SEALING

Your Connection Solution Expert

Selection Guide

Pressure Range / Recommend Model / Fitting Type	0-3 Bar	0-8 Bar	0-10 Bar	0-20 Bar	0-35 Bar	0-50 Bar	0-70 Bar	0-200 Bar	0-350 Bar	0-2500 Bar
Male Threaded Tube	G25A			G60/G85 (Water Heater)		G60		G85	G85H/ G60C	G60UHP
Female Threaded Tube	G20A					G80N		G80	G85H/ G65	
Straight Tube - OD	G20A		G10D		G10/ G10PRO	G30				
Straight Tube - ID	G20A	G35P/G35C/ G35N G15/G15K/ G15PRO		G35 (Large Bore)		G35				
Flanged Tube	G25A	G15/ G15PRO	G70P/ G35C		G10/ G10PRO	G70				
Flared Tube		G15/ G15PRO			G10/ G10PRO	G70K				
Barbed Tube	G25A	G15/ G15PRO	G70P/ G35P/ G35C		G35	G70				

Selection Guide

Pressure Range / Recommend Model / Fitting Type	0-3 Bar	0-8 Bar	0-10 Bar	0-20 Bar	0-35 Bar	0-50 Bar	0-70 Bar	0-200 Bar	0-350 Bar	0-2500 Bar
VDA Male	G25A	G10/ G10D/ G35C/ G15	G70P/ G90L/ G90S/ G35P			G35				
Fuel Line	G25A		G70P		G10/ G10PRO	G70				
Grooved Tube	G25A/ G20A	G15/ G15PRO	G70P		G10/ G10PRO	G70				
Flange Tube				G72L		G72R				
Coolant Port					G72K					
Vent Valve Port	G20F									
Electrical Connector Port	G25F	G15F								

Catalogue

GripSeal | Quick Connector Series

Irregular Tube + Fuel Line + Damage-Free Quick Connector 08

G70P Series
G70 Series

Female Thread + Mini Female Thread Connectors 26

G80 Series
G80N Series

High-Pressure + Low-Pressure Internal Expanding Quick Connectors 37

G35 Series
G35C Series
G35N Series

Lever-Type Quick Connectors 44

G90 Series
G90S Series

Internal Expanding Quick Connectors 53

G25F Series G25A Series
G25B Series

Low-Pressure Vent Valve Face Seal Connector 64

G20F Series
G20FN Series
G20A Series

Tube OD Quick Connectors 75

G10 Series
G10 PRO Series
G10D Series
G10T Series

Tube ID Quick Connectors 92

G15 Series
G15 PRO Series
G15K Series
G15T Series

Male Threaded Quick Connectors 106

G60 Series
G60C Series

Male Threaded Quick Connectors 111

G85 Series

High-Pressure Tube OD Quick Connectors 116

G30 Series

Irregular Tube Port Quick Connectors 120

G72R Series
G72K Series

Straight-Through Female Threaded Connector 128

G65 Series

GripSeal | Electrical Connectors + Liquid Cooling Couplings

Electrical Connector + Liquid Cooling Coupling 145

GripSeal | Quick Connector Applications

133 Automotive

135 New Energy

137 Refrigeration System

139 Water Heater

141 Automation

143 Instrumentation

G70P Damage-Free Quick Connector

ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |

The G70P series is a special version of the classic G70 external-grip connector, developed to prevent scratches on customer products made of aluminum or engineering plastics. The parts that contact the customer product - the locking jaws - have been improved, achieving damage-free connection while still meeting functional requirements for sealing and jaw life.

Damage-Free Quick Connector

* Polymer locking jaws for damage-free connection
* Sliding sleeve operation, intuitive to use
* Straight-through flow channel: high flow and low pressure loss
* Safety indicator at the rear for safe operation
* Moulded seal: excellent sealing and long life

G70P Series Quick Connector Features

1. Jaw locking
High pressure rating, with test pressures up to 1 MPa.

2.Polymer jaws
The parts contacting the customer product use insert-type polymer jaws, so no scratches are caused.

3. Sliding sleeve operation
Intuitive design, simple to operate.

4. Straight-through design
Large flow bore, ideal for liquid running and ageing tests

Selected Models

G70P Series

G70RP Series

G70SP Series

G70NP Series

G70P Quick Connector Advantages and Features

Polymer jaws:
No scratches on the customer product

Knurling:
Increases friction for easier operation

Sliding sleeve structure:
A light push locks or releases the connection



Straight-through design:
Reduces flow loss and ensures correct test results

Face seal:
Simple replacement, easy maintenance

G70P Quick Connector Specifications

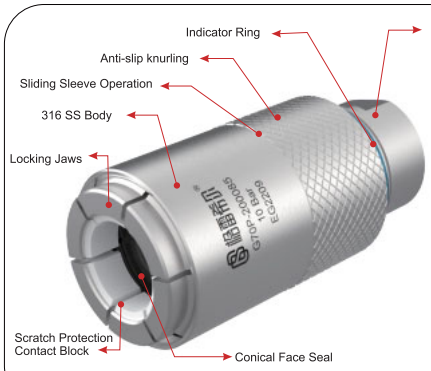

Max. Op. Pressure	Vacuum to 10 Bar
Sealing Range	See Selection Table
Max. Bead Width	4-8mm
Flow Port	See Selection Table
Material	316 Stainless
Main Seal	Neoprene, Silicone
Inner Seal	NBR, EPDM
Operating Temp	-20 °C to +120 °C

G70P Operation Demo

1. Align the connector with the tube to be sealed

2. Push to lock the connection

G70P Damage-Free Quick Connector
ONE-STOP CONNECTION
Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |

Application Cases

EV Battery Cold Plate Testing

Motor Cooling System

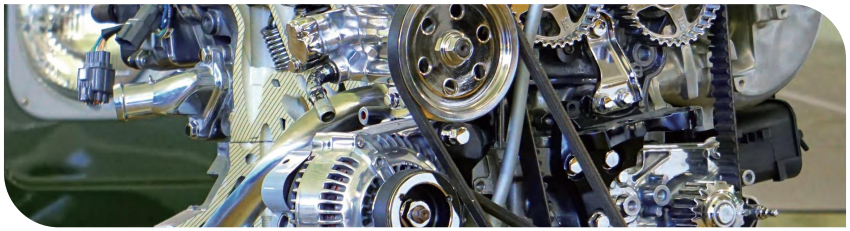

Engine Cooling Channel Testing







Coolant Pipe Selection Table

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D*	Max. Pressure*	Material	Seal Material	Seal No.
G70P-080025	8.0	2	25.4	80	BSPP1/4	10Bar	316 SS	Neoprene	SG70P-080025
G70P-090025	9.0								SG70P-090025
G70P-100045	10.0	3	30.4	80	BSPP1/4	10Bar	316 SS	Neoprene	SG70P-100045
G70P-110045	11.0								SG70P-110045
G70P-120045	12.0								SG70P-120045
G70P-130045	13.0								SG70P-130045
G70P-140065	14.0	4	35.4	83	BSPP3/8	10Bar	316 SS	Neoprene	SG70P-140065
G70P-150065	15.0								SG70P-150065
G70P-160065	16.0								SG70P-160065
G70P-170065	17.0								SG70P-170065
G70P-180085	18.0	5	40.4	85	BSPP1/2	10Bar	316 SS	Neoprene	SG70P-180085
G70P-190085	19.0								SG70P-190085
G70P-200085	20.0								SG70P-200085
G70P-210085	21.0								SG70P-210085
G70P-220085	22.0								SG70P-220085
G70P-230125	23.0	6	46.4	93	BSPP3/4	10Bar	316 SS	Neoprene	SG70P-230125
G70P-240125	24.0								SG70P-240125
G70P-250125	25.0								SG70P-250125
G70P-260125	26.0								SG70P-260125
G70P-270125	27.0								SG70P-270125
G70P-280125	28.0	7	50.4	93	BSPP3/4	10Bar	316 SS	Neoprene	SG70P-280125
G70P-290125	29.0								SG70P-290125
G70P-300125	30.0								SG70P-300125
G70P-310125	31.0								SG70P-310125
G70P-320125	32.0								SG70P-320125
G70P-330125	33.0								SG70P-330125
G70P-340125	34.0	8	55.4	93	BSPP3/4	10Bar	316 SS	Neoprene	SG70P-340125
G70P-350125	35.0								SG70P-350125
G70P-360125	36.0								SG70P-360125
G70P-370125	37.0								SG70P3-70125
G70P-380125	38.0								SG70P-380125
G70P-390125	39.0								SG70P-390125
G70P-400125	40.0								SG70P-400125
G70P-400165	40.0	9	66	110.5	BSPP1	5Bar	316 SS	Neoprene	SG70P-400165
G70P-410165	41.0								SG70P-410165
G70P-420165	42.0								SG70P-420165
G70P-430165	43.0								SG70P-430165
G70P-440165	44.0								SG70P-440165
G70P-450165	45.0								SG70P-450165
G70P-460165	46.0								SG70P-460165
G70P-470165	47.0								SG70P-470165
G70P-480165	48.0								SG70P-480165

G70P Damage-Free Quick Connector
ONE-STOP CONNECTION
Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |







Coolant Pipe Selection Table

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70P-500205	50.0	10	79	113	BSPP1 - 1/4	5Bar	Aluminum	Neoprene	SG70P-500205
G70P-520205	52.0								SG70P-520205
G70P-530205	53.0								SG70P-530205
G70P-540205	54.0								SG70P-540205
G70P-550205	55.0								SG70P-550205
G70P-560205	56.0								SG70P-560205
G70P-570205	57.0								SG70P-570205
G70P-600285	60.0	11	89	118	BSPP1 - 3/4	5Bar	Aluminum	Neoprene	SG70P-600285
G70P-610285	61.0								SG70P-610285
G70P-620285	62.0								SG70P-620285
G70P-630285	63.0								SG70P-630285
G70P-640285	64.0								SG70P-640285
G70P-650285	65.0								SG70P-650285
G70P-660285	66.0								SG70P-660285
G70P-670285	67.0								SG70P-670285
G70P-680285	68.0								SG70P-680285
G70P-700285	70.0	12	98	118	BSPP1 - 3/4	5 Bar	Aluminum	Neoprene	SG70P-700285
G70P-720285	72.0								SG70P-720285
G70P-740285	74.0								SG70P-740285
G70P-750285	75.0								SG70P-750285

G70P (Body 10 to Body 12)

Body 10

Body 11

Body 12

G70P Damage-Free Quick Connector

ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |

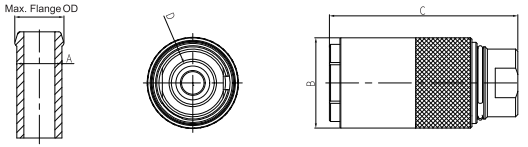

G70PK Damage-Free Connector

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70PK-080025	8.0	2	25.4	80	BSPP1/4	10Bar	316 SS	Neoprene	SG70PK-080025
G70PK-100045	10.0	3	30.4	80	BSPP1/4	10Bar	316 SS	Neoprene	SG70PK-100045
G70PK-120045	12.0								SG70PK-120045
G70PK-140065	14.0	4	35.4	83	BSPP3/8	10Bar	316 SS	Neoprene	SG70PK-140065
G70PK-160065	16.0								SG70PK-160065
G70PK-170065	17.0								SG70PK-170065
G70PK-180085	18.0	5	40.4	85	BSPP1/2	10Bar	316 SS	Neoprene	SG70PK-180085
G70PK-190085	19.0								SG70PK-190085
G70PK-200085	20.0								SG70PK-200085

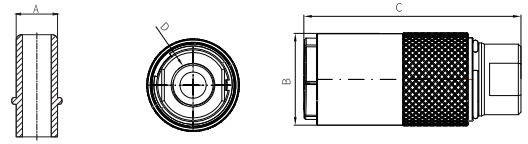

G70PJ Damage-Free Short Connector

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Materia	Seal No.
G70P-J079	7.89±0.06	2	25.4	80	BSPP1/4	10 Bar	316 SS	NBR	SG70P-J079
G70P-J095	9.49±0.06	3	30.4	80	BSPP1/4	10 Bar	316 SS	NBR	SG70P-J095
G70P-J118	11.80±0.10								SG70P-J118
G70P-J126	12.61±0.10	4	35.4	83	BSPP3/8	10 Bar	316 SS	NBR	SG70P-J126
G70P-J158	15.82±0.10								SG70P-J158

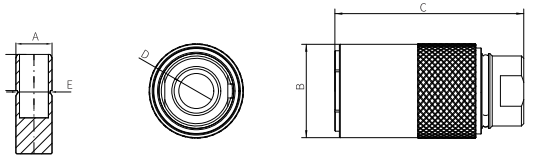

G70P CQC Male Connector (Grooved Tube) Damage-Free Connector

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure	Material	Seal Material	Seal No.
G70P-122045	CQC14	3	30.4	80	BSPP1/4	10 Bar	316 SS	NBR	SG70P-122045
G70P-142065	CQC16	4	35.4	80	BSPP3/8	10 Bar	316 SS	NBR	SG70P-142065
G70P-162065	CQC18	4	35.4	80	BSPP3/8	10 Bar	316 SS	NBR	SG70P-162085
G70P-182085	CQC20	5	40.4	83	BSPP1/2	10 Bar	316 SS	NBR	SG70P-182085

G70SP Small-Body Damage-Free Quick Connector

ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |

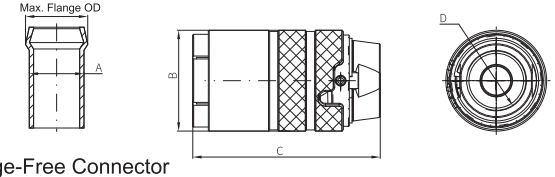

G70SP Small-Body Damage-Free Connector

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70SP-040	4.0	1SM	15.9	50.9	M8	10 Bar	316 SS	Neoprene	SG70SP-040
G70SP-050	5.0								SG70SP-050
G70SP-060	6.0	1S	20	51.9	BSPP1/8	10 Bar	316 SS	Neoprene	SG70SP-060
G70SP-070	7.0								SG70SP-070
G70SP-080	8.0								SG70SP-080
G70SP-090	9.0								SG70SP-090
G70SP-100	10.0								SG70SP-100
G70SP-110	11.0	2S	25	52.1	BSPP1/4	10 Bar	316 SS	Neoprene	SG70SP-110
G70SP-120	12.0								SG70SP-120
G70SP-130	13.0								SG70SP-130
G70SP-140	14.0								SG70SP-140
G70SP-160	16.0	3S	30	54	BSPP3/8	10 Bar	316 SS	Neoprene	SG70SP-160
G70SP-170	17.0								SG70SP-170
G70SP-180	18.0								SG70SP-180
G70SP-190	19.0	4S	35	65.1	BSPP1/2	10 Bar	316 SS	Neoprene	SG70SP-190
G70SP-200	20.0								SG70SP-200
G70SP-220	22.0								SG70SP-220
G70SP-230	23.0	5S	40	66	BSPP1/2	10 Bar	316 SS	Neoprene	SG70SP-230
G70SP-250	25.0								SG70SP-250
G70SP-260	26.0								SG70SP-270
G70SP-270	27.0								SG70SP-280
G70SP-280	28.0	6S	45	65.3	BSPP3/4	10 Bar	316 SS	Neoprene	SG70SP-300
G70SP-300	30.0								SG70SP-320
G70SP-320	32.0								SG70SP-330
G70SP-330	33.0	7S	50	65.8	BSPP1	10 Bar	316 SS	Neoprene	SG70SP-350
G70SP-350	35.0								SG70SP-360
G70SP-360	36.0								SG70SP-370
G70SP-370	37.0								SG70SP-380
G70SP-380	38.0	8S	55	65.8	BSPP1	10 Bar	316 SS	Neoprene	SG70SP-400
G70SP-400	40.0								SG70SP-420
G70SP-420	42.0								SG70SP-430

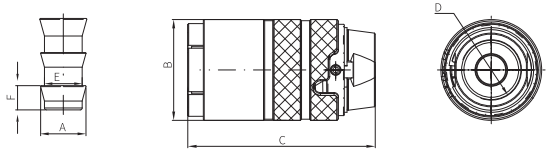

G70SP-BT Liquid Cooling Barbed Port

Model	Dim. A	Body No.	Dim. B	Dim. C	Dim. E	Dim. F	Fluid Thread D	Max. Pressure	Material	Seal Material	Seal No.
G70SP-BT075L045	7.5	1S	20	51.9	6.4	4.5	BSPP1/8"	10 Bar	Stainless	Neoprene	SG70SP-BT075L045
G70SP-BT087L048	8.7	1S	20	51.9	6.8	4.8	BSPP1/8"				SG70SP-BT087L048
G70SP-BT120L057	12.0	2S	25	52.1	9.9	5.7	BSPP1/4"				SG70SP-BT120L057
G70SP-BT150L053	15.0	3S	30	54	12.7	5.3	BSPP3/8"				SG70SP-BT150L053
G70SP-BT180L049	18.0	3S	30	54	15.9	4.9	BSPP3/8"				SG70SP-BT180L049

The models above are for illustration. For specific interface dimensions, please contact our sales team for the best solution.







G70SP-TL Small-Body Damage-Free Connector

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Thread Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70SP-060-TL025	6.00	1S	20	60	BSPP1/8	10 Bar	316 SS	Neoprene	SG70SP-060-TL025
G70SP-070-TL025	7.00								SG70SP-070-TL025
G70SP-080-TL025	8.00								SG70SP-080-TL025
G70SP-090-TL025	9.00								SG70SP-090-TL025
G70SP-100-TL025	10.00								SG70SP-100-TL025
G70SP-110-TL045	11.00	2S	25	60	BSPP1/4	10 Bar	316 SS	Neoprene	SG70SP-110-TL045
G70SP-120-TL045	12.00								SG70SP-120-TL045
G70SP-130-TL045	13.00								SG70SP-130-TL045
G70SP-140-TL045	14.00								SG70SP-140-TL045
G70SP-150-TL085	15.00	3S	30	62	BSPP1/2	10 Bar	316 SS	Neoprene	SG70SP-150-TL085
G70SP-160-TL085	16.00								SG70SP-160-TL085
G70SP-170-TL085	17.00								SG70SP-170-TL085
G70SP-180-TL085	18.00								SG70SP-180-TL085
G70SP-190-TL085	19.00	4S	35	73	BSPP1/2	10 Bar	316 SS	Neoprene	SG70SP-190-TL085
G70SP-200-TL085	20.00								SG70SP-200-TL085
G70SP-210-TL085	21.00								SG70SP-210-TL085
G70SP-220-TL085	22.00								SG70SP-220-TL085





G70SP-NW Interface (Four-Segment Jaw) Straight-Through

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70SP-NW6	10.40	3S	30	54	BSPP3/8	10 Bar	316 SS	NBR	SG70SP-NW6
G70SP-NW8	12.40								SG70SP-NW8
G70SP-NW12	16.30	4S	35	65.1	BSPP1/2	10 Bar	316 SS	NBR	SG70SP-NW12
G70SP-NW14	17.50								SG70SP-NW14
G70SP-NW14US	19.15	5S	40	66	BSPP1/2	10Bar	316 SS	NBR	SG70SP-NW14US
G70SP-NW16	22.30								SG70SP-NW16
G70SP-NW18	23.75	6S	45	65.3	BSPP3/4	10 Bar	316 SS	NBR	SG70SP-NW18
G70SP-NW20	26.30								SG70SP-NW20
G70SP-NW26	32.50	8S	55	65.8	BSPP1	10 Bar	316 SS	NBR	SG70SP-NW26

G70SP Small-Body Damage-Free Quick Connector
ONE-STOP CONNECTION
Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |







Fuel Line Connector - Compliant with J2044

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70SP-J063	6.30±0.06	2S	25	52.1	BSPP1/4	10 Bar	316 SS	NBR	SG70SP-J063
G70SP-J079	7.89±0.06								SG70SP-J079
G70SP-J095	9.49±0.06								SG70SP-J095
G70SP-J099	9.89±0.06								SG70SP-J099
G70SP-J118	11.80±0.10	3S	30	54	BSPP3/8	10 Bar	316 SS	NBR	SG70SP-J118
G70SP-J126	12.61±0.10								SG70SP-J126
G70SP-J158	15.82±0.10	4S	35	65.1	BSPP1/2	10 Bar	316 SS	NBR	SG70SP-J158
G70SP-J189	18.90±0.10	5S	40	66	BSPP1/2	10 Bar	316 SS	NBR	SG70SP-J189
G70SP-J227	22.70±0.15								SG70SP-J227
G70SP-J255	25.50±0.15	6S	45	65.3	BSPP3/4	10 Bar	316 SS	NBR	SG70SP-J255





G70SP-CQC Damage-Free Small-Body Connector

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Dim. E	Dim. F	Max. Pressure	Materia	Seal Material	Seal No.
G70SP-CQC10	10.0	1S	20.0	52.0	BSPP1/8	8.0	17.5	10Bar	316 SS	NBR	SG70SP-CQC10
G70SP-CQC14	14.0	2SM	27.0	56.4	BSPP3/8	12.2	18.3	10Bar	316 SS	NBR	SG70SP-CQC14
G70SP-CQC16	16.0	3S	30.0	54.0	BSPP3/8	14.2	16	10Bar	316 SS	NBR	SG70SP-CQC16
G70SP-CQC18	18.0	4S	35.0	65.1	BSPP1/2	16.5	19.8	10Bar	316 SS	NBR	SG70SP-CQC18
G70SP-CQC20	20.0	4S	35.0	65.1	BSPP1/2	18.2	19.9	10Bar	316 SS	NBR	SG70SP-CQC20

G70RP Rotating Sleeve Damage-Free Quick Connector

ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |







G70RP Damage-Free Short Connector

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70R-160PK	16.0	4R	35.4	73	BSPP3/8	10 Bar	316 SS	Neoprene	SG70R-160PK
G70R-160PKHF10	16.0								SG70R-160PKHF10
G70R-160PK-TN085	16.0								SG70R-160PK-TN085
G70R-200PK	20.0	5R	40.4	71	BSPP3/8	10 Bar	316 SS	Neoprene	SG70R-200PK
G70R-200PKHF10	20.0								SG70R-200PKHF10
G70R-200PK-TN085	20.0								SG70R-200PK-TN085
G70R-J158PK	15.8	4R	35.4	73	BSPP3/8	10 Bar	316 SS	NBR	SG70R-J158PK
G70R-J158PKHF10	15.8								SG70R-J158PKHF10
G70R-J158PK-TN085	15.8								SG70R-J158PK-TN085

* Other fluid port specifications are available, including BSPP1/2 female thread, BSPP3/8 male flat port and barbed fittings. Please enquire.





G70RP NW Interface (Four-Segment Jaw) L-Type Rotating Sleeve

Model	Dim. A	Body No	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70R-NW12P	16.30	4RS	35.4	75	BSPP3/8	10 Bar	316 SS	NBR	SG70R-NW12P
G70R-NW16P	22.30	5RS	40.4	75	BSPP3/8	10 Bar	316 SS	NBR	SG70R-NW16P

G70NP Mini Damage-Free Quick Connector

ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |





G70NP Damage-Free Mini Quick Connector

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Jaw Material	Seal Material	Seal No.
G70NP-080	8.0	2N	24.7	43	BSPP1/4	10 Bar	Polymer	Neoprene	SG70NP-080
G70NP-100	10.0								SG70NP-100
G70NP-110	11.0								SG70NP-120
G70NP-160	16.0	4N	34.6	43	BSPP1/4	10 Bar	Polymer	Neoprene	SG70NP-160
G70NP-170	17.0								SG70NP-170
G70NP-180	18.0								SG70NP-180
G70NP-190	19.0								SG70NP190
G70NP-200	20.0								SG70NP-200
G70NP-220	22.0	5N	38.6	48	BSPP1/4	10 Bar	Polymer	Neoprene	SG70NP-220
G70NP-230	23.0								SG70NP-230







G70NP-TL Damage-Free Mini Quick Connector

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G70NP-080-TL025	8.0	2N	19.8	43.7	BSPP1/8	30.9	10 Bar	316 SS	Neoprene	SG70N-080-TL025
G70NP-100-TL025	10.0									SG70N-100-TL025
G70NP-110-TL025	11.0									SG70N-110-TL025
G70NP-160-TL085	16.0	4N	34.6	46.8	BSPP1/2	56.8				SG70N-160-TL085
G70NP-170-TL085	17.0									SG70N-170-TL085
G70NP-180-TL085	18.0									SG70N-180-TL085
G70NP-190-TL085	19.0									SG70N-190-TL085
G70NP-200X-TL085	20.0									SG70N-200-TL085
G70NP-220-TL085	22.0									SG70N-220-TL085
G70NP-230X-TL085	23.0	5N	38.6	48		62.5				SG70N-230-TL085

The G70 series is an external-grip connector, widely used for leak testing, running tests and ageing tests of irregular tubes such as coolant pipes and fuel lines. Compact in structure, it can be held with one hand and is simple to use: a light hand push completes the connection.

Irregular Tube Quick Connector

* Face seal, easy to replace
* Push-pull operation: simple and reliable
* No flow loss, efficient testing
* Safetyindicator for reliable production

G70 Series Quick Connector Features

1. Sliding sleeve operation
Simple operation: a light push completes the threaded connection, and knurling on the housing increases grip for easier handling.

2. Face seal
Reliable sealing, high pressure rating, easy seal replacement and simple maintenance.

3. 316 stainless steel construction
Excellent mechanical properties: strong and durable, greatly extending connector service life.

4. Straight-through design
Maximises flow and minimises the effect on running tests.

5. Safety indicator ring
Position confirmation indicator for reliable production

Selected Models

G70 Irregular Tube Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |

G70 Quick Connector Advantages and Features

External-grip jaw locking: grips the raised feature of the tube end directly

Knurling: Increases friction for easier operation

Sliding sleeve structure:A light push locks or releases the connection



Straight-through design: Reduces flow loss and ensures correct test results

Side inlet: the G70R type offers a side inlet option. The connector is shorter and suits confined spaces

G70 Quick Connector Specifications

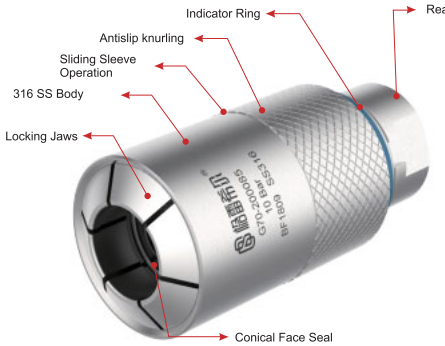

Max. Op. Pressure	Vacuum to 70 Bar
Sealing Range	See Selection Table
Max. Bead Width	4-8mm
Flow Port	See Selection Table
Material	316 Stainless
Main Seal	Neoprene, NBR
Inner Seal	NBR
Operating Temp.	-20 °C to +120 °C

G70 Operation Demo

1. Align the connector with the tube to be sealed

2. Push to lock the connection

Application Cases

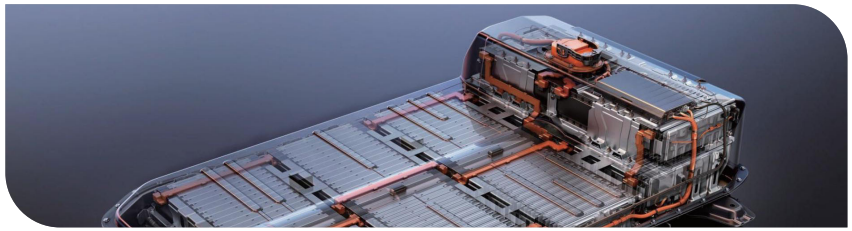

EV Battery Cold Plate Testing

Engine Assembly Testing

Engine Cooling Channel Testing

G70 Irregular Tube Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |

Irregular Tube Selection Table Bodies 2-8

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70-080025	8.0	2	25.4	75	BSPP1/4	10Bar	316 SS	Neoprene	SG70-080025
G70-100045	10.0	3	30.4	75	BSPP1/4	10Bar	316 SS	Neoprene	SG70-100045
G70-120045	12.0								SG70-120045
G70-140065	14.0	4	35.4	80	BSPP3/8	10Bar	316 SS	Neoprene	SG70-140065
G70-160065	16.0								SG70-160065
G70-170065	17.0								SG70-170065
G70-180085	18.0	5	40.4	80	BSPP1/2	10Bar	316 SS	Neoprene	SG70-180085
G70-190085	19.0								SG70-190085
G70-200085	20.0								SG70-200085
G70-250125	25.0	6	46.4	90	BSPP3/4	10Bar	316 SS	Neoprene	SG70-250125
G70-320125	32.0	7	50.4	90	BSPP3/4	10Bar	316 SS	Neoprene	SG70-320125
G70-350125	35.0	8	55.4	90	BSPP3/4	10Bar	316 SS	Neoprene	SG70-350125
G70-380125	38.0								SG70-380125

Note: For G70 connectors with bodies 4-8, the flange diameter of the tube being sealed is 2 mm larger than the straight tube OD. For example, if G70-200085 seals a tube with dimension A of 20 mm, the flange diameter is 22 mm.

* The default maximum pressure of standard products is 10 Bar. Please contact us if high-pressure testing from 10 to 50 Bar is required.

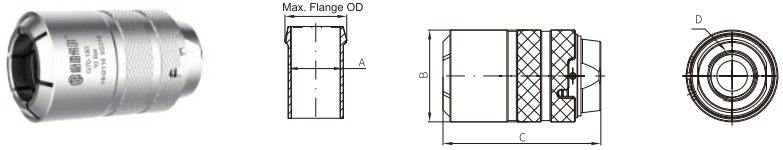

G70S Small-Body Connector

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70S-080	8.0	1S	20	50	BSPP1/8	10 Bar	316 SS	Neoprene	SG70S-080
G70S-100	10.0								SG70S-100
G70S-120	12.0	2S	25	50	BSPP1/4	10 Bar	316 SS	Neoprene	SG70S-120
G70S-140	14.0								SG70S-140
G70S-160M	16.0	2SM	27	55	BSPP3/8	10 Bar	316 SS	Neoprene	SG70S-160M
G70S-170	17.00	3S	30	51.6	BSPP3/8	10 Bar	316 SS	Neoprene	SG70S-170
G70S-180	18.00								SG70S-180
G70S-190	19.00	4S	35.6	63.5	BSPP1/2	10 Bar	316 SS	Neoprene	SG70S-190
G70S-200	20.0								SG70S-200
G70S-250	25.0	5S	40	63.5	BSPP1/2	10 Bar	316 SS	Neoprene	SG70S-250
G70S-280	28.0								SG70S-280
G70S-320	32.0	6S	45	62.5	BSPP3/4	10 Bar	316 SS	Neoprene	SG70S-320
G70S-350	35.0	8S	55	63	BSPP1	10 Bar	316 SS	Neoprene	SG70S-350
G70S-380	38.0								SG70S-380

G70N Mini Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |



G70N Small-Body Connector

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70N-080	8.0	2N	24.7	43	BSPP1/4	10 Bar	316 SS	Neoprene	SG70N-080
G70N-100	10.0								SG70N-100
G70N-120	12.0								SG70N-120
G70N-130	13.0								SG70N-130
G70N-160	16.0	4N	34.6	42	BSPP1/4	10 Bar	316 SS	Neoprene	SG70N-160
G70N-200	20.0								SG70N-200

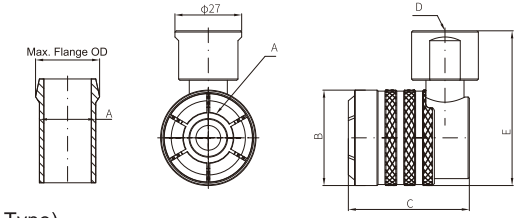

G70N-TL (Rotating Sleeve, L Type)

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Dim. E	Max. Pressure	Material	Seal Material	Seal No
G70N-080-TL025	8.0	1N	22.5	41.7	BSPP 1/8	34.8	10 Bar	316 SS	Neoprene	SG70N-080-TL025
G70N-100-TL025	10.0									SG70N-100-TL025
G70N-120-TL025	12.0	2N	24.7	43		/				SG70N-120-TL025
G70N-160-TL085	16.0	4N	34.6	46.8	BSPP 1/2	56.8				SG70N-160-TL085
G70N-200-TL085	20.0									SG70N-200-TL085

Grooved Tubes

Hot / Cold Water Pipes



E-Drive Water Inlet



Compressor Inlet



Compressor Outlet

The G70 series suits gripping all kinds of grooved ports, as shown above. For other port sealing requirements, please contact us.

G70R Rotating Sleeve Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |

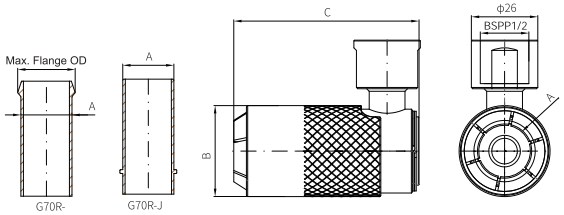

G70R Short-Body Connector (Rotating Sleeve, L Type)

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure*	Material	Seal Material	Seal No.
G70R-J158S	15.80	4R	35.4	73	BSPP3/8 Male Thread	20Bar	316 SS	NBR	SG70R-J158S
G70R-160S	16.00	4R	35.4	73	BSPP3/8 Male Thread	10Bar	316 SS	Neoprene	SG70R-160S
G70R-190S	19.00								SG70R-190S
G70R-200S	20.00								SG70R-200S
G70R-160S-085	16.00	4R	35.4	74	BSPP1/2 Female Thread	10Bar	316 SS	Neoprene	SG70R-160S
G70R-190S-085	19.00								SG70R-190S
G70R-200S-085	20.00								SG70R-200S
G70R-190	19.00	5R	40.4	70	BSPP3/8 Male Thread	10Bar	316 SS	Neoprene	SG70R-190
G70R-200	20.00								SG70R-200

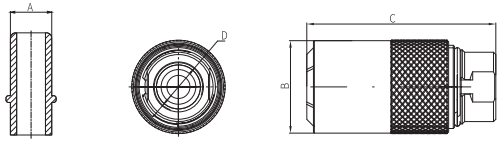

Fuel Line Connector - Compliant with J2044

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure	Material	Seal Material	Seal No.
G70-J063	6.30±0.06	2	25.4	75	BSPP1/4	50Bar	316 SS	NBR	SG70-J063
G70-J079	7.89±0.06								SG70-J079
G70-J095	9.49±0.06	3	30.4	80					SG70-J095
G70-J099	9.89±0.06								SG70-J099
G70-J118	11.80±0.10								SG70-J118
G70-J126	12.61±0.10	4	35.4	86	BSPP3/8				SG70-J126
G70-J158	15.82±0.10								SG70-J158
G70-J189	18.90±0.10	5	40.4	87	BSPP1/2				SG70-J189

G70K Quick Connectors for the Refrigeration Industry

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |

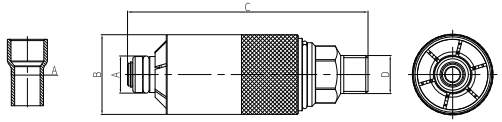

For leak testing of flared tubes in the refrigeration industry

Model	Dim. A	Body No.	Dim. B	Dim. C	Male Thread D	Max. Pressure	Material	Seal Material	Seal No.
G70-K095	9.52	3	30.4	90	BSPT3/8''	50 Bar	316 SS	NBR	SG70-K095
G70-K127	12.7	3	30.4	90					SG70-K127
G70-K158	15.8	4	35.4	95					SG70-K158
G70-K190	19	5	40.4	110					SG70-K190
G70-K222	22.2	5	40.4	110					SG70-K222
G70-K254	25.4	6	46.4	110					SG70-K254
G70-K285	28.5	7	50.4	120					SG70-K285
G70-K353	35.3	8	55	110					SG70-K353



For running tests of flared tubes in the refrigeration industry

Model	Dim. A	Body No.	Dim. B	Dim. C	Male Thread D	Max. Pressure	Material	Seal Material	Seal No.
G70KHF-095	9.52	3	30.4	90	BSPT1/4"	50Bar	316 SS	NBR	SG70KHF-095
G70KHF-127	12.7	3	30.4	90	BSPT3/8"				SG70KHF-127
G70KHF-158	15.8	4	35.4	95	BSPT1/2"				SG70KHF-158
G70KHF-190	19	5	40.4	110	BSPT3/4"				SG70KHF-190
G70KHF-222	22.2	5	40.4	110	BSPT3/4"				SG70KHF-222

All GripSeal connectors are designed with safety built in from the start. However, users of the connectors are responsible for designing their own safety precautions, to avoid property damage caused by incorrect sizing or other reasons. Safety chains, protective nets, protective cages or dedicated fixtures are all good protective measures. GripSeal can also provide, or help customers identify, potential safety hazards.

G80 Female Threaded Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |

The G80 series connector is designed for female threads and is widely used for plugging and connecting all kinds of threaded ports, such as high-pressure testing of automotive parts, leak testing and housing plugging of new energy motor controllers. Various drive options suit manual and pneumatic applications.

Female Thread Connection Solution

* Face seal, easy to replace
* Handle lever operation, simple
* Various drive options for different scenarios
* Customisable neck length to avoid interference

G80 Series Quick Connector Features

1. Modular drive
Three operation modes - pneumatic, push-button valve and lever - meet the requirements of every application.

2. O-ring sealing
Simple and reliable, easy to replace, low maintenance cost and a choice of O-ring material for different fluids.

3. 316 stainless steel construction
Excellent mechanical properties: strong and wear-resistant, greatly extending connector service life.

4. Optional neck length
Common models offer three neck lengths to clear obstructions and avoid interference.

5. Standardised maintenance
Modular internal structure, replaced as one unit, for simple repair

Selected Models

Handle Drive

Push-Button Drive

Pneumatic Drive

G80 Quick Connector Advantages and Features

Female threaded port:
Expanding threaded jaws grip with minimal damage to the thread

Modular drive:
Meets customer requirements for manual and pneumatic operation

Customisable neck length:
avoids interference

Flow Port:
Some jaws have additional flow holes to shorten test time

Face O-Ring:
simple replacement, easy maintenance

G80 Quick Connector Specifications

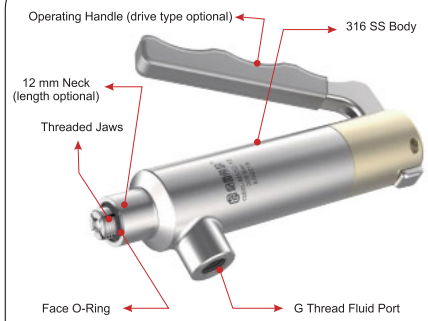

Max. Op. Pressure	Vacuum to 350 Bar
Sealing Range	See the relevant selection table
Min. Thread Depth	See the relevant selection table
Flow Port	BSPP1/8,BSPP1/4,BSPP3/8,BSPP1/2
Material	316 Stainless
Main Seal	NBR
Inner Seal	NBR / FKM
Operating Temp.	-20 °C to +120 °C

G80 Operation Demo

Step 1: Press the handle down

Step 2: Insert into the threaded ter

3: Release the handle to complete the connection

G80 Female Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |

Application Cases

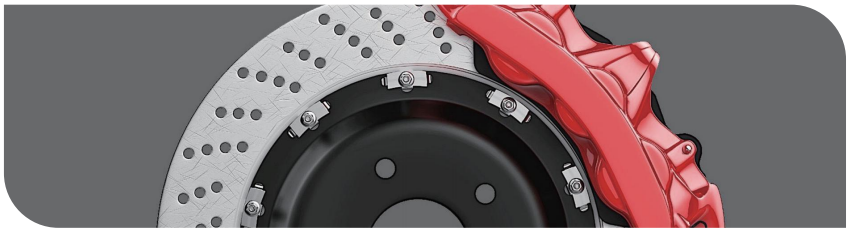

Brake Caliper

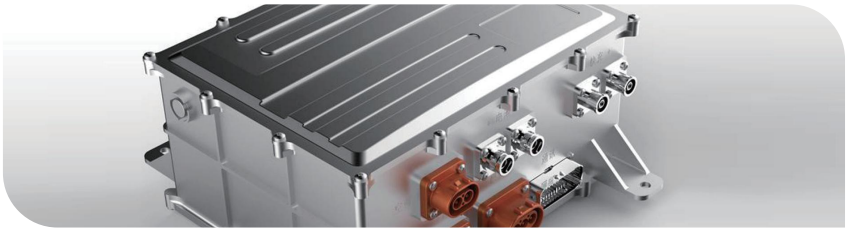

Motor Controller Housing

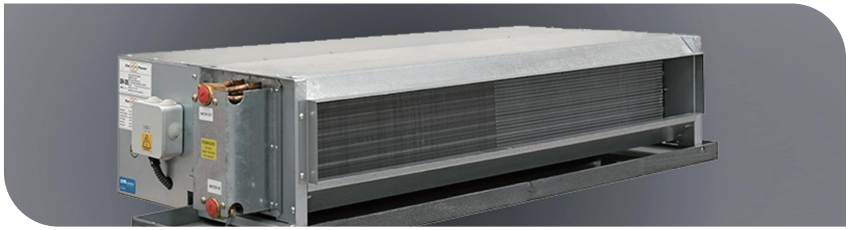

Air-Conditioning Industry

Modular drive options: handle drive G80L, pneumatic drive G80P and push-button drive G80V. They are interchangeable to reduce retrofit cost, and customised service is available.

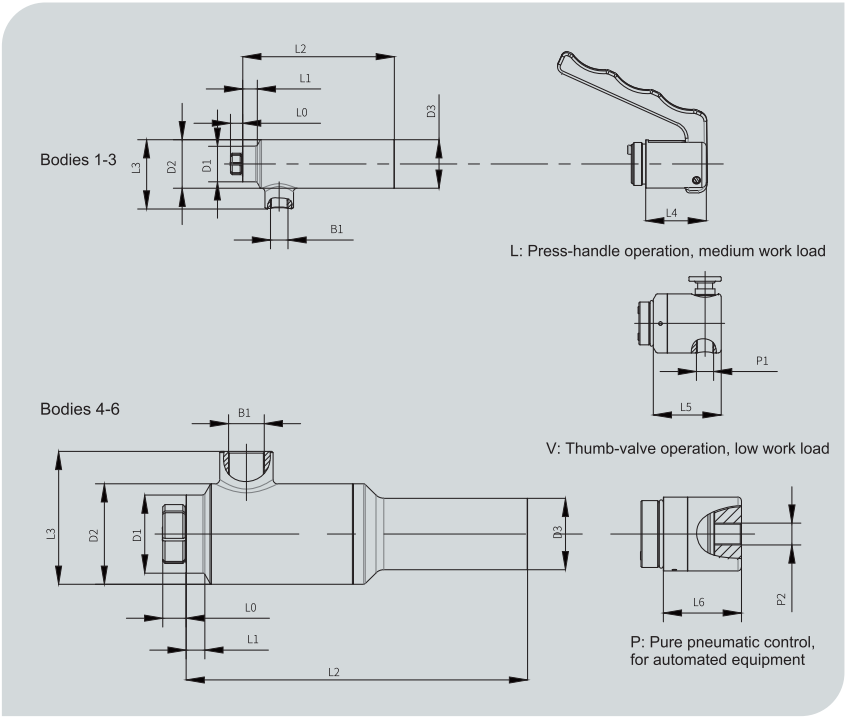

Body No.	B1 (Media Port)	D1	D2	D3	L0	L1	L2	L3	L4	L5	L6
1	BSPP1/8"	16	27	27	7	6.5	85	38.5	34	38	32
1A	BSPP1/8"	16	27	27	7	12.5	90	38.5	34	38	32
1B	BSPP1/8"	16	27	27	7	25.5	105	38.5	34	38	32
2	BSPP1/8"	20	27	27	7.5	6.5	85	38.5	34	38	32
2A	BSPP1/8"	20	27	27	7.5	12.5	90	38.5	34	38	32
2B	BSPP1/8"	20	27	27	7.5	25.5	110	38.5	34	38	32
3	BSPP1/4"	25	32	32	10	9.5	100	46	35	41	35
4	BSPP1/4"	30	38	32	11.5	8.5	123	54	35	41	35
5	BSPP3/8"	35	45	32	12	7.5	153	60	35	41	35
6	BSPP3/8"	40	50	32	12	7.5	153	67	35	41	35

Unit: mm

G80 Female Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |



G80 Metric M Thread Specification Table

Model	Female Thread Dim. A	Body No.	Min. Insert Depth	Fluid Port	Max. Pressure	Material	Seal Material	Seal No.
G80L-M8C	M8x1.0	1	7	BSPP1/8	200 Bar	316 SS	NBR	SG80L-M8C
G80L-M8D	M8x1.25	1						SG80L-M8D
G80L-M10C	M10 x 1.0	1						SG80L-M10C
G80L-M10D	M10 x 1.25	1						SG80L-M10D
G80L-M10E	M10 x 1.5	1						SG80L-M10E
G80L-M10C-12	M10 x 1.0	1A*						SG80L-M10C-12
G80L-M10D-12	M10 x 1.25	1A						SG80L-M10D-12
G80L-M10E-12	M10 x 1.5	1A						SG80L-M10E-12
G80L-M10C-25	M10 x 1.0	1B*						SG80L-M10C-25
G80L-M10D-25	M10 x 1.25	1B						SG80L-M10D-25
G80L-M10E-25	M10 x 1.5	1B						SG80L-M10E-25
G80L-M12C	M12 x 1.0	2	7.5					SG80L-M12C
G80L-M12D	M12 x 1.25	2						SG80L-M12D
G80L-M12E	M12 x 1.5	2						SG80L-M12E
G80L-M12C-12	M12 x 1.0	2A*						SG80L-M12C-12
G80L-M12D-12	M12 x 1.25	2A						SG80L-M12D-12
G80L-M12E-12	M12 x 1.5	2A						SG80L-M12E-12
G80L-M12C-25	M12 x 1.0	2B*						SG80L-M12C-25
G80L-M12D-25	M12 x 1.25	2B						SG80L-M12D-25
G80L-M12E-25	M12 x 1.5	2B						SG80L-M12E-25
G80L-M14C	M14x1.0	2						SG80L-M14C
G80L-M14D	M14x1.25	2						SG80L-M14D
G80L-M14E	M14x1.5	2						SG80L-M14E
G80L-M16B	M16x0.8	3	10	BSPP1/4				SG80L-M16B
G80L-M16C	M16x1.0	3						SG80L-M16C
G80L-M16E	M16x1.5	3						SG80L-M16E
G80L-M18E	M18x1.5	3						SG80L-M18E
G80L-M20E	M20x1.5	4	11.5					SG80L-M20E
G80L-M22E	M22x1.5	4						SG80L-M22E
G80L-M24E	M24x1.5	5	12	BSPP3/8				SG80L-M24E
G80L-M26E	M26x1.5	5						SG80L-M26E
G80L-M27F	M27x2.0	5						SG80L-M27F
G80L-M28E	M28x1.5	6	12					SG80L-M28E
G80L-M30E	M30x1.5	6						SG80L-M30E
G80L-M33F	M33x2.0	6						SG80L-M33F

1. Other thread specifications can be customised on request, up to 2 inch. 2.
Bodies 1A and 2A have a neck length of 12.5 mm.

3. Bodies 1B and 2B have a neck length of 25.5 mm, suitable for position-restricted applications.

G80 Pipe Thread Specification Table

Model	Female Thread Dim. A	Body No.	Min. Insert Depth	Fluid Port	Max. Pressure	Material	Seal Material	Seal No.
G80L-G01	BSPP1/8"	1	7	BSPP1/8	200 Bar	316 SS	NBR	SG80-01
G80L-G02	BSPP1/4"	2	7.5					SG80-02
G80L-G03	BSPP3/8"	3	10	BSPP1/4				SG80-03
G80L-G04	BSPP1/2"	4	11.5					SG80-04
G80L-G06	BSPP3/4"	5	12	BSPP3/8				SG80-06
G80L-G08	BSPP1"	6	12					SG80-08

G80 Taper Pipe Thread Specification Table

Model	Female Thread Dim. A	Body No	Min. Insert Depth	Fluid Port	Max. Pressure	Material	Seal Material	Seal No.
G80L-R01	R1/8" (BSPT)	1	7	BSPP1/8	200 Bar	316 SS	NBR	SG80-01
G80L-R02	R1/4" (BSPT)	2	7.5					SG80-02
G80L-R03	R3/8" (BSPT)	3	10	BSPP1/4				SG80-03
G80L-R04	R1/2" (BSPT)	4	11.5					SG80-04
G80L-R06	R3/4" (BSPT)	5	12	BSPP3/8				SG80-06
G80L-R08	R1" (BSPT)	6	12					SG80-08

G80 US Taper Pipe Thread - NPT Specification Table

Model	Female Thread Dim. A	Body No.	Min. Insert Depth	Fluid Port	Max. Pressure	Material	Seal Material	Seal No.
G80L-N01	NPT1/8"	1	7	BSPP1/8	200 Bar	316 SS	NBR	SG80-01
G80L-N02	NPT1/4"	2	7.5					SG80-02
G80L-N03	NPT3/8"	3	10	BSPP1/4				SG80-03
G80L-N04	NPT1/2"	4	11.5					SG80-04
G80L-N06	NPT3/4"	5	12	BSPP3/8				SG80-06
G80L-N08	NPT1"	6	12					SG80-08

G80 US Fine Thread - UNF Specification Table

Model	Female Thread Dim. A	Body No.	Min. Insert Depth	Fluid Port	Max. Pressure	Material	Seal Material	Seal No.
G80L-U02	UNF5/16-24	1	7	BSPP1/8	200 Bar	316 SS	NBR	SG80-UN02
G80L-U03	UNF3/8-24	1	7					SG80-UN03
G80L-U04	UNF7/16-20	2	7.5					SG80-UN04
G80L-U05	UNF1/2-20	2	7.5					SG80-UN05
G80L-U06	UNF9/16-18	2	7.51					SG80-UN06
G80L-U08	UNF3/4-16	4	1.51	BSPP1/4				SG80-UN08
G80L-U10	UNF 7/8-14	4	1.5					SG80-UN10
G80L-U12	UNF 1-1/16-12	5	12	BSPP3/8				SG80-UN12
G80L-U14	UNF1-3/16-12	6	12					SG80-UN14
G80L-U16	UNF 1-5/16-12	6	12					SG80-UN16



G80S Short Low-Pressure Version

Model	Dim. A	Body No.	Min. Insert Depth	Fluid Por	Max. Pressure	Material	Seal Material	Seal No.
G80L-M16ES	M16*1.5	3S	10	BSPP3/8"	50 Bar	316 SS	NBR	SG80-M16
G80L-M18ES	M18*1.5	3S	10	BSPP3/8"				SG80-M18
G80L-G03S	BSPP3/8"	3S	10	BSPP3/8"				SG80-G03
G80L-R03S	BSPT3/8"	3S	10	BSPP3/8"				SG80-R03

G80 Female Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |



G80HL Long-Jaw Metric M Thread Specification Table

Model	Dim. A	Body No.	Min. Insert Depth	Fluid Port	Max. Pressure	Material	Seal Material	Seal No.
G80HL-M10C	M10X1.0	1	10.5	BSPP1/8	350 Bar	316 SS	NBR	SG80HL-M10C
G80HL-M10C-12	M10X1.0	1A	9	BSPP1/8				SG80HL-M10C-12
G80HL-M10C-25	M10X1.0	1B	10	BSPP1/8				SG80HL-M10C-25
G80HL-M10E-12	M10X1.5	1A	9.2	BSPP1/8				SG80HL-M10E-12
G80HL-M12C	M12X1.0	2	11.75	BSPP1/8				SG80HL-M12C
G80HL-M12C-12	M12X1.0	2A	11.75	BSPP1/8				SG80HL-M12C-12
G80HL-M12D	M12X1.25	2	11.75	BSPP1/8				SG80HL-M12D
G80HL-M12D-12	M12X1.25	2A	11.75	BSPP1/8				SG80HL-M12D-12
G80HL-M12E-12	M12X1.5	2A	11.75	BSPP1/8				SG80HL-M12E-12
G80HL-M14E-12	M14X1.5	2A	11.25	BSPP1/8				SG80HL-M14E-12
G80HL-M16E	M16X1.5	3	12.5	BSPP1/4				SG80HL-M16E
G80HL-M18E	M18X1.5	3	12.5	BSPP1/4				SG80HL-M18E
G80HL-M20E	M20X1.5	4	12.8	BSPP1/4				SG80HL-M20E

G80HL Long-Jaw Pipe Thread Specification Table

Model	Dim. A	Body No.	Min. Insert Depth	Fluid Port	Max. Pressure	Material	Seal Material	Seal No.
G80HL-G02	BSPP1/4	2	14.7	BSPP1/8	350 Bar	316 SS	NBR	SG80HL-G02
G80HL-G03	BSPP3/8	3	12.5	BSPP1/4				SG80HL-G03
G80HL-G04	BSPP1/2	4	12.8	BSPP1/4				SG80HL-G04

G80HL Long-Jaw UNF Fine Thread Specification Table

Model	Dim. A	Body No.	Min. Insert Depth	Fluid Port	Max. Pressure	Material	Seal Material	Seal No.
G80HL-U06	1/2-20UN	3	11.5	BSPP1/4	350 Bar	316 SS	NBR	SG80HL-U06
G80HL-U12	1 1/16-12UN	5	14.76	BSPP3/8				SG80HL-U12

G80 Female Threaded Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |





G80L Long-Jaw Metric M Thread Specification Table (ISO 6149-1)

Model	Dim. A	Body No.	Min. Insert Depth	Fluid Port	Max. Pressure	Material	Seal Material	Seal No.
G80L-M12E-6149	M12X1.5	2	11.75	BSPP1/8	350 Bar	316 SS	NBR	SG80L-M12E-6149
G80L-M14E-6149	M14X1.5	2	11.25	BSPP1/8				SG80L-M14E-6149
G80L-M16E-6149	M16X1.5	3	12.5	BSPP1/4				SG80L-M16E-6149
G80L-M18E-6149	M18X1.5	3	12.5	BSPP1/4				SG80L-M18E-6149
G80L-M20E-6149	M20X1.5	4	12.8	BSPP1/4				SG80L-M20E-6149
G80L-M22E-6149	M22X1.5	4	12.8	BSPP1/4				SG80L-M22E-6149
G80L-M27F-6149	M27X2.0	5	13	BSPP3/8				SG80L-M27F-6149

G80L Long-Jaw UNF Fine Thread Specification Table (ISO 11926-1)

Model	Dim. A	Body No.	Min. Insert Depth	Fluid Port	Max. Pressure	Material	Seal Material	Seal No.
G80L-U05-6149	UNF1/2-20	2	11.75	BSPP1/8	350 Bar	316 SS	NBR	SG80L-U05-6149
G80L-U06-6149	UNF9/16-18	2	11.75	BSPP1/8				SG80L-U06-6149
G80L-U08-6149	UNF3/4-16	4	12.8	BSPP1/4				SG80L-U08-6149
G80L-U10-6149	UNF 7/8-14	4	12.8	BSPP1/4				SG80L-U10-6149
G80L-U12-6149	UNF 1-1/16-12	5	13	BSPP3/8				SG80L-U12-6149





G80L-T Thin-Wall Bore Connector

Model	Dim. A	Body No.	Thin-Wall Plate Thickness Range	Fluid Port	Max Pressure	Material	Seal No.
G80L-T065	6.5	1	0.5-4	BSPP1/8	10Bar	Stainless	SG80-T065
G80L-T090	9	1	0.5-4	BSPP1/8			SG80-T090
G80L-T10-12	10	1A	0.5-4	BSPP1/8			SG80-T10
G80L-T105-12	10.5	1A	0.5-4	BSPP1/8			SG80-T105

G80R Female Threaded Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |



G80R Adjustable Rear End Specification Table

Model	Dim. A	Body No.	Min. Insert Depth	Dim. B	Max. Pressure	Material	Seal Material	Seal No.
G80R-M10C	M10X1.0	1	7	BSPP 1/8	200 Bar	Stainless	NBR	SG80R-M10C
G80R-M10D	M10X1.25	1		BSPP 1/8				SG80R-M10D
G80R-M10E	M10X1.5	1		BSPP 1/8				SG80R-M10E
G80R-M10C-12	M10X1.0	1A		BSPP 1/8				SG80R-M10C-12
G80R-M10D-12	M10X1.25	1A		BSPP 1/8				SG80R-M10D-12
G80R-M10E-12	M10X1.5	1A		BSPP 1/8				SG80R-M10E-12
G80R-M10C-25	M10X1.0	1B		BSPP 1/8				SG80R-M10C-25
G80R-M10D-25	M10X1.25	1B		BSPP 1/8				SG80R-M10D-25
G80R-M10E-25	M10X1.5	1B		BSPP 1/8				SG80R-M10E-25
G80R-M12C	M12X1.0	2	7.5	BSPP 1/4				SG80R-M12C
G80R-M12D	M12X1.25	2		BSPP 1/4				SG80R-M12D
G80R-M12E	M12X1.5	2		BSPP 1/4				SG80R-M12E
G80R-M12C-12	M12X1.0	2A		BSPP 1/4				SG80R-M12C-12
G80R-M12D-12	M12X1.25	2A		BSPP 1/4				SG80R-M12D-12
G80R-M12E-12	M12X1.5	2A		BSPP 1/4				SG80R-M12E-12
G80R-M12C-25	M12X1.0	2B		BSPP 1/4				SG80R-M12C-25
G80R-M12D-25	M12X1.25	2B		BSPP 1/4				SG80R-M12D-25
G80R-M12E-25	M12X1.5	2B		BSPP 1/4				SG80R-M12E-25
G80HR-M10C	M10X1.0	1	10.5	BSPP 1/8	350 Bar	Stainless	NBR	SG80HR-M10C
G80HR-M10D	M10X1.25	1		BSPP 1/8				SG80HR-M10D
G80HR-M10E	M10X1.5	1		BSPP 1/8				SG80HR-M10E
G80HR-M10C-12	M10X1.0	1A	9	BSPP1/8				SG80HR-M10C-12
G80HR-M10D-12	M10X1.25	1A		BSPP1/8				SG80HR-M10D-12
G80HR-M10E-12	M10X1.5	1A		BSPP 1/8				SG80HR-M10E-12
G80HR-M10C-25	M10X1.0	1B	10	BSPP 1/8				SG80HR-M10C-25
G80HR-M10D-25	M10X1.25	1B		BSPP 1/8				SG80HR-M10D-25
G80HR-M10E-25	M10X1.5	1B		BSPP 1/8				SG80HR-M10E-25

1. Press the locking button; the handle can then be rotated



2. Rotate the handle to a suitable position

3.Release the handle button to f ix the position





G80NL Mini Low-Pressure Version - Metric ISO Thread (M Thread)

Model	Dim. A	No.Body	Min. Insert Depth	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Max. Pressure	Boby Material	Seal No.
G80NL-M10C	M10X1.0	1NL	7	16	6	58.5	BSPP1/8	58	18.2			
G80NL-M10D	M10X1.25	1NL	7	16	6	58.5	BSPP1/8	58	18.2			
G80NL-M10E	M10X1.5	1NL	7	16	6	58.5	BSPP1/8	58	18.2			
G80NL-M10C-12	M10X1.0	1NLA	6	16	18.5	71	BSPP1/8	58	18.2			
G80NL-M10D-12	M10X1.25	1NLA	6	16	18.5	71	BSPP1/8	58	18.2			SG80NL-M10
G80NL-M10E-12	M10X1.5	1NLA	6	16	18.5	71	BSPP1/8	58	18.2			
G80NL-M10C-25	M10X1.0	1NLB	6	16	31.5	84	BSPP1/8	58	18.2			
G80NL-M10D-25	M10X1.25	1NLB	6	16	31.5	84	BSPP1/8	58	18.2			
G80NL-M10E-25	M10X1.5	1NLB	6	16	31.5	84	BSPP1/8	58	18.2			
G80NL-M12C	M12X1.0	2NL	8	20	6	60.5	BSPP1/8	60	22.5			
G80NL-M12D	M12X1.25	2NL	8	20	6	60.5	BSPP1/8	60	22.5			
G80NL-M12E	M12X1.5	2NL	8	20	6	60.5	BSPP1/8	60	22.5	50Bar	Stainless	
G80NL-M12C-12	M12X1.0	2NLA	8	20	18.5	73	BSPP1/8	60	22.5			
G80NL-M12D-12	M12X1.25	2NLA	8	20	18.5	73	BSPP1/8	60	22.5			SG80NL-M12
G80NL-M12E-12	M12X1.5	2NLA	8	20	18.5	73	BSPP1/8	60	22.5			
G80NL-M12C-25	M12X1.0	2NLB	8	20	31.5	86	BSPP1/8	60	22.5			
G80NL-M12D-25	M12X1.25	2NLB	8	20	31.5	86	BSPP1/8	60	22.5			
G80NL-M12E-25	M12X1.5	2NLB	8	20	31.5	86	BSPP1/8	60	22.5			
G80NL-M14E	M14X1.5	2NL	8	20	6	60.5	BSPP1/8	60	22.5			SG80NL-M14
G80NL-M16E	M16X1.5	3NL	8	24	6	65	BSPP1/8	65	27			SG80NL-M16
G80NL-M18E	M18X1.5	3NL	8	24	6	65	BSPP1/8	65	27			SG80NL-M18
G80NL-M20E	M20X1.5	4NL	11.5	29	6.2	70.4	BSPP1/8	71.9	32			SG80NL-M20
G80NL-M22E	M22X1.5	4NL	11.5	29	6.2	70.4	BSPP1/8	71.9	32			SG80NL-M22
G80NL-M24E	M24X1.5	5NL	12	33.7	7.5	80.2	BSPP3/8	114.9	40.7			SG80NL-M24
G80NL-M24F	M24X2.0	5NL	12	33.7	7.5	80.2	BSPP3/8	114.9	40.7			SG80NL-M24
G80NL-M26E	M26X1.5	5NL	12	33.7	7.5	80.2	BSPP3/8	114.9	40.7			SG80NL-M26
G80NL-M27F	M27X2.0	5NL	12	33.7	7.5	80.2	BSPP3/8	114.9	40.7			SG80NL-M27

G80N Mini Female Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium | Compact |

G80NL Mini Low-Pressure Version - Pipe Thread (G Thread)

Model	Dim. A	Body No.	Min. Insert Depth	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Max. Pressure	Material	Seal No.
G80NL-G01	BSPP1/8	1NL	7	16	6	58.5	BSPP1/8	58	18.2			SG80NL-001
G80NL-G02	BSPP1/1	2NL	8	20	6	60.5	BSPP1/8	60	22.5			SG80NL-002
G80NL-G03	BSPP1/8	3NL	8	24	6	65	BSPP1/8	65	27	50Bar	Stainless	SG80NL-003
G80NL-G04	BSPP1/2	4NL	11.5	29	6.2	70.4	BSPP1/8	71.9	32			SG80NL-004
G80NL-G06	BSPP3/4	5NL	12	33.7	7.5	80.2	BSPP3/8	114.9	40.7			SG80NL-006

G80NL Mini Low Pressure Version - Taper Pipe Thread (BSPT)

Model	Dim. A	Body No.	Min. Insert Depth	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Max. Pressure	Material	Seal No.
G80NL-R01	R1/8"(BSPT)	1NL	7	16	6	58.5	BSPP1/8	58	18.2			SG80NL-001
G80NL-R02	R1/4"(BSPT)	2NL	8	20	6	60.5	BSPP1/8	60	22.5			SG80NL-002
G80NL-R03	R3/8"(BSPT)	3NL	8	24	6	65	BSPP1/8	65	27	50Bar	Stainless	SG80NL-003
G80NL-R04	R1/2"(BSPT)	4NL	11.5	29	6.2	70.4	BSPP1/8	71.9	32			SG80NL-004
G80NL-R06	R3/4"(BSPT)	5NL	12	33.7	7.5	80.2	BSPP3/8	114.9	40.7			SG80NL-006

G80NL Mini Low-Pressure Version - US Taper Pipe Thread (NPT)

Model	Dim. A	Body No.	Min. Insert Depth	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Max. Pressure	Material	Seal No.
G80NL-N01	NPT1/8"	1NL	7	16	6	58.5	BSPP1/8	58	18.2			SG80NL-001
G80NL-N02	NPT1/4"	2NL	8	20	6	60.5	BSPP1/8	60	22.5			SG80NL-002
G80NL-N03	NPT3/8"	3NL	8	24	6	65	BSPP1/8	65	27	50Bar	Stainless	SG80NL-003
G80NL-N04	NPT1/2"	4NL	11.5	29	6.2	70.4	BSPP1/8	71.9	32			SG80NL-004
G80NL-N06	NPT3/4"	5NL	12	33.7	7.5	80.2	BSPP3/8	114.9	40.7			SG80NL-006





G80NL-T Thin-Wall Bore Connector (Mini Version)

Model	Dim. A	Body No.	Thin-Wall Plate Thickness Range	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Max. Pressure	Material	Seal No.
G80NL-T065	6.5	1NL	0.5-4	16	6	58.5	BSPP1/8	58	18.2			SG80-T065
G80NL-T090	9	1NL	0.5-4	16	6	58.5	BSPP1/8	58	18.2			SG80-T090
G80NL-T10-12	10	1NLA	0.5-4	16	18.5	71	BSPP1/8	58	18.2	50Bar	Stainless	SG80-T10
G80NL-T105-12	10.5	1NLA	0.5-4	16	18.5	71	BSPP1/8	58	18.2			SG80-T105

1. Bodies 1NLA / 2NLA have a neck extended by 12.5 mm
2. Bodies 1NLB / 2NLB have a neck extended by 25.5 mm

G35 High-Pressure Internal Expanding Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | O-Ring | Locking | Full Model Range | Fast Operation | Various Seal Materials |

The G35 series is a high-pressure connector and the best internal sealing solution for copper, steel and aluminum tubes. It is widely used in refrigeration and new energy industries, such as heat exchangers, pressure vessels, instruments, meters and motor controller cooling plates.

Self-Locking High-Pressure ID Connection Solution

* Improved work efficiency and lower production cost
* Reliable sealing and long service life
* Lightweight and quick, reducing work intensity
* Built-in locking structure, suitable for high-pressure working environments

G35 Series Quick Connector Features

1. Pressure-assisted design
Sealing force increases as test pressure rises.

2. Handle drive
Insert the front seal of the connector into the test port and fold the handle through 90° to make the sealed connection.

3. High-hardness locking jaws
The jaw surface is grooved to increase the contact area and provide higher gripping force; the high-hardness jaws can grip stainless steel and low-carbon steel.

4. G or ZG threaded test port
Standard BSPP1/8 threaded side port, better suited to domestic applications; ZG threads are available for high-pressure test situations and seal more easily.

5. Disconnection
Once test pressure has dropped to zero, fold the handle back: the seal is released and the connection is disconnected

More than ten standard models cover sealing of tube diameters from 9.52 mm to 41.28 mm; other sizes can be customised up to 100 mm

Selected Bodies

G35P Series | G35P2 Series | G35 Series | G35C-P Series | G35C-P2 Series | G35N Series | G35N-P2 Series

G35 High-Pressure Internal Expanding Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | O-Ring | Locking | Full Model Range | Fast Operation | Various Seal Materials |

G35 Quick Connector Advantages and Features

Locking jaws:
they grip the inner wall of the tub firmly, raising the pressure limite

Grooved jaws:
fine grooves on thelocking jaws increase the contact area and provide more reliable gripping force.
*Only available on bodies 1 and 2

Multi-point locking:
the special jaw shape provides multi-point contact for greater gripping force while reducing scratches on thebore

Aviation aluminum with nylon handle:
light to operate, reducing operator fatigue

Pipe threaded fluid port:
compliant with international standards, widely used domestically, with easily available accessories

G35 Quick Connector Specifications

Max. Op. Pressure	Vacuum to 50 Bar or 70 Bar
Sealing Range	8mm ~ 100mm
Min. Insert Depth	Bodies 0, 1: 12 mm Body 2: 23 mm
Flow Port	BSPP1/8 or BSPT1/8 threaded port
Material	Aluminum, Stainless, Nylon
Main Seal	NBR
Inner Seal	NBR
Operating Temp.	-20 °C to +120 °C

G35 Operation Demo

1. Align the connector with the inside of the tube

2. Insert the connector into the tube

3. Turn the handle: the test piece islocked by the connector jaws and sealing is complete

G35 High-Pressure Internal Expanding Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | O-Ring | Locking | Full Model Range | Fast Operation | Various Seal Materials |

Application Cases

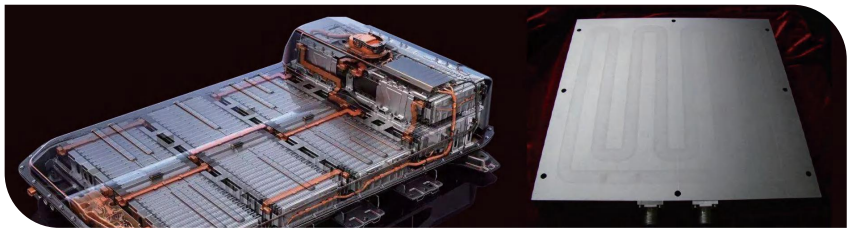

EV Battery Cold Plate Testing

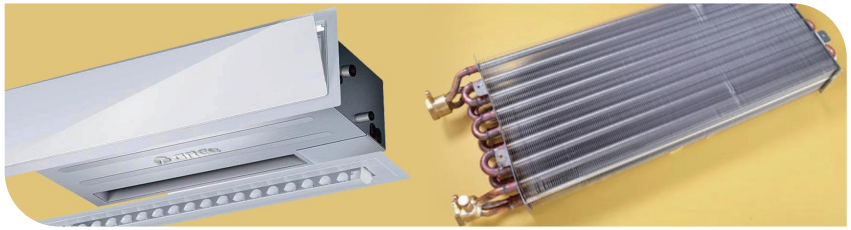

Air-Conditioner Radiator Testing

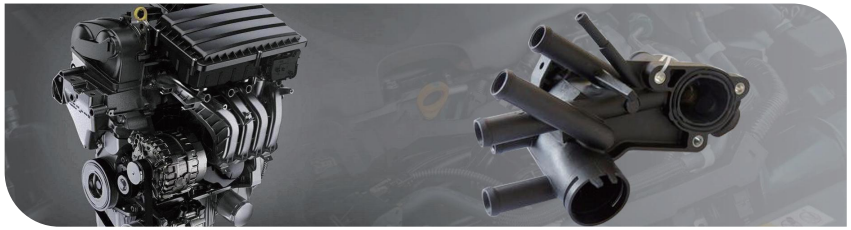

Engine Cooling Channel Testing

G35P Low-Pressure Internal Expanding Damage-Free Quick Connector

ONE-STOP CONNECTION

Testing up to 10 Bar | O-Ring | Engineering Plastic Locking | Full Model Range | Fast Operation | Various Seal Materials |

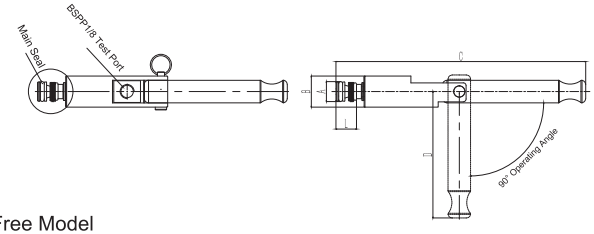

Polymer Jaw Damage-Free Model

Model	Seal Dimension	Max. Press.	Flow Bore	Dim. B	Dim. C	Dim. D	Insert Depth L	Material	Seal Material	Seal No.
G35P-0100	10.0	7 Bar	2.8mm	22	177	90	12	Aluminum	NBR	SG35P-0100
G35P-0110	11.0									SG35P-0110
G35P-0120	12.0									SG35P-0120
G35P-0130	13.0									SG35P-0130
G35P-0140	14.0									SG35P-0140
G35P-1150	15.0		4mm		182		14.5			SG35P-1150
G35P-1160	16.0									SG35P-1160
G35P-1170	17.0									SG35P-1170
G35P-1180	18.0									SG35P-1180
G35P-1190	19.0									SG35P-1190
G35P-1220	20.0									SG35P-1220

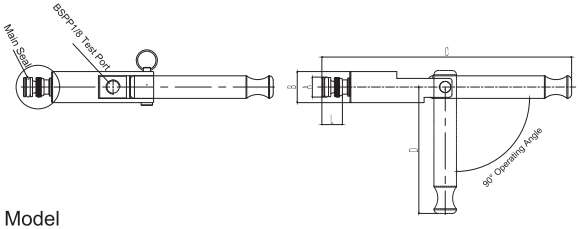

Metal Jaw Damage-Free Model

Model	Seal Dimension	Max. Press.	Flow Bore	Dim. B	Dim. C	Dim. D	Insert Depth L	Material	Seal Material	Seal No.
G35P2-0100	10.0	10 Bar	2.8mm	22	177	90	12	Aluminum	NBR	SG35P2-0100
G35P2-0110	11.0									SG35P2-0110
G35P2-0120	12.0									SG35P2-0120
G35P2-0130	13.0									SG35P2-0130
G35P2-0140	14.0									SG35P2-0140
G35P2-1150	15.0		4mm		182		14.5			SG35P2-1150
G35P2-1160	16.0									SG35P2-1160
G35P2-1170	17.0									SG35P2-1170
G35P2-1180	18.0									SG35P2-1180
G35P2-1190	19.0									SG35P2-1190
G35P2-1200	20.0									SG35P2-1200

G35 High-Pressure Internal Expanding Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | O-Ring | Locking | Full Model Range | Fast Operation | Various Seal Materials |

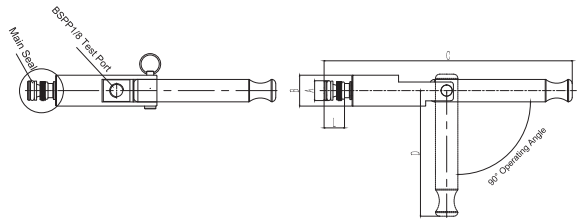

Metric Size Applications

Model	Seal Dim. (mm)±0.25	Max. Press.	Flow Bore	Dim. B	Dim. C	Dim. D	Insert Depth L	Material	Seal Materia	Seal No.
G35-0100	10.00	50Bar	2.8mm	22	177	90	12	Aluminum	NBR	SG35-0100
G35-0110	11.00									SG35-0110
G35-0120	12.00									SG35-0120
G35-0130	13.00									SG35-0130
G35-0140	14.00									SG35-0140
G35-1150	15.00		4.0mm		182		14.5			SG35-1150
G35-1160	16.00									SG35-1160
G35-1170	17.00									SG35-1170
G35-1180	18.00									SG35-1180
G35-1190	19.00									SG35-1190
G35-1200	20.00									SG35-1200
G35-1210	21.00									SG35-1210
G35-1220	22.00									SG35-1220
G35-1230	23.00									SG35-1230

Imperial Size Applications

Model	Seal Dim. (mm)±0.25	Max. Press.	Flow Bore	Dim. B	Dim. C	Dim. D	Insert Depth L	Material	Seal Material	Seal No.
G35-0095	9.52	50Bar	2.8mm	22	177	90	12	Aluminum	NBR	SG35-0095
G35-0127	12.7									SG35-0127
G35-1159	15.88		4.0mm		182		14.5			SG35-1159
G35-1222	22.23									SG35-1222
G35-2254	25.4				185		23			SG35-2254

Custom Size Applications

Model	Seal Dim. (mm)±0.25	Max. Press.	Flow Bore	Dim. L	Material	Seal Material	Seal No.
G35-1XXX	14-25	70Bar *	4mm	15	Aluminum	NBR	SG35-1XXX
G35-2XXX	25-35	50Bar *	4mm	25			SG35-2XXX
G35-3XXX	35-60	20Bar *	7mm	25			SG35-3XXX

Note: * Maximum pressure depends on the material and structural strength of the tube; maximum pressure can reach 70 Bar.

G35C Internal Expanding Low-Pressure Connector

ONE-STOP CONNECTION

Fast Replacement | Wide Range | Internal Expanding | Compact | Various Seal Materials |

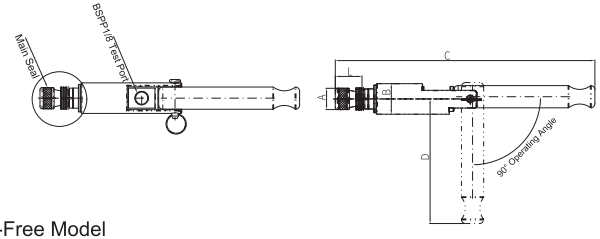

Polymer Jaw Damage-Free Model

Model	Seal Range	Max. Press.	Flow Bore	Dim. B	Dim. C	Dim. D	Insert Depth L	Material	Seal Material	Seal No.
G35C-0100P	9.5-10.5	7Bar	2.8mm	22	177	90	18	Aluminum	Neoprene	SG35C-0100P
G35C-0110P	10.5-11.5									SG35C-0110P
G35C-0120P	11.5-12.5									SG35C-0120P
G35C-0130P	12.5-13.5									SG35C-0130P
G35C-0140P	13.5-14.5									SG35C-0140P
G35C-1150P	14.5-15.5		4mm		182		19			SG35C-1150P
G35C-1160P	15.5-16.5									SG35C-1160P
G35C-1170P	16.5-17.5									SG35C-1170P
G35C-1180P	17.5-18.5									SG35C-1180P
G35C-1190P	18.5-19.5									SG35C-1190P
G35C-1200P	19.5-20.5									SG35C-1200P

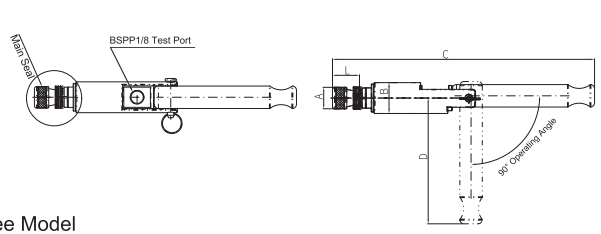

Metal Jaw Damage-Free Model

Model	Seal Range	Max. Press.	Flow Bore	Dim. B	Dim. C	Dim. D	Insert Depth L	Material	Seal Material	Seal No.
G35C-0100P2	9.5-10.5	10Bar	2.8mm	22	177	90	18	Aluminum	Neoprene	SG35C-0100P2
G35C-0110P2	10.5-11.5									SG35C-0110P2
G35C-0120P2	11.5-12.5									SG35C-0120P2
G35C-0130P2	12.5-13.5									SG35C-0130P2
G35C-0140P2	13.5-14.5									SG35C-0140P2
G35C-1150P2	14.5-15.5		4mm		187		19			SG35C-1150P2
G35C-1160P2	15.5-16.5									SG35C-1160P2
G35C-1170P2	16.5-17.5									SG35C-1170P2
G35C-1180P2	17.5-18.5									SG35C-1180P2
G35C-1190P2	18.5-19.5									SG35C-1190P2
G35C-1200P2	19.5-20.5									SG35C-1200P2

GripSeal offers additional non-standard sealing solutions - please contact us anytime if required!

G35N Mini Internal Expanding Quick Connector

ONE-STOP CONNECTION

Testing up to 10 Bar | O-Ring | Engineering Plastic Locking | Full Model Range | Fast Operation | Various Seal Materials |





Metal Jaw Standard Model

Model	Seal Dim.	Max. Press.	Flow Bore	Dim. B	Dim. C	Fluid Port D	Insert Depth L	Material	Seal Material	Seal No.
G35N-0100	10.0	10Bar	3mm	22	40	BSPP1/8	12	Stainless	NBR	SG35-0100
G35N-0110	11.0									SG35-0110
G35N-0120	12.0									SG35-0120
G35N-0130	13.0									SG35-0130
G35N-0140	14.0									SG35-0140
G35N-1150	15.0						14.5			SG35-1150
G35N-1160	16.0									SG35-1160
G35N-1170	17.0									SG35-1170
G35N-1180	18.0									SG35-1180
G35N-1190	19.0									SG35-1190





Metal Jaw Damage-Free Model

Model	Seal Dim.	Max. Press.	Flow Bore	Dim. B	Dim. C	Fluid Threaded Port D	Insert Depth L	Material	Seal Material	Seal No.
G35N-0100P2	10.0	7 Bar	3mm	22	40	BSPP1/8	12	Stainless	NBR	SG35N-0100P2
G35N-0110P2	11.0									SG35N-0110P2
G35N-0120P2	12.0									SG35N-0120P2
G35N-0130P2	13.0									SG35N-0130P2
G35N-0140P2	14.0									SG35N-0140P2
G35N-1150P2	15.0						14.5			SG35N-1150P2
G35N-1160P2	16.0									SG35N-1160P2
G35N-1170P2	17.0									SG35N-1170P2
G35N-1180P2	18.0									SG35N-1180P2
G35N-1190P2	19.0									SG35N-1190P2

G90 Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

The G90 series is a lever-operated manual connector. Its aluminum body keeps the connector strong while reducing operating effort. The special internal structure does not damage the customer product surface, preserving its appearance. It is widely used for engine fuel rails and new energy coolant ports.

Lever-Type Damage-Free Connector

* Lever operation saves time and effort
* No seal, so no consumables
* Aluminum construction: light and robust
* Few leak paths, high sealing class

G90 Series Quick Connector Features

1. Lever drive
Leverage reduces the operating force required and lowers operator load.

2. No seal required
Sealing uses the internal seal of the female fuel port, so there are no consumable parts and maintena nce cost is zero.

3. High sealing class
Only one sealing point inside the sealing channel makes helium testing easy.

4. 360° rotating inlet (optional)
The inlet port rotates freely, eliminating tangled air lines

Selected Models

G90L Series

G90R Series

G90SP Series

G90SPR Series

G90 Quick Connector Advantages and Features

Two operating modes:
Handle operation or push-button operation

Optional orientation:
Straight-through or side inlet options, flexibly configured to suit the site

Damage-free connection:
A PEEK insert design and the polymer piston nesting ensure damage-free connection to aluminium or plastic VDA structures

Mini body:
The miniaturised body suits situations with positional interference and offers broad adaptability

Adapter function:
G90SP / G90SPR offervarious Straight-through or side-exit adapters to other fitting types, including flanged tubes, J2044 and even threaded fittings

G90 Quick Connector Specifications

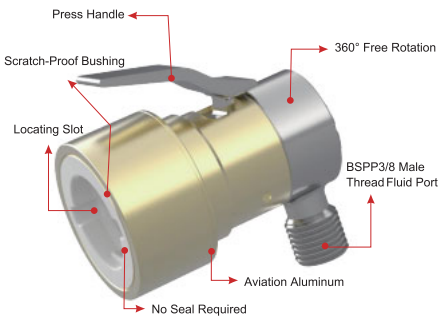

Max. Op. Pressure	Vacuum to 10 Bar
Sealing Range	10mm~56mm
Flow Port	BSPP1/8, BSPP1/4, BSPP3/8, BSPP1/2
Material	Aluminum, Stainless, Nylon
Main Seal	NBR
Inner Seal	NBR
Operating Temp.	-20 °C to +120 °C

G90 Operation Demo

1. Align the quick connector with the femalepart
2. Insert to form the seal
3. Press the side handle to pull it out easily

G90 Lever-Type Connector
ONE-STOP CONNECTION
Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

Application Cases

New Energy Electronic Control Cooling System

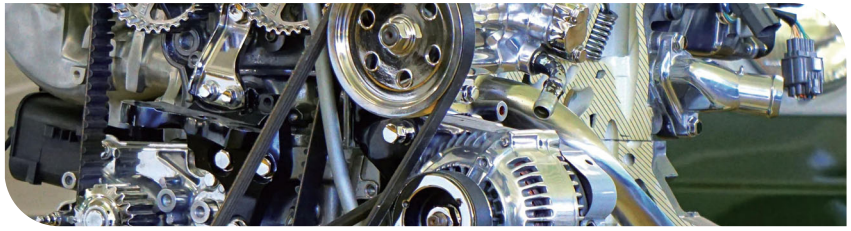

Engine Cooling System

Engine Fuel System

G90 Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |





G90L Quick Connector (Straight-Through) - VDA Standard Male Port

Model	Dim. A	Body No.	Dim. B	Dim. C	Dim. D	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90L-NW6	75	90NW1	37	58	BSPP1/4"	10.4	10Bar	Aluminum	NBR	SG90L-NW6
G90L-NW8	75	90NW1	37	58		12.4				SG90L-NW8
G90L-NW12	77	90NW2	43	61	BSPP3/8"	16.3				SG90L-NW12
G90L-NW16	79	90NW3	49	64		22.3				SG90L-NW16
G90L-NW18	81	90NW4	53	66		23.8				SG90L-NW18
G90L-NW20	81	90NW4	53	66		26.3				SG90L-NW20
G90L Quick Connector (Damage-Free Straight-Through) - VDA Standard Male Tube										
G90LP-NW12	77	90NW2	43	61	BSPP3/8"	16.3	10Bar	Aluminum	NBR	SG90L-NW12
G90LP-NW16	79	90NW3	49	64		22.3				SG90L-NW16







G90R Quick Connector (L Type) - VDA Standard Male Port

Model	Dim. A	Body No.	Dim. B	Dim. C	Dim. D	Connector Dim.E	Max. Pressure	Material	Seal Material	Seal No.
G90R-NW12	77	90NW2	43	61	BSPP3/8"	16.3	10Bar	Aluminum	NBR	SG90R-NW12
G90R-NW16	79	90NW3	49	64		22.3				SG90R-NW16
G90R-NW12HF10	77	90NW2	43	61		16.3				SG90R-NW12
G90R-NW16HF10	79	90NW3	49	64		22.3				SG90R-NW16

GripSeal offers additional non-standard sealing solutions - please contact us anytime if required!

G90SP Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |





G90SP Quick Connector - VDA Standard Male Tube, Direct Outlet

Model	Dim. A	Body No.	Dim. B	Dim. C	Dim. D	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90SP-NW06-045	43	90SNW1	26	35	BSP P1/4	10.4	10Bar	Aluminum	NBR	SG90SP-NW06
G90SP-NW08-065	45	90SNW2	28	37	BSP P3/8	12.4				SG90SP-NW08
G90SP-NW12-085	48	90SNW3	31	40	BSPP1/2	16.3				SG90SP-NW12
G90SP-NW16-085	51	90SNW6	38	49	BSPP1/2	22.3				SG90SP-NW16
G90SP-NW18-085	53	90SNW7	40	52	BSPP1/2	23.8				SG90SP-NW18
G90SP-NW20-125	58	90SNW8	45	58	BSPP3/4	26.3				SG90SP-NW20



Type A



Type B



G90SP Quick Connector - VDA Standard Male Tube, Straight-Through Adapter

Model	Dim. A	Dim. B	Dim. C	Dim. D	Rear End	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90SP-NW12-T200	50	31	41	20	A	16.3	10Bar	Aluminum	NBR	SG90S-NW12
G90SP-NW16-T200	54	38	49			22.3				SG90S-NW16
G90SP-NW12-T160	50	31	41	16	A	16.3				SG90S-NW12
G90SP-NW16-T160	54	38	49			22.3				SG90S-NW16
G90SP-NW12-J158	50	31	41	15.8	B	16.3				SG90S-NW12
G90SP-NW16-J158	54	38	49			22.3				SG90S-NW16

G90SP-NW12-T200

G90SP-NW16-J158

G90SPR Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

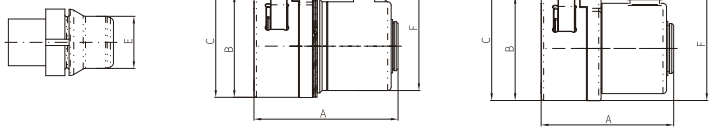

G90SPR Quick Connector - VDA Standard Male Tube, Side-Exit Adapter

Model	Dim. A	Dim. B	Dim. C	Dim. D	Rear End	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90SPR-NW12-T200	58	31	63	20	A	16.3	10Bar	Aluminum	NBR	SG90S-NW12
G90SPR-NW16-T200	62	38	71			22.3				SG90S-NW16
G90SPR-NW12-T160	58	31	63	16	A	16.3				SG90S-NW12
G90SPR-NW16-T160	62	38	71			22.3				SG90S-NW16
G90SPR-NW12-085	58	31	63	15.8	B	16.3				SG90S-NW12
G90SPR-NW16-085	62	38	71			22.3				SG90S-NW16

G90SPR-NW16-T200

G90SPR-NW16-085

G90S Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

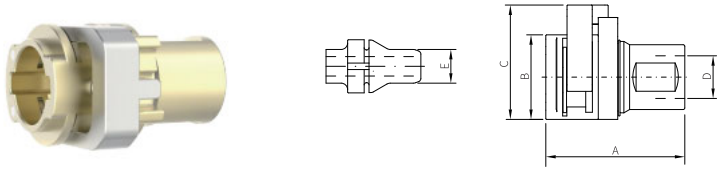

G90S Quick Connector - VDA Standard Male Tube, Direct Outlet

Model	Dim. A	Body No.	Dim. B	Dim. C	Dim. D	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90S-NW06-045	43	90SNW1	26	35	BSPP1/4	10.4	10Bar	Aluminum	NBR	SG90S-NW06
G90S-NW08-065	45	90SNW2	28	37	BSPP3/8	12.4				SG90S-NW08
G90S-NW12-085	48	90SNW3	31	40	BSPP1/2	16.3				SG90S-NW12
G90S-NW16-085	51	90SNW6	38	49	BSPP1/2	22.3				SG90S-NW16
G90S-NW18-085	53	90SNW7	40	52	BSPP1/2	23.8				SG90S-NW18
G90S-NW20-125	58	90SNW8	45	58	BSPP3/4	26.3				SG90S-NW20

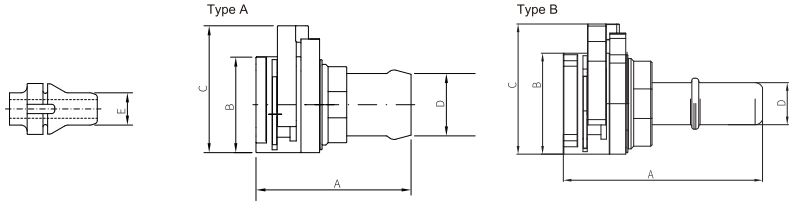

G90S Quick Connector - VDA Standard Male Tube, Straight-Through Adapter

Model	Dim. A	Dim. B	Dim. C	Dim. D	Rear End	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90S-NW12-T200	50	31	41	20	A	16.3	10Bar	Aluminum	NBR	SG90S-NW12
G90S-NW16-T200	54	38	49			22.3				SG90S-NW16
G90S-NW12-T160	50	31	41	16	A	16.3				SG90S-NW12
G90S-NW16-T160	54	38	49			22.3				SG90S-NW16
G90S-NW12-J158	50	31	41	15.8	B	16.3				SG90S-NW12
G90S-NW16-J158	54	38	49			22.3				SG90S-NW16

G90S-NW12-T200

G90S-NW16-J158

G90S Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

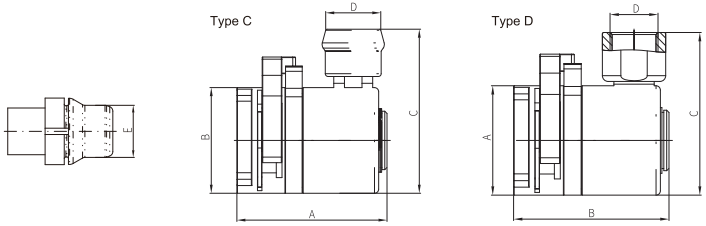

G90SL Quick Connector - VDA Standard Male Tube, Side-Exit Adapter

Model	Dim. A	Dim. B	Dim. C	Dim. D	Rear End	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90SL-NW12-T200	58	31	63	20	C	16.3	10Bar	Aluminum	NBR	SG90S-NW12
G90SL-NW16-T200	62	38	71			22.3				SG90S-NW16
G90SL-NW12-T160	58	31	63	16	C	16.3				SG90S-NW12
G90SL-NW16-T160	62	38	71			22.3				SG90S-NW16
G90SL-NW12-085	58	31	63	BSPP1/2"	D	16.3				SG90S-NW12
G90SL-NW16-085	62	38	71			22.3				SG90S-NW16

G90SL-NW16-T200

G90SL-NW16-085

G90 Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

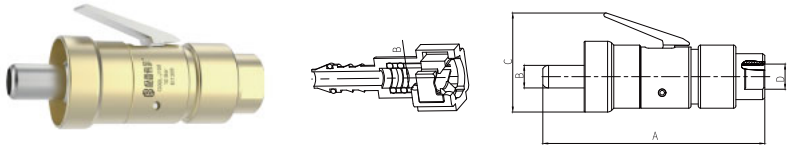

G90L Quick Connector - J2044 Standard Female

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Female Dim.B	Max. Pressure	Material	Seal No.
G90L-J063	116	90J1	Φ6.3	52	BSPP1/4"	6.3	10Bar	Aluminum	SG90L-J063
G90L-J079	116	90J1	Φ7.9	52	BSPP1/4"	7.9			SG90L-J079
G90L-J095	116	90J1	Φ9.5	52	BSPP1/4"	9.5			SG90L-J095
G90L-J099	116	90J1	Φ9.9	52	BSPP1/4"	9.9			SG90L-J099
G90L-J110	116	90J1	Φ11.0	52	BSPP1/4"	11.0			SG90L-J110
G90L-J118	116	90J1	Φ11.8	52	BSPP1/4"	11.8			SG90L-J118
G90L-J126	116	90J2	Φ12.6	55	BSPP3/8"	12.6			SG90L-J126
G90L-J158	116	90J2	Φ15.8	55	BSPP3/8"	15.8			SG90L-J158
G90L-J189	116	90J2	Φ18.9	55	BSPP3/8"	18.9			SG90L-J189

The G90 series offers extensive customisation, including J2044 / VDA and various specific functions. Some examples we have produced are shown below for reference.

G90S-M5-HF14



G90S-NW16-TNW16



G90S-NW16-LM5



G90S-NW12OD165-085



G90V-J079

G90L-J079

G25F Electrical Connector Test Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |

The G25F series is intended for leak testing of electrical interfaces; for communication / electrical testing please refer to the E10 series. The electrical interface bore is sealed by expanding the seal. The connector is short overall, preventing its own length and weight from affecting sealing performance.

Electrical Connector Testing Connection Solution

* Sliding sleeve locks to prevent ejection
* Shorter body to prevent tipping
* Handle operation: simple, effort-saving, self-locking and anti-rebound
* Rotatable handle for easy operation
* Aluminum body: light and robust
* Self-adjusting spring extends service life

G25F Series Quick Connector Features

1. Handle operation
Simple operation: align with the electrical interface and fold the handle down 90° to make the sealed connection.

2. Expanding seal
Reliable sealing, easy seal replacement and simple maintenance.

3. Four versions available
G25F-DK high-current pin / hole type, G25F-DJ high-current clip type, G25F-T probe type, G25F-JP low-current clip type.

4. Multiple material options
The connector housing is made of aviation aluminum, POM, glass-filled nylon, resin and similar materials: lightweight and durable, ensuring connector life while reducing operator effort

5. Pneumatic version G15F
The G15F is designed for automated or pneumatic connection, using pneumatic drive for fast sealing of electrical interfaces

1

Selected Bodies

G25F-DJ517419R6.7

G25F-T400210R3

G15F-T300210R3

G15F-JP318305R7.3-GF

G25F Electrical Connector Test Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |

G25F Quick Connector Advantages and Features

Self-adjusting spring:
Seal pressure adjusts automatically to the bore diameter, extending service life



Sliding sleeve locking:
Sliding sleeve locks to prevent ejection



Rotatable handle:
The handle rotates for easier operation

Aluminum Body:
Lightweight and durable, reducing operator fatigue

Handle operation:
Simple, effort-saving, self-locking and anti-rebound

G25F Quick Connector Specifications

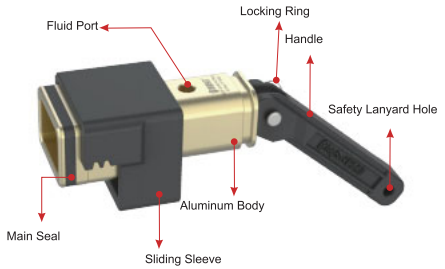

Max. Op. Pressure	Vacuum to 50 kPa
Sealing Range	Customised to the electrical interface size
Flow Port	M5,BSPP1/8
Material	Aluminum
Main Seal	Neoprene / Silicone
Operating Temp.	-20 °C to +120 °C

G25F Operation Demo

1. Insert the front seal of the connector into the electrical connector to be sealed



2.Lock the sliding sleeve and fold the handle to form the seal

G25F Electrical Connector Test Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |

Application Cases:

EV Battery Pack Testing
Motor Controller Leak Testing

EV Battery Pack

Motor Controller





G25F-JP Low-Current Clip Type

Model	Inner Length A	Inner Width B	Corner Radius C	Dim. D	Dim. E	Dim. L	Fluid Port M	Max. Pressure	Main Seal Kit**
G25F-JP275183R6.6	27.5	18.3	6.6	90.6	24.7	127.6	M5	50Kpa	SG25F-JP275183R6.6
G25F-JP280254R6.6	28.0	25.4	6.6	90.6	24.7	127.6	M5	50Kpa	SG25F-JP280254R6.6
G25F-JP281188R6	28.1	18.8	6.0	90.6	24.7	127.6	M5	50Kpa	SG25F-JP281188R6
G25F-JP285175R6.8	28.5	17.5	6.8	90.6	24.7	127.6	M5	50Kpa	SG25F-JP285175R6.8
G25F-JP287194R6.2	28.7	19.4	6.2	90.6	24.7	127.6	M5	50Kpa	SG25F-JP287194R6.2
G25F-JP290192R6.7	29.0	19.2	6.7	90.6	24.7	127.6	M5	50Kpa	SG25F-JP290192R6.7
G25F-JP291203R8.3	29.1	20.3	8.3	90.6	24.7	127.6	M5	50Kpa	SG25F-JP291203R8.3
G25F-JP298184R6.3	29.8	18.4	6.3	90.6	24.7	127.6	M5	50Kpa	SG25F-JP298184R6.3
G25F-JP330301R8.9	33.0	30.1	8.9	90.6	24.7	127.6	M5	50Kpa	SG25F-JP330301R8.9
G25F-JP330193R5	33.0	19.3	5.0	90.6	24.7	127.6	M5	50Kpa	SG25F-JP330193R5
G25F-JP330249R10.6	33.0	24.9	10.6	90.6	24.7	127.6	M5	50Kpa	SG25F-JP330249R10.6
G25F-JP302207R7.1	30.2	22.0	7.1	90.6	24.7	127.6	M5	50Kpa	SG25F-JP302207R7.1
G25F-JP303214R7.4	30.3	21.4	7.4	90.6	24.7	127.6	M5	50Kpa	SG25F-JP303214R7.4
G25F-JP304201R7.5	30.4	20.1	7.5	90.6	24.7	127.6	M5	50Kpa	SSG25F-JP304201R7.5
G25F-JP365296R8.0	36.5	29.6	8.0	90.6	24.7	127.6	M5	50Kpa	SG25F-JP365296R8.0
G25F-JP379224R7.4	37.9	22.4	7.4	90.6	24.7	127.6	M5	50Kpa	SG25F-JP379224R7.4
G25F-JP382230R7.7	38.2	23.0	7.7	90.6	24.7	127.6	M5	50Kpa	SG25F-JP382230R7.7
G25F-JP403194R6.2	40.3	31.9	6.2	90.6	24.7	127.6	M5	50Kpa	SG25F-JP403194R6.2
G25F-JP429254R10.7	42.9	25.4	10.7	132.1	24.7	127.6	M5	50Kpa	SG25F-JP429254R10.7
G25F-JP311298R9.4	31.1	29.8	9.4	132.1	32.0	127.6	BSPP1/8	50Kpa	SG25F-JP311298R9.4
G25F-JP313313R7.3	31.3	31.3	7.3	132.1	32.0	127.6	BSPP1/8	50Kpa	SG25F-JP313313R7.3
G25F-JP318305R7.3	31.8	30.5	7.3	132.1	32.0	127.6	BSPP1/8	50Kpa	SG25F-JP318305R7.3
G25F-JP330330R8	33.0	33.0	8.0	132.1	32.0	127.6	BSPP1/8	50Kpa	SG25F-JP330330R8
G25F-JP368318R9.9	36.8	31.8	9.9	132.1	32.0	127.6	BSPP1/8	50Kpa	SG25F-JP368318R9.9

G25F Electrical Connector Test Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |





G25F-DJ High-Current Clip Type

Model	Inner Length A	Inner Width B	Corner Radius C	Dim. D	Dim. E	Dim. L	Fluid Port M	Max. Pressure	Main Seal Kit**
G25F-DJ378338R4.1	37.8	33.8	4.1	21.0	24.7	184.1	M5	50Kpa	SG25F-DJ378338R4.1
G25F-DJ387327R4.6	38.7	32.7	4.6	13.2	32.0	190.1	BSPP1/8	50Kpa	SG25F-DJ387327R4.6
G25F-DJ392340R5.3	39.2	34.0	5.3	20.8	24.7	184.1	M5	50Kpa	SG25F-DJ392340R5.3
G25F-DJ393312R6.8	39.3	31.2	6.8	13.2	32.0	190.1	BSPP1/8	50Kpa	SG25F-DJ393312R6.8
G25F-DJ400319R7.2	40.0	31.9	7.2	13.2	32.0	190.1	BSPP1/8	50Kpa	SG25F-DJ400319R7.2
G25F-DJ418338R3.9	41.8	33.8	3.9	9.2	32.0	194.1	BSP P1/8	50Kpa	SG25F-DJ418338R3.9
G25F-DJ429328R9.2	42.9	32.8	9.2	27.0	32.0	194.1	BSP P1/8	50Kpa	SG25F-DJ429328R9.2
G25F-DJ434358R4.1	43.4	35.8	4.1	13.0	32.0	195.7	BSP P1/8	50Kpa	SG25F-DJ434358R4.1
G25F-DJ445391R8.3	44.5	39.1	8.3	13.0	32.0	192.1	BSPP1/8	50Kpa	SG25F-DJ445391R8.3
G25F-DJ463404R8.2	46.3	40.4	8.2	16.3	32.0	194.1	BSPP1/8	50Kpa	SG25F-DJ463404R8.2
G25F-DJ456354R5.3	45.6	35.4	5.3	13.2	32.0	191.8	BSPP1/8	50Kpa	SG25F-DJ456354R5.3
G25F-DJ466379R4.1	46.6	38.9	4.1	16.3	30.0	194.1	BSPP1/8	50Kpa	SG25F-DJ466379R4.1
G25F-DJ467327R4.6	46.7	32.7	4.6	13.2	32.0	190.1	BSPP1/8	50Kpa	SG25F-DJ467327R4.6
G25F-DJ509414R6.3	50.9	41.4	6.3	15.1	32.0	201.7	BSPP1/8	50Kpa	SG25F-DJ509414R6.3
G25F-DJ517419R6.7	51.7	41.9	6.7	15.0	32.0	199.0	BSPP1/8	50Kpa	SG25F-DJ517419R6.7
G25F-DJ516437R7.5	51.6	43.7	7.5	15.0	32.0	199.1	BSPP1/8	50Kpa	SG25F-DJ516437R7.5
G25F-DJ523417R8.5	52.3	41.7	8.5	15.0	32.0	199.1	BSPP1/8	50Kpa	SG25F-DJ523417R8.5
G25F-DJ554464R5.7	55.4	46.4	5.7	13.0	32.0	212.9	BSPP1/8	50Kpa	SG25F-DJ554464R5.7
G25F-DJ554470R9	55.4	47.0	9.0	13.0	32.0	197.1	BSPP1/8	50Kpa	SG25F-DJ554470R9
G25F-DJ570470R9	57.0	47.0	9.0	13.2	32.0	213.1	BSPP1/8	50Kpa	SG25F-DJ570470R9
G25F-DJ587477R10.6	58.7	47.7	10.6	13.0	32.0	212.9	BSPP1/8	50Kpa	SG25F-DJ587477R10.6

For Serrated Electrical Sockets

For Ear-Type Electrical Sockets

Note: 1. The bore must be deep enough to accept the seal at the front of the connector. 2. The main seal kit contains enough material for 5 replacements.

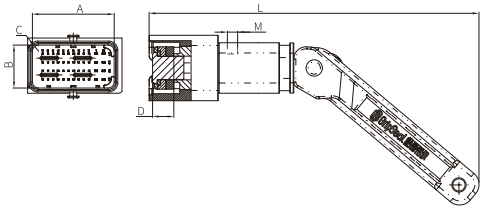

G25F-T Probe Type

Model	Inner Length A	Inner Width B	Corner Radius C	Pins	Dim. D	Dim. L	Fluid Port M	Max. Pressure	Main Seal Kit**
G25F-T186183R4.3	18.6	18.3	4.3	6	23.5	166.1	M5	50Kpa	SG25F-T186183R4.3
G25F-T216146R3.6	21.6	14.6	3.6	4	11.4	150.2	M5	50Kpa	SG25F-T216146R3.6
G25F-T217119R4	21.7	11.9	4.0	12	9.0	150.4	M5	50Kpa	SG25F-T217119R4
G25F-T260080R1.8	26.0	8.0	1.8	24	9.9	150.2	M5	50Kpa	SG25F-T260080R1.8
G25F-T266148R4.3	26.6	14.8	4.3	12	11.0	149.5	M5	50Kpa	SG25F-T266148R4.3
G25F-T267152R4.3	26.7	15.2	4.3	12	13.6	157.2	M5	50Kpa	SG25F-T267152R4.3
G25F-T278244R2.8	27.8	24.4	2.8	60	13.5	168.5	M5	50Kpa	SG25F-T278244R2.8
G25F-T280280R8	28.0	28.0	8.0	/	14.7	172.9	M5	50Kpa	SG25F-T280280R8
G25F-T281109R3.5	28.1	10.9	3.5	16	15.4	153.6	M5	50Kpa	SG25F-T281109R3.5
G25F-T284206R4.7	28.4	20.6	4.7	10	13.8	161.4	M5	50Kpa	SG25F-T284206R4.7
G25F-T296146R3.6	29.6	14.6	3.6	6	11.4	150.2	M5	50Kpa	SG25F-T296146R3.6
G25F-T300210R3.0	30.0	21.0	3.0	32	10.4	161.4	M5	50Kpa	SG25F-T300210R3.0
G25F-T318104R3.5	31.8	10.4	3.5	/	11.2	150.2	M5	50Kpa	SG25F-T318104R3.5
G25F-T319184R4.1	31.9	18.4	4.1	12	26.3	165.9	M5	50Kpa	SG25F-T319184R4.1
G25F-T319204R4	31.9	20.4	4.0	32	10.8	169.6	M5	50Kpa	SG25F-T319204R4
G25F-T362142R7.1	36.2	14.2	7.1	14	11.1	153.7	M5	50Kpa	SG25F-T362142R7.1
G25F-T378164R6.5	37.8	16.4	6.5	20	11.4	155.2	M5	50Kpa	SG25F-T378164R6.5
G25F-T400210R3	40.0	21.0	3.0	48	10.4	161.4	M5	50Kpa	SG25F-T400210R3
G25F-T404206R4.7	40.4	20.6	4.7	23	14.6	162.6	M5	50Kpa	SG25F-T404206R4.7
G25F-T428156R4.5	42.8	15.6	4.5	18	11.4	155.2	M5	50Kpa	SG25F-T428156R4.5
G25F-T406150R4.3	40.6	15.0	4.3	20	16.2	163.2	M5	50Kpa	SG25F-T406150R4.3
G25F-T432345R5.4	43.2	34.5	5.4	20	14.7	188.3	BSPP1/8	50Kpa	SG25F-T432345R5.4
G25F-T500210R3	50.0	21.0	3.0	64	10.3	163.6	M5	50Kpa	SG25F-T500210R3
G25F-T548268R10	54.8	26.8	10.0	/	9.6	160.2	M5	50Kpa	SG25F-T548268R10
G25F-T550270R9.5	55.0	27.0	9.5	/	13.5	159.9	M5	50Kpa	SG25F-T550270R9.5
G25F-T556296R14.8	55.6	29.6	14.8	/	16.3	165.5	M5	50Kpa	SG25F-T556296R14.8
G25F-T564206R4.7	56.4	20.6	4.7	35	10.8	169.6	M5	50Kpa	SG25F-T564206R4.7
G25F-T600340R17	60.0	34.0	17.0	/	15.0	177.1	BSPP1/8	50Kpa	SG25F-T600340R17
G25F-T660360R18	66.0	36.0	18.0	/	17.0	180.7	BSPP1/8	50Kpa	SG25F-T660360R18
G25F-T675366R8	67.5	36.6	8.0	/	15.7	176.9	M5	50Kpa	SG25F-T675366R8
G25F-T790414R20.7	79.0	41.4	20.7	/	14.0	182.1	BSPP1/8	50Kpa	SG25F-T790414R20.7

G25F Electrical Connector Test Quick Connector
ONE-STOP CONNECTION
Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |



G25F-DK High-Current Multi-Pin/Hole (Square)

Model	Inner Cavity Length A	Inner Cavity B	Product Inner Cavity Corner Radius C	Dim. D	Dim. E	Dim. L	Fluid Port M	Max. Press.	Main Seal Kit**
G25F-DK496256R9.9	49.6	62.5	9.9	15.3	32.0	205.9	BSP P1/8	50Kpa	SG25F-DK496256R9.9
G25F-DK500310R13.5	50.0	31.0	13.5	15.3	32.0	206.9	BSPP1/8	50Kpa	SG25F-DK500310R13.5
G25F-DK502272R13.6	50.2	22.7	13.6	15.3	32.0	205.9	BSPP1/8	50Kpa	SG25F-DK502272R13.6
G25F-DK512318R14.1	51.2	31.8	14.1	15.3	32.0	206.9	BSPP1/8	50Kpa	SG25F-DK512318R14.1
G25F-DK522332R14.6	52.2	33.2	14.6	15.3	32.0	206.9	BSPP1/8	50Kpa	SG25F-DK522332R14.6
G25F-DK525332R10.5	52.5	33.2	10.5	15.3	32.0	191.1	BSPP1/8	50Kpa	SG25F-DK525332R10.5

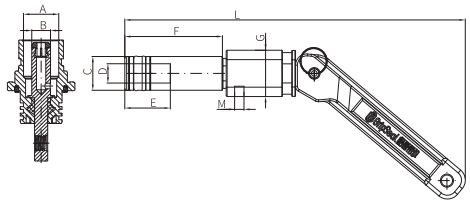

G25F-DK-C High-Current Single Pin/Hole (Round)

Model	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Fluid Port M	Max. Pressure	Main Seal Kit**
G25F-DK160091C	16.0	9.1	15.4	9.4	24.3	30.8	24.7	183.0	M5	50Kpa	SG25F-DK160091C
G25F-DK164080C	16.4	9.4	15.4	9.4	24.2	52.0	24.7	181.7	M5	50Kpa	SG25F-DK164080C
G25F-DK174080C	17.4	8.0	17.0	10.3	24.3	52.1	24.7	181.7	M5	50Kpa	SG25F-DK174080C
G25F-DK176100C	17.6	10.0	17.0	10.3	24.3	52.1	24.7	181.7	M5	50Kpa	SG25F-DK176100C
G25F-DK188100C	18.8	10.0	18.0	10.3	24.3	52.1	24.7	181.7	M5	50Kpa	SG25F-DK188100C
G25F-DK372326C	37.2	32.6	36.2	28.7	40.0	49.0	32.0	196.0	BSPP1/8	50Kpa	SG25F-DK372326C

G25A Internal Expanding Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |

The G25A series quick connector is an internal expanding quick connector, mainly sealing all kinds of bores and tube holes. Whether the sealing surface is machined or partly cast, an effective seal is formed. This series provides sealing only, with no gripping feature.

Cost-Effective Internal Expanding Connection Solution

* Low-pressure sealing connector, simple to operate
* Instant connection with handle operation: simple and reliable
* Fine and reliable seal material that does not damage the product surface
* Simple structure and easy seal replacement extend connector service life

G25A Series Quick Connector Features

1. Adaptive sealing
An internal spring compresses the front seal, so the connector automatically adjusts compression to suit the sealing bore size and maintains sealing performance.

2. Handle drive
Insert the front seal of the connector into the test port and fold the handle through 90° to make the sealed connection.

3. G threaded test port
BSPP1/8 threaded side port, better suited to domestic applications.

4. Aviation aluminum
The connector housing is made of aviation-grade aluminum: lightweight and durable, ensuring connector life while reducing operator effort

4 body sizes cover sealing of tubes from 10 mm to 34 mm in diameter

Selected Bodies

Body 1 Body 2 Body 3 Body 4

G25A Internal Expanding Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |

G25A Quick Connector Advantages and Features



Self-adjusting spring:
Seal pressure adjusts automatically to the bore diameter, extending service life

Low-pressure thread sealing:
A basic threaded sealing kit for low-pressure threaded port sealing



Extended neck spacer:
Allows the seal to reach deep into the bore, avoiding the face-end groove

Multiple seal materials:
Optional materials to meet specific customer requirements



Nut-free locking:
Nut-free locking at the face end requires a shallower sealing bore and suits a wide range of applications

G25A Quick Connector Specifications

Max. Op. Pressure	Vacuum to 3 Bar
Sealing Range	10mm ~ 34mm
Min. Insert Depth	Bodies 1, 2: 15 mm Bodies 3, 4: 25 mm
Flow Port	BSPP1/8 Threaded Port
Material	Aluminum
Main Seal	Neoprene
Inner Seal	NBR
Operating Temp.	-20 °C to +120 °C

G25A Operation Demo

1. Insert the front seal of the connector into the bore to be sealed

2. Fold the handle down to form the seal

G25A Internal Expanding Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |

Application Cases:

Engine Water Channel Testing
EV Battery Cold Plate Testing
EV Battery Pack Testing Motor
ControllerLeak Testing

Engine

EV Battery Pack

Motor Controller



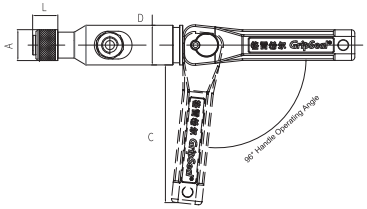

Model	Sealing Dia.	Dim. B	Dim. C	Dim. D	Dim. L	Dim. M	Main Seal Kit**
G25A-1100	10.5 - 11.5	194	85	24	14.7	BSPP1/8	SG25A-1100
G25A-1110	11.5 - 12.5						SG25A-1110
G25A-1120	12.5 - 13.5						SG25A-1120
G25A-1130	13.5 - 14.5						SG25A-1130
G25A-1140	14.5 - 15.5						SG25A-1140
G25A-1150	15.5 - 16.5						SG25A-1150
G25A-2160	16.5 - 17.5	195	85	24	15.3	BSPP1/8	SG25A-2160
G25A-2170	17.5 - 18.5						SG25A-2170
G25A-2180	18.5 - 19.5						SG25A-2180
G25A-2190	19.5 - 20.5						SG25A-2190
G25A-2200	20.5 - 21.5						SG25A-2200
G25A-2210	21.5 - 22.5						SG25A-2210
G25A-3220	22.5 - 23.5	216	97	30	24.5	BSPP1/8	SG25A-3220
G25A-3230	23.5 - 24.5						SG25A-3230
G25A-3240	24.5 - 25.5						SG25A-3240
G25A-3250	25.5 - 26.5						SG25A-3250
G25A-3260	26.5 - 27.5						SG25A-3260
G25A-3270	27.5 - 28.5						SG25A-3270
G25A-4280	28.5 - 29.5	217	97	30	25.3	BSPP1/8	SG25A-4280
G25A-4290	29.5 - 30.5						SG25A-4290
G25A-4300	30.5 - 31.5						SG25A-4300
G25A-4310	31.5 - 32.5						SG25A-4310
G25A-4320	32.5 - 33.5						SG25A-4320
G25A-4330	33.5 - 34.5						SG25A-4330

Note: 1. The bore must be deep enough to accept the seal at the front of the connector. 2. The main seal kit contains enough material for 5 replacements.

G25P Internal Expanding Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |

Cost-Effective Internal Expanding Connection Solution

* For plugging, with a simple structure and easy maintenance
* Compact, suitable for space-limited applications
* Lightweight, reducing operator load
* Damage-free connection that does not harm the customer product



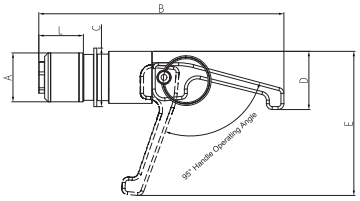

Model	Sealing Dia.	Dim. B	Dim. C	Dim. D	Dim. E	Dim. L	Main Seal Kit**
G25P-1100	10.5 - 11.5	77	16.3	19.3	48.7	14.7	SG25P-1100
G25P-1110	11.5 - 12.5						SG25P-1110
G25P-1120	12.5 - 13.5						SG25P-1120
G25P-1130	13.5 - 14.5						SG25P-1130
G25P-1140	14.5 - 15.5						SG25P-1140
G25P-1150	15.5 - 16.5						SG25P-1150
G25P-2160	16.5 - 17.5	83.8	18	19.9	49.3	15.3	SG25P-2160
G25P-2170	17.5 - 18.5		20				SG25P-2170
G25P-2180	18.5 - 19.5						SG25P-2180
G25P-2190	19.5 - 20.5		24				SG25P-2190
G25P-2200	20.5 - 21.5						SG25P-2200
G25P-2210	21.5 - 22.5						SG25P-2210

G25B Internal Expanding Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |

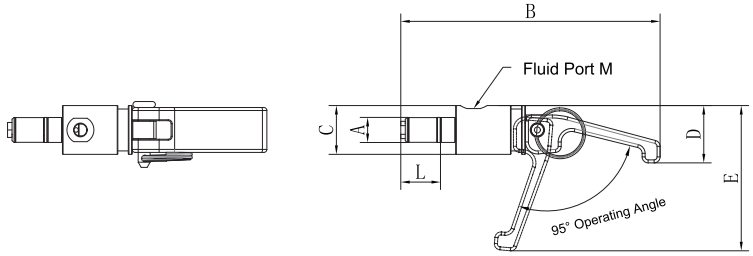

Model	Sealing Dia. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. L	Fluid Port M	Main Seal Kit**
G25B-0080	7.8-8.5	83.8	16.3	19.2	48.5	13.5	M5	SG25B-0080
G25B-0085	8.5-9.5							SG25B-0085
G25B-0095	9.5-10.5							SG25B-0095
G25B-1100	10.5-11.5	87.5	16.3	19.3	48.7	14.7	M5	SG25B-1100
G25B-1110	11.5-12.5							SG25B-1110
G25B-1120	12.5-13.5							SG25B-1120
G25B-1130	13.5-14.5							SG25B-1130
G25B-1140	14.5-15.5							SG25B-1140
G25B-1150	15.5-16.5							SG25B-1150
G25B-2160	16.5-17.5	97.5	20	21	50.3	15.3	M5	SG25B-2160
G25B-2170	17.5-18.5							SG25B-2170
G25B-2180	18.5-19.5							SG25B-2180
G25B-2190	19.5-20.5		24					SG25B-2190
G25B-2200	20.5-21.5							SG25B-2200
G25B-2210	21.5-22.5							SG25B-2210

G20F Vent Valve Quick Connector

ONE-STOP CONNECTION

Low-Pressure Use | No Surface Damage | Handle Operation |

The G20F series is a dedicated connector for vent valves, widely used in various battery packs. It is easy to use: align with the vent valve bayonet and fold the handle down to complete the connection.

Vent Valve Face Seal Connection Solution

* Hook-on retention: safe and reliable
* Handle operation: simple and effort-saving
* Aluminum body: light and robust
* Self-adjusting spring for a longer service life
* Magnetic disc / suction cup valve opening for easy venting

G20F Series Quick Connector Features

1. Handle operation
Simple operation: align with the vent valve bayonet and fold the handle 90° to form a seal.

2.Face seal
Reliable sealing, easy seal replacement and simple maintenance.

3. Magnetic / suction cup design
Opens the vent valve for easy venting.

4. Aviation-grade aluminum
The connector housing is made of aviation-grade aluminum: lightweight and durable, ensuring connector life while reducing operator effort

Selected Bodies

G20F-PBA2K-42

G20F-PBAL-M40

G20F-PMCM12

G20F Vent Valve Quick Connector

ONE-STOP CONNECTION

Low-Pressure Use | No Surface Damage | Handle Operation |

G20F Quick Connector Advantages and Features

Self-adjusting spring:
Seal pressure adjusts automatically to the bore easy venting diameter, extending service life



Magnetic / suction cup design:
Opens the vent valve for



Face seal:
Reliable sealing; the seal is easy to replace, simplifying maintenance

Aluminum Body:
Lightweight and durable, reducing operator fatigue

Handle operation:
simple and effort-saving

G20F Quick Connector Specifications

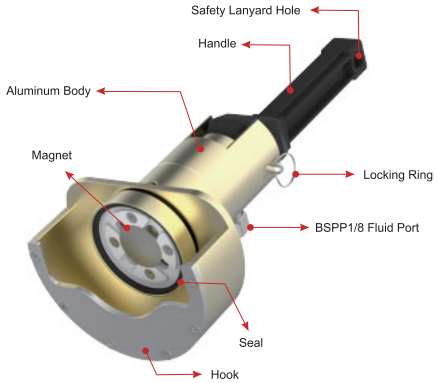

Max. Op. Pressure	Vacuum to 50 kPa
Sealing Range	Customised to the vent valve
Flow Port	BSPP1/8 Threaded Port
Material	Aluminum
Main Seal	Neoprene
Valve Opening Method	Magnet / Suction Cup
Operating Temp.	-20 °C to +120 °C

G20F Operation Demo

1. Fit the front of the connector onto the vent valve to be sealed

2. Fold the handle down to form the seal

G20F Vent Valve Quick Connector

ONE-STOP CONNECTION

Low-Pressure Use | No Surface Damage | Handle Operation |

Application Cases

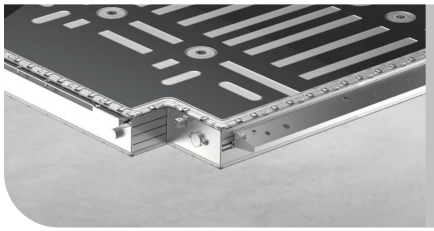

Vent Valve





Magnetic Vent Valve

Vent Valve Model	Model	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Fluid Port M	Seal No.
PMCM-12*1.5/11-210723	G20F-PMCM-M12E	21	18.2	1	5.8	26	-	-	49	-	SG20F-PMCM-M12E
PMCM-M16E	G20F-PMCM-M16E	29	24.4	3.8	6.2	34	38	89.1	183.3	BSPP1/8	SG20F-PMCM-M16E
PBAL-M20E	G20F-PBAL-M20E	30.3	27.9	1.5	8	36	38	90.9	184	BSPP1/8	SG20F-PBAL-M20E
PBAL-M20E-15D	G20F-PBAL-M20E-15D	30.3	27.9	1.2	10.8	36	38	90.9	184	BSPP1/8	SG20F-PBAL-M20E-15D
PBA2K-42	G20F-PBA2K-42	41.8	69.9	1.8	6.1	83.8	38	95.8	190	BSPP1/8	SG20F-PBA2K-42
PBA2K-42	G20F-PBA2K-42-SKQ	41.8	69.9	1.8	6.1	83.8	38	95.8	190	BSPP1/8	SG20F-PBA2K-42-SKQ
PBA2K-42JZ	G20F-PBA2K-42JZ	41.8	69.9	1.8	6.1	82	38	125.5	219.7	BSPP1/8	SG20F-PBA2K-42JZ
PBAL-M32E	G20F-PBAL-M32E	46	42	2.5	7.5	58	38	99.2	193.4	BSPP1/8	SG20F-PBAL-M32E
PBA4K-50	G20F-PBA4K-50	49.6	46.6	2	5.3	58	38	98.5	192.7	BSPP1/8	SG20F-PBA4K-50
PBA2K-50G	G20F-PBA2K-50G	49.8	47.4	1.5	4.5	64.5	38	98	192.2	BSPP1/8	SG20F-PBA2K-50G
D50-M5B	G20F-D50-M5B	50	46	1.8	6.8	58	38	100.6	194.8	BSPP1/8	SG20F-D50-M5B
PBAL-M40E	G20F-PBAL-M40E	53.6	49.8	1.2	8.8	58	38	107.2	201.4	BSPP1/8	SG20F-PBAL-M40E
PBA2K-60	G20F-PBA2K-60	59.8	57.6	1.6	4.6	73.5	38	93.8	188	BSPP1/8	SG20F-PBA2K-60
PBA2K-60	G20F-PBA2K-60G-LTNM	59.8	57.6	1.6	4.6	73.5	38	93.8	188	BSPP1/8	SG20F-PBA2K-60G-LTNM
PBA4K-70	G20F-PBA4K-70	70	67	2	6.5	83.8	38	100.2	194.4	BSPP1/8	SG20F-PBA4K-70

G20F Vent Valve Quick Connector

ONE-STOP CONNECTION

Low-Pressure Use | No Surface Damage | Handle Operation |





Magnetic Vent Valve

Vent Valve Model	Model	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Fluid Port M	Seal No.
VALVE-M12E	G20F-VALVE-M12E	17	17	1	10	34	38	57.5	149.4	BSPP1/8	SG20F-VALVE-M12E
BBG-M12E	G20F-BBG-M12E	19.6	17	1	10.2	32	32	78.9	177.2	M5	SG20F-BBG-M12E
VEM615	G20F-VEM615	24	22	1.7	4.9	38	38	94.4	188.7	BSPP1/8	SG20F-VEM615
VOIR-M16E	G20F-VOIR-M16E	24.5	20	2	10.6	42	42	106	193.3	-	SG20F-VOIR-M16E
SKQ-M16E	G20F-SKQ01-M16E	24.5	-	-	11.6	40.5	40.5	107	208.8	BSPP1/8	SG20F-SKQ01-M16E
PRV-2.5	G20F-PRV-2.5	27.5	25.5	R1.8	5	34	38	90.9	184.4	BSPP1/8	SG20F-PRV-2.5
VEM378A	G20F-VEM378A	41.8	69.9	1.8	6.1	83.8	38	95.8	190	BSPP1/8	SG20F-VEM378A
SST-M32E	G20F-SST-M32E	45	42	1.3	8.7	58	38	99.7	194	BSPP1/8	SG20F-SST-M32E
M32E-HJ01	G20F-M32E-HJ01	46	41.4	1.6	4.3	58	38	99.1	193.4	BSPP1/8	SG20F-M32E-HJ01
CHIKU-M32E	G20F-CHIKU-M32E	46	33.6	3.8	7.6	58	38	98.9	193.2	BSPP1/8	SG20F-CHIKU-M32E
VEM621	G20F-VEM621	49.6	46.6	2	5.3	58	38	98.5	192.7	BSPP1/8	SG20F-VEM621
VEM482V	G20F-VEM482V	50.7	47.1	1.8	6	58	38	99.2	193.4	BSPP1/8	SG20F-VEM482V
VEM558	G20F-VEM558	54	48	2	9.5	72	38	107	201.2	BSPP1/8	SG20F-VEM558
SST-M40E	G20F-SST-M40E	54	49	2	9.5	59	38	108.5	203.2	BSPP1/8	SG20F-SST-M40E
FOUND-M40-3	G20F-FOUND-M40-3	54	50	1.8	9.5	59	38	107.2	201.5	BSPP1/8	SG20F-FOUND-M40-3
FRD-M40E	G20F-FRD-M40E	56	51	2	7.5	68	38	111	205.3	BSPP1/8	SG20F-FRD-M40E
VEP725A	G20F-VEP725A	56.3	80.8	4.8	16.2	97	65	82.3	171	M5	SG20F-VEP725A
CATL-PCM42E	G20F-CATL-PCM42E	60.4	51.2	4	6.5	72	38	96.7	190.9	BSPP1/8	SG20F-CATL-PCM42E
FY-D70	G20F-FY-D70	70	67	1.8	8.1	83.8	38	101.7	180	BSPP1/8	SG20F-FY-D70
ER22-FBFSS	G20F-ER22-FBFSS	116.1	116.1	4.7	29	120.1	120.1	101.2	245.7	BSPP1/8	SG20F-ER22-FBFSS
1899FBF	G20F-1899FBF	116.1	116.1	4.7	24	132.1	132.1	103.4	244.9	BSPP1/8	SG20F-1899FBF





Suction Cup Version

Vent Valve Model	Model	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Fluid Port M	Seal No.
PBAL-M20E-15DF	G20F-P-M20E-15DF-NM	30.3	27.2	1.5	9.9	25.8	3.5	46	207	M5-6 Push-In	SG20F-P-M20E-15DF-NM
PBA2K-50F	G20F-PBA2K-50F-NM	49.6	47.4	1.5	4.2	44.7	1.9	64.5	201.8	BSPP1/8	SG20F-PBA2K-50F-NM
VEM482VF	G20F-VEM482VF-NM	50.7	47.1	1.8	6	48	2.6	66.5	208.3	BSPP1/8	SG20F-VEM482VF-NM
VEM603F	G20F-VEM603F-NM	51.6	47.8	1.6	4.4	48.6	2.9	68.5	194.5	BSPP1/8	SG20F-VEM603F-NM
VEP774AF	G20F-VEP774AF-NM	52	48	2	4.9	49.8	3.1	68.5	207.5	BSPP1/8	SG20F-VEP774AF-NM
FOUND-M40-3	G20F-FOUND-M40-3-NM	54	50	1.8	9.5	-	-	67.5	207	BSPP1/8	SG20F-FOUND-M40-3-NM
VEM558F	G20F-VEM558F-NM	56	48.4	2	9.3	48	2.7	67.5	207	BSPP1/8	SG20F-VEM558F-NM
VEM569F	G20F-VEM569F-NM	59.8	57.6	1.7	4.55	57.4	3	73.5	201.3	BSPP1/8	SG20F-VEM569F-NM
VEM356F	G20F-VEM356F-NM	70	67	2.5	6.5	67.4	3	89	210.3	BSPP1/8	SG20F-VEM356F-NM

G20FN Vent Valve Quick Connector

ONE-STOP CONNECTION

Low-Pressure Use | No Surface Damage | Handle Operation |

The G20FN series is a mini connector dedicated to vent valves in space-limited battery packs, widely used in various compact battery packs. It is easy to use: align with the vent valve bayonet and turn the handle to complete the connection.



Vent Valve Face Seal Connection Solution

* Hook-on retention: safe and reliable
* Handle / press operation: simple and effort-saving
* Aluminum body: light and robust
* Self-adjusting spring for a longer servicelife
* Magnetic disc / suction cup valve opening for easy venting

G20FN Series Quick Connector Features

1. Rotating handle operation, simple to use
Align with the vent valve bayonet and turn the handle 90° to form a seal.

2. Face seal
Reliable sealing, easy seal replacement and simple maintenance.

3. Magnetic / suction cup design
Opens the vent valve for easy venting.

4.Aviation-grade aluminum
The connector housing is made of aviation aluminum: lightweight and durable, ensuring connector life while reducing operator effort.

5. Mini version
For testing after vehicle assembly and in narrow spaces; length greatly reduced

Selected Bodies

G20FN-PBA2K-42G

G20FN-PBA4K-50

G20FND-PMCM-12E

G20FN Vent Valve Quick Connector

ONE-STOP CONNECTION

Low-Pressure Use | No Surface Damage | Handle Operation |

G20FN Quick Connector Advantages and Features

Self-adjusting spring: Seal pressure adjusts automatically to the bore diameter, extending service life

Magnetic / suction cup design: Opens the vent valve for easy venting

Face seal: Reliable sealing; the seal is easy to replace, simplifying maintenance

Aluminum Body: Lightweight and durable, reducing operator fatigue

Handle operation: simple and effort-saving

G20FN Quick Connector Specifications

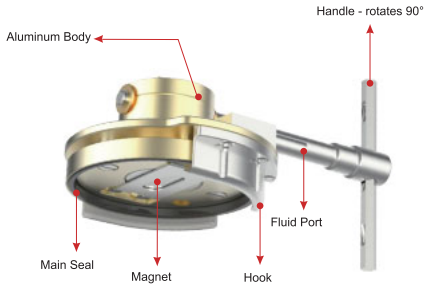

Max. Op. Pressure Sealing Range	Vacuum to 30 kPa, customised to the vent valve
Flow Port	BSPP1/8 Threaded Port
Material	Aluminum
Main Seal	Neoprene
Valve Opening Method	Magnet / Suction Cup / Silicone
Operating Temp	-20 °C to +120 °C

G20FN Operation Demo

1. Fit the front of the connector onto the vent valve to be sealed

2. Rotate the handle to form the seal

G20FN Vent Valve Quick Connector

ONE-STOP CONNECTION

Low-Pressure Use | No Surface Damage | Handle Operation |

Model	Product Diagram	Vent Valve Diagram
G20FN-PBA2K-42G		
G20FND-PBA2K-60G		
G20FN-PBA4K-50		
G20FN-VEM569D		
G20FND-PMCM-12E		

G20FN Vent Valve Quick Connector

ONE-STOP CONNECTION

Low-Pressure Use | No Surface Damage | Handle Operation |

Model	Product Diagram	Vent Valve Diagram
G20FN-VEM378F		
G20FN-PBA2K-42VII		
G20FN-PBA2K-70WG		
G20FN-VEM582		

G20A Low-Pressure Wrap-Around Connector

ONE-STOP CONNECTION

Low-Pressure Use | Wrap-Around | No Surface Damage | Handle Operation | Wide Sealing Range |

The G20A series low-pressure wrap-around connector is designed for sealing tubes at test pressures below 3 bar. The seal expands radially against the tube for excellent sealing without any damage to the appearance of the test part. A rear handle makes operation simple, and the self-adjusting spring extends seal service life.



Low-Pressure Wrap-Around Connector

* Wrap-around connection with high flow
* Handle drive reduces operating effort
*Aluminum body: light and reliable
*Self-adjusting spring

G20A Series Quick Connector Features

1. OD sealing
The expanded seal forms a radial seal on the tube OD: large sealing surface, reliable and stable.

2.Self-adjusting spring
The self-adjusting spring automatically adjusts seal compression to suit different tube diameters. While preserving seal life, it makes the connector suitable for different fittings.

3. No damage to appearance
Only the rubber seal contacts the sealing surface, with no hard parts touching, preserving the appearance of the test tube.

4. Simple maintenance
Can be dismantled without tools, simplifying later maintenance.

5. Handle operation
Injection moulded: lightweight, wear-resistant and reducing operating effort - operator friendly

G20 Series Body Display

G20A Quick Connector Advantages and Features



Wrap-around seal:No scratches on the product; materials optional

Self-adjusting spring: Automatically adjusts sealing pressure and extends service life



Aluminum body: Light and robust with low operating effort

Tool-free dismantling for simple maintenance

Handle operation: simple and effort-saving

G20A Quick Connector Specifications

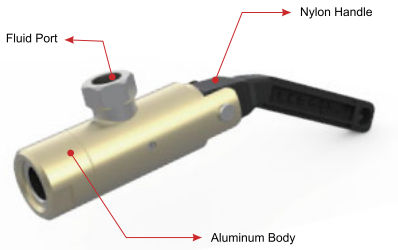

Max. Op. Pressure	Vacuum to 3 Bar
Sealing Range	See Selection Table
Flow Port	BSPP1/8,BSPP3/8
Material	Aluminum
Main Seal	Neoprene, Silicone
Operating Temp.	-20 °C to +120 °C

G20A Operation Demo

1. Fit the front of the connector onto the tube to be sealed

2. Fold the handle down to form the seal

G20A Low-Pressure Wrap-Around Connector
ONE-STOP CONNECTION
Low-Pressure Use | Wrap-Around | No Surface Damage | Handle Operation | Wide Sealing Range |

Application Cases

Engine Coolant Pipe

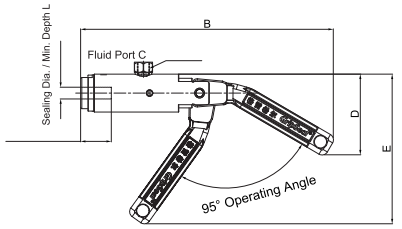



Model	Sealing Dia.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Insert Depth L	Main Seal Kit**
G20A-0007D	0.8 - 1.3	29.7	206.9	BSPP1/8	65.7	124.4	15.4	SG20A-0007D
G20A-0013D	1.3 - 2.0							SG20A-0013D
G20A-0020D	2.0 - 3.3							SG20A-0020D
G20A-0025	2.5 - 4.5							SG20A-0025
G20A-0045	4.5 - 6.5							SG20A-0045
G20A-0065	6.5 - 8.5							SG20A-0065
G20A-0075	7.5 - 9.5							SG20A-0075
G20A-0085	8.5 - 10.5							SG20A-0085
G20A-0095	9.5 - 11.5							SG20A-0095
G20A-0105	10.5 - 13.0							SG20A-0105
G20A-1110	11.0 - 13.0	37.5	214.3	BSPP3/8	72.2	128.3	15.6	SG20A-1110
G20A-1130	13.0 - 15.0							SG20A-1130
G20A-1150	15.0 - 17.0							SG20A-1150
G20A-1160	16.0 - 18.0							SG20A-1160
G20A-1170	17.0 - 19.0							SG20A-1170
G20A-1180	18.0 - 20.0							SG20A-1180
G20A-1190	19.0 - 21.0							SG20A-1190
G20A-1210	21.0 - 23.0							SG20A-1210

G10 Tube OD Quick Connector

ONE-STOP CONNECTION

Easy Replacement | Automated Operation | Full Model Range | Fast Operation | Various Seal Materials | OD Sealing |

The G10 series pneumatic quick sealing connector uses air pressure to expand the seal, creating an internal leak-tight connection with virtually any type of port. It is ideal for high-volume automated production testing.

Fully Automated OD Connection Solution

* More effective testing lowers overall manufacturing cost
* Highly integrated automated testing maximises output capacity
* Eliminates waste caused by failed tests
* Improves the stability of the entire test process

G10 Series Quick Connector Features

1. Pneumatic drive
Air enters through the rear drive port, pushing the internal piston to compress the seal for expanding sealing.

2. Automated operation
Two rear fixing holes allow the connector to be mounted on any actuator for accurate, reliable automated operation.

3. Test port
Straight-through design with no effect on flow. G threaded test port, compliant with domestic standards.

4. Damage-free operation
The seal grips by clamping, so the test piece surface is never damaged

G10 series quick connectors, from body A to body 3, seal plain tubes from 0.8 mm to 50 mm in diameter.

Selected Bodies

G10 Tube OD Quick Connector

ONE-STOP CONNECTION

Easy Replacement | Automated Operation | Full Model Range | Fast Operation | Various Seal Materials | OD Sealing |

Making connections simple and reliable

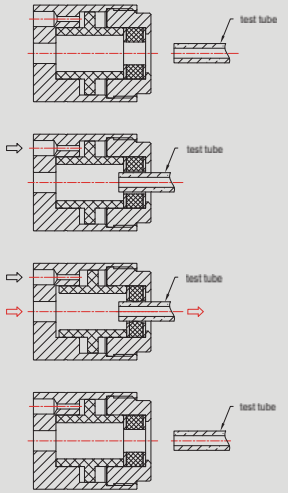

Step 1:

Place the test tube into the front test port of the G10 series

Step 2:

Air is supplied through the drive port; the seal is compressed, expands and presses against the outer wall of the test tube to form a seal

Step 3:

a. Once the seal is formed, fill the test port with the test medium (compressed air, test fluid, etc.)

b. After testing is complete the test medium is drained; once test pressure returns to normal, the drive air is vented, the seal is no longer pressurised, the sealed connection is released and the connector can be removed

Step 4:

When the above steps are complete, the test tube can be removed from the connector

G10 Quick Connector Display

G10 Quick Connector Advantages and Features

Pneumatic drive: Reliable sealing, stable operation

Flexible customization: Extended connector parts avoid interference

Quick Seal Replacement: Simple maintenance, longer service life

Seal material: Optional materials to meet specific customer requirements

Automated operation: Higher efficiency, more stable test results

G10 Quick Connector Specifications

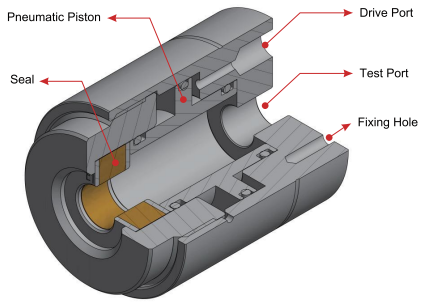

Max. Op. Pressure	Vacuum to 35 Bar
Sealing Range	0.8mm ~ 80mm
Min. Insert Depth	Bodies 0, 1: 15 mm Bodies 2, 3: 30 mm
Flow Port	BSPP1/8, BSPP1/4, BSPP1/2 Threaded Ports
Material	Aluminum or Stainless
Main Seal	Neoprene / Silicone
Inner Seal	NBR
Drive Pressure	4-6 Bar
Operating Temp.	-20 °C to +120 °C

The G10 series uses pneumatic drive to compress the internal seal, creating a leak-free external connection for all kinds of fittings. The G10 connector is the ideal choice for leak testing and function testing.

Water Channel Testing

Turbocharger
Radiator
Plastic Port
Fuel Pump

G10 Tube OD Quick Connector
ONE-STOP CONNECTION
Easy Replacement | Automated Operation | Full Model Range | Fast Operation | Various Seal Materials | OD Sealing |





G10 Model Specification Table (Aluminum Version)

Model	Sealing Dia.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Main Seal Kit**
G10-0007D	0.8 - 1.3	51.4	37.9	BSPP1/8	M5	27.6	13.8	M5	15	SG10-0007D
G10-0013D	1.3 - 2.0									SG10-0013D
G10-0020D	2.0 - 3.3									SG10-0020D
G10-0025	2.5 - 4.5									SG10-0025
G10-0045	4.5 - 6.5									SG10-0045
G10-0065	6.5 - 8.5									SG10-0065
G10-0075	7.5 - 9.5									SG10-0075
G10-0085	8.5 - 10.5									SG10-0085
G10-0095	9.5 - 11.5									SG10-0095
G10-0105	10.5 - 13.0									SG10-0105
G10-1110	11.0 - 13.0	68.4	56.3	BSPP1/4	BSPP1/8	41.2	20	M5	15	SG10-1110
G10-1130	13.0 - 15.0									SG10-1130
G10-1150	15.0 - 17.0									SG10-1150
G10-1160	16.0 - 18.0									SG10-1160
G10-1170	17.0 - 19.0									SG10-1170
G10-1180	18.0 - 20.0									SG10-1180
G10-1190	19.0 - 21.0									SG10-1190
G10-2200	20.0 - 22.0	88.7	79	BSPP1/2	BSPP1/8	63.5	31.7	M6	30	SG10-2200
G10-2220	22.0 - 24.0									SG10-2220
G10-2240	24.0 - 26.0									SG10-2240
G10-2260	26.0 - 28.0									SG10-2260
G10-2280	28.0 - 30.0									SG10-2280
G10-2300	30.0 - 32.0									SG10-2300
G10-2320	32.0 - 34.0									SG10-2320
G10-2340	34.0 - 36.0									SG10-2340
G10-2360	36.0 - 38.0									SG10-2360
G10-3380	38.0 - 41.0	113.5	107.4	BSPP1	BSPP1/8	82.6	41.3	M6	30	SG10-3380
G10-3410	41.0 - 44.0									SG10-3410
G10-3440	44.0 - 47.0									SG10-3440
G10-3470	47.0 - 50.0									SG10-3470

1. Non-standard G10 quick connectors include larger outer diameters, extended front ends and shorter sealing lengths.
2. Custom G10 quick connectors include sealing various threads, non-circular shapes, snap-fit mechanisms and multiple connector combinations. Please contact your local distributor or GripSeal sales representative.

G10P Tube OD Quick Connector

ONE-STOP CONNECTION

Easy Replacement | Automated Operation | Full Model Range | Fast Operation | Various Seal Materials | OD Sealing |

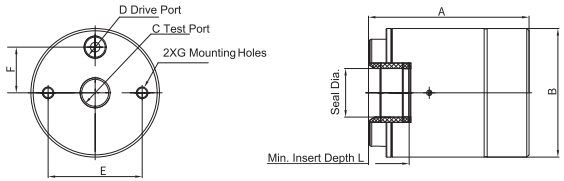

G10P Model Specification Table

Model	Sealing Dia.	Max. Press.	Length A	Dia. B	Test Port C	Drive Port D	Dim. E	Dim. F	Mount Hole G	Dim. L	Main Seal Kit**
G10P-0025	2.5 - 4.5	10Bar	53.5	37.9	BSPP1/8	M5	27.6	13.8	M5	17	SG10P-0025
G10P-0045	4.5 - 6.5										SG10P-0045
G10P-0065	6.5 - 8.5										SG10P-0065
G10P-0075	7.5 - 9.5										SG10P-0075
G10P-0085	8.5 - 10.5										SG10P-0085
G10P-0095	9.5 - 11.5										SG10P-0095
G10P-0105	10.5 - 13.0										SG10P-0105
G10P-1110	11.0 - 13.0		70.3	56.3	BSPP1/4	BSPP1/8	41.2	20	M5	17.8	SG10P-1110
G10P-1120	12.0 - 14.0										SG10P-1120
G10P-1130	13.0 - 15.0										SG10P-1130
G10P-1140	14.0 - 16.0										SG10P-1140
G10P-1150	15.0 - 17.0										SG10P-1150
G10P-1160	16.0 - 18.0										SG10P-1160
G10P-1170	17.0 - 19.0										SG10P-1170
G10P-1180	18.0 - 20.0										SG10P-1180
G10P-1190	19.0 - 21.0										SG10P-1190

Body 0

Body 1

G10SS Tube OD Quick Connector (Stainless Steel Version)

ONE-STOP CONNECTION

Easy Replacement | Automated Operation | Full Model Range | Fast Operation | Various Seal Materials | OD Sealing |

G10SS-A

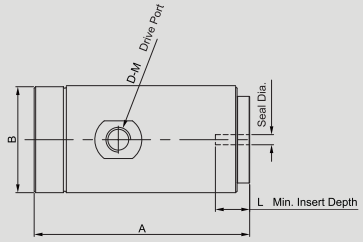

G10SS-0

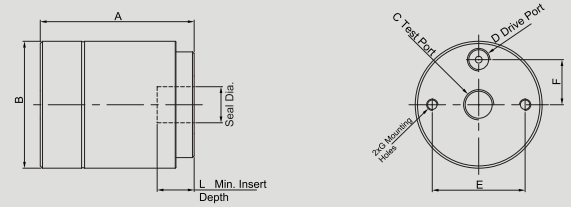

G10SS Model Specification Table (Stainless Steel Version)

Model	Sealing Dia.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Main Seal Kit**
G10SS-A007	0.8 - 1.3	43.5	21.4	BSPP1/8	M5	15.7	N/A	M4	4.5	SG10SS-A007
G10SS-A013	1.3 - 2.0									SG10SS-A013
G10SS-A020	2.0 - 3.3									SG10SS-A020
G10SS-A007C	0.8 - 1.3	43.5	21.4	BSPP1/8	M5	15.7	N/A	M4	6.1	SG10SS-A007C
G10SS-A013C	1.3 - 2.0									SG10SS-A013C
G10SS-A020C	2.0 - 3.3									SG10SS-A020C
G10SS-0007D	0.8 - 1.3	51.4	37.9	BSPP1/8	M5	27.6	13.8	M5	15	SG10SS-0007D
G10SS-0013D	1.3 - 2.0									SG10SS-0013D
G10SS-0020D	2.0 - 3.3									SG10SS-0020D
G10SS-0025	2.5 - 4.5									SG10SS-0025
G10SS-0045	4.5 - 6.5									SG10SS-0045
G10SS-0065	6.5 - 8.5									SG10SS-0065
G10SS-0075	7.5 - 9.5									SG10SS-0075
G10SS-0085	8.5 - 10.5									SG10SS-0085
G10SS-0095	9.5 - 11.5									SG10SS-0095
G10SS-0105	10.5 - 13.0									SG10SS-0105

G10RC Tube OD Quick Connector (Taper Pipe Thread)

ONE-STOP CONNECTION

Easy Replacement | Automated Operation | Full Model Range | Fast Operation | Various Seal Materials | OD Sealing |

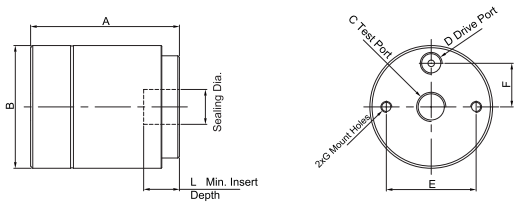

G10RC Model Specification Table (Aluminum Version)

Model	Sealing Dia.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Main Seal Kit**
G10RC-0007D	0.8 - 1.3	51.4	37.9	BSPT1/8	M5	27.6	13.8	M5	15	SG10RC-0007D
G10RC-0013D	1.3 - 2.0									SG10RC-0013D
G10RC-0020D	2.0 - 3.3									SG10RC-0020D
G10RC-0025	2.5 - 4.5									SG10RC-0025
G10RC-0045	4.5 - 6.5									SG10RC-0045
G10RC-0065	6.5 - 8.5									SG10RC-0065
G10RC-0075	7.5 - 9.5									SG10RC-0075
G10RC-0085	8.5 - 10.5									SG10RC-0085
G10RC-0095	9.5 - 11.5									SG10RC-0095
G10RC-0105	10.5 - 13.0									SG10RC-0105
G10RC-1110	11.0 - 13.0	68.4	56.3	BSPT1/4	BSPT1/8	41.2	20	M5	15	SG10RC-1110
G10RC-1130	13.0 - 15.0									SG10RC-1130
G10RC-1150	15.0 - 17.0									SG10RC-1150
G10RC-1160	16.0 - 18.0									SG10RC-1160
G10RC-1170	17.0 - 19.0									SG10RC-1170
G10RC-1180	18.0 - 20.0									SG10RC-1180
G10RC-1190	19.0 - 21.0									SG10RC-1190
G10RC-2200	20.0 - 22.0	88.7	79	BSPT1/2	BSPT1/8	63.5	31.7	M6	30	SG10RC-2200
G10RC-2220	22.0 - 24.0									SG10RC-2220
G10RC-2240	24.0 - 26.0									SG10RC-2240
G10RC-2260	26.0 - 28.0									SG10RC-2260
G10RC-2280	28.0 - 30.0									SG10RC-2280
G10RC-2300	30.0 - 32.0									SG10RC-2300
G10RC-2320	32.0 - 34.0									SG10RC-2320
G10RC-2340	34.0 - 36.0									SG10RC-2340
G10RC-2360	36.0 - 38.0									SG10RC-2360
G10RC-3380	38.0 - 41.0	113.5	107.4	BSPT1	BSPT1/8	82.6	41.3	M6	30	SG10RC-3380
G10RC-3410	41.0 - 44.0									SG10RC-3410
G10RC-3440	44.0 - 47.0									SG10RC-3440
G10RC-3470	47.0 - 50.0									SG10RC-3470

1. Non-standard G10RC quick connectors include larger outer diameters, extended front ends and shorter sealing lengths.
2. Custom G10RC quick connectors include sealing various threads, non-circular shapes, snap-fit mechanisms and multiple connector combinations. Please contact your local distributor or GripSeal sales representative.

G10 Pro Tube OD Quick Connector

ONE-STOP CONNECTION

Signal Feedback | Automated Operation | OD Sealing | Full Model Range | Damage-Free Connection |

Compared with the traditional G10 series, the G10 Pro series can carry an external magnetic sensor for more precise tracking of the drive status of the connector and the expansion of the seal, eliminating faulty connections caused by incomplete sealing and improving automated inspection efficiency.

Automated Wrap-Around Connection Solution

* Sensor feedback for early detection
* Eliminates waste caused by failed connections
* Automated testing maximises output capacity
* Improves the stability of the entire test process

G10 Pro Series Quick Connector Features

1. Sensor feedback
Sensor position indicates whether the connection is properly in place.

2.Pneumatic drive
Air enters through the rear drive port, pushing the internal piston to compress the seal for expanding sealing.

3. Automated operation
Two rear fixing holes allow the connector to be mounted on any actuator for accurate, reliable automated operation.

4. Damage-free operation
The seal grips without scoring, so the test part surface is never damaged

G10 Pro series quick connectors, from body A to body 3, seal plain tubes from 0.8 mm to 50 mm in diameter.
Selected Bodies

G10 Pro Quick Connector Advantages and Features

Damage-free sealed connection that does not affect the appearance of the product



A position sensor gives real-time feedback on whether the internal has actuated

Quick Seal Replacement: Simple maintenance, piston longer service life

Seal material: Optional materials to meet different customer requirements

Automated operation: Higher efficiency, more stable test results

G10 Pro Quick Connector Specifications

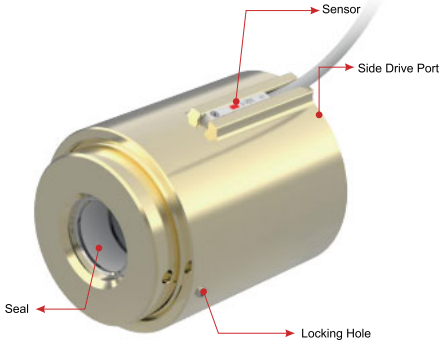

Max. Op. Pressure	Vacuum to 35 Bar
Sealing Range	See Selection Table
Min. Insert Depth	Bodies 0, 1: 15 mm Bodies 2, 3: 30 mm
Flow Port	BSPP1/8, BSPP1/4, BSPP1/2 Threaded Ports
Material	Aluminum or Stainless
Main Seal	Neoprene / Silicone
Inner Seal	NBR
Drive Pressure	4-6 Bar
Operating Temp.	-20 °C to +120 °C

SMC solid-state magnetic switches are recommended; related models are listed below:

Direct Cable Outlet

- Two-wire type with low load current 2.5~40mA
- Standard type uses a flexible cable

Output Type \ Cable Length	0.5 m	1 m	3 m
NPN Type	D-M9N	D-M9NM	D-M9NL
PNP Type	D-M9P	D-M9PM	D-M9PL
Two-Wire Type	D-M9B	D-M9BM	D-M9BL

G10 Pro Tube OD Quick Connector ONE-STOP CONNECTION
Signal Feedback | Automated Operation | OD Sealing | Full Model Range | Damage-Free Connection |





G10Pro Model Specification Table (Aluminum Version)

Model	Sealing Dia.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Main Seal Kit**
G10Pro-0007D	0.8 - 1.3	53.6	41	BSPP1/8	M5	27.6	13.8	M5	15	SG10Pro-0007D
G10Pro-0013D	1.3 - 2.0									SG10Pro-0013D
G10Pro-0020D	2.0 - 3.3									SG10Pro-0020D
G10Pro-0025	2.5 - 4.5									SG10Pro-0025
G10Pro-0045	4.5 - 6.5									SG10Pro-0045
G10Pro-0065	6.5 - 8.5									SG10Pro-0065
G10Pro-0075	7.5 - 9.5									SG10Pro-0075
G10Pro-0085	8.5 - 10.5									SG10Pro-0085
G10Pro-0095	9.5 - 11.5									SG10Pro-0095
G10Pro-0105	10.5 - 13.0									SG10Pro-0105
G10Pro-1110	11.0 - 13.0	68.4	60	BSPP1/4	BSPP1/8	41.2	20	M5	15	SG10Pro-1110
G10Pro-1130	13.0 - 15.0									SG10Pro-1130
G10Pro-1150	15.0 - 17.0									SG10Pro-1150
G10Pro-1160	16.0 - 18.0									SG10Pro-1160
G10Pro-1170	17.0 - 19.0									SG10Pro-1170
G10Pro-1180	18.0 - 20.0									SG10Pro-1180
G10Pro-1190	19.0 - 21.0									SG10Pro-1190
G10Pro-2200	20.0 - 22.0	91.4	83	BSPP1/2	BSPP1/8	63.5	31.7	M6	30	SG10Pro-2200
G10Pro-2220	22.0 - 24.0									SG10Pro-2220
G10Pro-2240	24.0 - 26.0									SG10Pro-2240
G10Pro-2260	26.0 - 28.0									SG10Pro-2260
G10Pro-2280	28.0 - 30.0									SG10Pro-2280
G10Pro-2300	30.0 - 32.0									SG10Pro-2300
G10Pro-2320	32.0 - 34.0									SG10Pro-2320
G10Pro-2340	34.0 - 36.0									SG10Pro-2340
G10Pro-2360	36.0 - 38.0									SG10Pro-2360

1. Non-standard G10Pro quick connectors include larger outer diameters, extended front ends and shorter sealing lengths.
2. Custom G10Pro quick connectors include sealing various threads, non-circular shapes, snap-fit mechanisms and multiple connector combinations. Please contact your local distributor or GripSeal sales representative.

The G10D series pneumatic quick connector forms a seal by using drive air to push an internal piston that compresses the seal. Compared with the standard G10 series, G10D connectors have a smaller outer diameter and suit space-limited applications. The innovative Double Thrust technology keeps thrust stable despite the small outer diameter.

Pneumatic Wrap-Around Quick Connector

* Compact with high flow
* More effective testing lowers overall manufacturing cost
* Automated testing maximises output capacity
* Improved test stability
* Reduces cost waste caused by failed connections

G10D Series Quick Connector Features

1. Double thrust
Double Thrust technology lets the G10D provide strong thrust while keeping a small outer diameter, maintaining stable sealing.

2. Fixed fluid port
The side fluid port is fixed and does not move with the internal mechanism, reducing turbulence and helping to keep the test connector stable

3. Small OD
Better suited to automated applications with limited space.

4.High flow
Both side and straight-through inlets use a large-bore design, fully ensuring flow during liquid testing

G10D series quick connectors, from body 0 to body 2, seal plain tubes from 0.8 mm to 28 mm indiameter.
Selected Bodies

G10D Wrap-Around Quick Connector (Double Thrust)
ONE-STOP CONNECTION
High Flow | Side Inlet | Wrap-Around | Fixed Inlet Port | Small OD |

G10D Quick Connector Advantages and Features

Side fluid port: simplifies on-site routing

Smaller OD: The G10D is slimmer and longer, suited to space-limited applications

Double thrust: Stable sealing force keeps test results consistent

Multiple drive ports: Both side and bottom drive ports are provided, for flexible selection to the situation



Maintenance flat: Simplifies connector removal, maintenance and seal suitreplacement

G10D Quick Connector Specifications

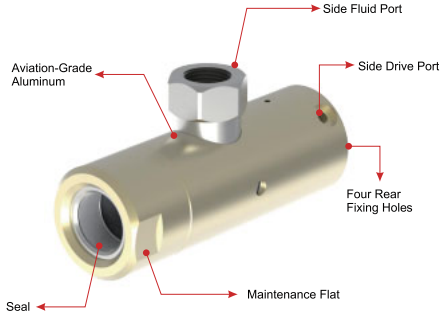

Max. Op. Pressure	Vacuum to 10 Bar
Sealing Range	0.8mm - 28mm
Min. Insert Depth	Bodies 0, 1, 2: 15 mm
Flow Port	BSPP1/8, BSPP3/8, BSPP1/2 Threaded Ports
Material	Aluminum
Main Seal	Medical Silicone / Neoprene
Inner Seal	NBR
Drive Pressure	4-88ar
Operating Temp.	-20 °C to +120 °C

Multiple mounting options for the G10D: four threaded holes on the base and an adjustable test port direction. The drive port can be at the base or at the side - choose either, for further flexibility.

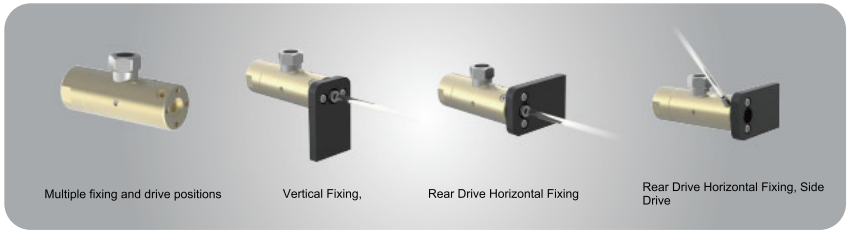

Multiple fixing and drive positions

Vertical Fixing,

Rear Drive Horizontal Fixing

Rear Drive Horizontal Fixing, Side Drive

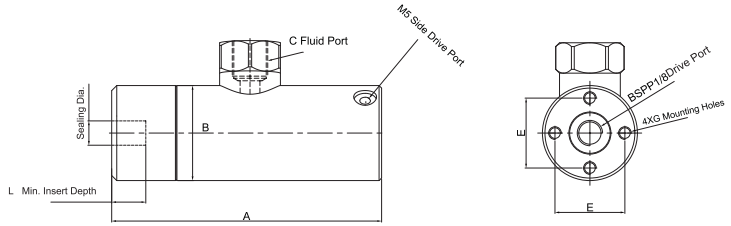

G10D Model Specification Table (Aluminum Version)

Model	Sealing Dia.	Dim. A	Dim. B	Dim. C	Dim. E	Dim. G	Insert Depth L	Main Seal Kit**
G10D-0007D	0.8 - 1.3	99.9	29.7	BSPP1/8	23	M4	15.4	SG10D-0007D
G10D-0013D	1.3 - 2.0							SG10D-0013D
G10D-0020D	2.0 - 3.3							SG10D-0020D
G10D-0025	2.5 - 4.5							SG10D-0025
G10D-0045	4.5 - 6.5							SG10D-0045
G10D-0065	6.5 - 8.5							SG10D-0065
G10D-0075	7.5 - 9.5							SG10D-0075
G10D-0085	8.5 - 10.5							SG10D-0085
G10D-0095	9.5 - 11.5							SG10D-0095
G10D-0105	10.5 - 13.0							SG10D-0105
G10D-1110	11.0 - 13.0	106.6	37.5	BSPP3/8	27.6	M5	15.3	SG10D-1110
G10D-1130	13.0 - 15.0							SG10D-1130
G10D-1150	15.0 - 17.0							SG10D-1150
G10D-1160	16.0 - 18.0							SG10D-1160
G10D-1170	17.0 - 19.0							SG10D-1170
G10D-1180	18.0 - 20.0							SG10D-1180
G10D-1190	19.0 - 21.0							SG10D-1190
G10D-1210	21.0 - 23.0							SG10D-1210
G10D-2200	20.0 - 22.0	116.6	44.7	BSPP1/2	32	M6	18.0	SG10D-2200
G10D-2220	22.0 - 24.0							SG10D-2220
G10D-2240	24.0 - 26.0							SG10D-2240
G10D-2260	26.0 - 28.0							SG10D-2260

The small size, high flow, pneumatic drive and leak-free performance of the G10D series make it the best connection solution for automated pressure testing, running testing and flow testing.

The connector has a BSPP1/8 drive port at the base and an M5 drive port at the side; users may choose either, as both air paths are connected. Standard products are supplied with an M5 plug cap.

G10D Wrap-Around Quick Connector (Double Thrust)
ONE-STOP CONNECTION
High Flow | Side Inlet | Wrap-Around | Fixed Inlet Port | Small OD |

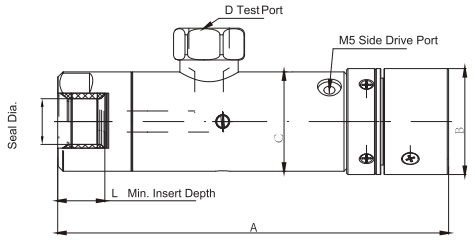

G10D Model Specification Table (Aluminum Version)

Model	Sealing Dia.	Max. Press.	Length A	Dia. B	Dim. C	Test Port D	Dim. E	Locating Pin F	Mount Hole G	Min. Insertion Depth L	Main Seal Kit**
G10D-0025PA-GFL	2.5 - 4.5	10 Bar	140	40	29.7	BSPP1/8	32.5	4	M4	16.9	SG10D-0025PA-GFL
G10D-0045PA-GFL	4.5 - 6.5										SG10D-0045PA-GFL
G10D-0065PA-GFL	6.5 - 8.5										SG10D-0065PA-GFL
G10D-0075PA-GFL	7.5 - 9.5										SG10D-0075PA-GFL
G10D-0085PA-GFL	8.5 - 10.5										SG10D-0085PA-GFL
G10D-0095PA-GFL	9.5 - 11.5										SG10D-0095PA-GFL
G10D-0105PA-GFL	10.5 - 13.0										SG10D-0105PA-GFL
G10D-1110PA-GFL	11.0 - 13.0		147.59	40	37.5	BSPP3/8	32.5	4	M4	17.9	SG10D-1110PA-GFL
G10D-1120PA-GFL	12.0 - 14.0										SG10D-1120PA-GFL
G10D-1130PA-GFL	13.0 - 15.0										SG10D-1130PA-GFL
G10D-1140PA-GFL	14.0 - 16.0										SG10D-1140PA-GFL
G10D-1150PA-GFL	15.0 - 17.0										SG10D-1150PA-GFL
G10D-1160PA-GFL	16.0 - 18.0										SG10D-1160PA-GFL
G10D-1170PA-GFL	17.0 - 19.0										SG10D-1170PA-GFL
G10D-1180PA-GFL	18.0 - 20.0										SG10D-1180PA-GFL
G10D-1190PA-GFL	19.0 - 21.0										SG10D-1190PA-GFL
G10D-1210PA-GFL	21.0 - 23.0										SG10D-1210PA-GFL



Body 0 Body 1

G10T Wrap-Around Quick Connector

ONE-STOP CONNECTION

High Flow | Side Inlet | Wrap-Around | Fixed Inlet Port | Small OD | Damage-Free Connection | Float Compensation |

The G10T series pneumatic quick connector forms a seal by using drive air to push an internal piston that compresses the seal. Compared with the standard G10 series, G10T connectors use a PEEK spacer for damage-free connection, and the drive and test ports are moved to the side, making them suitable for GFL float compensation modules.

Pneumatic Wrap-Around Quick Connector

* Damage-free connection
* With a float compensation module it aligns automatically with the product
* Automated testing maximises output capacity
* Improved test stability
* Reduces cost waste caused by failed connections

G10T Series Quick Connector Features

1. Damage-free connection
PEEK is used at contact points to prevent damage to the product.

2.Automatic alignment
Supplied with a float compensation module with 2 mm unilateral offset, compatible with most alignment situations.

3. Small OD
Better suited to automated applications with limited space.

4.High flow
Both side and straight-through inlets use a large-bore design, fully ensuring flow during liquid testing

G10T series quick connectors, from body 0 to body 1, seal plain tubes from 0.8 mm to 19 mm in diameter.

Selected Bodies

G10T Wrap-Around Quick Connector

ONE-STOP CONNECTION

High Flow | Side Inlet | Wrap-Around | Fixed Inlet Port | Small OD | Damage-Free Connection | Float Compensation |

G10T Quick Connector Advantages and Features

Damage-free connection:
PEEK is used at all contact points to prevent damage to the product

With float compensation module:
Automatic alignment with the product



Side drive and test ports:
for easy mounting of bottom accessories

Quick seal replacement:
simple maintenance and a longer service life

Seal material:
Optional materials to meet different customer requirements

G10T Quick Connector Specifications

Max. Op. Pressure	Vacuum to 10 Bar
Sealing Range	0.8mm - 19mm
Min. Insert Depth	Bodies 0, 1, 2: 15 mm
Flow Port	BSPP1/8, BSPP3/8 , BSPP1/2, BSPP1/4 Threaded Port
Material	Aluminum
Main Seal	Medical Silicone / Neoprene
Inner Seal	NBR
Drive Pressure	4-8Bar
Operating Temp.	-20 °C to +120 °C

The G10T series uses pneumatic drive to compress the internal seal, creating a leak-free external connection for all kinds of fittings. The G10T connector is the ideal choice for leak testing and function testing.

Water Channel Testing

Turbocharger
Radiator
Plastic Port
Fuel Pump

Carbon Canister

Medical Tubing

Motor Controller

G10T Wrap-Around Quick Connector

ONE-STOP CONNECTION

High Flow | Side Inlet | Wrap-Around | Fixed Inlet Port | Small OD | Damage-Free Connection | Float Compensation |





G10T Model Specification Table

Model	Sealing Dia.	Max. Press.	Length A	Dia. B	Drive Port C	Test Port D	Dim. E	Locating Pin F	Mount Hole	Min. Insert Depth L	Main Seal Kit**
G10T-0007D-GFL	0.8 - 1.3	10Bar	100	40	M5	BSPP1/8	32.5	4	M4	16.9	SG10T-0007D-GFL
G10T-0013D-GFL	1.3 - 2.0										SG10T-0013D-GFL
G10T-0020D-GFL	2.0 - 3.3										SG10T-0020D-GFL
G10T-0025-GFL	2.5 - 4.5										SG10T-0025-GFL
G10T-0045-GFL	4.5 - 6.5										SG10T-0045-GFL
G10T-0065-GFL	6.5 - 8.5										SG10T-0065-GFL
G10T-0075-GFL	7.5 - 9.5										SG10T-0075-GFL
G10T-0085-GFL	8.5 - 10.5										SG10T-0085-GFL
G10T-0095-GFL	9.5 - 11.5										SG10T-0095-GFL
G10T-0105-GFL	10.5 - 13.0										SG10T-0105-GFL
G10T-1110-GFL	11.0 - 13.0	10Bar	121.4	59.8	BSPP1/8	BSPP1/4	32.5	4	M4	17.8	SG10T-1110-GFL
G10T-1120-GFL	12.0 - 14.0										SG10T-1120-GFL
G10T-1130-GFL	13.0 - 15.0										SG10T-1130-GFL
G10T-1140-GFL	14.0 - 16.0										SG10T-1140-GFL
G10T-1150-GFL	15.0 - 17.0										SG10T-1150-GFL
G10T-1160-GFL	16.0 - 18.0										SG10T-1160-GFL
G10T-1170-GFL	17.0 - 19.0										SG10T-1170-GFL
G10T-1180-GFL	18.0 - 20.0										SG10T-1180-GFL
G10T-1190-GFL	19.0 - 21.0										SG10T-1190-GFL





GFL Model Specification Table

Model	Unilateral Float Range	A	B	C	D	E
GFL-S2-Z	2	40	33.5	32.5	4	M4
GFL-S3-Z	3	60	36	53	4	M4

G15 Tube ID Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Automated Operation | Full Model Range | Fast Operation | Various Seal Materials | Compact | Internal Expanding Seal |

The G15 series pneumatic quick sealing connector uses air pressure to expand the seal, creating an internal leak-tight connection with virtually any type of port. It is ideal for high-volume automated production testing.

Efficient Automated Connection Solution

* Pneumatic drive for a more stable driving pressure
* Instant connection for smooth, rough, porous, threaded and all kinds of irregular fittings
* Fine and reliable seal material that does not damage theproduct surface
* Suitable for pick-and-place robot applications; simple maintenance and replaceable seals greatly extend connector service life3

G15 Series Quick Connector Features

1. Pneumatic drive
Air enters through the rear drive port, pushing the internal piston to compress the seal for internal expanding sealing.

2. Automated operation
Two rear fixing holes allow the connector to be mounted on any actuator for accurate, reliable automated operation.

3. Straight-through test port
Fewer intermediate parts improve sealing and ensure flow.

4. Stop ring
A built-in stop ring limits piston travel and prevents the seal from overloading and blowing out

G15 series quick connectors, from body 0 to body 5, seal plain tubes from 8.5 mm to 44 mm in diameter.
Selected Bodies

Making connections simple and reliable

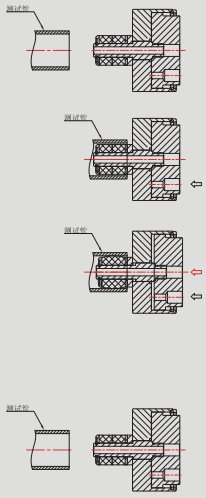

Step 1:

Place the test tube into the front test port of the G15 series

Step 2:

Air is supplied through the drive port; the seal is compressed, expands and presses against the inner wall of the test tube to form a seal

Step 3:

a. Once the seal is formed, fill the test port with the test medium (compressed air, test fluid, etc.)

b. After testing is complete the test medium is drained; once test pressure returns to normal, the drive air is vented, the seal is no longer pressurised, the sealed connection is released and the connector can be removed

Step 4:

When the above steps are complete, the test tube can be removed from the connector

G15 Quick Connector Display

G15 Tube ID Quick Connector
ONE-STOP CONNECTION
Low-Pressure Testing | Easy Replacement | Automated Operation | Full Model Range | Fast Operation | Various Seal Materials | Compact | Internal Expanding Seal |

G15 Quick Connector Advantages and Features

Pneumatic drive: Excellent sealing, simple operation

Flexible customization: More flexible clamping positions avoid interference

Quick Seal Replacement: Simple maintenance for a longer connector service life

Compact size: Takes up no operating space and can be positioned anywhere on the fixture

Automated operation: Higher efficiency, more stable test results

G15 Quick Connector Specifications

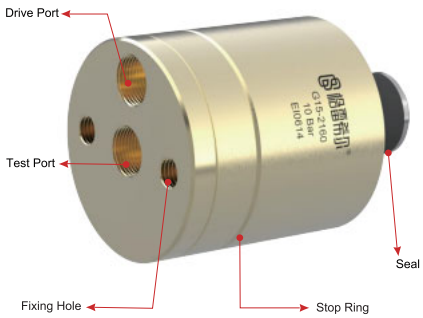

Max. Op. Pressure	Vacuum to 8 Bar
Sealing Range	8.5mm ~ 44mm
Min. Insert Depth	Bodies 1, 2: 15 mm Bodies 3, 4: 25 mm
Flow Port	BSPP1/8,BSPP3/8
Material	Aluminum
Main Seal	Neoprene / Silicone
Inner Seal	NBR
Drive Pressure	4-6 Bar
Operating Temp.	-20 °C to +120 °C

The G15 system injects drive pressure into the rear drive port, pushing the housing forward to compress the front seal and create a leak-free internal connection suitable for all kinds of fittings. The G15 connector is the ideal choice for high-volume automated production.

Water Channel Testing

Turbocharger
Radiator
Plastic Port
Fuel Pump

Motor Water Channel

Engine Assembly Testing

Motor Controller

G15 Tube ID Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Automated Operation | Full Model Range | Fast Operation | Various Seal Materials | Compact | Internal Expanding Seal |





Model	Sealing Dia.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Main Seal Kit**
G15-0080	8.0 - 8.5	50.4	33.5	M5	M5	20.3	10	M5	12.2	SG15-0080
G15-0085	8.5 - 9.5									SG15-0085
G15-0095	9.5 - 10.5									SG15-0095
G15-1100	10.5 - 11.5	61.8	40	BSPP1/8	BSPP1/8	25.9	13	M6	14.5	SG15-1100
G15-1110	11.5 - 12.5									SG15-1110
G15-1120	12.5 - 13.5									SG15-1120
G15-1130	13.5 - 14.5									SG15-1130
G15-1140	14.5 - 15.5									SG15-1140
G15-1150	15.5 - 17.0									SG15-1150
G15-2160	17.0 - 18.0	61.8	40	BSPP1/8	BSPP1/8	25.9	13	M6	14.5	SG15-2160
G15-2170	18.0 - 19.0									SG15-2170
G15-2180	19.0 - 20.0									SG15-2180
G15-2190	20.0 - 21.0									SG15-2190
G15-2200	21.0 - 22.0									SG15-2200
G15-2210	22.0 - 23.0									SG15-2210
G15-3220	23.0 - 24.0	63.6	60	BSPP1/8	BSPP1/8	40.6	18.3	M6	24.5	SG15-3220
G15-3230	24.0 - 25.0									SG15-3230
G15-3240	25.0 - 26.0									SG15-3240
G15-3250	26.0 - 27.0									SG15-3250
G15-3260	27.0 - 28.0									SG15-3260
G15-3270	28.0 - 29.0									SG15-3270
G15-4280	29.0 - 30.0	63.6	60	BSPP1/8	BSPP1/8	40.6	18.3	M6	24.5	SG15-4280
G15-4290	30.0 - 31.0									SG15-4290
G15-4300	31.0 - 32.0									SG15-4300
G15-4310	32.0 - 33.0									SG15-4310
G15-4320	33.0 - 34.0									SG15-4320
G15-4330	34.0 - 35.0									SG15-4330
G15-5340	35.0 - 37.0	93.5	88.5	BSPP3/8	BSPP1/8	58.7	29.4	M8	31.3	SG15-5340
G15-5350	36.0 - 38.0									SG15-5350
G15-5370	38.0 - 40.0									SG15-5370
G15-5390	40.0 - 42.0									SG15-5390
G15-5400	41.0 - 43.0									SG15-5400
G15-5420	43.0 - 45.0									SG15-5420

1. Non-standard G15 quick connectors mainly include larger sizes (up to 80 mm), longer centre rods, larger flow bores and thinner seal thickness. 2. Custom G15 quick connectors include sealing various threads, smaller volume and complex shapes. Please contact your local distributor or GripSeal sales representative.

G15RC Tube ID Quick Connector \ (Taper Pipe Thread)

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Automated Operation | Full Model Range | Fast Operation | Various Seal Materials |Compact | Internal Expanding Seal |





Model	Sealing Dia.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Main Seal Kit**
G15RC-1100	10.5 - 11.5	61.8	40	BSPT1/8		25.9	13	M6	14.5	SG15-1100
G15RC-1110	11.5 - 12.5									SG15-1110
G15RC-1120	12.5 - 13.5									SG15-1120
G15RC-1130	13.5 - 14.5									SG15-1130
G15RC-1140	14.5 - 15.5									SG15-1140
G15RC-1150	15.5 - 17.0									SG15-1150
G15RC-2160	17.0 - 18.0	61.8	40	BSPT1/8		25.9	13	M6	14.5	SG15-2160
G15RC-2170	18.0 - 19.0									SG15-2170
G15RC-2180	19.0 - 20.0									SG15-2180
G15RC-2190	20.0 - 21.0									SG15-2190
G15RC-2200	21.0 - 22.0									SG15-2200
G15RC-2210	22.0 - 23.0									SG15-2210
G15RC-3220	23.0 - 24.0	63.6	60	BSPT1/4	BSPT1/8	40.6	18.3	M6	24.5	SG15-3220
G15RC-3230	24.0 - 25.0									SG15-3230
G15RC-3240	25.0 - 26.0									SG15-3240
G15RC-3250	26.0 - 27.0									SG15-3250
G15RC-3260	27.0 - 28.0									SG15-3260
G15RC-3270	28.0 - 29.0									SG15-3270
G15RC-4280	29.0 - 30.0	63.6	60	BSPT1/4	BSPT1/8	40.6	18.3	M6	24.5	SG15-4280
G15RC-4290	30.0 - 31.0									SG15-4290
G15RC-4300	31.0 - 32.0									SG15-4300
G15RC-4310	32.0 - 33.0									SG15-4310
G15RC-4320	33.0 - 34.0									SG15-4320
G15RC-4330	34.0 - 35.0									SG15-4330
G15RC-1120-250*	13.0 - 14.0	86.8	40	BSPT1/8	BSPT1/8	25.9	13	M6	14.5	SG15-1120
G15RC-2180-500*	19.0 - 20.0	111.8								SG15-2180
G15RC-3260-750*	27.0 - 28.0	138.6	60	BSPT1/4		40.6	18.3		24.5	SG15-3260
G15RC-4280-500*	29.0 - 30.0	113.6								SG15-4280

Note: * Extended versions are available; * denotes integral multiples of 25 mm, with H up to 150 mm.

1. Non-standard G15RC quick connectors mainly include larger sizes (up to 80 mm), longer centre rods, larger flow bores and thinner seal thickness. 2. Custom G15RC quick connectors include sealing various threads, smaller volume and complex shapes. Please contact your local distributor or GripSeal sales representative.

G15 Pro Tube ID Quick Connector

ONE-STOP CONNECTION

Signal Feedback | Position Confirmation | Internal Expanding Seal | Easy Maintenance | Full Model Range | Automated Operation |

Compared with the traditional G15 series, the G15 Pro series comes with an external magnetic sensor that tracks the connector's drive status and seal expansion more accurately, preventing faulty connections from incomplete sealing and boosting automated inspection efficiency.

Efficient Automated Connection Solution

* Pneumatic drive for a more stable driving pressure
* Instant connection for smooth, rough, porous, threaded and all kinds of irregular fittings
* Fine and reliable seal material that does not damage the product surface
* Suitable for pick-and-place robot applications; simple maintenance and replaceable seals greatly extend connector service life

G15 Pro Series Quick Connector Features

1. Sensor feedback
Sensor position indicates whether the connection is properly in place.

2. Pneumatic drive
Air enters through the rear drive port, pushing the internal piston to compress the seal for internal expanding sealing.

3. Automated operation
Two rear fixing holes allow the connector to be mounted on any actuator for automated operation that is accu rate and reliable.

4. Damage-free operation
The seal grips without scoring, so the test part surface is never damaged

G15 Pro series quick connectors, from body 0 to body 4, seal plain tubes from 8.5 mm to 35 mm in diameter.

Selected Bodies

G15 Pro Tube ID Quick Connector

ONE-STOP CONNECTION

Signal Feedback | Position Confirmation | Internal Expanding Seal | Easy Maintenance | Full Model Range | Automated Operation

G15 Pro Quick Connector Advantages and Features



Flexible customization: Avoids interference

Position sensor: Real-time feedback on whether the internal piston has actuated

Quick Seal Replacement: Simple maintenance, longer service life

Quick Seal Replacement: Simple maintenance, longer service life

Automated operation: Higher efficiency, more stable test results

G15 Pro Quick Connector Specifications

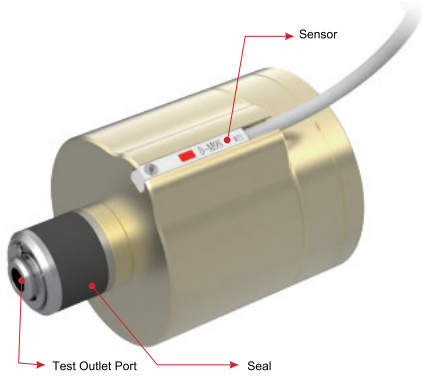

Max. Op. Pressure	Vacuum to 8 Bar
Sealing Range	8.5mm ~ 35mm
Min. Insert Depth	Bodies 1, 2: 15 mm Bodies 3, 4: 25 mm
Flow Port	BSPP1/8
Material	Aluminum
Main Seal	Neoprene / Silicone
Inner Seal	NBR
Drive Pressure	4-6 Bar
Operating Temp.	-20 °C to +120 °C

SMC solid-state magnetic switches are recommended; related models are listed below:

Direct Cable Outlet

- Two-wire type with low load current 2.5~40mA
- Standard type uses a flexible cable

Output Type \ Cable Length	0.5 m	1 m	3 m
NPN Type	D-M9N	D-M9NM	D-M9NL
PNP Type	D-M9P	D-M9PM	D-M9PL
Two-Wire Type	D-M9B	D-M9BM	D-M9BL

G15 Pro Tube ID Quick Connector

ONE-STOP CONNECTION

Signal Feedback | Position Confirmation | Internal Expanding Seal | Easy Maintenance | Full Model Range | Automated Operation |





Model	Sealing Dia.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Main Seal Kit**
G15Pro-0080	8.0 - 8.5	54.7	38	M5	M5	20.3	10	M5	12.2	SG15Pro-0080
G15Pro-0085	8.5 - 9.5									SG15Pro-0085
G15Pro-0095	9.5 - 10.5									SG15Pro-0095
G15Pro-1100	10.5 - 11.5	62	45	BSPP1/8		25.9	13	M6	14.5	SG15Pro-1100
G15Pro-1110	11.5 - 12.5									SG15Pro-1110
G15Pro-1120	12.5 - 13.5									SG15Pro-1120
G15Pro-1130	13.5 - 14.5									SG15Pro-1130
G15Pro-1140	14.5 - 15.5									SG15Pro-1140
G15Pro-1150	15.5 - 17.0									SG15Pro-1150
G15Pro-2160	17.0 - 18.0	62	45	BSPP1/8		25.9	13	M6	14.5	SG15Pro-2160
G15Pro-2170	18.0 - 19.0									SG15Pro-2170
G15Pro-2180	19.0 - 20.0									SG15Pro-2180
G15Pro-2190	20.0 - 21.0									SG15Pro-2190
G15Pro-2200	21.0 - 22.0									SG15Pro-2200
G15Pro-2210	22.0 - 23.0									SG15Pro-2210
G15Pro-3220	23.0 - 24.0	63.6	64	BSPP1/8		40.6	18.3	M6	24.5	SG15Pro-3220
G15Pro-3230	24.0 - 25.0									SG15Pro-3230
G15Pro-3240	25.0 - 26.0									SG15Pro-3240
G15Pro-3250	26.0 - 27.0									SG15Pro-3250
G15Pro-3260	27.0 - 28.0									SG15Pro-3260
G15Pro-3270	28.0 - 29.0									SG15Pro-3270
G15Pro-4280	29.0 - 30.0	63.6	64	BSPP1/8		40.6	18.3	M6	24.5	SG15Pro-4280
G15Pro-4290	30.0 - 31.0									SG15Pro-4290
G15Pro-4300	31.0 - 32.0									SG15Pro-4300
G15Pro-4310	32.0 - 33.0									SG15Pro-4310
G15Pro-4320	33.0 - 34.0									SG15Pro-4320
G15Pro-4330	34.0 - 35.0									SG15Pro-4330

1. Non-standard G15Pro quick connectors mainly include larger sizes (up to 80 mm), longer centre rods, larger flow bores and thinner seal thickness.
2. Custom G15Pro quick connectors include sealing various threads, smaller volume and complex shapes.Please contact your local distributor or GripSeal sales representative.

G15K Pneumatic Expanding Connector

ONE-STOP CONNECTION

Fast Replacement | Automation | Internal Expanding | Compact | Various Seal Materials |

The G15K series pneumatic quick sealing connector uses air pressure to expand the seal, creating an internal leak-tight connection with virtually any type of port. It is ideal for high-volume automated production testing and features innovative Quick Maintenance technology: the seal can be replaced without dismantling the connector, greatly shortening maintenance time.

Pneumatic Expanding Connector

* More effective testing lowers overall manufacturing cost
* Automated testing maximises output capacity
* Improved test stability
* Even faster seal replacement and shorter maintenance time

G15K Series Quick Connector Features

1. Fast maintenance
Pressing the button allows quick removal of the seal, greatly reducing maintenance time.

2.Internal expanding seal
Compact internal structure, small size and a wide range of applications.

3. Damage-free
All parts connected to the test port are rubber, so customer products are never damaged.

4.Pneumatic drive
The seal can be expanded and contracted pneumatically - ideal for automated applications

G15K series quick connectors, from body 0 to body 4, seal plain tubes from 8.5 mm to 35 mm in diameter.
Selected Bodies

G15K Pneumatic Expanding Connector

ONE-STOP CONNECTION

Fast Replacement | Automation | Internal Expanding | Compact | Various Seal Materials |

G15K Quick Connector Advantages and Features



Internal expanding seal: The expanded seal forms the seal



Fast replacement: Fast seal replacement reduces maintenance time and cost

Standard threaded port: Drive port, test port, fixing holes all use standard threads, making accessories easy to source

Compact size: Compact internal structure and small size for a wide range of applications

Multiple materials: A choice of seal materials to suit different testing scenarios

G15K Quick Connector Specifications

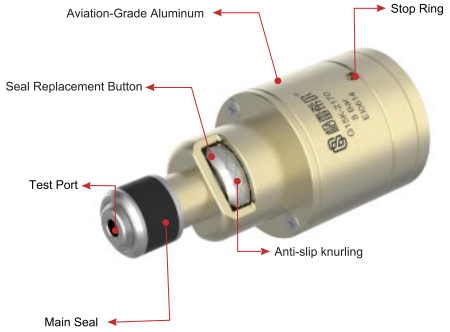

Max. Op. Pressure	Vacuum to 8 Bar
Sealing Range	8.5mm ~ 35mm
Min. Insert Depth	Bodies 1, 2: 15 mm Bodies 3, 4: 25 mm
Flow Port	M5,BSPP1/8
Material	Aluminum
Main Seal	Neoprene / PU / Silicone
Inner Seal	NBR
Drive Pressure	4-6 Bar
Operating Temp.	-20 °C to +120 °C

Thanks to fast maintenance, damage-free and leak-free performance, the G15K series is the best connection solution for automated pressure testing, running testing and flow testing.

Seal Replacement Steps

Step 1: Press the silver button; the front end pops out automatically (cover the front with your palm to prevent the assembly from springing out). Pull out the old seal assembly.

Step 2: Fit the new seal assembly onto the co nnector

Step 3: Press in the replacement seal assembly; a click means it is correctly installed

G15K Pneumatic Expanding Connector

ONE-STOP CONNECTION

Fast Replacement | Automation | Internal Expanding | Compact | Various Seal Materials |

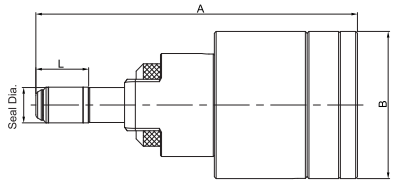



Model	Sealing Dia.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. L	Main Seal Kit**
G15K-0080	8.0 - 8.5	72.7	33.5	M5	M5	20.3	10	M5	13.1	SG15-0080
G15K-0085	8.5 - 9.5									SG15-0085
G15K-0095	9.5 - 10.5									SG15-0095
G15K-1100	10.5 - 11.5	90	40	BSPP1/8	BSPP1/8	25.9	13	M6	15.3	SG15-1100
G15K-1110	11.5 - 12.5									SG15-1110
G15K-1120	12.5 - 13.5									SG15-1120
G15K-1130	13.5 - 14.5									SG15-1130
G15K-1140	14.5 - 15.5									SG15-1140
G15K-1150	15.5 - 17.0									SG15-1150
G15K-2160	17.0 - 18.0	90	40	BSPP1/8	BSPP1/8	25.9	13	M6	15.3	SG15-2160
G15K-2170	18.0 - 19.0									SG15-2170
G15K-2180	19.0 - 20.0									SG15-2180
G15K-2190	20.0 - 21.0									SG15-2190
G15K-2200	21.0 - 22.0									SG15-2200
G15K-2210	22.0 - 23.0									SG15-2210
G15K-3220	23.0 - 24.0	91	60	BSPP1/8	BSPP1/4	40.6	18.3	M6	24.5	SG15-3220
G15K-3230	24.0 - 25.0									SG15-3230
G15K-3240	25.0 - 26.0									SG15-3240
G15K-3250	26.0 - 27.0									SG15-3250
G15K-3260	27.0 - 28.0									SG15-3260
G15K-3270	28.0 - 29.0									SG15-3270
G15K-4280	29.0 - 30.0	91	60	BSPP1/8	BSPP1/4	40.6	18.3	M6	24.5	SG15-4280
G15K-4290	30.0 - 31.0									SG15-4290
G15K-4300	31.0 - 32.0									SG15-4300
G15K-4310	32.0 - 33.0									SG15-4310
G15K-4320	33.0 - 34.0									SG15-4320
G15K-4330	34.0 - 35.0									SG15-4330

1. Non-standard G15K quick connectors mainly include larger sizes (up to 80 mm), longer centre rods, larger flow bores and thinner seal thickness.
2. Custom G15K quick connectors include sealing various threads, smaller volume and complex shapes. Please contact your local distributor or GripSeal sales representative.

G15T Pneumatic Expanding Connector

ONE-STOP CONNECTION

Fast Replacement | Automation | Internal Expanding | Compact | Various Seal Materials | Damage-Free Connection | Float Compensation |

The G15T series pneumatic quick sealing connector uses air pressure to expand the seal, creating an internal leak-tight connection with all kinds of bore ports Ideal for high-volume automated production testing. PEEK is used where the head contacts the test product, effectively protecting it for damage-free testing. The drive and test ports are moved to the side,making it suitable for GFL float compensation modules and solving the problem of test alignment.

Pneumatic Expanding Connector

* With float compensation module for automatic centring
* Automated testing maximises output capacity
* Damage-free connection
* Even faster seal replacement and shorter maintenance time

G15T Series Quick Connector Features

1. Fast maintenance
The centre rod can be unscrewed quickly, making seal replacement easier than with a circlip design.

2. Internal expanding seal
Compact internal structure, small size and a wide range of applications.

3. Damage-free
All parts connected to the test port are rubber, so customer products are never damaged.

4.Pneumatic drive
The seal can be expanded and contracted pneumatically - ideal for automated applications

G15T series quick connectors, from body 0 to body 4, seal plain tubes from 8.5 mm to 35 mm indiameter.
Selected Bodies

G15T Pneumatic Expanding Connector

ONE-STOP CONNECTION

Fast Replacement | Automation | Internal Expanding | Compact | Various Seal Materials | Damage-Free Connection | Float Compensati

G15T Quick Connector Advantages and Features

Damage-free connection:
PEEK is used at all contact points to prevent damage to the product



With float compensation module:
Automatic alignment with the product

Side drive and test ports:
for easy mounting of bottom accessories

Quick Seal Replacement:
Simple maintenance, longer service life

Multiple materials:
A choice of seal materials to suit different testing scenarios

G15T Quick Connector Specifications

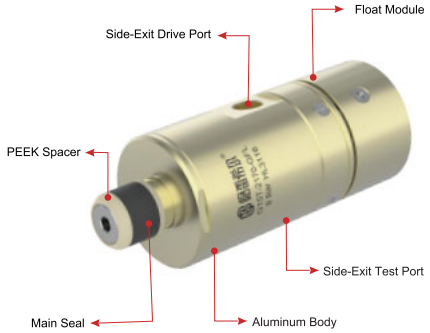

Max. Op. Pressure	Vacuum to 8 Bar
Sealing Range	8.5mm ~ 35mm
Min. Insert Depth	Bodies 0, 1, 2: 14.3 mm Bodies 3, 4: 16.3 mm
Flow Port	M5,BSPP1/8,BSPP1/4
Material	Aluminum
Main Seal	Neoprene / PU / Silicone
Inner Seal	NBR
Drive Pressure	4-6 Bar
Operating Temp.	-20 °C to +120 °C

The G15T system injects drive pressure into the rear drive port, pushing the housing forward to compress the front seal and create a leak-free internal connection suitable for all kinds of fittings. The G15 connector is the ideal choice for high-volume automated production.

Water Channel Testing

Turbocharger
Radiator
Plastic Port
Fuel Pump

Motor Water Channel

Engine Assembly Testing

Motor Controller

G15T Pneumatic Expanding Connector

ONE-STOP CONNECTION

Fast Replacement | Automation | Internal Expanding | Compact | Various Seal Materials | Damage-Free Connection | Float Compensation |

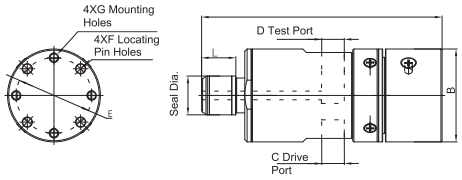

G15T Model Specification Table

Model	Sealing Dia.	Max. Press.	Length A	Dia. B	Drive Port C	Test Port D	Dim. E	Locating Pin F	Mount Hole	Min. Insert Depth L	Main Seal Kit**
G15T-0080-GFL	8.0 - 8.5	8Bar	103	40	M5	M5	32.5	4	M4	14.3	SG15T-0080-GFL
G15T-0085-GFL	8.5 - 9.5										SG15T-0085-GFL
G15T-0095-GFL	9.5 - 10.5										SG15T-0095-GFL
G15T-0100-GFL	10.5 - 11.5										SG15T-0100-GFL
G15T-1110-GFL	11.5 - 12.5	8Bar	103	40	BSPP1/8	BSPP1/8	32.5	4	M4	14.3	SG15T-1110-GFL
G15T-1120-GFL	12.5 - 13.5										SG15T-1120-GFL
G15T-1130-GFL	13.5 - 14.5										SG15T-1130-GFL
G15T-1140-GFL	14.5 - 15.5										SG15T-1140-GFL
G15T-1150-GFL	15.5 - 17.0										SG15T-1150-GFL
G15T-2160-GFL	17.0 - 18.0	8Bar	103.6	40	BSPP1/8	BSPP1/8	32.5	4	M4	14.7	SG15T-2160-GFL
G15T-2170-GFL	18.0 - 19.0										SG15T-2170-GFL
G15T-2180-GFL	19.0 - 20.0										SG15T-2180-GFL
G15T-2190-GFL	20.0 - 21.0										SG15T-2190-GFL
G15T-2200-GFL	21.0 - 22.0										SG15T-2200-GFL
G15T-2210-GFL	22.0 - 23.0										SG15T-2210-GFL
G15T-3220-GFL	23.0 - 24.0	8Bar	119	60	BSPP1/8	BSPP1/4	53	4	M4	16.1	SG15T-3220-GFL
G15T-3230-GFL	24.0 - 25.0										SG15T-3230-GFL
G15T-3240-GFL	25.0 - 26.0										SG15T-3240-GFL
G15T-3250-GFL	26.0 - 27.0										SG15T-3250-GFL
G15T-3260-GFL	27.0 - 28.0										SG15T-3260-GFL
G15T-3270-GFL	28.0 - 29.0										SG15T-3270-GFL
G15T-4280-GFL	29.0 - 30.0	8Bar	119.2	60	BSPP1/8	BSPP1/4	53	4	M4	16.3	SG15T-4280-GFL
G15T-4290-GFL	30.0 - 31.0										SG15T-4290-GFL
G15T-4300-GFL	31.0 - 32.0										SG15T-4300-GFL
G15T-4310-GFL	32.0 - 33.0										SG15T-4310-GFL
G15T-4320-GFL	33.0 - 34.0										SG15T-4320-GFL
G15T-4330-GFL	34.0 - 35.0										SG15T-4330-GFL

G60 Male Threaded Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |

The G60 series is a dedicated connector for male threads, widely used in the instrument / meter, appliance and air-conditioning industries for line testing, such as ignition testing of water heaters, pressure testing of instruments, and refrigerant charging during outdoor air-conditioner assembly. Simple to use - a light hand push completes the connection - it is the best choice for male thread connection / testing solutions.

Male Threaded Quick Connector

* Face seal, easy to replace
* Push-pull operation: simple and reliable
* No flow loss, efficient testing
* Safety indicator for reliable production

G60 Series Quick Connector Features

1. Sliding sleeve operation
Simple operation: a light push completes the threaded connection, and knurling on the housing increases grip for easier handling.

2. Face seal
Reliable sealing, very high pressure rating, easy seal replacement and simple mainten ance.

3. 316 stainless steel construction
Excellent mechanical properties: strong and wear-resistant, greatly extending connector service life.

4. Straight-through design
Maximises flow and minimises the effect on running tests.

5. Safety indicator ring
Position confirmation indicator ensures correct connector operation

The G60 male threaded quick connector covers imperial, metric and SAE threads in many sizes, and meets pressure requirements from 20 bar, 50 bar and 100 bar up to 2500 bar (UHP version). Selected Bodies

G60 Quick Connector Features and Advantages

Wrap-around thread locking: no rotation required, protecting the product thread

Knurling:
Increases friction for easier operation

Sliding sleeve structure:A light push locks or releases the connection

Straight-through design:
Reduces flow loss and ensures correct test results

Face seal:
Simple replacement, easy maintenance

G60 Quick Connector Specifications

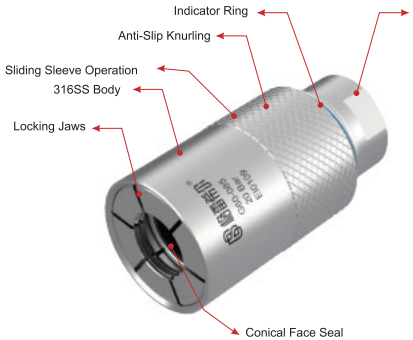

Max. Op. Pressure	Vacuum to 50 Bar (UHP version 2500 Bar)
Sealing Range	1/8"-2"
Min. Insert Depth	25mm
Flow Port	See Selection Table
Material	Aluminum, Stainless, Nylon
Main Seal	Neoprene / NBR
Inner Seal	NBR
Operating Temp.	-20 °C to +120 °C

G60 Operation Demo

1. Align the connector with the tube to be sealed

2. Push to lock the connection

G60 Male Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |

Application Cases

Water Heater

Air-Conditioner Outdoor Unit

Washing Machine Mixing Valve

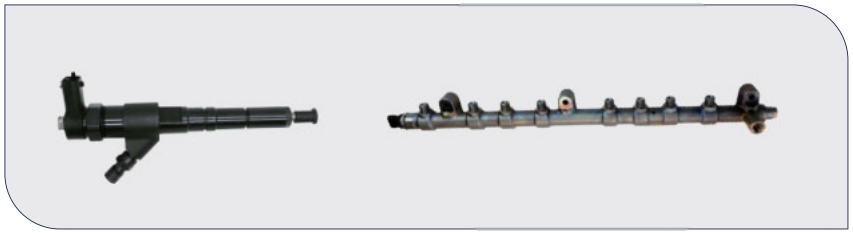

Injectors and Fuel Rail

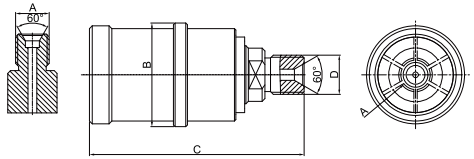

G60UHP Ultra-High-Pressure Quick Connector for Fuel Systems

Mode	Dim. A	Body No.	Dim. B	Dim. C	Male Thread D	Max. Press.*	MaterialSeal	Material	Seal No.
G60UHP-M12E-A601	M12X1.5	1U	34	80	M14x1.5	2500 Bar	Special Stainless Steel	PU Rubber	SG60UHP-M12E
G60UHP-M14E-A601	M14X1.5	1U	34	80					SG60UHP-M14E
G60UHP-M16E-A601	M16X1.5	1U	34	80					SG60UHP-M16E
G60UHP-M18E-A601	M18X1.5	2U	38	80					SG60UHP-M18E



G60C Quick Connector for Instrument Calibration

Model	Dim. A	Body No.	Dim. B	Dim. C	Male Thread D	Max. Press.*	Material	Seal Material	Seal No.
G60C-M10C	M10*1.0	1C	25	72	M14*1.5	350 Bar	316 SS	NBR	SG60C-M10C
G60C-M10E	M10*1.5	1C	25	72					SG60C-M10E
G60C-G01	BSPP1/8"	1C	25	72					SG60C-G01
G60C-R01	BSPT1/8"	1C	25	72					SG60C-R01
G60C-N01	NPT1/8"	1C	25	72					SG60C-N01
G60C-M12C	M12*1.0	2C	32	72	M20*1.5				SG60C-M12C
G60C-M12E	M12*1.5	2C	32	72					SG60C-M12E
G60C-M14E	M14*1.5	2C	32	75	M20*1.5				SG60C-M14E
G60C-G02	BSPP1/4"	2C	32	75					SG60C-G02
G60C-R02	BSPT1/4"	2C	32	75					SG60C-R02
G60C-N02	NPT1/4"	2C	32	75					SG60C-N02
G60C-M20E	M20*1.5	3C	40	85	M20*1.5				SG60C-M20E
G60C-G04	BSPP1/2"	3C	40	85					SG60C-G04
G60C-R04	BSPT1/2"	3C	40	85					SG60C-R04
G60C-N04	NPT1/2"	3C	40	85					SG60C-N04
G60HP-M14E	M14*1.5	2HP	36	85	M14*1.5	700 Bar	316 SS	NBR	SG60HP-M14E
G60HP-M20E	M20*1.5	3HP	43	95	M20*1.5				SG60HP-M20E

G60 Male Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |

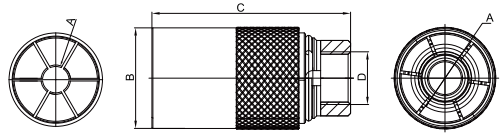

G/R Imperial Thread Selection Table (Water Heater Version)

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure	Material	Seal Material	Seal No.
G60-085	G(R)1/2	5	40	80	BSPP 1/2	20bar	Stainless	NBR	SG60-085
G60-125	G(R)3/4	6	46	90	BSPP 3/4				SG60-125
G60P-085	G(R)1/2	5	40	80	BSPP 1/2				SG60P-085
G60P-125	G(R)3/4	6	46	90	BSPP3/4				SG60P-125
G60A-085	G(R)1/2	5	40	80	BSPP 1/2				SG60A-085
G60A-125	G(R)3/4	6	46	90	BSPP 3/4				SG60A-125
G60A-165	G(R)1	7	50	90	BSPP 1				SG60A-165

* Other thread specifications can be customised on request, up to 2 inch.

Metric Thread Selection Table (M)

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure	Material	Seal Material	Seal No.
G60-M10	M10X1.0	2	25	75	BSPP1/8	50 Bar	316 SS	Neoprene	SG60-M10
G60-M12	M12X1.5	3	30	75	BSPP1/4	50 Bar	316 SS	Neoprene	SG60-M12
G60-M14	M14X1.5	4	35	80	BSPP3/8	50 Bar	316 SS	Neoprene	SG60-M14
G60-M16	M16X1.5	4	35	80	BSPP3/8	50 Bar	316 SS	Neoprene	SG60-M16
G60-M18	M18X1.5	5	40	80	BSPP1/2	50 Bar	316 SS	Neoprene	SG60-M18
G60-M20	M20X1.5	5	40	80	BSPP1/2	50 Bar	316 SS	Neoprene	SG60-M20
G60-M22	M22X1.5	6	46	90	BSPP3/4	50 Bar	316 SS	Neoprene	SG60-M22
G60-M24	M24X1.5	6	46	90	BSPP3/4	50 Bar	316 SS	Neoprene	SG60-M24

SAE 45° Thread Selection Table

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure	Material	Seal Material	Seal No.
G60-A04	-4(7/16-20)	2	25	75	BSPP1/8	50 Bar	316 SS	NBR	SG60-A04
G60-A06	-6(9/16-18)	4	35	80	BSPP3/8	50 Bar	316 SS	NBR	SG60-A06
G60-A08	-8(3/4-16)	4	35	80	BSPP3/8	50 Bar	316 SS	NBR	SG60-A08
G60-A10	-10(7/8-14)	6	46	90	BSPP3/4	50 Bar	316 SS	NBR	SG60-A10
G60-A12	-12(1-1/16-12)	6	46	90	BSPP3/4	50 Bar	316 SS	NBR	SG60-A12
G60-A14	-14(1-1/4-12)	7	50	90	BSPP3/4	50 Bar	316 SS	NBR	SG60-A14
G60-A16	-16(1-3/8-12)	7	50	90	BSPP3/4	50 Bar	316 SS	NBR	SG60-A16

Note:
For all male threaded ports, customers must provide drawings and samples for final confirmation. If a larger size than shown in the selection table is required, please contact us. G60 connectors with other thread types (NPT) and larger sizes can be customised.

The G85 series is a male threaded connector, widely used for plugging and connecting various male threaded ports such as water heaters and instruments. Various drive options suit manual and pneumatic applications.

Male Thread Connection Solution

* Face seal, easy to replace
* Lever operation reduces operating effort
* Various drive options for different scenarios
* Stainless steel: robust and reliable

G85 Series Quick Connector Features

1. Modular drive
Three operation modes - pneumatic, push-button valve and lever - meet the requirements of every application.

2. Face seal
Simple and reliable, easy to replace, low maintenance cost and a choice of materials for different fluids.

3. 316 stainless steel construction
Excellent mechanical properties: strong and wear-resistant, greatly extending connector service life.

4. Max. pressure 350 Bar
Suits all kinds of high-pressure test applications, such as pressure sensors and hydraulic valves.

5. High flow
The large internal flow bore greatly reduces flow loss

Selected Models

G85 Male Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |

G85 Quick Connector Advantages and Features

Contracting threaded jaw locking:
Minimal thread damage and high connection efficiency

316 stainless steel body: excellent mechanical properties and a very high pressure rating

Multiple drive options: Meets diverse operating requirements

High flow:
Large internal flow bore with little effect on running tests

Face seal:
Simple replacement, easy maintenance

G85 Quick Connector Specifications

Max. Op. Pressure	Vacuum to 350 Bar
Sealing Range	See the relevant selection table
Male Thread Height	See the relevant selection table
Flow Port	BSPP1/8,BSPP1/4,BSPP3/8
Material	316 Stainless
Main Seal	NBR
Inner Seal	NBR
Operating Temp.	-20 °C to +120 °C

G85 Operation Demo

Step 1: Press the handle down.

Step 2: Insert the test tube into the connector.

Step 3: Release the handle to complete the connection.

Application Cases

Gas Stove

Wall-Hung Water Heater

Toilet

G85 Male Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |



Water Heater Model Specification Table (Straight-Through)

Model	Body No.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Max. Pressure	Main Material	Seal Material	Seal No.
G85V-085	85V1	BSPP1/2	38	150	BSPT1/2 Male, Direct	12	BSPP1/8	55	20 Bar	Stainless steel + aluminum alloy	Neoprene	SG85-085
G85V-125	85V2	BSPP3/4	43	150	BSPT3/4 Male, Direct	15	BSPP1/8	62				SG85-125

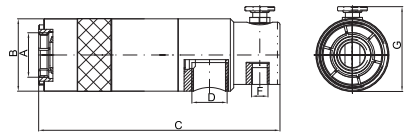

Water Heater Model Specification Table (Side Exit)

Model	Body No.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. F	Dim. G	Max. Pressure	Main Material	Seal Material	Seal No.
G85V-085HF	85HFV1	BSPP1/2	38	135	BSPP3/8 Female, Side	BSPP1/8	38	20 Bar	Stainless steel + aluminum alloy	Neoprene	SG85-085
G85V-125HF	85HFV2	BSPP3/4	43	143.5	BSPP1/2 Female, Side	BSPP1/8	50.5				SG85-125

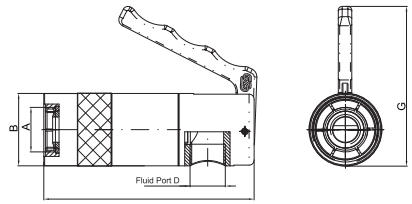

Water Heater Model Specification Table (Handle)

Model	Body No.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. G	Max. Pressure	Main Material	Seal Material	Seal No.
G85L-G02-A001	85L1	BSPP1/4	31.7	125	BSPP1/8 Female, Side	81.5	20 Bar	Stainless steel + aluminum alloy	Neoprene	SG85-G02
G85L-G03-A001	85L1	BSPP3/8	31.7	125	BSPP1/8 Female, Side	81.5				SG85-G03
G85L-G04-A001	85L2	BSPP1/2	43	125	BSPP1/2 Female, Side	95				SG85-G04

G85 Male Threaded Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |





Male Thread (Internal Cone)

Model	Dim. A	Internal Cone Angle	Body No.	Male Thread Height L	Fluid Threaded Port	Max. Pressure	Material	Seal Material	Seal No.
G85L-M12E-A601	M12X1.5	60°	1	9	BSPP1/8	350 Bar	316 SS	NBR	SG85-M12E-A601
G85L-M14E-A601	M14X1.5	60°							SG85-M14E-A601
G85L-M16E-A601	M16X1.5	60°							SG85-M16E-A601
G85L-G02-A601	BSPP1/4	60°							SG85-G02-A601
G85L-G03-A601	BSPP3/8	60°							SG85-G03-A601
G85L-M12D-A241	M12x1.25	24°							SG85-M12D-A241
G85L-M12E-A241	M12x1.5	24°							SG85-M12E-A241
G85L-M14E-A241	M14x1.5	24°							SG85-M14E-A241
G85L-M16E-A241	M16x1.5	24°							SG85-M16E-A241
G85L-M14E-A242	M14x1.5	24°							SG85-M14E-A242
G85L-M12E-A251	M12x1.5	25°							SG85-M12E-A901
G85L-M10E-A901	M10x1.5	90°							SG85-M10E-A901
G85L-M12E-A901	M12x1.5	90°							SG85-M12E-A901
G85L-M10E-A902D	M10X1.5	90°							SG85-M10E-A902
G85L-M12E-A902D	M12x1.5	90°							SG85-M12E-A902
G85L-M14E-A901	M14x1.5	90°							SG85-M14E-A901

Male Thread (External Cone)

Model	Dim. A	External Cone Angle	Body No.	Male Thread Height L	Fluid Threaded Port	Max. Press.	Material	Seal Material	Seal No.
G85L-M14E-B741	M14x1.5	74°	1	9	BSPP1/8	100Bar	316 SS	NBR	SG85-M14E-B741
G85L-U06-B601	UNF9/16-18	90°	1	15	BSPP1/4	200Bar			SG85-U06-B601
G85L-M22E-B901	M22X1.5	90°	2	12	BSPP1/4	50 Bar			SG85-M22E-B901





G85 Instrumentation Model Specification Table

Model	Male Thread Dim. A	Body No.	Male Thread Height L	Fluid Port	Max. Pressure	MaterialSeal	Material	Seal No.
G85C-G01	BSPP1/8	1	9	BSPP1/8	350 Bar	316 SS	NBR	SG85C-G01
G85C-G02	BSPP1/4	1						SG85C-G02
G85C-G04	BSPP1/2	2						SG85C-G04
G85C-M10C	M10x1.0	1						SG85C-M10C
G85C-M14E	M14x1.5	1						SG85C-M14E
G85C-M20E	M20x1.5	2						SG85C-M20E

G30 High-Pressure OD Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Jaw Locking | Full Model Range | Simple Operation | Various Seal Materials | OD Sealing |

The G30 series is a high-pressure connector and the best external-diameter sealing solution for copper, steel and aluminum tubes. It is widely used in refrigeration and new energy industries, such as heat exchangers, pressure vessels, instruments, meters and motor controller cooling plates.

High-Pressure External Grip Connection Solution

* More effective testing lowers overall manufacturing cost
* Eliminates waste caused by failed tests
* Improves the stability of the entire test process
* Metal locking structure raises the pressure limit

G30 Series Quick Connector Features

1. Pressure-assisted design
Sealing force increases as test pressure rises.

2. Handle drive
Insert the test tube into the front sealing bore of the connector and fold the handle through 90° to make the sealed connection.

3. High-hardness locking jaws
The jaw surface is grooved to increase the contact area and provide higher gripping force; the high-hardness jaws can grip stainless steel and low-carbon steel.

4. Taper pipe threaded test port
Standard ZBSPP1/8 or ZBSPP1/4 threaded side port, better suited to domestic applications.

5.Disconnection
Once test pressure has dropped to zero, fold the handle back: the seal is released and the connection is disconnected

The G30 series includes many imperial and metric models, covering sealing of tubes from 6 mm to 22.23 mmOD.
Selected Bodies

G30 High-Pressure OD Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Jaw Locking | Full Model Range | Simple Operation | Various Seal Materials | OD Sealing |

G30 Quick Connector Advantages and Features



High-hardness locking jaws: Locking jaws grip the outer wall of the tube firmly, raising the pressure limit

Grooved jaws: Fine grooves on the ocking jaws increase the contact area and provide more reliable gripping force

Automatic return: Reduces operating effort land the risk of jamming while improving efficiency

Nylon handle: Ergonomic design for a more comfortable grip



Taper pipe threaded fluid port: compliant with international standards, widely used domestically, with easily available accessories for simpler sealing

G30 Quick Connector Specifications

Max. Op. Pressure	Vacuum to 70 Bar
Sealing Range	6mm ~ 35mm
Min. Insert Depth	25mm
Flow Port	ZBSPP1/8 or ZBSPP1/4
Material	Aluminum, Stainless, Nylon
Main Seal	FKM
Inner Seal	NBR
Operating Temp.	-20 °C to +120 °C

G30 Operation Demo

1. Insert the test piece into the test port of the connector.

2. Push the test piece all the way to the bottom of the test port.

3. Turn the handle: the test piece is locked in the test port and sealing is complete

G30 High-Pressure OD Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Jaw Locking | Full Model Range | Simple Operation | Various Seal Materials | OD Sealing |

Application Cases

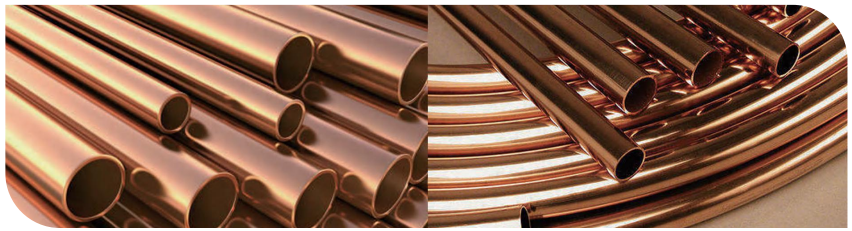

Process Pipe Sealing and Testing

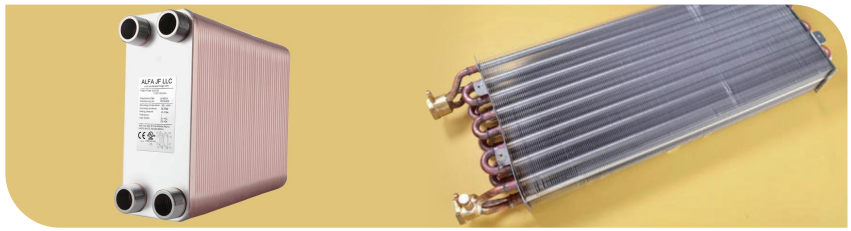

Air-Conditioner Radiator Testing

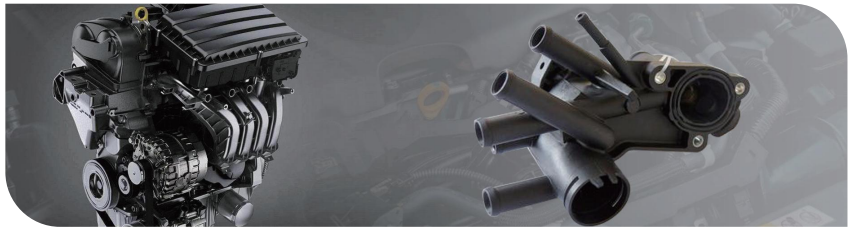

Engine Cooling Channel Testing

G30 High-Pressure OD Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Jaw Locking | Full Model Range | Simple Operation | Various Seal Materials | OD Sealing |





Imperial Size Applications

Model	Seal Dim. (mm)±0.25	Max. Pressure	Flow Bore	Dim. A	Dim. B	Dim. C	Dim. D	Test Port E	Dim. L	Material	Seal Material	Seal No.
G30-0063	6.35	70 Bar	7	193	89	31	109.5	BSPT1/8	25	Aluminum	FKM	SG30-0063
G30-0079	7.92											SG30-0079
G30-0095	9.52											SG30-0095
G30-0127	12.7											SG30-0127
G30-1159	15.88		10			40		BSPT1/4				SG30-1159
G30-1190	19.05											SG30-1190

Metric Size Applications

Model	Seal Dim. (mm)±0.25	Body No.	Max. Pressure	Flow Bore	Dim. A	Dim. B	Dim. C	Dim. D	Test Port E	Dim. L	Material	Seal Material	Seal No.
G30-0030	3.0	0	70 Bar	7	193	89	31	109.5	BSPT1/8	25	Aluminum	FKM	SG30-0030
G30-0040	4.0												SG30-0040
G30-0050	5.0												SG30-0050
G30-0060	6.0												SG30-0060
G30-0070	7.0												SG30-0070
G30-0080	8.0												SG30-0080
G30-0085	8.5												SG30-0085
G30-0090	9.0												SG30-0090
G30-0100	10.0												SG30-0100
G30-0110	11.0												SG30-0110
G30-0120	12.0												SG30-0120
G30-1130	13.0	1	70 Bar	10	193	89	40	109.5	BSPT1/4	25	Aluminum	FKM	SG30-1130
G30-1135	13.5												SG30-1135
G30-1140	14.0												SG30-1140
G30-1150	15.0												SG30-1150
G30-1160	16.0												SG30-1160
G30-1170	17.0												SG30-1170
G30-1180	18.0												SG30-1180
G30-1200	20.0												SG30-1200
G30-1210	21.0												SG30-1210
G30-1213	21.3												SG30-1213
G30-1220	22.0												SG30-1220
G30-1222	22.2												SG30-1222
G30-2230	23.0	2	50 Bar	16	193	89	52.8	109.5	BSPT3/8	25	Aluminum	FKM	SG30-2230
G30-2250	25.0												SG30-2250
G30-2254	25.4												SG30-2254
G30-2266	26.6												SG30-2266
G30-2285	28.5												SG30-2285
G30-2320	32.0												SG30-2320

All GripSeal connectors are designed with safety built in from the start. However, users of the connectors are responsible for designing their own safety precautions, to avoid property damage caused by incorrect sizing or other reasons. Safety chains,protective nets, protective cages or dedicated fixtures are all good protective measures. GripSeal can also provide, or help customers identify, potential safety hazards.

G72R Irregular Tube Port Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |

The G72R series is a dedicated connector for irregular radiator ports. It seals two closely spaced ports at the same time, solving sealing problems in confined spaces. Manually operated and easy to use, its special aviation aluminum alloy body stays robust while keeping the connector light, greatly reducing operator fatigue. A full range of models covers flanged tube sealing in many sizes. The straight-through design ensures high flow performance for both gas and liquid testing.



Flange Connection Solution

* Improved work efficiency and lower production cost
* Reliable sealing and long service life
* Lightweight and quick, reducing work intensity
* Built-in locking structure, suitable for high-pressure working environments

G72R Series Quick Connector Features

1. Handle press drive
Pressing the handle opens the jaws so the test sample can be inserted; releasing the handle closes them automatically to grip the sample and complete the connection, ready for gas testing.

2. Test port
A G threaded test port at the rear, customisable as required; BSPP1/8 thread is standard.

3. Aluminum body
Aviation aluminum body: light and robust.

4.Stainless steel jaws
The jaws are machined from stainless steel for sufficient strength and corrosion resistance; max. pressure 50 bar.

Selected Models

G72R-2G-270D1 (Dual Tube)

G72R-2K-40D01 (Dual Port)

G72R-1K-155-L200 (Single Port)

G72R Quick Connector Advantages and Features

Handle press drive:
Handle operation: simple, quick and highly efficient



Aluminum Body:
Lightweight and durable, low operating effort



Stainless steel jaws:
Sufficient strength together with corrosion resistance; maximum pressure 50Bar



Quick Seal Replacement:
Simple maintenance, longer service life



Test port:
G threaded test port at the rear; threaded ports can be customised

G72R Quick Connector Specifications

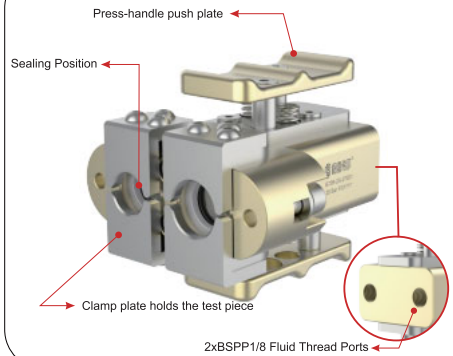

Max. Op. Pressure	Vacuum to 50 Bar
Sealing Range	Customised to the tube
Flow Port	BSPP1/8, BSPP1/4 Threaded Ports
Material	Aluminum
Main Seal	NBR
Operating Temp.	-20 °C to +120 °C

G72R Operation Demo



1. Press the handle: the jaws open.

2. Place the Insert the test piece test piece into the front test port of the G72R series

3. Release the handle: the jaws close automatically. Gas testing can then be carried out.

G72R Irregular Tube Port Quick Connector
ONE-STOP CONNECTION
High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |

Application Cases

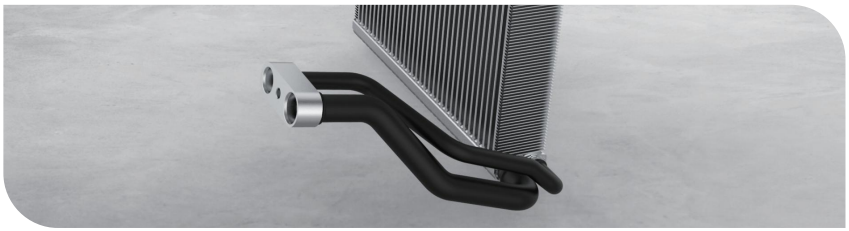

Evaporator Testing

Air-Conditioner Radiator Testing

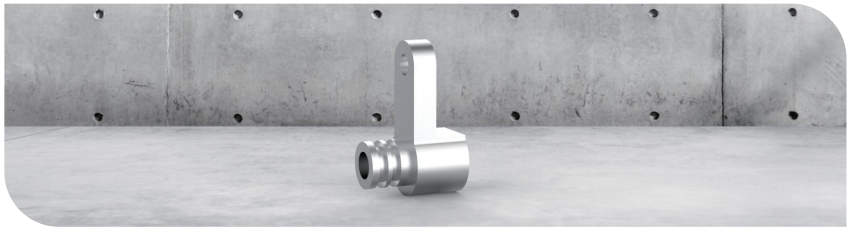

Irregular Tube Port Connection Testing

G72R Irregular Tube Port Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |



Dual-Tube Application

Model	Dim. A1	Dim. A2	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure	Jaw Material	Seal Material	Seal No.
G72R-2G-270D1	11.7	14.5	1	27	8.5	BSPP1/8	50 Bar	Stainless	NBR	*SG72R-2G-270D1-01 SG72R-2G-270D1-02*
G72R-2G-290D1	11.7	14.5	1	29	8					*SG72R-2G-290D1-01 SG72R-2G-290D1-02*



Dual-Port Application

Model	Dim. A1	Dim. A2	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure	Jaw Material	Seal Material	Seal No.
G72R-2K-310D1	15.5	18.3	1	31	9.5	BSPP1/8	50 Bar	Stainless	NBR	*SG72R-2K-310D1-01 SG72R-2K-310D1-02*
G72R-2K-350D1	15.5	18.3	1	35	9.5					*SG72R-2K-350D1-01 SG72R-2K-350D1-02*
G72R-2K-400D1	15.5	18.3	1	40	9.5					*SG72R-2K-400D1-01 SG72R-2K-400D1-02*



Single-Tube Application

Model	Dim. A1	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure	Jaw Material	Seal Material	Seal No.
G72R-1G-155D1	15.5	1	14.5	33	BSPP1/8	50 Bar	Stainless	NBR	SG72R-1G-155D1-01
G72R-1G-183D1	18.3	1	14.5	33					SG72R-1G-183D1-01

G72K Irregular Tube Port Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |

The G72K series quick sealing connector is designed for test ports with a threaded side hole. Compact and able to lock threads quickly, a small rotation presses the sealing head tight to withstand test pressures up to 50 bar. After testing, simply release the handle to remove the connector, greatly improving test efficiency. The sealing head is replaceable, made of POM, and does not damage the test port.

Side Threaded Port Connection Solution

* Fast thread locking - no more screwing
* Reliable sealing, economical and durable
* Damage-free connection
* High pressure rating, testable up to 50 bar

G72K Series Quick Connector Features

1. Handle drive
After docking, turn the handle over and the jaws open automatically to lock the thread; turning clockwise by a small amount locks the connector to ensure leak-tightness for high-pressure testing.

2.Customisable interface
Aluminum body, with the threaded locking pin and sealing head as standard parts; the body can be customised and the interface flexibly configured.

3. Damage-free sealing
The sealing head is made of POM, so it does not damage high-precision test ports

Selected Models

G72K-S1901-155M8

G72K-S4001-183102M6

G72K Irregular Tube Port Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |

G72K Quick Connector Advantages and Features

Handle drive:
Flip the handle to lock, simple and convenient

Aluminum Body:
Lightweight and durable, low operating effort

Quick thread connection:
High-strength jaws,stable and reliable

Quick Seal Replacement:
Seals are easy to replace and maintenance is simple

Test port:
G threaded test port at the side, threaded ports can be customised

G72K Quick Connector Specifications

Max. Op. Pressure	Vacuum to 50 Bar
Sealing Range	Customised to the product
Flow Port	BSPP1/8, BSPP1/4 Threaded Ports
Material	Aluminum
Main Seal	NBR
Operating Temp.	-20 °C to +120 °C

G72K Operation Demo

1. Insert the front of the connector into the bore to be sealed

2. Fold the handle down

3. Turn the handle clockwise to complete the connection

G72K Irregular Tube Port Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |

Application Cases

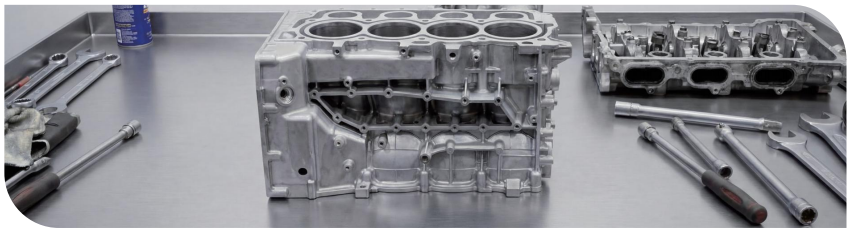

Engine Cooling Water Port

Battery Pack Refrigerant Port

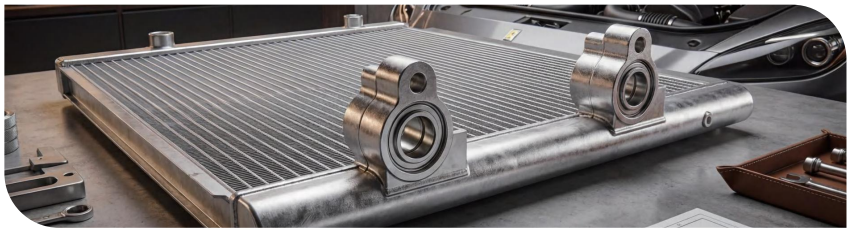

Radiator Refrigerant Port

G72K Irregular Tube Port Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |

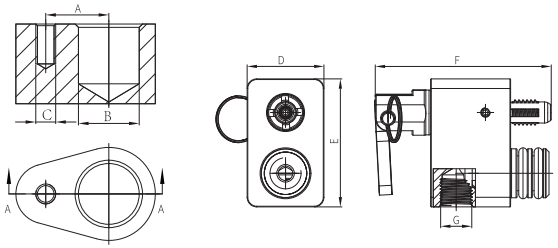

Single-Port Application

Model	Max. Pressure	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Seal Material	Seal No.
G72K-S1901-155M6	50Bar	19.0	15.5	M6	19	46	55	BSPP1/8	NBR	SG72K-S1901-155M6
G72K-S1901-183M6		19.0	18.3	M6	19	46	55	BSPP1/8	NBR	SG72K-S1901-183M6
G72K-S1901-155M8		19.0	15.5	M8	24	40	55	BSPP1/8	NBR	SG72K-S1901-155M8
G72K-S1901-183M8		19.0	18.3	M8	24	40	55	BSPP1/8	NBR	SG72K-S1901-183M8

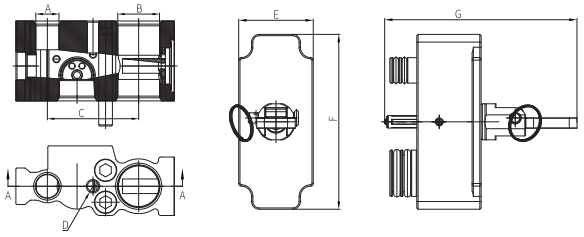

Dual-Port Application

Model	Max. Press.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Seal Material	Seal No.
G72K-S4001-183102M6	50Bar	10.2	18.3	40	M6	29	68	75	NBR	SG72K-S4001-183102M6

G65 Straight-Through Female Threaded Connector

ONE-STOP CONNECTION

Straight-Through | Sliding Sleeve | Female Thread | Built-in Valve | High Flow | Locking |

The G65 is a connector designed for female threaded ports. With a large through-bore and high flow, it withstands up to 400 kg of pressure. A built-in shut-off relief valve prevents the test medium from escaping, making it widely used for filling and charging with various gas and liquid media.

Straight-Through Female Threaded Quick Connector

* Secure against loosening with a firm connection
* Large flow bore that does not affect testing
* Very high pressure rating - testing up to 400 kg
* Self-sealing design prevents the test medium from overflowing

G65 Series Quick Connector Features

1. Anti-loosening clip
Once the connector is locked, twisting the housing locks it further to prevent loosening.

2. Built-in overflow shut-off valve
An overflow shut-off valve is built into the connector. When not connected to a threaded port the valve stays closed, preventing the test medium from overflowing.

3. Pressure up to 400 kg
The connector assembly uses high-performance stainless steel: it withstands high pressure and resists rust and corro sion.

4. Straight-through design
A straight-through flow channel greatly reduces loss of test pressure and flow (versions without a shut-off valve only)

Selected Models

G65 Straight-Through Female Threaded Connector

ONE-STOP CONNECTION

Straight-Through | Sliding Sleeve | Female Thread | Built-in Valve | High Flow | Locking |

G65 Quick Connector Advantages and Features



Straight-through design: Straight-through flow channel with high flow

Anti-loosening clip: Prevents loosening during testing and improves test safety

Built-in shut-off valve: When not connected, the shut-off valve closes to prevent the test medium from overflowing

Standard seal: The face seal is a standard O-ring: easy to and remove and simple to maintain

Threaded jaws: High-performance fit stainless steel with special heat treatment; pressure up to 400 kg

G65 Quick Connector Specifications

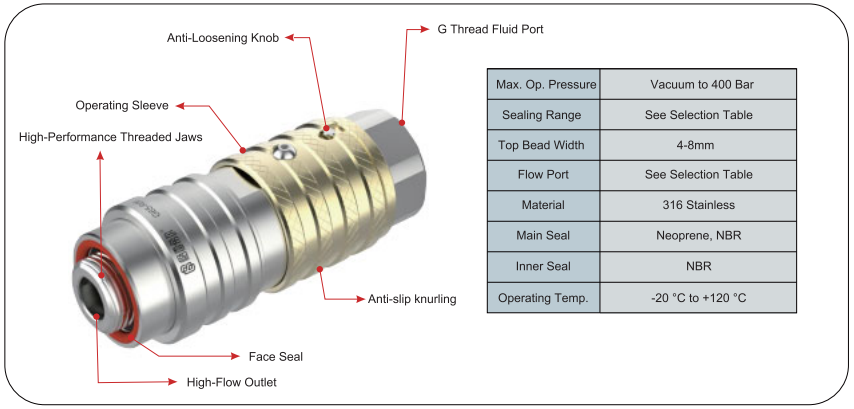

Max. Op. Pressure	Vacuum to 400 Bar
Sealing Range	See Selection Table
Top Bead Width	4-8mm
Flow Port	See Selection Table
Material	316 Stainless
Main Seal	Neoprene, NBR
Inner Seal	NBR
Operating Temp.	-20 °C to +120 °C

Thanks to high flow, high pressure and anti-overflow performance, the G65 series is the best connection solution forliquid pressure testing, running testing and flow testing.

G65 Operation Demo

1. Align the front threaded jaws of the connector with the threaded port to be connecteed

2. Push the rear of the connector to form the seal

G65 Straight-Through Female Threaded Connector

ONE-STOP CONNECTION

Straight-Through | Sliding Sleeve | Female Thread | Built-in Valve | High Flow | Locking |

Application Cases

Pressure Transmitter

High-Pressure Testing

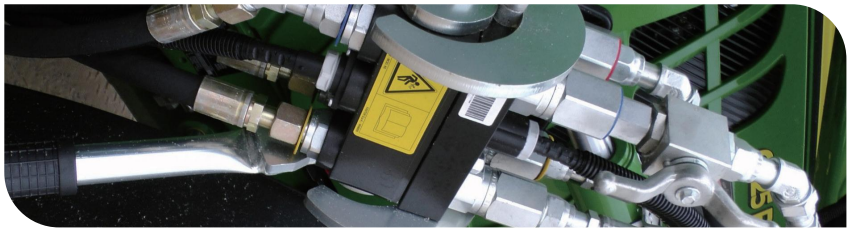

Hydraulic Connection

G65 Straight-Through Female Threaded Connector

ONE-STOP CONNECTION

Straight-Through | Sliding Sleeve | Female Thread | Built-in Valve | High Flow | Locking |

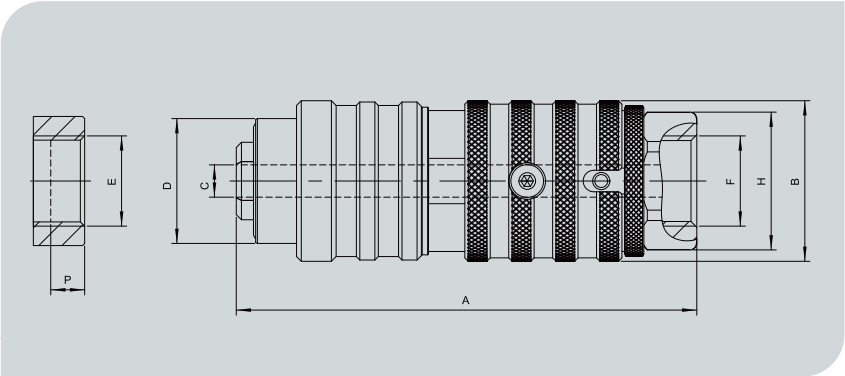

Body No.	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	P (mm)	SH (mm)
2	71	25	5	20	BSPP1/4"	6.5	20
3	85	32	6	25	BSPP3/8"	6.5	21
4	107	37	7.5	29	BSPP1/2"	10	29
6	113	43	12	36	BSPP3/4"	12	35
8	126	54	15	44	BSPP1"	15	45

G65 Pipe Thread Specification Table

Model	Female Thread Dim.E	Body No.	Insertion Depth(mm)	Rear Thread Port	Flow Dia. (mm)	Max. Pressure	Material	Seal Material	Seal No.
G65V-G02 (with valve)	BSPP1/4"	2	6.5	BSPP1/4"	5	400Bar	Stainless	NBR	SG65-02
G65-G02									
G65V-G03 (with valve)	BSPP3/8"	3	6.5	BSPP3/8"	6				SG65-03
G65-G03									
G65V-G04 (with valve)	BSPP1/2"	4	10	BSPP1/2"	7.5				SG65-04
G65-G04									
G65V-G06 (with valve)	BSPP3/4"	6	12	BSPP3/4"	12				SG65-06
G65-G06									
G65V-G08 (with valve)	BSPP1"	8	15	BSPP1"	15				SG65-08
G65-G08									

G65 Taper Pipe Thread Specification Table

Model	Female Thread Dim.E	Body No.	Insertion Depth(mm)	Rear Thread Port	Flow Dia. (mm)	Max. Pressure	Material	Seal Material	Seal No.
G65V-R02 (with valve)	BSPT1/4"	2	6.5	BSPP1/4"	5	400Bar	Stainless	NBR	SG65-02
G65-R02									
G65V-R03 (with valve)	BSPT3/8"	3	6.5	BSPP3/8"	6				SG65-03
G65-R03									
G65V-R04 (with valve)	BSPT1/2"	4	10	BSPP1/2"	7.5				SG65-04
G65-R04									
G65V-R06 (with valve)	BSPT3/4"	6	12	BSPP3/4"	12				SG65-06
G65-R06									
G65V-R08 (with valve)	BSPT1"	8	15	BSPP1"	15				SG65-08
G65-R08									

G65 Straight-Through Female Threaded Connector

ONE-STOP CONNECTION

Straight-Through | Sliding Sleeve | Female Thread | Built-in Valve | High Flow | Locking |

G65 Metric Thread Specification Table

Model	Female Thread Dim.E	Body No.	Insertion Depth(mm)	Rear Thread Port	Flow Dia. (mm)	Max. Pressure	Material	Seal Material	Seal No.
G65V-M14E (with valve)	M14x1.5	2	6.5	BSPP1/4"	5	400Bar	Stainless	NBR	SG65-M14
G65-M14E									
G65V-M16E (with valve)	M16x1.5	3	6.5	BSPP3/8"	6				SG65-M16
G65-M16E									
G65V-M18E (with valve)	M18x1.5								SG65-M18
G65-M18E									
G65V-M20E (with valve)	M20x1.5	4	10	BSPP1/2"	7.5				SG65-M20
G65-M20E									
G65V-M22E (with valve)	M22x1.5								SG65-M22
G65-M22E									
G65V-M24E (with valve)	M24x1.5	6	12	BSPP3/4"	12				SG65-M24
G65-M24E									
G65V-M27E (with valve)	M27x1.5								SG65-M27
G65-M27E									
G65V-M30E (with valve)	M30x1.5	8	15	BSPP1"	15				SG65-M30
G65-M30E									
G65V-M33E (with valve)	M33x1.5								SG65-M33
G65-M33E									

Selected Customised Models

G65LRV-M18E

G65-M22E-6149

All GripSeal connectors are designed with safety built in from the start. However, users of the connectors are responsible for designing their own safety precautions, to avoid property damage caused by incorrect sizing or other reasons. Safety chains, protective nets, protective cages or dedicated fixtures are all good protective measures. GripSeal can also provide, or help customers identify, potential safety hazards.

GripSeal offers additional non-standard sealing solutions - please contact us anytime if required!

Engine
(1) Assembly Testing
(2) Hot Testing
(3) Cold Testing

Turbocharger
Leak Testing

Automotive Drivetrain
(1) Gearbox Leak Testing
(2) Gearbox Hot Testing

Automotive Exhaust System
(1) Manifold
(2) Catalytic Converter
(3) Muffler

Engine Fuel System
(1) Fuel Pump Testing
(2) Common Rail Leak Testing
(3) Helium Testing

Automotive Air-Conditioning System
(1) Condenser
(2) Compressor
(3) Connecting Pipe

Vehicle Chassis
(1) Axle Housing
(2) Shock Absorber

Brake System
(1) Brake Caliper
(2)Brake Pump
(3) Brake Hoses and Assemblies

Recommended Solution:

G80 Series

G70 Series

G25A Series

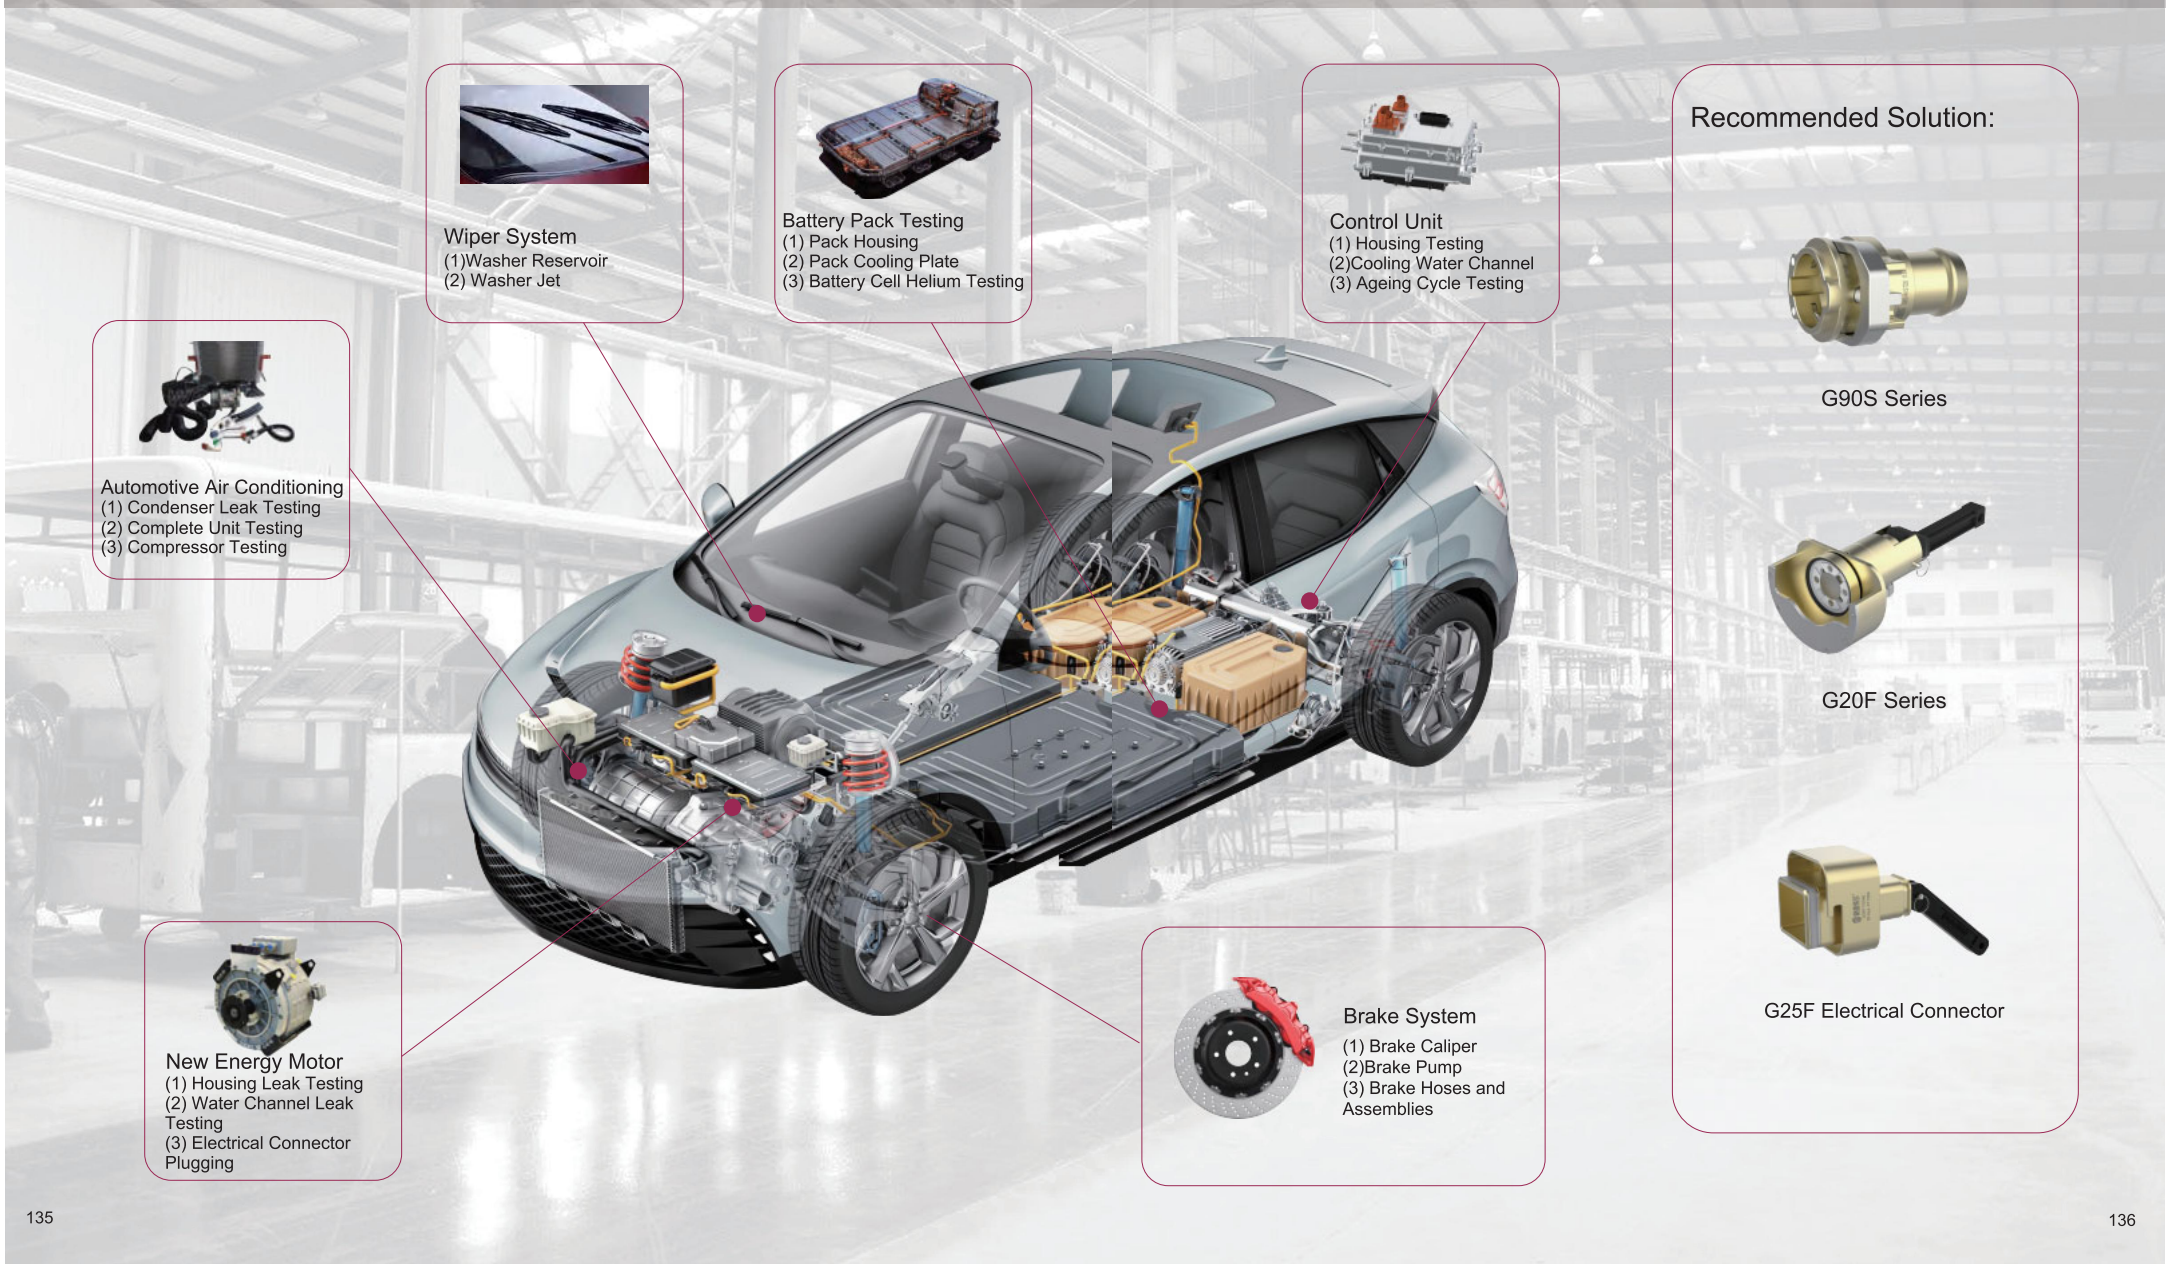

Wiper System
(1)Washer Reservoir
(2) Washer Jet

Battery Pack Testing
(1) Pack Housing
(2) Pack Cooling Plate
(3) Battery Cell Helium Testing

Control Unit
(1) Housing Testing
(2)Cooling Water Channel
(3) Ageing Cycle Testing

Automotive Air Conditioning
(1) Condenser Leak Testing
(2) Complete Unit Testing
(3) Compressor Testing

New Energy Motor
(1) Housing Leak Testing
(2) Water Channel Leak Testing
(3) Electrical Connector Plugging

Brake System
(1) Brake Caliper
(2)Brake Pump
(3) Brake Hoses and Assemblies

Recommended Solution:

G90S Series

G20F Series

G25F Electrical Connector

GripSeal | Quick Connectors for Refrigeration (HVAC) Applications

For leak and helium testing and refrigerant charging of central air-conditioning chillers, compressors, heat exchangers and similar components. Chiller | Compressor | Outdoor Unit | Packaged Air Conditioner

GripSeal

Fan Coil Unit

(1) Immersion Testing
(2) Helium Testing

Air-Conditioning Compressor
(1) Gas Leak Testing
(2) Helium Testing

Large-Bore Copper Pipe

Pressure testing above 3 MPa

Helium Testing

For rapid helium recovery

Condenser / Radiator
(1) Copper Tube Pressure Testing
(2) Immersion Leak Testing

Outdoor Unit
(1)Evacuation
(2) Refrigerant Charging
(3) Pressure Testing

Recommended Solution:

G70K Series

G80 Series

G35 Series

GripSeal | Quick Connectors for the Water Heater

For water-flow running tests of wall-hung boilers, instant water heaters, gas water heaters and storage water heaters, and for leak testing during assembly. Wall-Hung Boiler | Instant Water Heater | Gas Water Heater | Storage Water Heater

Gas Water Heater
(1) Leak Testing
(2) Water Flow Testing

Storage Water Heater
(1) Leak Testing

Heat Exchanger
(1) Leak Testing
(2) Water Flow Testing

Faucet
(1) Leak Testing

Water Heater Tank
(1) Leak Testing

Smart Toilet Seat
(1) Water Flow Running Testing

Recommended Solution:

G60 Series

G85 Series

G72 Series

GripSeal | Quick Connectors for the Automation

For automated connection and plugging of holes, straight tubes and threaded ports, and for new energy electrical connectors, convenient for gripping and leak testing. Automotive Assembly | Auto Parts | Appliance Assembly Automation | Air-Conditioning & Refrigeration Automated Testing

Automated Hole Sealing

Automated Threaded Port Plugging

Automated Coolant Pipe Sealing

Automated Hose Sealing

Automated Fitting Sealing

Recommended Solution:

G10 PRO

G10 Series

G15 Series

Pressure Transmitter

Pressure Gauge

Pressure Switch

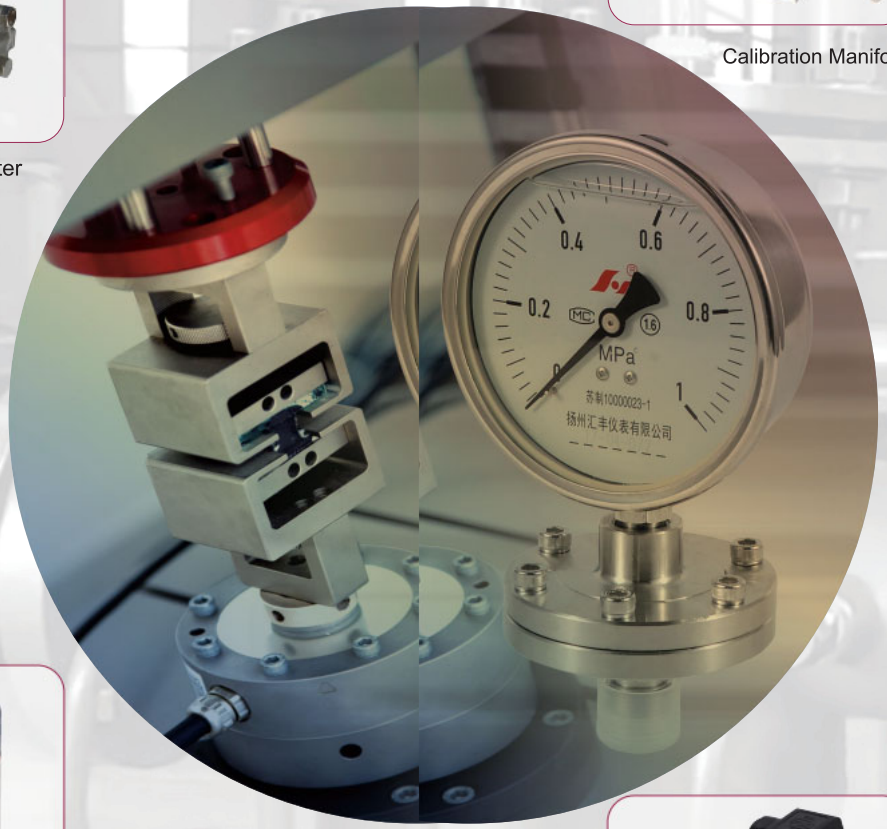

Calibration Manifold

Pressure Sensor

Recommended Solution:

G60C Series

G80 Series

G85 Series

GripSeal Electrical Conn. + Liquid Cooling

ONE-STOP CONNECTION

Flexible Customisation | Short Lead Time | Full Model Range | Fast Operation | Reliable Sealing |



Electrical Connectors

The electrical connector range is a one-stop solution for quick connection in automatic or manual pallet production systems. It provides a complete package of high-current, signal, coolant and test electrical connectors together with quick sealing couplings for the test item. Using this solution greatly simplifies the commissioning of pallet production lines for automation companies or end customers, and delivers highly reliable, long-cycling and highly flexible core components plus custom design capability.

Electrical connectors include the following series:

Docking system

C9M modular electric connectors

E series testing electric connectors

C series automatic couplings

G serials quick connector

Liquid Cooling Couplings

Liquid cooling couplings are fluid quick-disconnect / connect couplings for AI data centres, burn-in testing and similar applications. They use a drip-free design and comply with OCP requirements. Manual versions can be operated with one hand for easy connection and disconnection; the outer parts carry clear colour coding to simplify hot and cold loop routing; the body is made of 316L stainless steel for excellent corrosion resistance; the wetted seal material is EPDM, tolerant of temperature differences and coolant chemistry; every product passes stringent leak and durability tests as well as flow-resistance and burst tests; a wide range of rear-end interfaces is available and customer-specified designs are accepted.

Selected Liquid Cooling Couplings

C70 Series UQD Connectors

C71 Series UQDB Connectors

C75 Series NVQD Connectors

C23 Series manual couplings

Warranty Terms

GripSeal provides a one-year limited warranty for all connectors sold (excluding some metal wear parts and seals), calculated from the date of shipment. The warranty is void where the connector is used beyond its written or marked specifications, or where problems result from customer misuse.

All products returned to GripSeal require prior contact with a sales representative or authorised distributor, and a return code where necessary. GripSeal accepts only limited liability for returned products: it provides the necessary part replacement and repair, or a partial or full refund of the corresponding connector price. Beyond that, it accepts no liability for any related losses caused by unsuitability or failure.

Refurbishment and Recycling Programmes

All GripSeal quick connectors are optimised to be reused many times by replacing wear parts, rather than being single-use like many low-cost connectors.

Besides routine replacement of wear parts to extend service life, GripSeal also offers additional maintenance and renewal programmes to protect your investment. They usually consist of two parts: 1) Refurbishment programme - by replacing the necessary parts / seals and passing strict lubrication tests, the connector reaches a level almost equivalent to new, at only about 20-50% of the cost. 2) Recycling programme - return old connectors to us to obtain a discount on new purchases of about 10-30%, depending on years of service. Please contact our sales representatives for details.

Changes and Disclaimer

All connector specifications in this brochure, including dimensions, pressure ranges, materials, seal specifications and materials, may be changed without notice to customers. GripSeal reserves the right to notify customers and does not guarantee the accuracy of the information in this brochure. To protect your interests, Please contact an authorised distributor or sales representative for the latest information before purchase, to ensure product suitability.

Intellectual Property

The intellectual property of all GripSeal connectors belongs to GripSeal and must be protected. Without written permission, no person or company may copy or imitate GripSeal connectors or parts.