GripSeal®



CZ Series Gas Cylinder Filling Connector

Rev. R1.0

CZ

CZ connector for filling of gas cylinders

Product Description

The CZ series gas cylinder filling connectors are mainly used for filling compressed gas cylinders. They are widely applied in industrial gas stations for inert gases such as helium and nitrogen, as well as medical oxygen and other gases. The product features simple connection; during filling, an anti-detach pin pops out to lock the connection, preventing accidental disconnection caused by impact and ensuring reliable and convenient filling.

Dedicated Connection Solution for Compressed Gas Cylinders



- Grab handle loops around the valve port for enhanced safety
- Safety latch locks for double protection
- Compact and lightweight, one-hand operation
- Standard G5/8 connection thread, high universality
- Removable plunger design, compatible with valved cylinders

Features of CZ Series Connectors

1. Grab Handle

Simple operation; when locked, it loops around the valve port to prevent detachment, protecting operators.

2. Safety Latch

After releasing the handle, the safety latch automatically locks. Press to unlock after filling is complete.

3. Compact Structure

Small size, light weight, operable with one hand, reducing operator workload.

4. Multiple Specifications

Standardized products with diverse specifications, covering common cylinder valve interfaces.

5. Excellent Sealing

Multiple internal O-rings ensure airtight connection, improving work efficiency.

Product Showcase



CZ105 (Standard)



CZ105D (with Plunger)



CZ205D (with Plunger)



CZ205S (with Plunger)

GripSeal®

Advantages & Features



Grab Handle
Loops around valve port for safer filling




Safety Latch
After releasing handle, latch auto-locks. Press to unlock after filling



Stainless Steel Body
Rugged and durable, long service life




Swivel Fill Port
Rotates freely to accommodate random cylinder fill port angles, easy connection



O-Ring Seal
Material options available, easy to r eplace and maintain

Specifications & Parameters

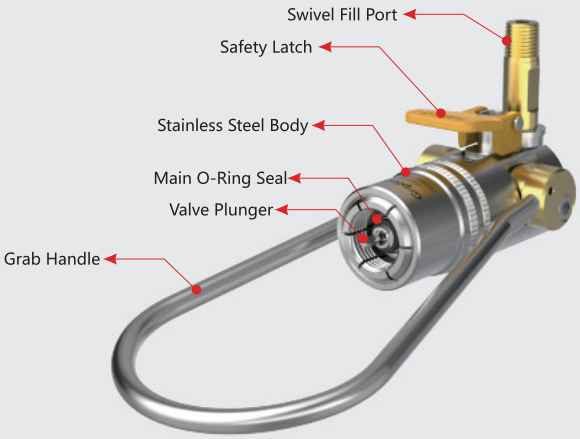

Parameter (EN)	Value
Max. Operating Pressure	From vacuum to 240 Bar
Sealing Range	See selection table
Flow Port	NPT1/4, etc.
Body Material	Stainless Steel, Brass, etc.
Main Seal	Viton (FKM), etc.
Internal Seal	Combined Seal
Operating Temperature	-20°C to 120°C
Applicable Gases	Compressed air, nitrogen, oxygen and other non-corrosive industrial gases. Not for high-purity gases.

Operation Demonstration



1. Lift the handle and align with valve port



2. Connect to valve port



3. Release handle to lock onto valve port

CZ

CZ connector for filling of gas cylinders

Application Cases




Industrial Gas Filling Station

Widely used in industrial gas stations for filling cylinders with inert gases such as helium, nitrogen, argon, and other industrial gases, ensuring safe and efficient filling operations.

Medical Oxygen Filling Station

Applied in medical oxygen filling stations for hospitals and healthcare facilities, providing reliable connections for medical-grade oxygen cylinder filling.




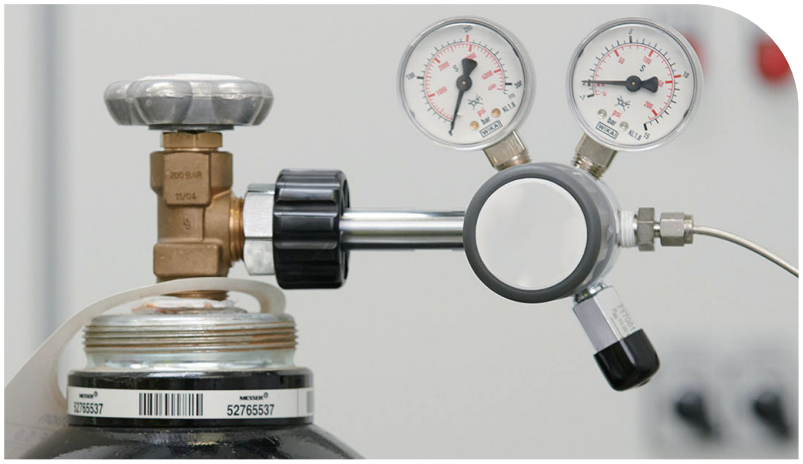


Compressed Cylinder Testing

Used in compressed gas cylinder testing and inspection processes, ensuring airtight connections for pressure testing and leak detection.

CZ105D/CZ105

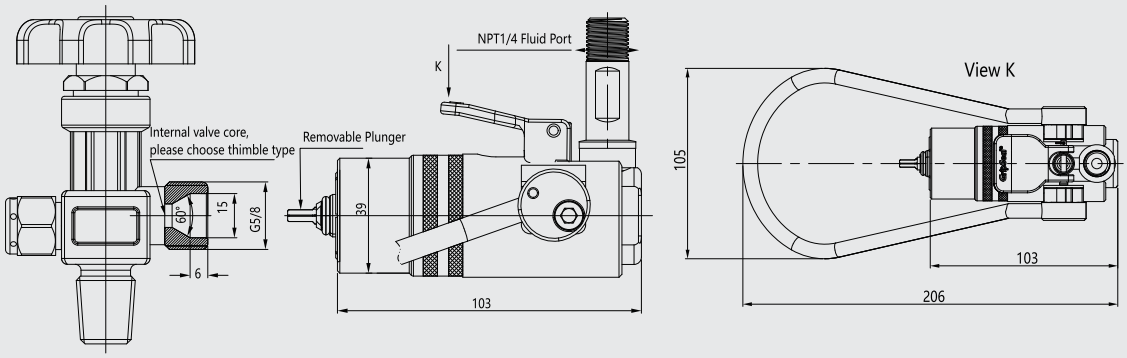

CZ105DS/CZ105S

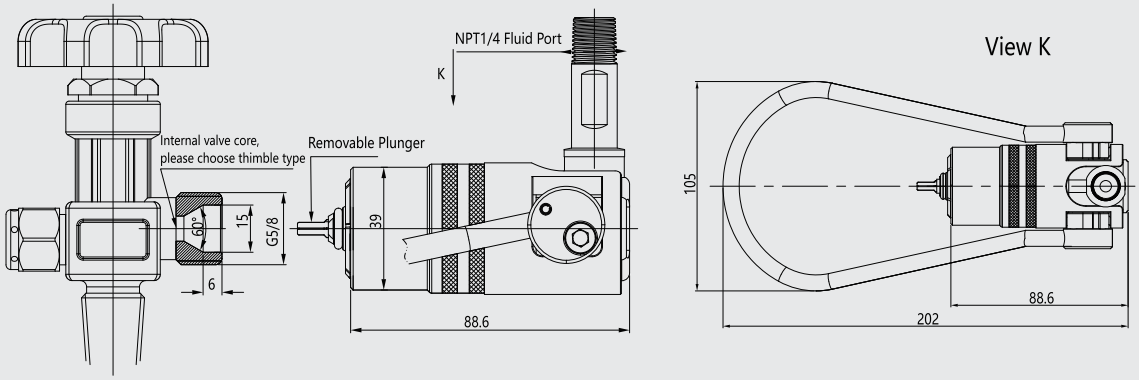


Related Product Information

Model	Fillable Gases	Thread Spec	Max Pressure	Handle Type	With Plunger	Seal Material	Seal Model
CZ105	Compressed air, O2, N2, Ar	G5/8 Ext	240 Bar	Metal Grab Handle	No	Viton (FKM)	SCZ105
CZ105D					Yes		SCZ105D
CZ105S					No		SCZ105S
CZ105DS					Yes		SCZ105DS

CZ

CZ connector for filling of gas cylinders


CZ106/CZ106D

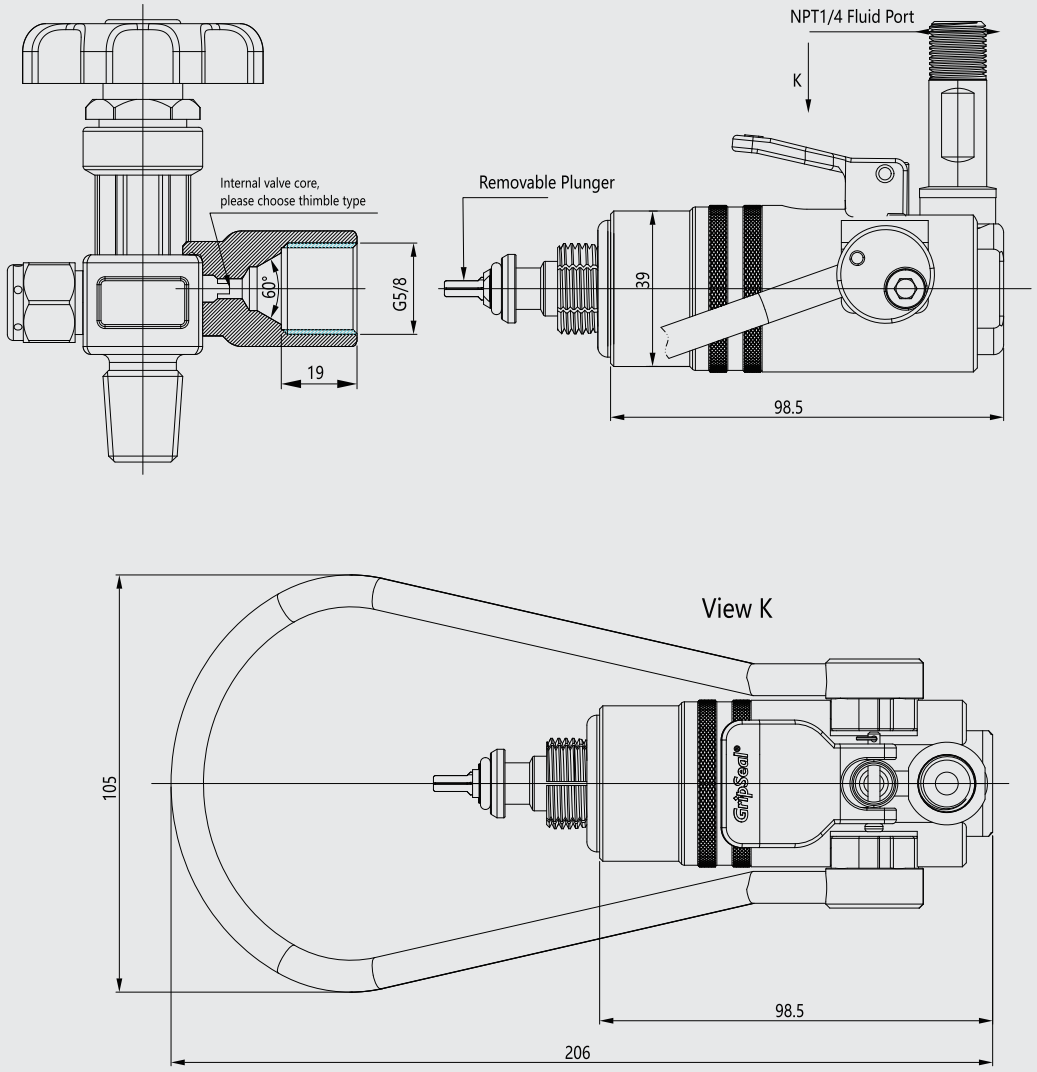



Related Product Information

Model	Fillable Gases	Thread Spec	Max Pressure	Handle Type	With Plunger	Seal Material	Seal Model
CZ106	Compressed air, O2, N2, Ar, He	G5/8 Int.	240 Bar	Metal Grab Handle	No	Viton (FKM)	SCZ106
CZ106D					Yes		SCZ105D


CZ205D/CZ205

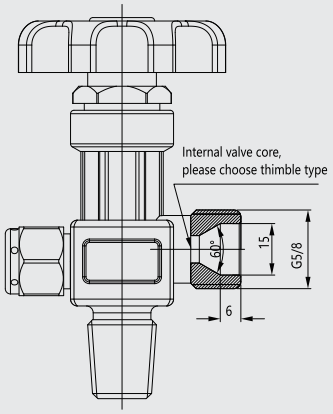


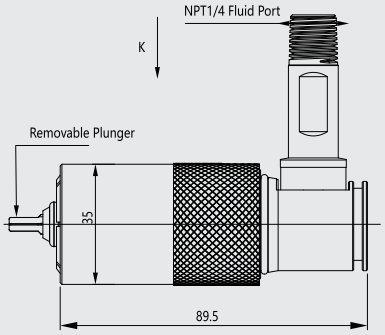

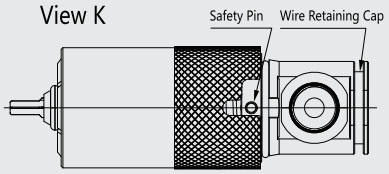

CZ205S

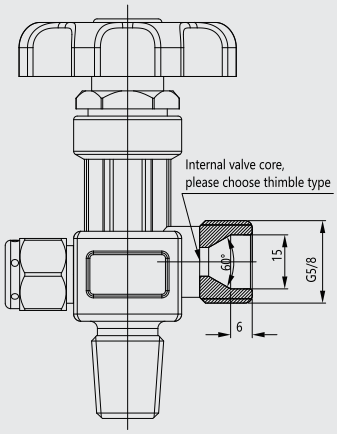

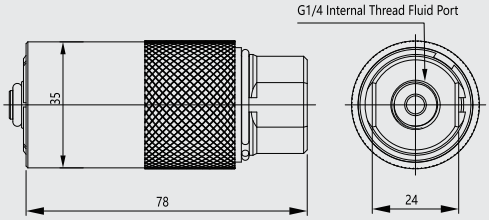

Related Product Information

Model	Fillable Gases	Thread Spec	Max Pressure	Handle Type	With Plunger	Seal Material	Seal Model
CZ205	Compressed air, O2, N2, Ar	G5/8 Ext.	240 Bar	Metal Slide Sleeve	No	Viton (FKM)	SCZ205
CZ205D					Yes		SCZ205D
CZ205S					No		SCZ205S