G72K Irregular Tube Port Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |

The G72K series quick sealing connector is designed for test ports with a threaded side hole. Compact and able to lock threads quickly, a small rotation presses the sealing head tight to withstand test pressures up to 50 bar. After testing, simply release the handle to remove the connector, greatly improving test efficiency. The sealing head is replaceable, made of POM, and does not damage the test port.



Side Threaded Port Connection Solution

* Fast thread locking - no more screwing
* Reliable sealing, economical and durable
* Damage-free connection
* High pressure rating, testable up to 50 bar

G72K Series Quick Connector Features

1. Handle drive
After docking, turn the handle over and the jaws open automatically to lock the thread; turning clockwise by a small amount locks the connector to ensure leak-tightness for high-pressure testing.

2.Customisable interface
Aluminum body, with the threaded locking pin and sealing head as standard parts; the body can be customised and the interface flexibly configured.

3. Damage-free sealing
The sealing head is made of POM, so it does not damage high-precision test ports

Selected Models



G72K-S1901-155M8



G72K-S4001-183102M6

G72K Irregular Tube Port Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |

G72K Quick Connector Advantages and Features



Handle drive:
Flip the handle to lock, simple and convenient



Aluminum Body:
Lightweight and durable, low operating effort



Quick thread connection:
High-strength jaws,stable and reliable



Quick Seal Replacement:
Seals are easy to replace and maintenance is simple



Test port:
G threaded test port at the side, threaded ports can be customised

G72K Quick Connector Specifications



Max. Op. Pressure	Vacuum to 50 Bar
Sealing Range	Customised to the product
Flow Port	BSPP1/8, BSPP1/4 Threaded Ports
Material	Aluminum
Main Seal	NBR
Operating Temp.	-20 °C to +120 °C

G72K Operation Demo



1. Insert the front of the connector into the bore to be sealed



2. Fold the handle down




3. Turn the handle clockwise to complete the connection

G72K Irregular Tube Port Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |


Application Cases

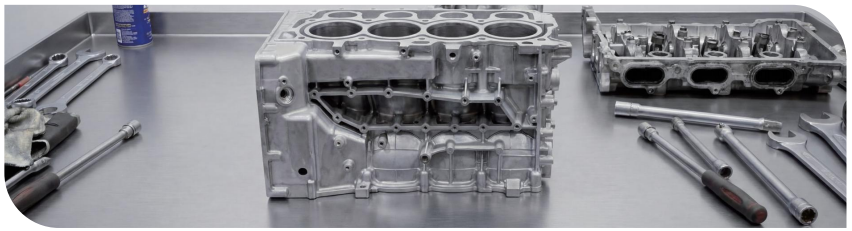

Engine Cooling Water Port




Battery Pack Refrigerant Port

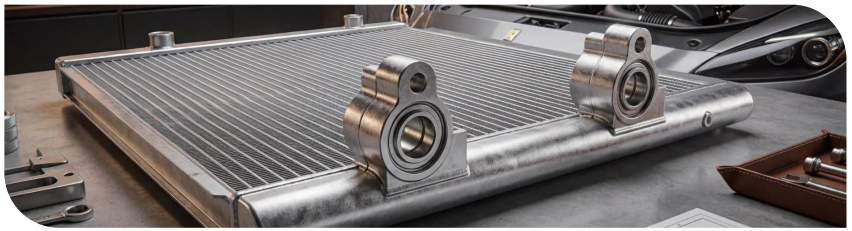

Radiator Refrigerant Port

G72K




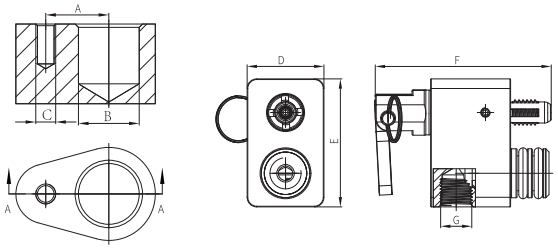

Single-Port Application

Model	Max. Pressure	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Seal Material	Seal No.
G72K-S1901-155M6	50Bar	19.0	15.5	M6	19	46	55	BSPP 1/8	NBR	SG72K-S1901-155M6
G72K-S1901-183M6		19.0	18.3	M6	19	46	55	BSPP 1/8	NBR	SG72K-S1901-183M6
G72K-S1901-155M8		19.0	15.5	M8	24	40	55	BSPP 1/8	NBR	SG72K-S1901-155M8
G72K-S1901-183M8		19.0	18.3	M8	24	40	55	BSPP 1/8	NBR	SG72K-S1901-183M8



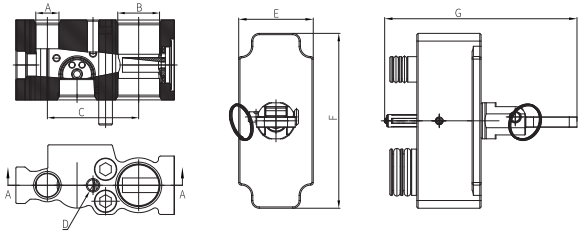

Dual-Port Application

Model	Max. Press.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Seal Material	Seal No.
G72K-S4001-183102M6	50Bar	10.2	18.3	40	M6	29	68	75	NBR	SG72K-S4001-183102M6